

承认书

SPECIFICATION FOR APPROVEAL

客户名称 (CUSTOMER): ZLGD A1-0051

客户料号 (PART NO.):

品 名 (DESCRIPTION): Coil + diskette

规格 (SPECIFICATION): 0. 08*105Psilk-covered wire, $\varnothing 38 \times 14$, inductance value 6. 8uH,
magnetic isolation sheet $\varnothing 44 \times 0. 8$ (Open slot) Magnetic edge from 20MM

日 期 (DATE): 20220415

本司确认 (TRX APPROVAL)		
制作	审核	承认日期
潘锡明	邱志辉	20220415
客户确认 (CUSTOMER APPROVAL)		
工程	批准	承认日期
确认结果 (Result): ☐ 合格 ☐ 不合格 ☐ 其它		

东莞市德弗力五金电子材料有限公司

Dongguan city DFL Electronic Technology Co., LTD

东莞市石碣镇新风西路107号

电话: 0769-86016320

传真: 0769-86372427


东莞市德弗力五金电子材料有限公司

Dongguan city DFL Electronic Technology Co.,LTD

SPECIFICATION

产品型号: DESC	ZLGD0-14*38-20-FR	版本 Rev:A	Customer:	ZLGD
			Description:	Coil + diskette
			Date:	20220415

一、尺寸DIMENSION: (mm)

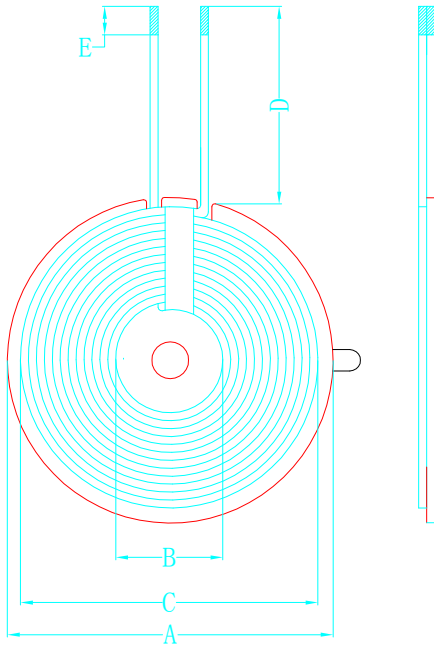

A	44.0±1.0
B	14.0±1.0
C	38.0±1.5
D	20.0±2.0
E	3.5±1.5
F	
G	
H	
I	
J	
K	
L	

Notice:

1. The coil is hard magnetic, the magnetic disc has holes with double slots and the thickness of the magnetic disc is between 0.8-0.89, and the coil position is centered
2. White double-sided tape with ears on the back of the magnetic disc
3. Wrap 5mm high-temperature tape around the cable outlet
4. Do not loosen the coil

二、天线增益Antenna gain:

Operation frequency:	113kHz-205kHz
Antenna Type:	Loop coil Antenna
Antenna gain:	0dBi

三、绕线参数(WindingSpecification:)

序号 NO.	端子 TERMINAL	线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1		0.08X105P silk-covered wire	12TS	anticlockwise

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE: 25±10° C, 湿度 RELATIVE HUMIDITY: 65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.		6.8UH (必须在6.5-7.1内)	100KHZ/1.0V	SHDA 1062
2	IND.				
3	Q值				
4	DCR				

拟制/日期PREPARED BY/DATE	审核/日期CHECKED BY/DATE	客户/日期CUSTOMEU/DATE