



FUJI PHOTO FILM CO., LTD.

26-30, NISHIAZABU 2-CHOME,

MINATO-KU, TOKYO 106, JAPAN

Telephone: (03) 3406-2934

Facsimiles: (03) 3406-9967

page 5 of 7

FCC ID : F5GFP-F601

Part 15 Sub.part B Class B Digital Device

6. TESTED SYSTEM DETAILS

6.1 Peripherals and Others:

Description	Model Name	Serial No.	Manufacturer	FCC ID
Personal Computer	12XL212	1V08FHNJE1N5	Compaq Computer Co., Ltd.	DOC
Mouse	M-BB48	LZE01271677	Logitech	DOC
PC Monitor	M2978	CY52401HF3CV	LG Electronics, Inc.	BEJCA500
Scanner	AS-1	0009	Fuji Photo Film Co., Ltd.	F5GAS-1
AC Adapter (for PC)	LE-9702B-01	177625-001	Compaq Computer Co., Ltd.	DOC
AC Adaptor (for EUT)	AC-5VS	9956	Fuji Photo Film Co., Ltd.	N/A
Video Monitor	PVM-8040	2029411	SONY	N/A

(for AC Adapter of EUT, Input: 120V AC, 60Hz / Output: 5V DC)

Note:

*DOC: Declaration of Conformity by Manufacturer, Compaq Computer Co., Ltd., or Logitech.

* N/A: Equipment required for the Verification.

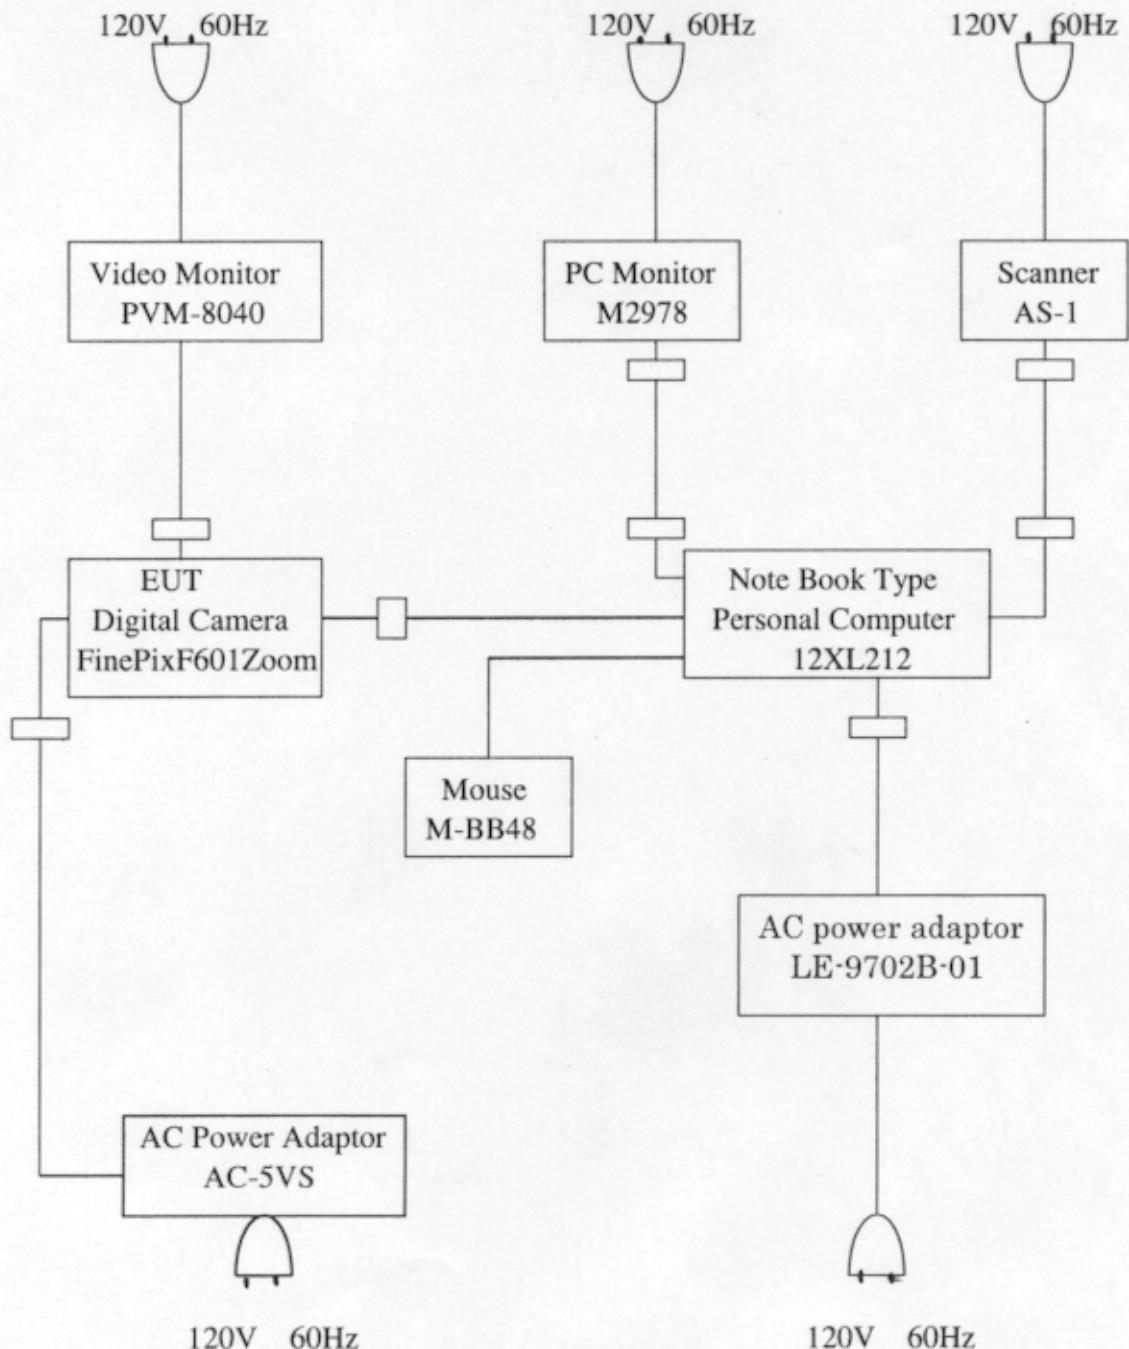
*page 6 of 7*FCC ID : **F5GFP-F601**
Part 15 Sub.part B Class B Digital Device

6.2 List of Cables:

<i>Description</i>	<i>Length</i>	<i>Type of shield</i>	<i>Ferrite Core</i>
EUT / Personal Computer	1.5 m	Shielded	Add
DC Power Cord (EUT/AC adaptor)	1.9 m	Shielded	Add
Scanner / Personal Computer	1.5 m	Shielded	Provided
PC Monitor / Personal Computer	1.65 m	Shielded	Provided
Mouse / Personal Computer	1.9 m	Shielded	N/A
DC Power Cord (PC/AC adaptor)	1.5 m	Shielded	Provided
AC Power Cord (PC/AC adapter)	1.7 m	Non-shielded	N/A
AC Power Cord (Scanner)	1.8 m	Non-shielded	N/A
AC Power Cord (PC Monitor)	1.7 m	Non-shielded	N/A
AV Cable	1.4 m	Shielded	Add
AC Power Cord (Video Monitor)	1.5 m	Non-shielded	N/A

Note:

- * Provided: The cable is an accessory for Personal Computer, Scanner or PC Monitor that was attached a ferrite core.

Figure 6-1 System Configuration Diagram :



FUJI PHOTO FILM CO., LTD.

26-30, NISHIAZABU 2-CHOME,
MINATO-KU, TOKYO 106, JAPAN

Telephone: (03) 3406-2934
Facsimiles: (03) 3406-9967

FCC ID : **F5GFP-F601**
Part 15 Sub.part B Class B Digital Device

7. TEST RESULTS

7.1 Conducted Radio Noise Measurement

7.1.1 Measurement Instrumentation Used:

(Model / Serial No. / Manufacturer)

Test Receiver ----- (ESCS 30 / 825788-007 / Rohde & Schwarz)

L. I. S. N ----- (KNW-407 / 8-823-10 / Kyoritsu Electrical)

L. I. S. N ----- (KNW-407 / 8-680-7 / Kyoritsu Electrical)

Spectrum Analyzer System ----- (8568S / 2445A00924 / Hewlett Packard)

7.1.2 Measurement Procedure:

The power line conducted interference measurements were performed in a shield enclosure with peripherals placed on a table, 80cm high over a metal floor. It was located more than required distance away from the shielded enclosure wall. The EUT was plugged into the L.I.S.N. and the frequency range of interest scanned.



FUJIFILM

FUJI PHOTO FILM CO., LTD.

26-30, NISHIAZABU 2-CHOME,

MINATO-KU, TOKYO 106, JAPAN

Telephone: (03) 3406-2934

Facsimiles: (03) 3406-9967

FCC ID : F5GFP-F601
Part 15 Sub.part B Class B Digital Device

7.1.3 Test Data

Table 7.1-1 Conducted Radio Noise Measurement Results:

Operating mode: PC Camera Mode

Date of measurement: December 14, 2001

Test Procedure: ANSI C63.4-1992

Temperature: 15 degree C

Humidity: 40 %

Frequency (MHz)	Results		Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dBuV/m)			
	Meter Reading.							
	VA. (dBuV/m)	VB. (dBuV/m)						
0.4900	32.1	36.7	36.7	47.9	11.2			
0.7800	30.7	32.3	32.3	47.9	15.6			
1.5100	33.3	33.9	33.9	47.9	14.0			
3.3200	33.0	32.6	33.0	47.9	14.9			
6.2500	30.2	31.0	31.0	47.9	16.9			
17.7600	17.8	24.6	24.6	47.9	23.3			

Note:

- 1) Emission Levels are higher levels of VA or VB of Meter Readings + Correction Factor.
- 2) VA: Between one end of the power cable and the grounded.
VB: Between the other end of power cable and the grounded.

7.1.4 Conducted Radio Noise Calculation

The conducted radio noise is calculated by adding the calibration factor to the measured reading. The basic equation and a sample calculation are as follows:

$$\text{CRN} = \text{TRM} + \text{CF}$$

$$\text{Margin} = \text{Limit} - \text{CRN}$$

where CRN = Conducted Radio Noise (dBuV)

TRM = Test Receiver Reading (dBuV)

CF : Correction Factor (dB/m)

The Correction factor includes cable loss and LISN factor.



FUJI PHOTO FILM CO., LTD.

26-30, NISHIAZABU 2-CHOME,
MINATO-KU, TOKYO 106, JAPAN

Telephone: (03) 3406-2934
Facsimiles: (03) 3406-9967

FCC ID : **F5GFP-F601**
Part 15 Sub.part B Class B Digital Device

7.2 Radiated Radio Noise Measurement

7.2.1 Measurement Instrumentation Used :

(Model / Serial No. / Manufacturer)

Test Receiver ----- (ESCS 30 / 834115-020 / Rohde & Schwarz)

Bi-Conical Antenna ----- (BBA9106 / D-6901 No.2 / Schwarzbeck)

Log-Periodic Antenna ----- (UHALP9107 / 424-517 / Schwarzbeck)

Spectrum Analyzer System ----- (8568S / 2445A00924 / Hewlett Packard)

7.2.2 Measurement Procedure:

The EUT was placed in a 80cm high table along with the peripherals.

The turntable was separated from the antenna at a distance of 3 meter. Cables were placed in a position to produce maximum emission as determined by experimentation, and operation mode was selected for maximum.

The frequencies and amplitudes of maximum emission were measured at varying azimuths, antenna heights and antenna polarities.

FCC ID : **F5GFP-F601**
 Part 15 Sub.part B Class B Digital Device

7.2.3 Test Data

Table 7.2-1 Radiated Radio Noise Measurement Results:

 Operating mode: PC Camera Mode
 Test Procedure: ANSI C63.4-1992

 Date of measurement: December 14, 2001
 Temperature: 15 degree C
 Humidity: 40 %

Frequency (Mhz)	Correction Factor (dB)	Results		Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dBuV/m)			
		Meter Reading.							
		Hori.	Vert.						
66.440	8.2	-	27.5	27.5	40.0	12.5			
68.220	8.0	29.1	-	29.1	40.0	10.9			
71.970	7.7	-	27.2	27.2	40.0	12.8			
196.370	19.2	34.7	35.2	35.2	43.5	8.3			
220.910	20.3	33.2	33.4	33.4	46.0	12.6			
245.460	20.7	34.5	-	34.5	46.0	11.5			
311.420	19.8	42.7	34.2	42.7	46.0	3.3			
319.090	20.0	27.7	-	27.7	46.0	18.3			
320.050	20.0	41.1	-	41.1	46.0	4.9			
343.640	20.5	-	33.2	33.2	46.0	12.8			
415.230	21.8	-	32.9	32.9	46.0	13.1			
520.080	24.0	37.0	-	37.0	46.0	9.0			
540.080	24.4	36.3	-	36.3	46.0	9.7			
560.080	24.9	34.3	-	34.3	46.0	11.7			
613.640	26.3	35.3	-	35.3	46.0	10.7			
615.680	26.3	32.7	-	32.7	46.0	13.3			
662.730	27.1	33.9	40.2	40.2	46.0	5.8			

Note: 1) Meter Readings are corrected by all Correction Factors.

2) Emission Levels are higher levels of Hori. or Vert. of Meter Readings.

3) Margin = Limit - Emission Level.



FUJI PHOTO FILM CO., LTD.

26-30, NISHIAZABU 2-CHOME,
MINATO-KU, TOKYO 106, JAPAN

Telephone: (03) 3406-2934

Facsimiles: (03) 3406-9967

FCC ID : F5GFP-F601

Part 15 Sub.part B Class B Digital Device

7.2.4 Radiated Radio Noise Calculation

The radiated radio noise is calculated by adding the correction factor to the measured reading. The basic equation and a sample of calculation are as follows;

$$\text{RRN} = \text{TRM} + \text{CF}$$

$$\text{Margin} = \text{Limit} - \text{RRN}$$

where RRN = Radiated Radio Noise (dBuV)

TRM = Test Receiver Reading (dBuV)

CF : Correction Factor (dB/m), The correction factor includes pre-amplifier gain, cable loss and antenna factor.