

Product specification


Quick Reference Date

	Antenna module on the system board	
Antenna type	PCB Antenna	
Frequency	2.45GHz*1	
Ant. Port Input Pwr. (dBm)	0 (Typ. BT class 2 output power)	
Tot. Rad. Pwr. (dBm)	-2.3 (Input pwr – loss pwr)	
Peak EIRP(dBm)	1.3	
Directivity (dBi)	1 (all direction antenna)	
Efficiency (dB)	-2.3 (58.5%)	
Gain (dBi)	1.7 (Peak Gain XZ-plane)	
Maximum Power (dBm)	1.3 (XY-plane)	
Minimum Power (dBm)	-4(XY-plane)	
Avg. Power (dBm)	-0.5(XY-plane)	
Max/Min Ratio (dB)	5.3(XY-plane)	
Max/Avg Ratio (dB)	1.8(XY-plane)	
Min/Avg Ratio (dB)	-3.5(XY-plane)	
Average Gain (dB)	-0.5 (Avg Gain XY-plane)	
Company address	Dongguan Hiper Song Electronic Technology Co Ltd.	
Address	Room 1001, Building 4, No.25 Huailin Road, Humen Town, Dongguan City China	


All the technical data and information contained herein are subject to change without prior notice

Antenna Layout & module on the system board



Size:

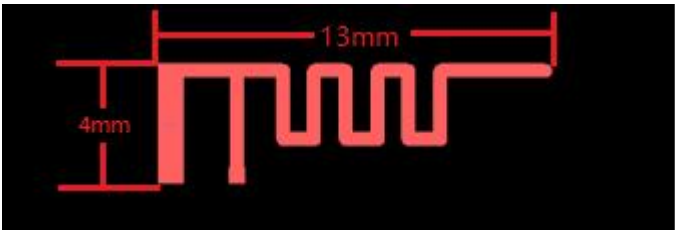


Unit in dBi @2.44GHz	XY-plane		XZ-plane		YZ-plane		Efficiency
	Peak	Avg.	Peak	Avg.	Peak	Avg.	
Module Board	1.3	-0.5	1.7	-3.8	1.1	-3.0	58.5%

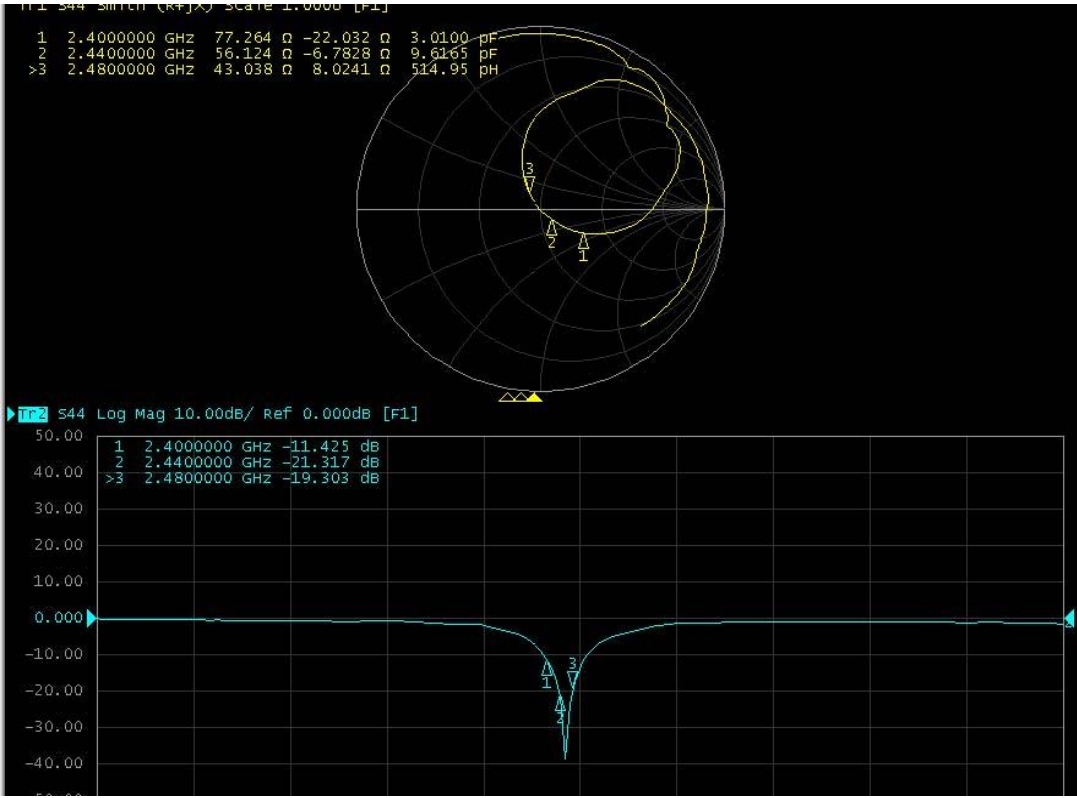




Return Loss

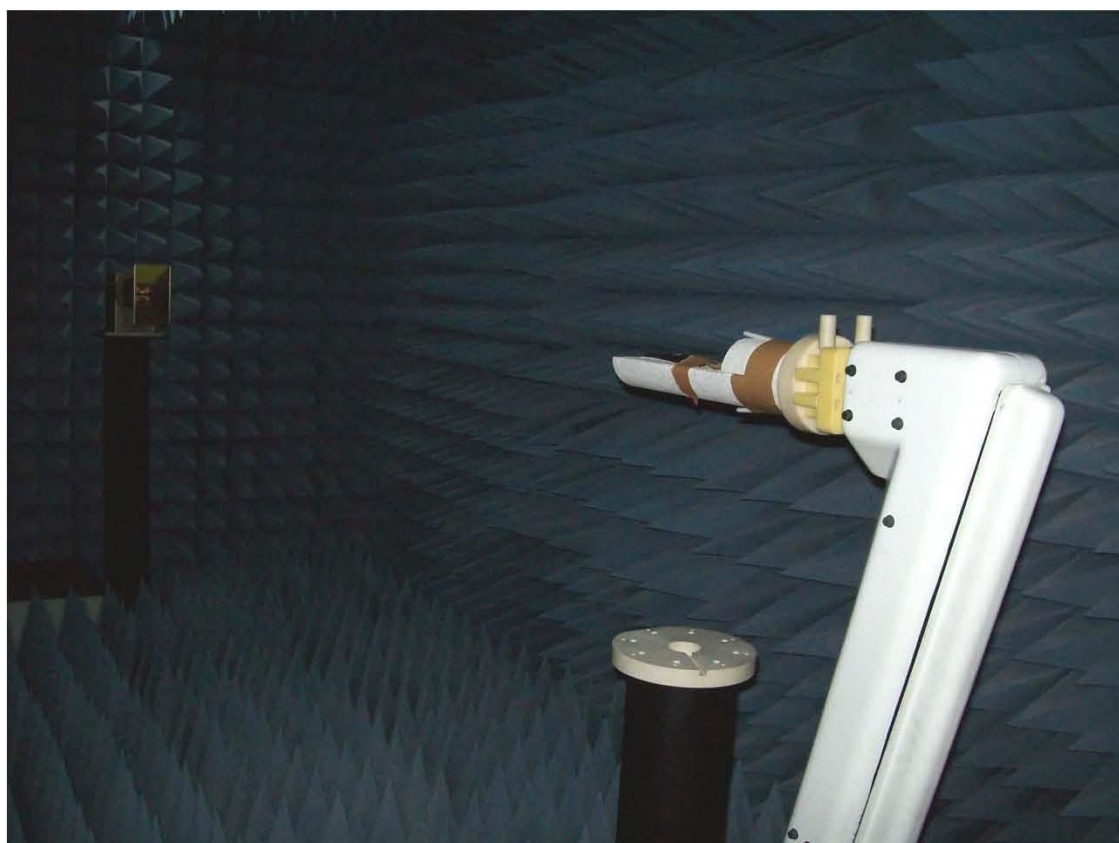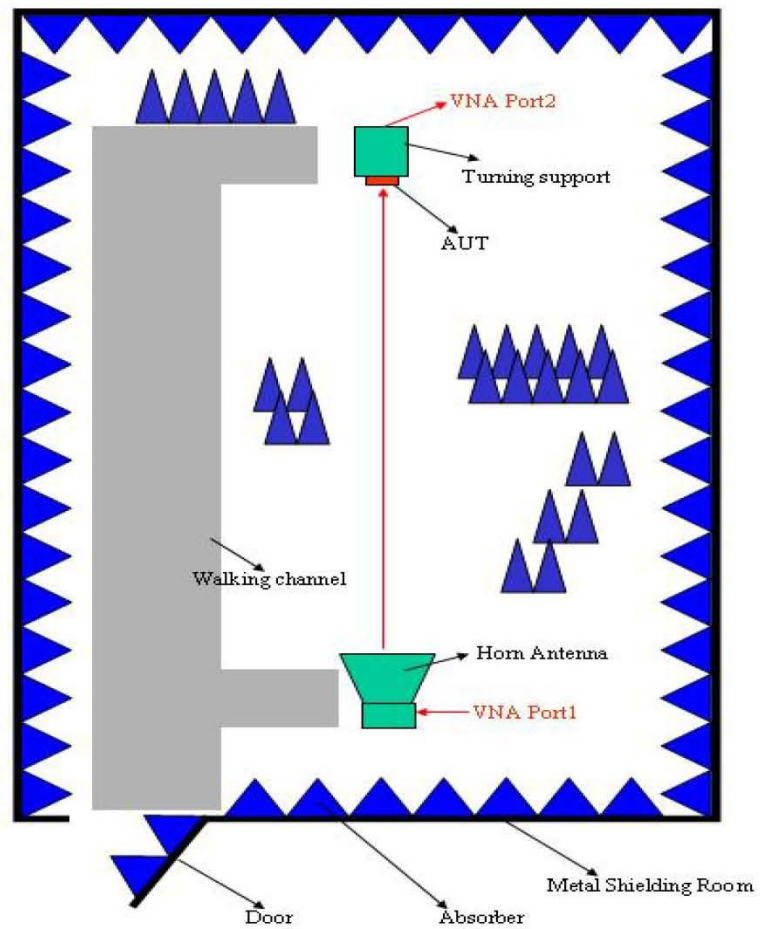

The Environment of Antenna Radiation Pattern

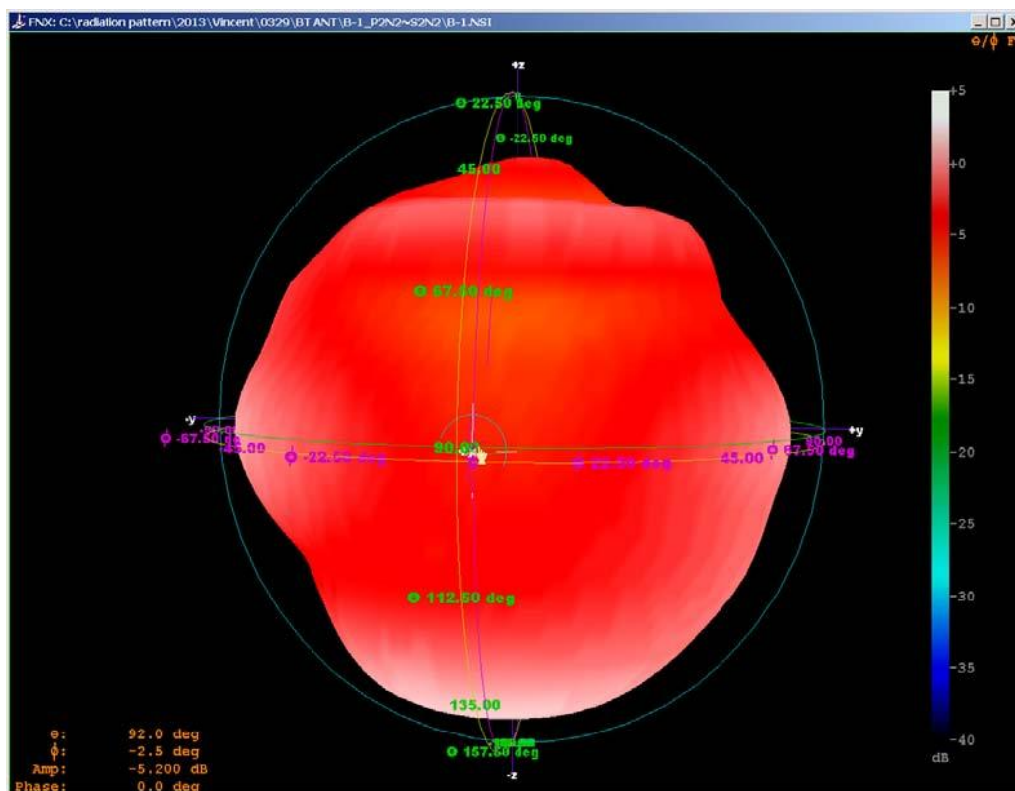

3D radiation pattern diagram

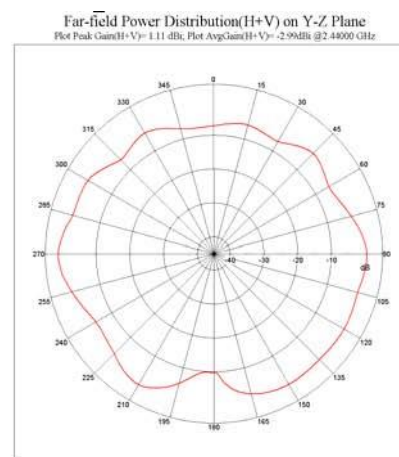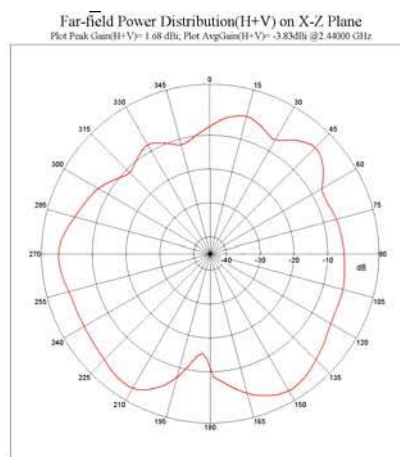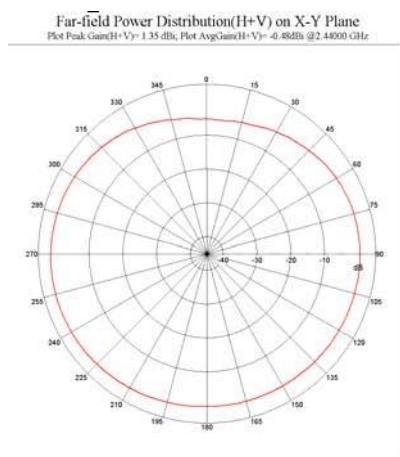

XY-plane XZ-plane YZ-plane