



Appendix F. FCC 3G SAR Measurement Procedures

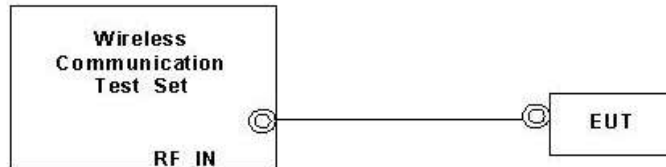
Conducted Output Power:

The PBA is fulfilled. The EUT was tested according to the requirements of the FCC 3G procedures and the TS 34.121. The EUT's WCDMA and HSPA function is Release 6 version supporting HSDPA Category 8, and HSUPA Category 5. A detailed analysis of the output power for all WCDMA, HSPDA, and HSPA (HSUPA&HSDPA) modes is provided in the tables below. According to the FCC 3G procedures, handsets with both HSDPA and HSUPA should be tested according to Release 6 HSPA test procedures, and the EUT does not support VOIP function over the HSPA function. Device was tested according to procedure KDB941225 - section Release 6 HSPA Data Devices as documented/evaluated in the following table. Power values for HSPA are less than ¼ dB higher than the basic 12.2 kbps RMC configurations in WCDMA.

WCDMA SAR Test mode - Conducted Power							
Mode	Setup	Cell band (850)			PCS band (1900)		
		CH4132	CH4182	CH4233	CH9262	CH9400	CH9538
		826.4 (MHz)	836.4 (MHz)	846.6 (MHz)	1852.4 (MHz)	1880.0 (MHz)	1907.6 (MHz)
R99 - WCDMA	RMC 12.2Kbps	24.12	24.11	24.12	24.04	24.08	23.83
R5 - HSDPA	HSDPA - subtest 1	24.04	23.98	23.96	23.94	24.07	23.73
	HSDPA - subtest 2	23.85	23.79	23.80	23.84	23.98	23.69
	HSDPA - subtest 3	23.37	23.28	23.33	23.41	23.58	23.51
	HSDPA - subtest 4	23.32	23.38	23.31	23.30	23.60	23.29
R6 - HSPA (HSUPA & HSDPA)	HSUPA - subtest 1	23.84	23.55	23.82	23.35	23.48	23.23
	HSUPA - subtest 2	22.18	22.13	22.02	22.06	21.93	21.86
	HSUPA - subtest 3	22.61	22.52	22.44	22.40	22.47	22.44
	HSUPA - subtest 4	22.23	22.19	22.14	22.17	22.82	22.04
	HSUPA - subtest 5	23.81	23.62	23.83	23.01	23.52	23.48

WCDMA Setup Configuration:

- a. The EUT was connected to Base Station referred to the drawing of Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting
 - i. Data rates: Varied from RMC 12.2Kbps
 - ii. RMC Test Loop = Loop Mode 1
 - iii. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.


Setup Configuration
HSDPA Setup Configuration:

- a. The EUT was connected to Base Station referred to the drawing of Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors(β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC12.2Kbps + HSDPA mode
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set DeltaACK, DeltaNACK and DeltaCQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPCCH, DPCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSPA (HSUPA & HSPDA) Setup Configuration:

- a. The EUT was connected to Base Station referred to the drawing of Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121.
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode = Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtests' E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration

Note: For details settings in the Agilent 8960 test equipment, please refer to the user guide "HSUPA Measurement Guide with 8960 V7.5.0 Release 7 (2007-06) Ver.: v.02.18"



Call Setup Screen									
Call Control		Active Cell Operating Mode						Call Parms	
Channel (UARFCN) Info	Cell Parameters	UE Information						Cell Power	-86.00
		INSI: INEI: Power Class:						dBm/3.84 MHz	
Generator Info	Uplink Parameters	UE Expected Open Loop Transmit Power						Channel Type	12.2k + HSPA
		Initial PRACH TX Power: -11.70 dBm Initial DPCH TX Power: -0.56 dBm						Paging Service	RB Test Mode
Uplink Parameters	UE Rep Neas	Uplink Parameters				Value		HSPA Parameters	34.121 Preset Call Configs
		PRACH Preambles				64			
Close Menu	2 of 4	PRACH Ramping Cycles(MAX)				2		Channel (UARFCN) Parms	1 of 3
		Available Subchannels (Bit Mask)				000000000001			
		Uplink DPCH Scrambling Code				0			
		Uplink DPCH Bc/Bd Control				Manual			
		Manual Uplink DPCH Bc				11			
		Manual Uplink DPCH Bd				15			
		Maximum Uplink Transmit Power Level				21 dBm			
		Active Cell				Sys Type: UTRA FDD			
		Idle							
		IntRef				Offset			

Example for HSPA Subtest 1, and other subtests following table, C11.1.3
(Gain Factors ($\beta_c = 11$ and $\beta_d = 15$))

Call Setup Screen									
Call Control		Active Cell Operating Mode						Serving Grant	
Additional Screens	Cell Parameters	UE Information						AG Mode	Single Shot
		INSI: INEI: Power Class:						Single Shot AG	20: $(119/15)^2$
Generator Info	Uplink Parameters	UE Expected Open Loop Transmit Power						Send Single Shot Absolute Grant	
		Initial PRACH TX Power: -11.70 dBm Initial DPCH TX Power: -0.56 dBm						Send Relative Grant Up	
UE Rep Neas	Trig Output Setup	Call Processing Status						Send Relative Grant Down	
		Current Service Type: None Min Status: Abs Single Shot AG GMM State: Index 15: $(67/15)^2$ Current DPCH Index 16: $(75/15)^2$ HSUPA In Index 17: $(84/15)^2$ UE Rep E-DCH Index 18: $(95/15)^2$ Last Received Index 19: $(106/15)^2$ Throughput: Index 20: $(119/15)^2$ ACKs Transmitted: ----- ACKs Received: -----						Information	Ratio: ----- % kbps
Sys Frame Clock	2 of 4	Active Cell				Sys Type: UTRA FDD		Return	1 of 2
		Idle							
		IntRef				Offset			

Example: AG – Index = 20 for HSPA subtest 1



Call Setup Screen			
Screen Ctrl	Recorded E-TFCI Information		E-TFCI Record
Channel (UARFCN) Info	E-TFCI Recording State		E-TFCI Rec Count
	Idle		15
HSPA Information	Recorded E-TFCI Values		Start Recording E-TFCI Values
E-TFCI Recording Information	1: 75 11: 75 21: ---- 31: ---- 41: ---- 2: 75 12: 75 22: ---- 32: ---- 42: ---- 3: 75 13: 75 23: ---- 33: ---- 43: ---- 4: 75 14: 75 24: ---- 34: ---- 44: ---- 5: 75 15: 75 25: ---- 35: ---- 45: ---- 6: 75 16: ---- 26: ---- 36: ---- 46: ---- 7: 75 17: ---- 27: ---- 37: ---- 47: ---- 8: 75 18: ---- 28: ---- 38: ---- 48: ---- 9: 75 19: ---- 29: ---- 39: ---- 49: ---- 10: 75 20: ---- 30: ---- 40: ---- 50: ----		
Clear UE Info	15/15		Send Step Up TPC Bit Pattern
Return			Send Step Down TPC Bit Pattern
	Background Active Cell Connected Sys Type: UTRA FDD		Return
	IntRef Offset		

Example: Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1

Reference:

- [1] 941225 D01 SAR test for 3G devices v02, SAR Measurement Procedures for 3G Devices CDMA 2000/Ev-Do/WCDMA/HSDPA/HSPA Oct. 2007 Laboratory Division Office of Engineering and Technology Federal Communications Commission
- [2.] TS 34.121 Universal Mobile Telecommunications System (UMTS); Terminal Conformance Specification, Radio Transmission and Reception (FDD)
- [3.] HSUPA Measurement Guide with 8960 V7.5.0 Release 7 (2007-06) Ver.: v.02.18