

| <b>RADIO REPORT</b><br><b>FCC 47 CFR Part 15C</b><br><b>ISED Canada RSS-247</b><br><b>Frequency hopping systems operating within the 2400 – 2483.5 MHz band</b> |                                                                                                                                                                                                                                        |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Report Reference No</b>                                                                                                                                      | G0M-1702-6284-TFC247BT-V03                                                                                                                                                                                                             |
| <b>Testing Laboratory</b>                                                                                                                                       | Eurofins Product Service GmbH                                                                                                                                                                                                          |
| <b>Address</b>                                                                                                                                                  | Storkower Str. 38c<br>15526 Reichenwalde<br>Germany                                                                                                                                                                                    |
| <b>Accreditation</b>                                                                                                                                            | <br>A2LA Accredited Testing Laboratory, Certificate No.: 1983.01<br>FCC Filed Test Laboratory, Reg.-No.: 96970<br>IC Testing Laboratory site: 3470A-2 |
| <b>Applicant</b>                                                                                                                                                | Panasonic Industrial Devices Europe GmbH                                                                                                                                                                                               |
| <b>Address</b>                                                                                                                                                  | Zeppelinstr. 19<br>21337 Lüneburg<br>GERMANY                                                                                                                                                                                           |
| <b>Test Specification</b>                                                                                                                                       | According to FCC/ISED rules                                                                                                                                                                                                            |
| <b>Standard</b>                                                                                                                                                 | 47 CFR Part 15C<br>RSS-247, Issue 1, 2015-05                                                                                                                                                                                           |
| <b>Non-Standard Test Method</b>                                                                                                                                 | None                                                                                                                                                                                                                                   |
| <b>Test Scope</b>                                                                                                                                               | Partial radio compliance test                                                                                                                                                                                                          |
| <b>Equipment under Test (EUT):</b>                                                                                                                              |                                                                                                                                                                                                                                        |
| <b>Product Description</b>                                                                                                                                      | Class 2 Bluetooth Low Energy Module                                                                                                                                                                                                    |
| <b>Model(s)</b>                                                                                                                                                 | ENW89837A5KF                                                                                                                                                                                                                           |
| <b>Additional Model(s)</b>                                                                                                                                      | None                                                                                                                                                                                                                                   |
| <b>Brand Name(s)</b>                                                                                                                                            | PAN1026A                                                                                                                                                                                                                               |
| <b>Hardware Version(s)</b>                                                                                                                                      | 01                                                                                                                                                                                                                                     |
| <b>Software Version(s)</b>                                                                                                                                      | 01                                                                                                                                                                                                                                     |
| <b>FCC-ID</b>                                                                                                                                                   | T7VPAN10                                                                                                                                                                                                                               |
| <b>IC</b>                                                                                                                                                       | 216Q-PAN10                                                                                                                                                                                                                             |
| <b>Test Result</b>                                                                                                                                              | <b>PASSED</b>                                                                                                                                                                                                                          |

Test Report No.: G0M-1702-6284-TFC247BT-V03

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                  |                                                                                       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|---------------------------------------------------------------------------------------|
| <b>Possible test case verdicts:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                            |                  |                                                                                       |
| required by standard but not tested                                                                                                                                                                                                                                                                                                                                                                                                                                            | N/T              |                                                                                       |
| not required by standard                                                                                                                                                                                                                                                                                                                                                                                                                                                       | N/R              |                                                                                       |
| test object does meet the requirement                                                                                                                                                                                                                                                                                                                                                                                                                                          | P(PASS)          |                                                                                       |
| test object does not meet the requirement                                                                                                                                                                                                                                                                                                                                                                                                                                      | F(FAIL)          |                                                                                       |
| <b>Testing:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                  |                                                                                       |
| Test Lab Temperature                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 20 - 23 °C       |                                                                                       |
| Test Lab Humidity                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 32 – 38 %        |                                                                                       |
| Date of receipt of test item                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 2017-30-03       |                                                                                       |
| <b>Report:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                  |                                                                                       |
| Compiled by                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Wilfried Treffke |                                                                                       |
| Tested by (+ signature)<br>(Responsible for Test)                                                                                                                                                                                                                                                                                                                                                                                                                              | Wilfried Treffke |   |
| Approved by (+ signature)<br>(Head of Lab)                                                                                                                                                                                                                                                                                                                                                                                                                                     | Christian Weber  |  |
| Date of Issue                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 2017-07-28       |                                                                                       |
| Total number of pages                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 79               |                                                                                       |
| <b>General Remarks:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                  |                                                                                       |
| <p>The test results presented in this report relate only to the object tested.</p> <p>The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.</p> <p>This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.</p> |                  |                                                                                       |
| <b>Additional Comments:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                  |                                                                                       |
| Partial test / Test selection for Class II Permissive change according to permissive change letter.                                                                                                                                                                                                                                                                                                                                                                            |                  |                                                                                       |

## VERSION HISTORY

| Version History |            |                                              |            |
|-----------------|------------|----------------------------------------------|------------|
| Version         | Issue Date | Remarks                                      | Revised By |
| 01              | 2017-05-10 | Initial Release                              |            |
| 02              | 2017-07-22 | Model name; Hardware and Software corrected. | W: Treffke |
| 03              | 2017-07-28 | PMN corrected                                | C: Weber   |

## ABBREVIATIONS AND ACRONYMS

| Acronyms         |                                                     |
|------------------|-----------------------------------------------------|
| Acronym          | Description                                         |
| BR               | Bluetooth Basic Rate mode                           |
| EUT              | Equipment Under Test                                |
| FCC              | Federal Communications Commission                   |
| ISED             | Innovation, Science and Economic Development Canada |
| RBW              | Resolution bandwidth                                |
| RMS              | Root mean square                                    |
| VBW              | Video bandwidth                                     |
| V <sub>NOM</sub> | Nominal supply voltage                              |



## REPORT INDEX



|          |                                                                         |           |
|----------|-------------------------------------------------------------------------|-----------|
| <b>1</b> | <b>Equipment (Test Item) Under Test.....</b>                            | <b>6</b>  |
| 1.1      | Photos – Equipment External .....                                       | 7         |
| 1.2      | Photos – Equipment Internal .....                                       | 9         |
| 1.3      | Photos – Test Setup.....                                                | 10        |
| 1.4      | Support Equipment.....                                                  | 11        |
| 1.5      | Test Modes .....                                                        | 12        |
| 1.6      | Test Frequencies.....                                                   | 13        |
| 1.7      | Sample emission level calculation.....                                  | 14        |
| <b>2</b> | <b>Result Summary.....</b>                                              | <b>15</b> |
| <b>3</b> | <b>Test Conditions and Results.....</b>                                 | <b>16</b> |
| 3.1      | Test Conditions and Results - Occupied bandwidth.....                   | 16        |
| 3.2      | Test Conditions and Results - Maximum peak conducted output power ..... | 21        |
| 3.3      | Test Conditions and Results - Band-edge compliance.....                 | 23        |
| 3.4      | Test Conditions and Results - Conducted spurious emissions.....         | 29        |
| 3.5      | Test Conditions and Results - Transmitter radiated emissions .....      | 33        |
| 3.6      | Test Conditions and Results - Receiver radiated emissions .....         | 36        |
| ANNEX A  | Transmitter sprurious emissions .....                                   | 38        |
| ANNEX B  | Receiver sprurious emissions .....                                      | 70        |

## 1 Equipment (Test Item) Under Test


|                          |                                                                                          |                            |
|--------------------------|------------------------------------------------------------------------------------------|----------------------------|
| Description              | Class 2 Bluetooth Low Energy Module                                                      |                            |
| Model                    | ENW89837A5KF                                                                             |                            |
| Additional Model(s)      | None                                                                                     |                            |
| Brand Name(s)            | PAN1026A                                                                                 |                            |
| Serial Number(s)         | 12653                                                                                    |                            |
| Hardware Version(s)      | 01                                                                                       |                            |
| Software Version(s)      | 01                                                                                       |                            |
| PMN                      | PAN1026A                                                                                 |                            |
| HVIN                     | ENW89837A5KF                                                                             |                            |
| FVIN                     | N/A                                                                                      |                            |
| HMN                      | N/A                                                                                      |                            |
| FCC-ID                   | T7VPAN10                                                                                 |                            |
| IC                       | 216Q-PAN10                                                                               |                            |
| Equipment type           | End Product                                                                              |                            |
| Radio type               | Transceiver                                                                              |                            |
| Assigned frequency bands | 2400 - 2483.5 MHz                                                                        |                            |
| Radio technology         | Bluetooth                                                                                |                            |
| Modulation               | GFSK                                                                                     |                            |
| Number of antenna ports  | 1                                                                                        |                            |
| Antenna                  | Type                                                                                     | Integrated                 |
|                          | Model                                                                                    | ANT2012LL13R2400A          |
|                          | Manufacturer                                                                             | Yageo                      |
|                          | Gain                                                                                     | 0.8 dBi (from declaration) |
| Supply Voltage           | V <sub>NOM</sub>                                                                         | 3.3 VDC                    |
| Operating Temperature    | T <sub>NOM</sub>                                                                         | 25 °C                      |
| AC/DC-Adaptor            | Model                                                                                    | N/A                        |
|                          | Vendor                                                                                   | N/A                        |
|                          | Input                                                                                    | N/A                        |
|                          | Output                                                                                   | N/A                        |
| Manufacturer             | Panasonic Industrial Devices Europe GmbH<br>Zeppelinstr. 19<br>21337 Lüneburg<br>GERMANY |                            |

## 1.1 Photos – Equipment External

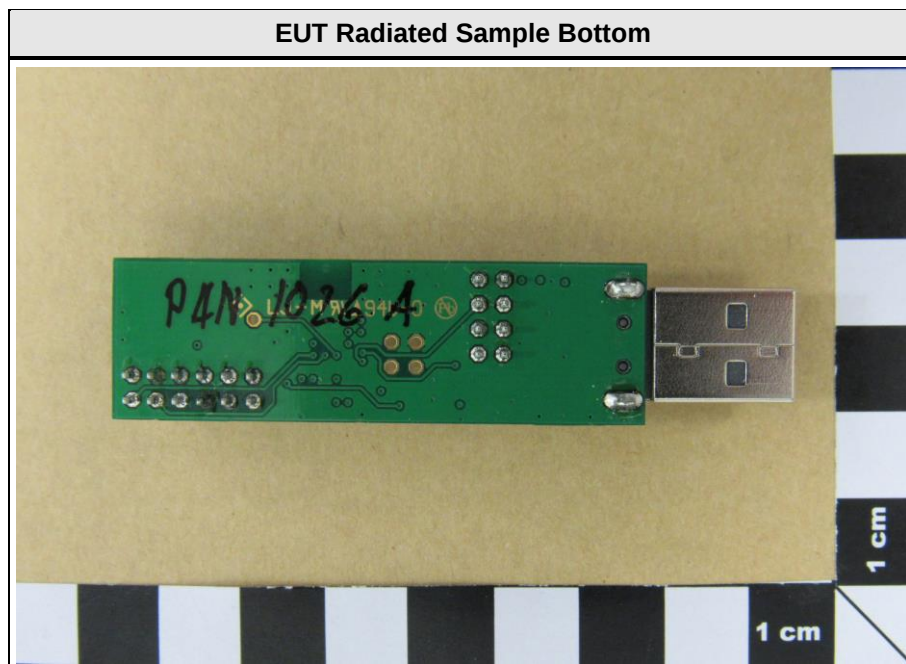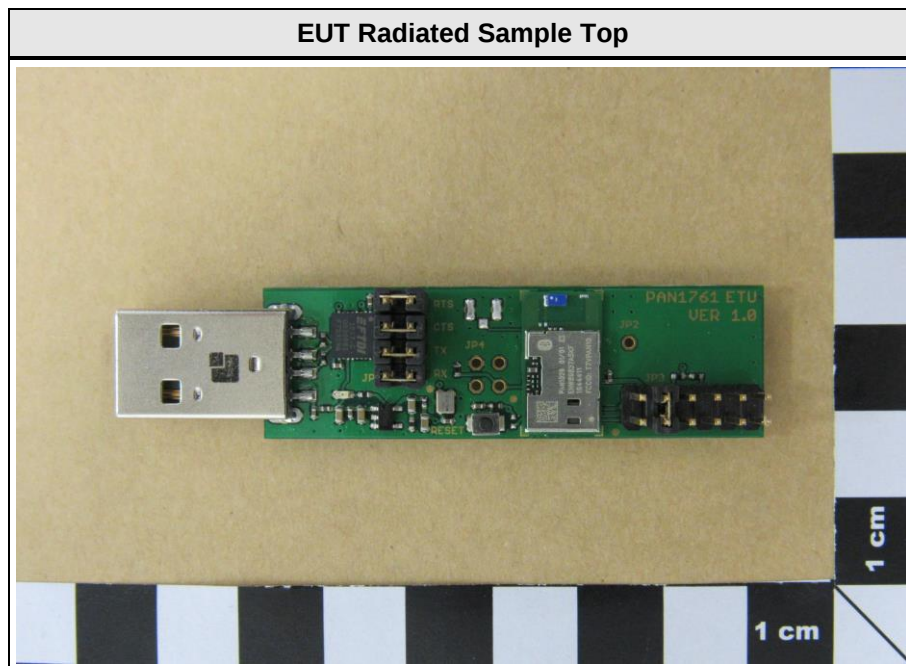


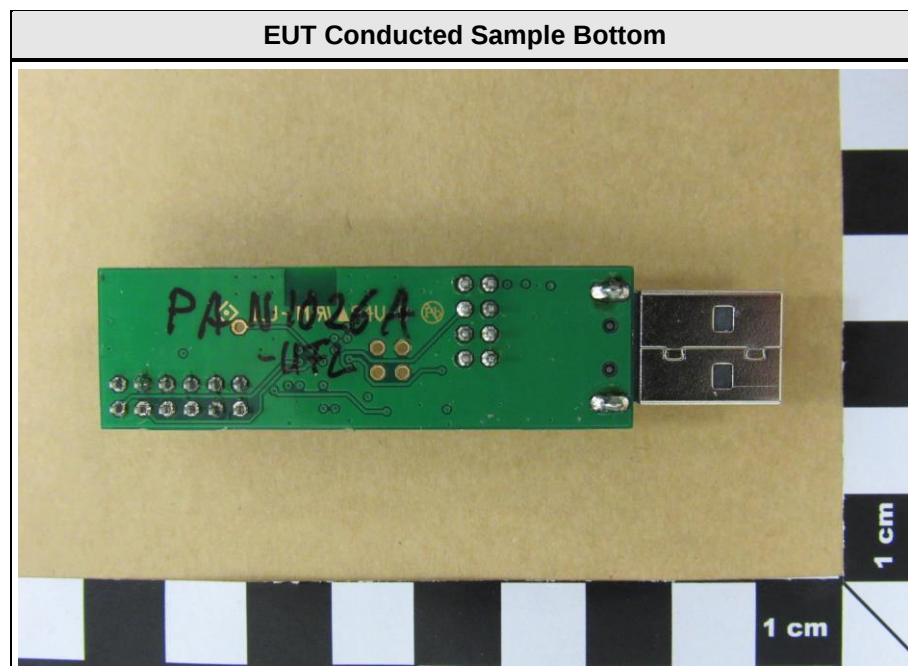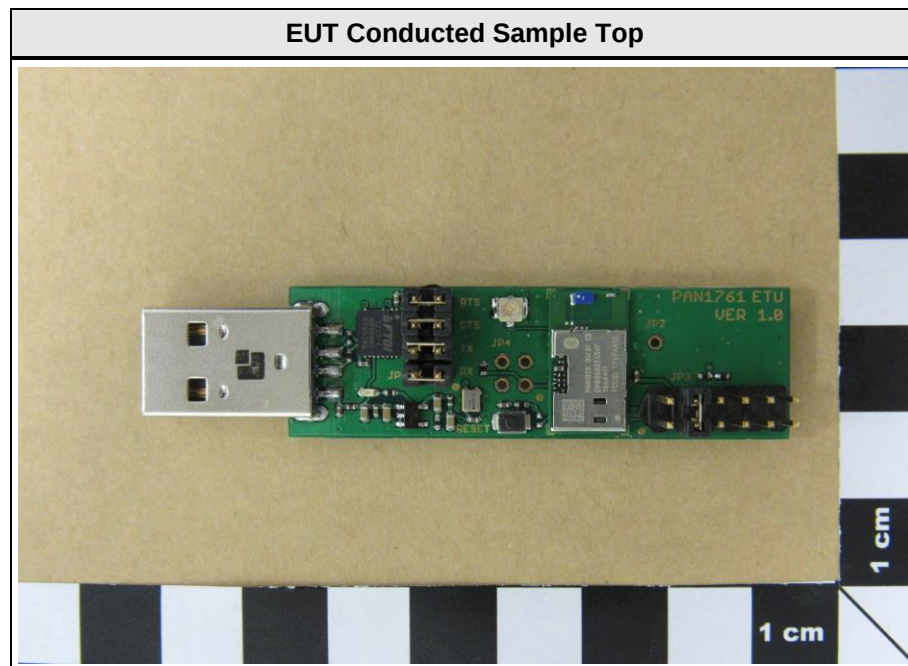

## 1.2 Photos – Equipment Internal

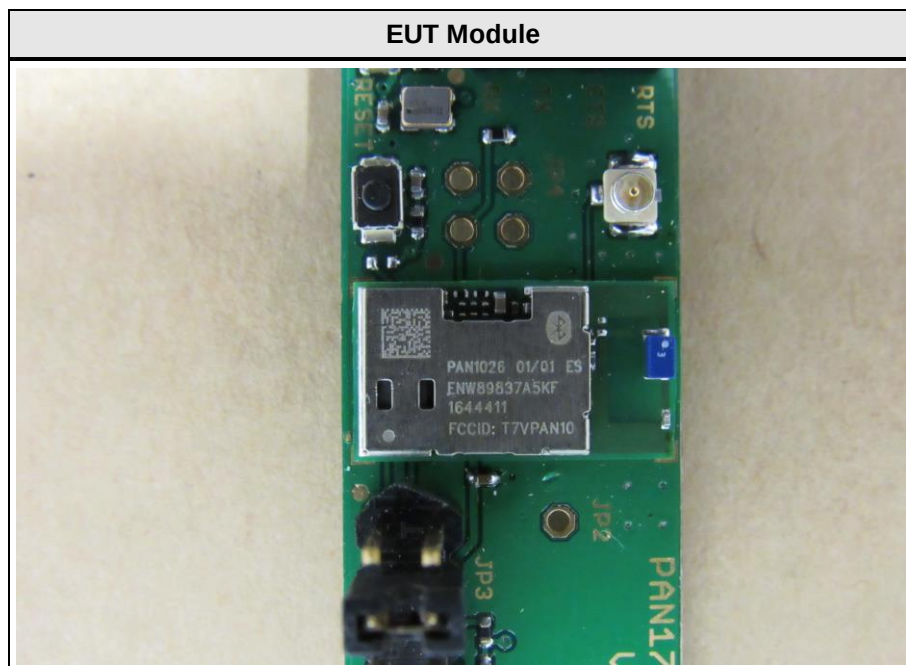

### 1.3 Photos – Test Setup

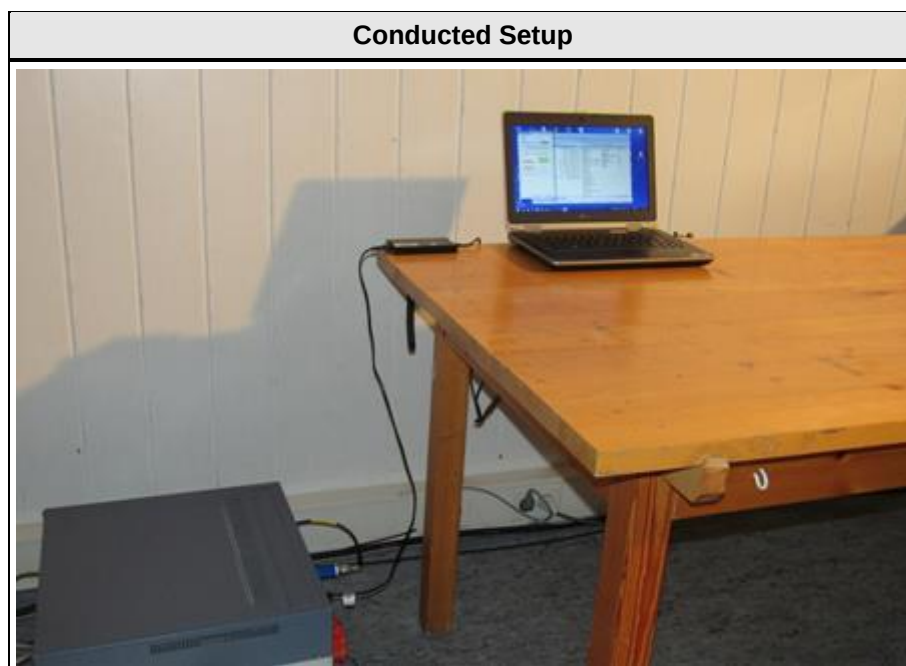

#### 1.4 Support Equipment

| Product Type | Device               | Manufacturer | Model          | Comment    |
|--------------|----------------------|--------------|----------------|------------|
| SIM          | Communication Tester | R&S          | CMW270         | Test mode  |
| AE           | Power Supplay        | Dell         | FA65NE0-00     | S/N RX929  |
| AE           | Laptop               | Dell         | Latitude E6420 | S/N HPJ4R1 |
| Description: |                      |              |                |            |
| AE           | Auxillary Equipment  |              |                |            |
| SIM          | Simulator            |              |                |            |
| CBL          | Connecting Cable     |              |                |            |
| Comment:     |                      |              |                |            |

## 1.5 Test Modes

| Mode           | Description                                                                                       |
|----------------|---------------------------------------------------------------------------------------------------|
| DH5<br>Single  | Mode = Transmit<br>Modulation = GFSK<br>Spreading = None<br>Packet type = DH5<br>Duty cycle = 78% |
| DH5<br>Hopping | Mode = Transmit<br>Modulation = GFSK<br>Spreading = FHSS<br>Packet type = DH5<br>Duty cycle = 78% |
| Receive        | Mode = Receive (Scan)                                                                             |
| Comment:       |                                                                                                   |

## 1.6 Test Frequencies

| Designator | Mode    | Channel | Frequency [MHz] |
|------------|---------|---------|-----------------|
| F1         | Tx / Rx | 0       | 2402            |
| F2         | Tx / Rx | 39      | 2441            |
| F4         | Tx / Rx | 78      | 2480            |

## 1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dBμV. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBμV/m). The FCC limits are given in units of μV/m. The following formula is used to convert the units of μV/m to dBμV/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 \cdot \log(\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

|              |                       |   |             |               |           |
|--------------|-----------------------|---|-------------|---------------|-----------|
| Reading + AF | = Net Reading         | : | Net reading | - FCC limit   | = Margin  |
| +21.5 dBμV   | + 26 dB = 47.5 dBμV/m | : | 47.5 dBμV/m | - 57.0 dBμV/m | = -9.5 dB |

## 2 Result Summary

| FCC 47 CFR Part 15C, ISED RSS-247                     |                                         |                  |        |                    |
|-------------------------------------------------------|-----------------------------------------|------------------|--------|--------------------|
| Product Standard Reference                            | Requirement                             | Reference Method | Result | Remarks            |
| RSS-Gen 6.6                                           | Occupied Bandwidth                      | ANSI C63.10      | N/R    | Informational only |
| FCC § 15.247(a)(1)<br>ISED RSS-247 § 5.1              | 20 dB Bandwidth                         | ANSI C63.10      | N/T    |                    |
| FCC § 15.247(a)(1)(iii)<br>ISED RSS-247 § 5.1         | Number of hopping frequencies           | ANSI C63.10      | N/T    |                    |
| FCC § 15.247(a)(1)<br>ISED RSS-247 § 5.1              | Frequency hopping channel separation    | ANSI C63.10      | N/T    |                    |
| FCC § 15.247(a)(1)(iii)<br>ISED RSS-247 § 5.1         | Time of occupancy (Dwell time)          | ANSI C63.10      | N/T    |                    |
| FCC § 15.247(b)(1)<br>ISED RSS-247 § 5.4              | Maximum peak conducted power            | ANSI C63.10      | PASS   |                    |
| FCC § 15.207<br>ISED RSS-247 § 3.1                    | AC power line conducted emissions       | ANSI C63.10      | PASS   |                    |
| FCC § 15.247(d)<br>ISED RSS-247 § 5.5                 | Band edge compliance                    | ANSI C63.10      | PASS   |                    |
| FCC § 15.247(d)<br>ISED RSS-247 § 5.5                 | Conducted spurious emissions            | ANSI C63.10      | PASS   |                    |
| FCC § 15.247(d)<br>FCC § 15.209<br>ISED RSS-GEN § 8.9 | Transmitter radiated spurious emissions | ANSI C63.10      | PASS   |                    |
| ISED RSS-247 § 3.1                                    | Receiver radiated spurious emissions    | ANSI C63.10      | PASS   |                    |
| Comment:                                              |                                         |                  |        |                    |

| Possible Test Case Verdicts |                                              |
|-----------------------------|----------------------------------------------|
| PASS                        | Test object does meet the requirements       |
| FAIL                        | Test object does not meet the requirements   |
| N/T                         | Required by standard but not tested          |
| N/R                         | Not required by standard for the test object |

### 3 Test Conditions and Results

#### 3.1 Test Conditions and Results - Occupied bandwidth


##### 3.1.1 Information

| Test Information   |                   |
|--------------------|-------------------|
| Reference          | ISED RSS-Gen 6.6  |
| Measurement Method | ANSI C63.10 6.9.3 |
| Operator           | Wilfried Treffke  |
| Date               | 2017-05-04        |

##### 3.1.2 Limits

| Limits                    |
|---------------------------|
| None (Informational only) |

##### 3.1.3 Setup

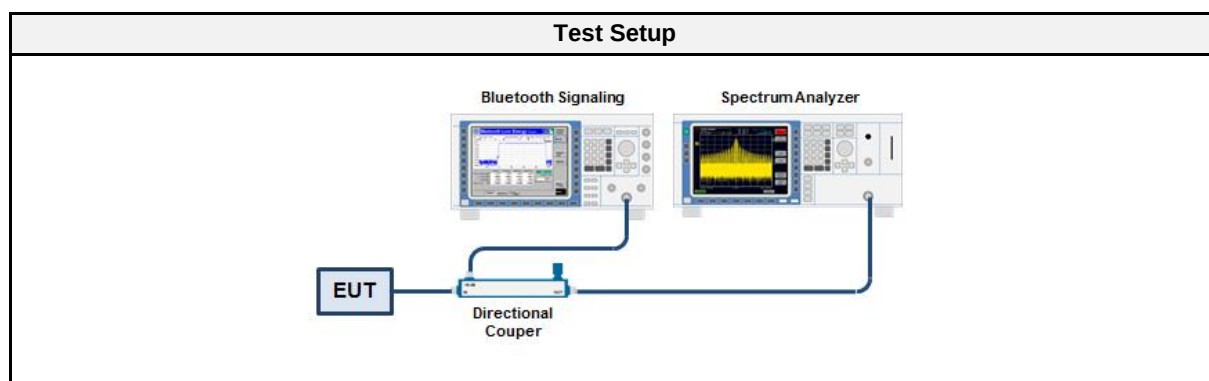

##### 3.1.4 Equipment

| Test Equipment                      |              |        |            |           |          |
|-------------------------------------|--------------|--------|------------|-----------|----------|
| Description                         | Manufacturer | Model  | Identifier | Cal. Date | Cal. Due |
| Spectrum Analyzer                   | R&S          | FSU 26 | EF01003    | 2017-04   | 2018-04  |
| Wideband radio communication tester | R&S          | CMW270 | EF01169    | 2016-09   | 2017-09  |

##### 3.1.5 Procedure


| Test Procedure                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ol style="list-style-type: none"> <li>1. EUT transmitter is activated in test mode under normal conditions</li> <li>2. The spectrum analyzer is set to peak detection and maximum hold with a span twice the emission spectrum</li> <li>3. The resolution bandwidth is set to 1 % of the bandwidth</li> <li>4. The occupied bandwidth is measured with the build-in analyzer function</li> </ol> |

### 3.1.6 Results

| Test Results |                    |                    |
|--------------|--------------------|--------------------|
| Mode         | Frequency<br>[MHz] | Bandwidth<br>[MHz] |
| DH5          | 2402               | 0.860              |
| DH5          | 2441               | 0.855              |
| DH5          | 2480               | 0.855              |

## Occupied Bandwidth


Project Number: G0M-1702-6284  
 Applicant: Panasonic Industrial Devices Europe GmbH  
 Model Description: Class 2 Bluetooth Low Energy Module  
 Model: ENW89837A5KF  
 Test Sample ID: 12653  
 Reference Standards: FCC 15.247, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 6.9.3  
 Operational Mode: DH5, Channel: 0, 2402 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: W. Treffke  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2017-05-04  
 Occupied Bandwidth [MHz]: 0.860

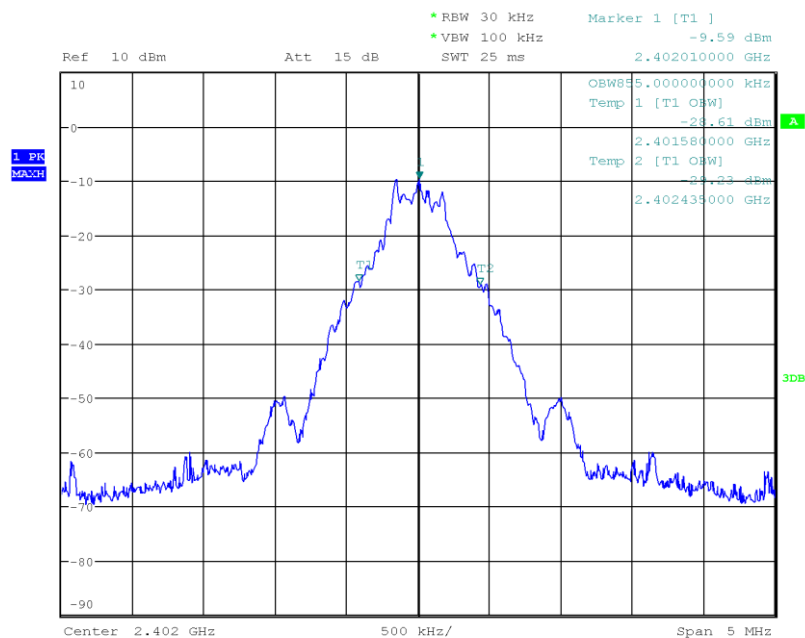

Date: 4.MAY.2017 13:50:43

## Occupied Bandwidth


Project Number: G0M-1702-6284  
 Applicant: Panasonic Industrial Devices Europe GmbH  
 Model Description: Class 2 Bluetooth Low Energy Module  
 Model: ENW89837A5KF  
 Test Sample ID: 12653  
 Reference Standards: FCC 15.247, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 6.9.3  
 Operational Mode: DH5, Channel: 39, 2441 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: W. Treffke  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2017-05-04  
 Occupied Bandwidth [MHz]: 0.855

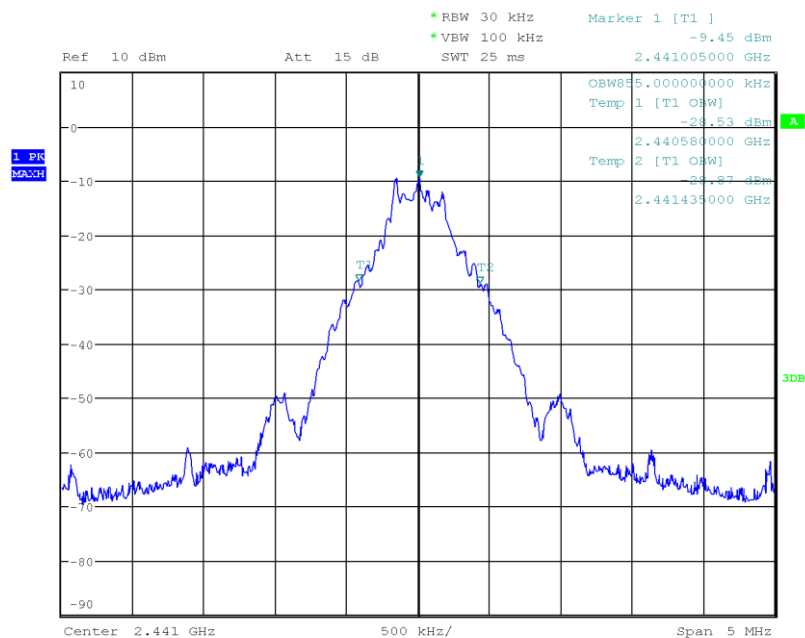

Date: 4.MAY.2017 13:52:30

## Occupied Bandwidth

Project Number: G0M-1702-6284  
 Applicant: Panasonic Industrial Devices Europe GmbH  
 Model Description: Class 2 Bluetooth Low Energy Module  
 Model: ENW89837A5KF  
 Test Sample ID: 12653  
 Reference Standards: FCC 15.247, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 6.9.3  
 Operational Mode: DH5, Channel: 78, 2480 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: W. Treffke  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2017-05-04  
 Occupied Bandwidth [MHz]: 0.855

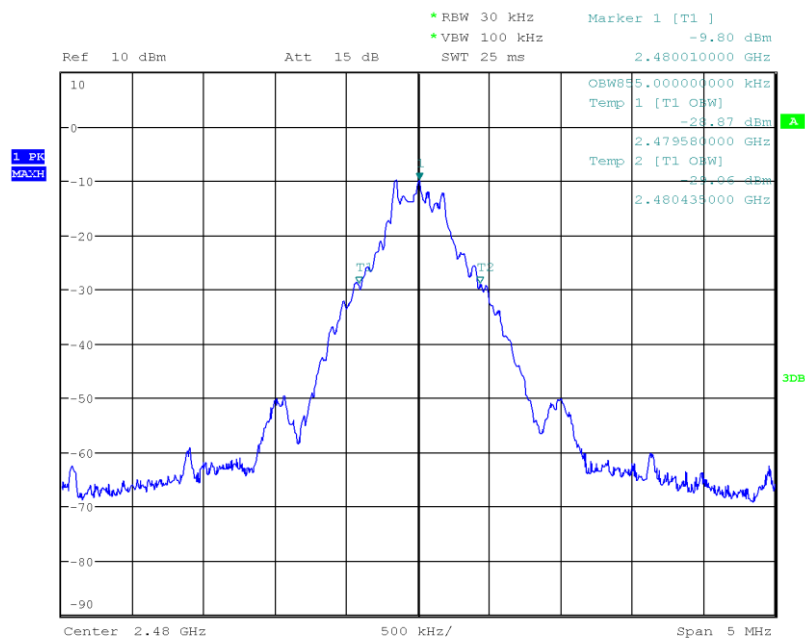

Date: 4.MAY.2017 13:54:28

### 3.2 Test Conditions and Results - Maximum peak conducted output power


#### 3.2.1 Information

| Test Information   |                                      |
|--------------------|--------------------------------------|
| Reference          | FCC 15.247(b)(1) / ISSED RSS-247 5.4 |
| Measurement Method | ANSI C63.10 7.8.5                    |
| Operator           | Wilfried Treffke                     |
| Date               | 2017-05-04                           |

#### 3.2.2 Limits

| Limits                                                                                                                                                                                                                                                                                                                                                                                                                  |                  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| Condition                                                                                                                                                                                                                                                                                                                                                                                                               | Power            |
| Number of hopping channels $\geq 75$                                                                                                                                                                                                                                                                                                                                                                                    | 1 W (30 dBm)     |
| $75 > \text{Number of hopping channels} \geq 15$                                                                                                                                                                                                                                                                                                                                                                        | 0.125 W (21 dBm) |
| The conducted output power limit specified above is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in the table, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi. |                  |

#### 3.2.3 Setup

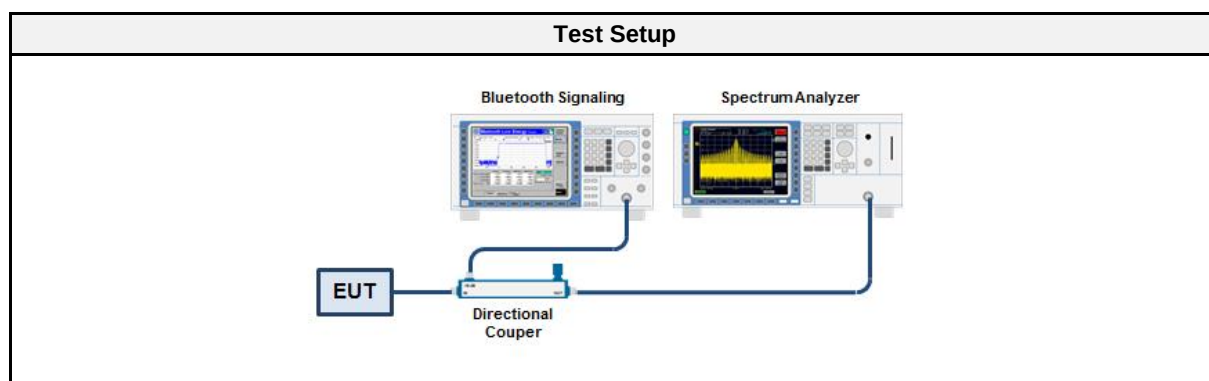

#### 3.2.4 Equipment

| Test Equipment                      |              |        |            |           |          |
|-------------------------------------|--------------|--------|------------|-----------|----------|
| Description                         | Manufacturer | Model  | Identifier | Cal. Date | Cal. Due |
| Spectrum Analyzer                   | R&S          | FSU 26 | EF01003    | 2017-04   | 2018-04  |
| Wideband radio communication tester | R&S          | CMW270 | EF01169    | 2016-09   | 2017-09  |

#### 3.2.5 Procedure

| Test Procedure                                                                                                                                                                                                                                                                                                                                                                 |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ol style="list-style-type: none"> <li>1. EUT set to test hopping mode (Communication tester is used if needed)</li> <li>2. Analyzer resolution bandwidth is set <math>\geq</math> DTS bandwidth</li> <li>3. Detector set to peak and max hold</li> <li>4. Sweep time is set to auto</li> <li>5. After the trace has stabilized a marker is set to peak of envelope</li> </ol> |

### 3.2.6 Results

| Test Results - DH5 |                |              |              |         |
|--------------------|----------------|--------------|--------------|---------|
| Channel<br>[MHz]   | Power<br>[dBm] | Power<br>[W] | Limit<br>[W] | Verdict |
| 2402               | -0.755         | 0.00084      | 1.0          | PASS    |
| 2441               | -0.592         | 0.00087      | 1.0          | PASS    |
| 2480               | -0.946         | 0.00080      | 1.0          | PASS    |

### 3.3 Test Conditions and Results - Band-edge compliance


#### 3.3.1 Information

| Test Information   |                                  |
|--------------------|----------------------------------|
| Reference          | FCC 15.247(d) / ISED RSS-247 5.5 |
| Measurement Method | ANSI C63.10 6.10                 |
| Operator           | Wilfried Treffke                 |
| Date               | 2017-05-04                       |

#### 3.3.2 Limits

| Limits            |                              |
|-------------------|------------------------------|
| Power Measurement | Out-of-band attenuation [dB] |
| Peak              | 20                           |
| RMS               | 30                           |

#### 3.3.3 Setup

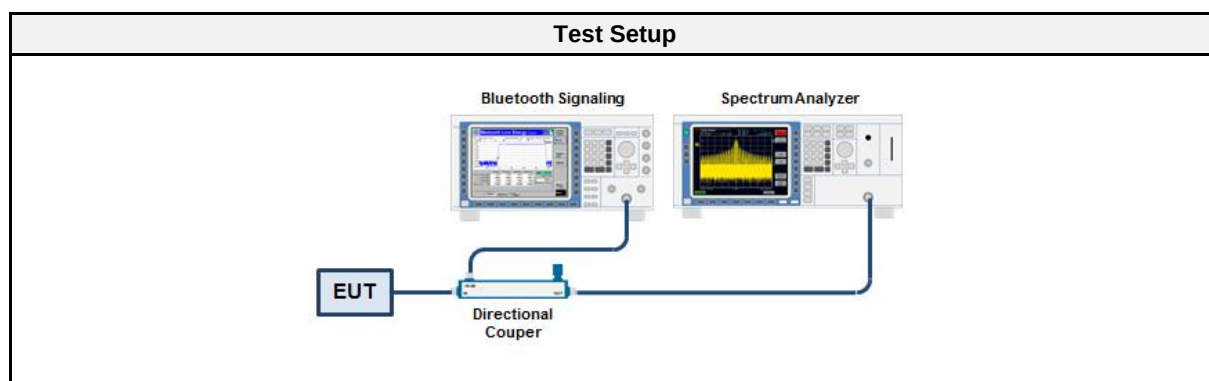

#### 3.3.4 Equipment

| Test Equipment                      |              |        |            |           |          |
|-------------------------------------|--------------|--------|------------|-----------|----------|
| Description                         | Manufacturer | Model  | Identifier | Cal. Date | Cal. Due |
| Spectrum Analyzer                   | R&S          | FSW 43 | EF00896    | 2017-01   | 2017-07  |
| Wideband radio communication tester | R&S          | CMW270 | EF01169    | 2016-09   | 2017-09  |

#### 3.3.5 Procedure


| Test Procedure                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ol style="list-style-type: none"> <li>1. EUT set to test mode (Communication tester is used if needed)</li> <li>2. Span set around lower band edge and detector is set to peak and max hold</li> <li>3. Resolution bandwidth is set to 100 kHz</li> <li>4. Markers are set to peak emission levels within frequency band and outside frequency band</li> <li>5. Band edge attenuation is determined from level difference</li> </ol> |

### 3.3.6 Results

| Test Results |               |                              |            |         |
|--------------|---------------|------------------------------|------------|---------|
| Mode         | Channel [MHz] | Out-of-band Attenuation [dB] | Limit [dB] | Verdict |
| DH5 Single   | 2402          | -49.98                       | -20        | PASS    |
| DH5 Single   | 2480          | -53.69                       | -20        | PASS    |
| DH5 Hopping  | 2402 - 2480   | -50.75                       | -20        | PASS    |
| DH5 Hopping  | 2402 - 2480   | -56.65                       | -20        | PASS    |

## Band-edge Compliance


Project Number: G0M-1702-6284  
 Applicant: Panasonic Industrial Devices Europe GmbH  
 Model Description: Class 2 Bluetooth Low Energy Module  
 Model: ENW89837A5KF  
 Test Sample ID: 12653  
 Reference Standards: FCC 15.247, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 7.8.6, 6.10.4  
 Operational Mode: DH5, Hopping  
 Operating Conditions: Tnom/Vnom  
 Operator: W. Treffke  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2017-05-08  
 Band-edge: Lower  
 In-band Frequency [MHz]: 2411.984  
 Max. in-band Level [dBm/100 kHz]: -1.821  
 Out-of-band Frequency [MHz]: 2399.58  
 Max. out-of-band Level [dBm/100 kHz]: -52.569  
 Attenuation [dB]: -50.75

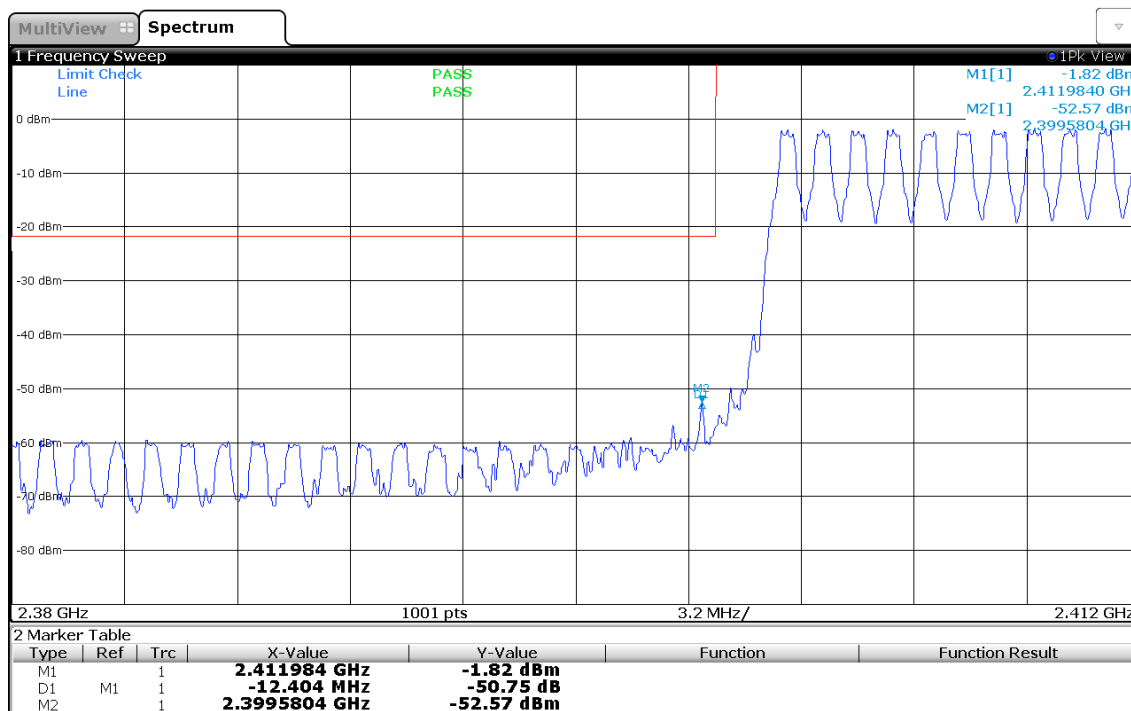

09:16:34 08.05.2017

## Band-edge Compliance


Project Number: G0M-1702-6284  
 Applicant: Panasonic Industrial Devices Europe GmbH  
 Model Description: Class 2 Bluetooth Low Energy Module  
 Model: ENW89837A5KF  
 Test Sample ID: 12653  
 Reference Standards: FCC 15.247, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 7.8.6, 6.10.4  
 Operational Mode: DH5, Channel: 0, 2402 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: W. Treffke  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2017-05-08  
 Band-edge: Lower  
 In-band Frequency [MHz]: 2402.01  
 Max. in-band Level [dBm/100 kHz]: -1.965  
 Out-of-band Frequency [MHz]: 2399.58  
 Max. out-of-band Level [dBm/100 kHz]: -51.95  
 Attenuation [dB]: -49.98

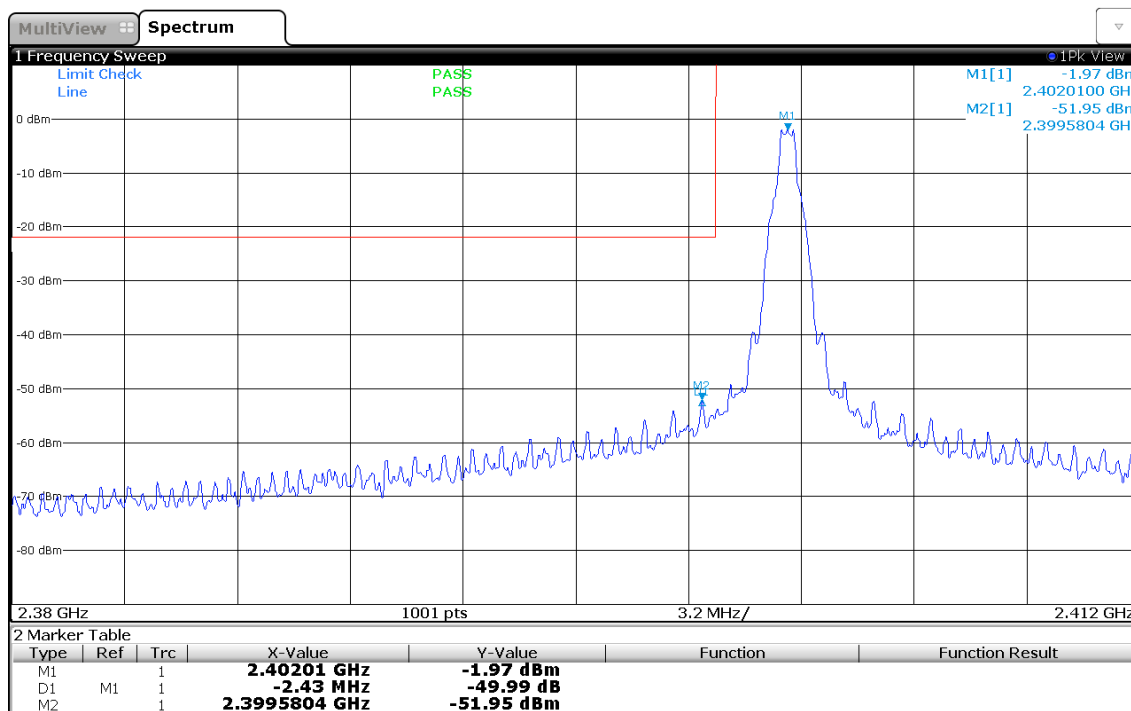

08:58:51 08.05.2017

## Band-edge Compliance


Project Number: G0M-1702-6284  
 Applicant: Panasonic Industrial Devices Europe GmbH  
 Model Description: Class 2 Bluetooth Low Energy Module  
 Model: ENW89837A5KF  
 Test Sample ID: 12653  
 Reference Standards: FCC 15.247, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 7.8.6, 6.10.4  
 Operational Mode: DH5, Hopping  
 Operating Conditions: Tnom/Vnom  
 Operator: W. Treffke  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2017-05-08  
 Band-edge: Upper  
 In-band Frequency [MHz]: 2475.997  
 Max. in-band Level [dBm/100 kHz]: -1.843  
 Out-of-band Frequency [MHz]: 2483.864  
 Max. out-of-band Level [dBm/100 kHz]: -58.496  
 Attenuation [dB]: -56.65

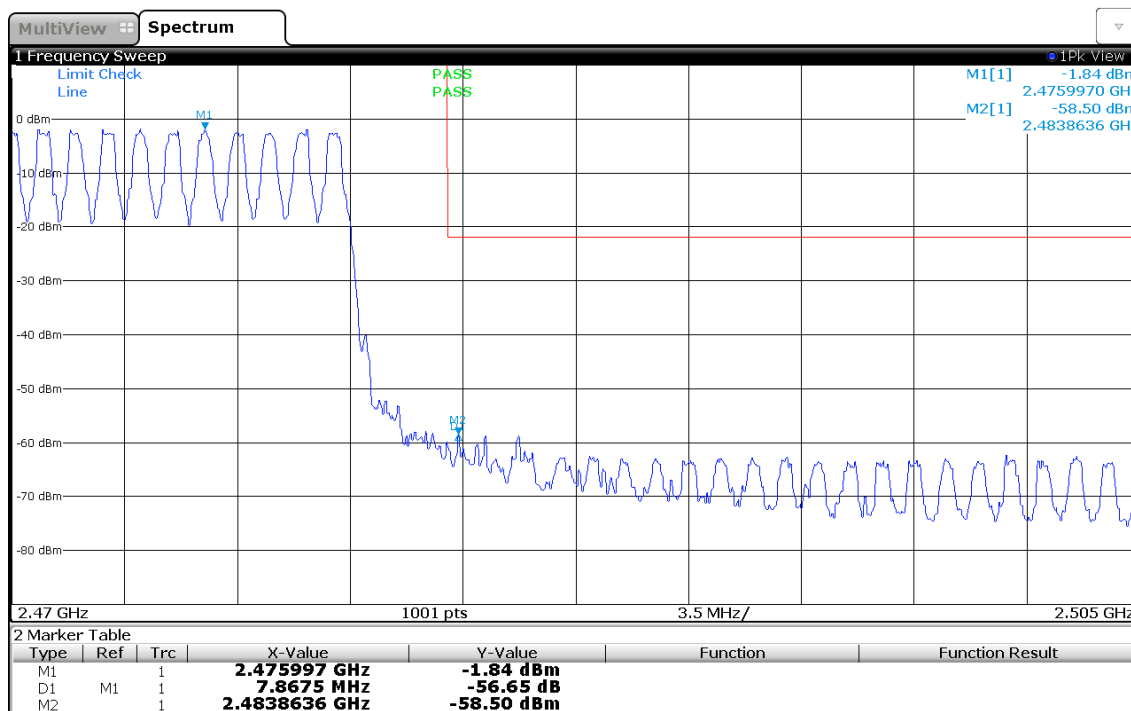

09:13:46 08.05.2017

## Band-edge Compliance

Project Number: G0M-1702-6284  
 Applicant: Panasonic Industrial Devices Europe GmbH  
 Model Description: Class 2 Bluetooth Low Energy Module  
 Model: ENW89837A5KF  
 Test Sample ID: 12653  
 Reference Standards: FCC 15.247, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 7.8.6, 6.10.4  
 Operational Mode: DH5, Channel: 78, 2480 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: W. Treffke  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2017-05-08  
 Band-edge: Upper  
 In-band Frequency [MHz]: 2480.017  
 Max. in-band Level [dBm/100 kHz]: -1.759  
 Out-of-band Frequency [MHz]: 2484.038  
 Max. out-of-band Level [dBm/100 kHz]: -55.445  
 Attenuation [dB]: -53.69

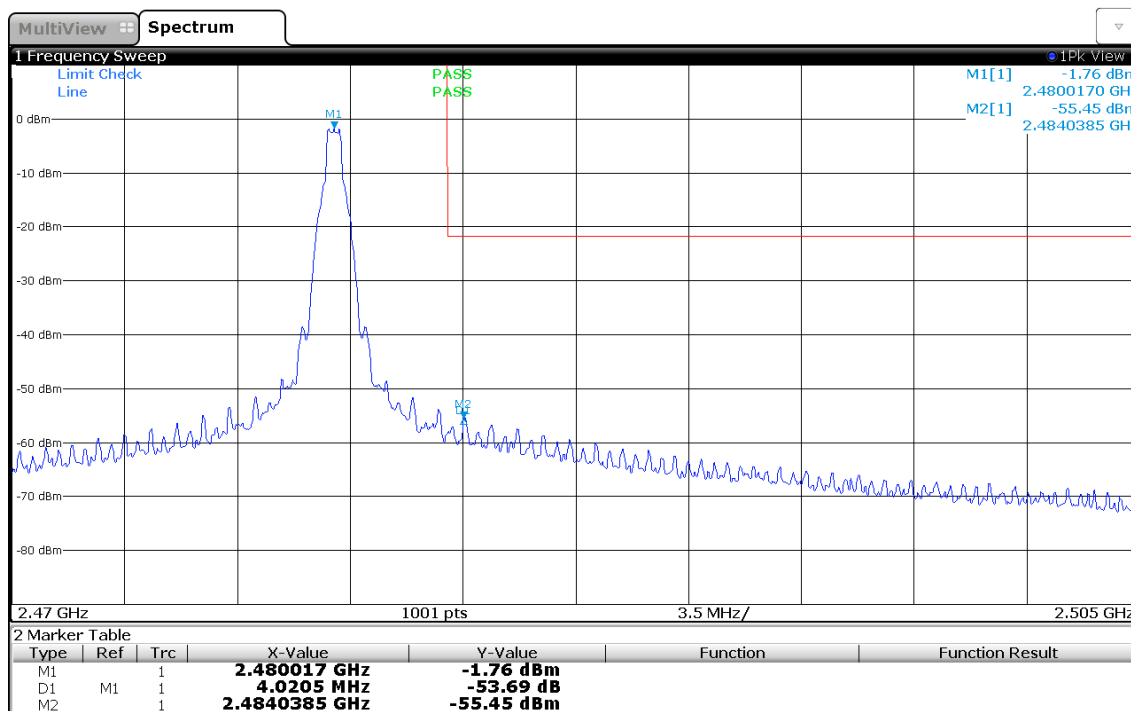

09:12:05 08.05.2017

### 3.4 Test Conditions and Results - Conducted spurious emissions


#### 3.4.1 Information

| Test Information   |                                   |
|--------------------|-----------------------------------|
| Reference          | FCC 15.247(d) / ISSED RSS-247 5.5 |
| Measurement Method | ANSI C63.10 6.10                  |
| Operator           | Wilfried Treffke                  |
| Date               | 2017-05-08                        |

#### 3.4.2 Limits

| Limits            |                              |
|-------------------|------------------------------|
| Power Measurement | Out-of-band attenuation [dB] |
| Peak              | 20                           |
| RMS               | 30                           |

#### 3.4.3 Setup

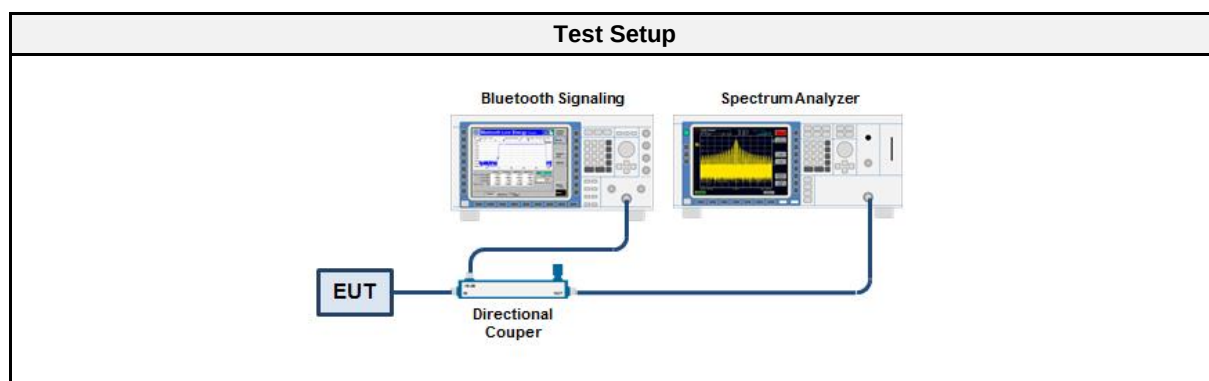

#### 3.4.4 Equipment

| Test Equipment    |              |        |            |           |          |
|-------------------|--------------|--------|------------|-----------|----------|
| Description       | Manufacturer | Model  | Identifier | Cal. Date | Cal. Due |
| Spectrum Analyzer | R&S          | FSW 43 | EF00896    | 2017-01   | 2017-07  |

#### 3.4.5 Procedure


| Test Procedure                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ol style="list-style-type: none"> <li>1. EUT set to test mode (Communication tester is used if needed)</li> <li>2. Span set around lower band edge and detector is set to peak and max hold</li> <li>3. Resolution bandwidth is set to 100 kHz</li> <li>4. Markers are set to peak emission levels within frequency band and outside frequency band</li> <li>5. Band edge attenuation is determined from level difference</li> </ol> |

#### 3.4.6 Results

| Test Results |               |         |
|--------------|---------------|---------|
| Mode         | Channel [MHz] | Verdict |
| DH5          | 2402          | PASS    |
| DH5          | 2441          | PASS    |
| DH5          | 2480          | PASS    |

## Conducted Spurious Emissions


Project Number: G0M-1702-6284  
 Applicant: Panasonic Industrial Devices Europe GmbH  
 Model Description: Class 2 Bluetooth Low Energy Module  
 Model: ENW89837A5KF  
 Test Sample ID: 12653  
 Reference Standards: FCC 15.247, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 7.8.8  
 Operational Mode: DH5, Channel: 0, 2402 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: W. Treffke  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2017-05-08  
 Max. in-band Frequency [MHz]: 2402.0  
 Max. in-band Level [dBm/100 kHz]: -2.7  
 Out-of-band Limit [dBm/100 kHz]: -22.7

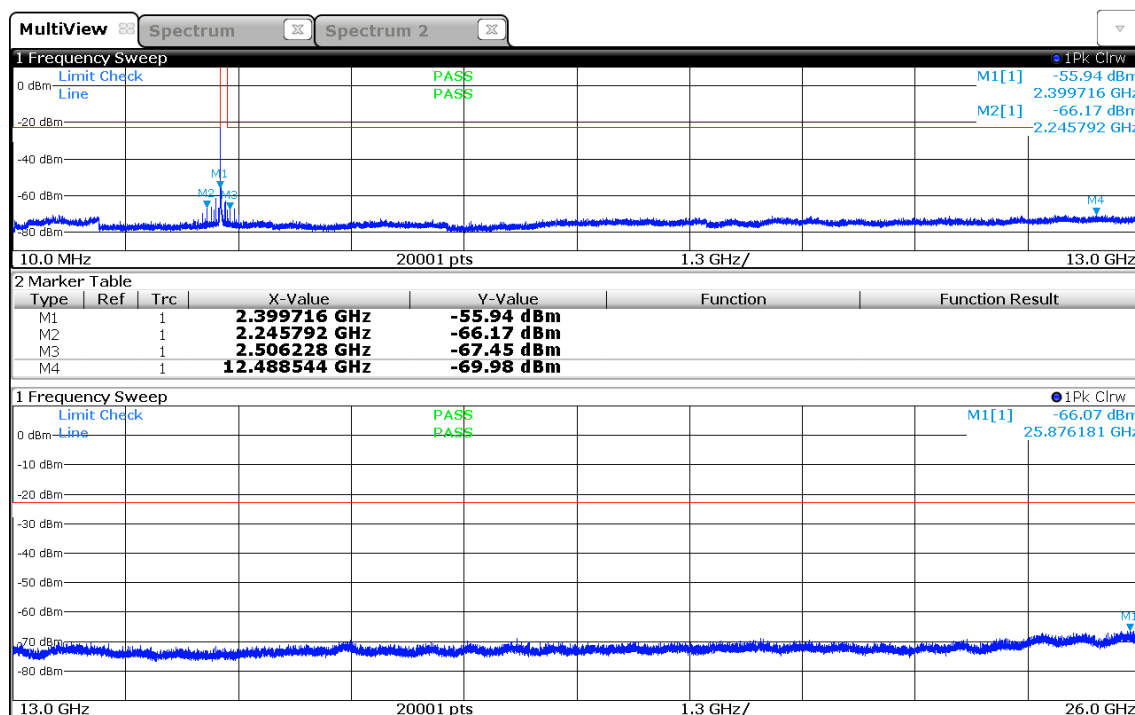

11:04:03 08.05.2017

## Conducted Spurious Emissions


Project Number: G0M-1702-6284  
 Applicant: Panasonic Industrial Devices Europe GmbH  
 Model Description: Class 2 Bluetooth Low Energy Module  
 Model: ENW89837A5KF  
 Test Sample ID: 12653  
 Reference Standards: FCC 15.247, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 7.8.8  
 Operational Mode: DH5, Channel: 39, 2441 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: W. Treffke  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2017-05-08  
 Max. in-band Frequency [MHz]: 2441.0  
 Max. in-band Level [dBm/100 kHz]: -2.6  
 Out-of-band Limit [dBm/100 kHz]: -22.6

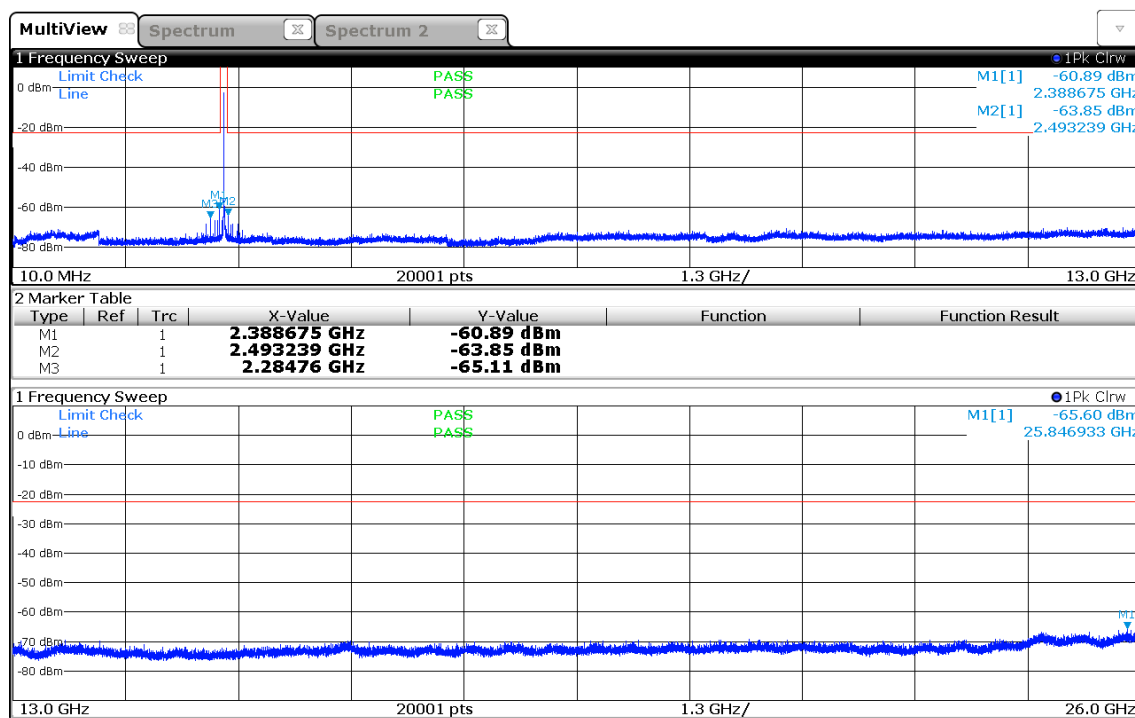

11:12:01 08.05.2017

## Conducted Spurious Emissions

Project Number: G0M-1702-6284  
 Applicant: Panasonic Industrial Devices Europe GmbH  
 Model Description: Class 2 Bluetooth Low Energy Module  
 Model: ENW89837A5KF  
 Test Sample ID: 12653  
 Reference Standards: FCC 15.247, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 7.8.8  
 Operational Mode: DH5, Channel: 78, 2480 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: W. Treffke  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2017-05-08  
 Max. in-band Frequency [MHz]: 2480.0  
 Max. in-band Level [dBm/100 kHz]: -2.9  
 Out-of-band Limit [dBm/100 kHz]: -22.9

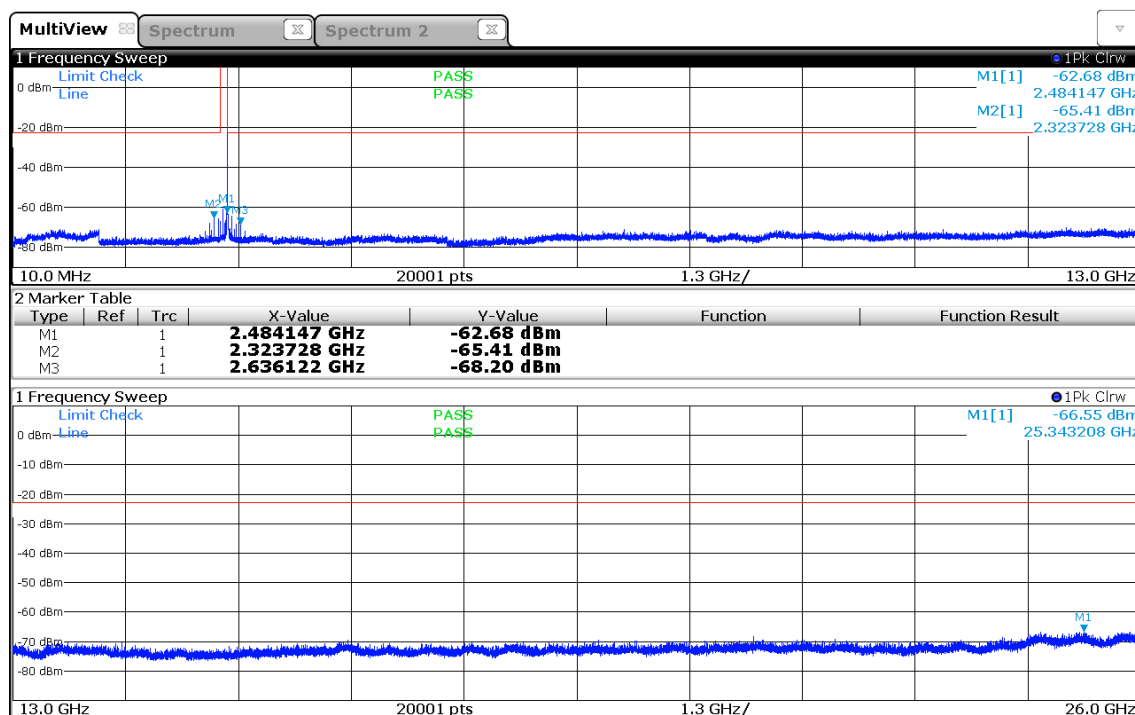

11:21:03 08.05.2017

### 3.5 Test Conditions and Results - Transmitter radiated emissions


#### 3.5.1 Information


| Test Information   |                                   |
|--------------------|-----------------------------------|
| Reference          | FCC 15.247(d) / ISSED RSS-GEN 8.9 |
| Measurement Method | ANSI C63.10 6.4, 6.5, 6.6         |
| Operator           | Wilfried Treffke                  |
| Date               | 2017-05-09                        |

#### 3.5.2 Limits

| Limits          |            |                               |                          |
|-----------------|------------|-------------------------------|--------------------------|
| Frequency [MHz] | Detector   | Field strength [dB $\mu$ V/m] | Measurement distance [m] |
| 0.009 - 0.09    | Average    | 2400/F[kHz]                   | 300                      |
| 0.09 - 0.110    | Quasi-Peak | 2400/F[kHz]                   | 300                      |
| 0.110 - 0.490   | Average    | 2400/F[kHz]                   | 300                      |
| 0.490 - 1.705   | Quasi-Peak | 24000/F[kHz]                  | 30                       |
| 1.705 - 30.0    | Quasi-Peak | 30                            | 30                       |
| 30 - 88         | Quasi-Peak | 100                           | 3                        |
| 88 - 216        | Quasi-Peak | 150                           | 3                        |
| 216 - 960       | Quasi-Peak | 200                           | 3                        |
| 960 - 1000      | Quasi-Peak | 500                           | 3                        |
| >1000           | Average    | 500                           | 3                        |

#### 3.5.3 Setup

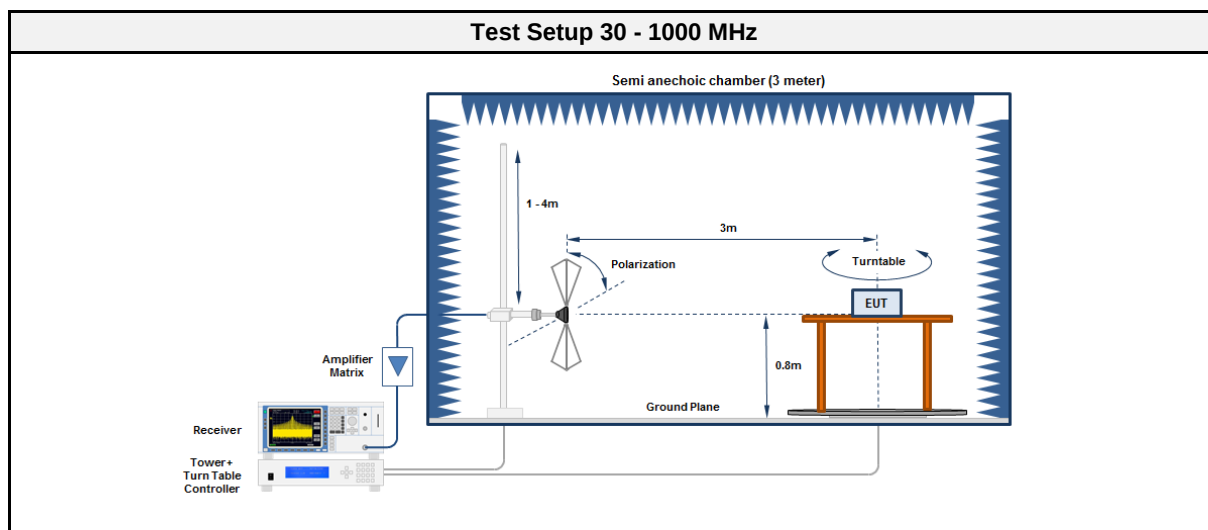

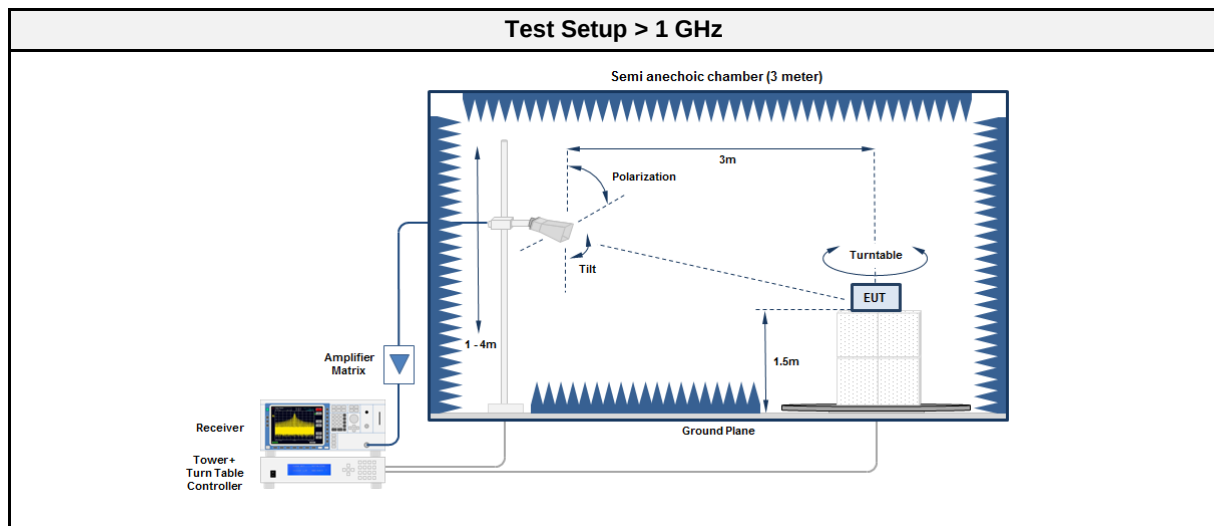

### 3.5.4 Equipment

| Test Equipment 30 - 1000 MHz |              |        |            |           |          |
|------------------------------|--------------|--------|------------|-----------|----------|
| Description                  | Manufacturer | Model  | Identifier | Cal. Date | Cal. Due |
| Anechoic Chamber             | Frankonia    | AC1    | EF00062    | 2017-02   | 2020-02  |
| Measurement Receiver         | R&S          | ESU 26 | EF00887    | 2017-01   | 2018-01  |
| Biconical antenna            | R&S          | HK116  | EF00030    | 2016-04   | 2019-04  |
| LPD antenna                  | R&S          | HL223  | EF00202    | 2016-02   | 2018-02  |

| Test Equipment > 1 GHz |              |            |            |           |          |
|------------------------|--------------|------------|------------|-----------|----------|
| Description            | Manufacturer | Model      | Identifier | Cal. Date | Cal. Due |
| Anechoic Chamber       | Frankonia    | AC1        | EF00062    | 2017-02   | 2020-02  |
| Measurement Receiver   | R&S          | ESU 26     | EF00887    | 2017-01   | 2018-01  |
| Horn antenna           | Schwarzbeck  | BBHA 9120D | EF00019    | 2016-09   | 2018-09  |

### 3.5.5 Procedure

| Test Procedure 30 - 1000 MHz                                                                                                                                                                                                                                                                                                                                                                                                                             |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| <ol style="list-style-type: none"> <li>1. EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground</li> <li>2. EUT set to test mode</li> <li>3. The receiver is set to peak detection with max hold</li> <li>4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m</li> <li>5. All significant emissions are measured again using the corresponding final detector</li> </ol> |  |

| Test Procedure > 1 GHz                                                                                                                                                                                                                                                                                                                                                                                                                                   |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| <ol style="list-style-type: none"> <li>1. EUT is placed on a non conducting support at the center of a turn table 1.5 m above the ground</li> <li>2. EUT set to test mode</li> <li>3. The receiver is set to peak detection with max hold</li> <li>4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m</li> <li>5. All significant emissions are measured again using the corresponding final detector</li> </ol> |  |

### 3.5.6 Results

| Test Results - DH5 |                |                |      |      |                |             |
|--------------------|----------------|----------------|------|------|----------------|-------------|
| Channel [MHz]      | Emission [MHz] | Level [dBμV/m] | Det. | Pol. | Limit [dBμV/m] | Margin [dB] |
| 2402               | 2349.6         | 50.45          | pk   | hor  | 74.00          | -23.55      |
| 2402               | 2349.6         | 37.78          | RMS  | hor  | 54.00          | -16.22      |
| 2402               | 2383.2         | 51.05          | pk   | ver  | 74.00          | -22.95      |
| 2402               | 2383.2         | 37.43          | RMS  | ver  | 54.00          | -16.57      |

### 3.6 Test Conditions and Results - Receiver radiated emissions



#### 3.6.1 Information

| Test Information   |                      |
|--------------------|----------------------|
| Reference          | ISED RSS-247 3.1     |
| Measurement Method | ANSI C63.10 6.5, 6.6 |
| Operator           | Wilfried Treffke     |
| Date               | 2017-05-09           |

#### 3.6.2 Limits

| Limits          |            |                               |                          |
|-----------------|------------|-------------------------------|--------------------------|
| Frequency [MHz] | Detector   | Field strength [dB $\mu$ V/m] | Measurement distance [m] |
| 30 - 88         | Quasi-Peak | 100                           | 3                        |
| 88 - 216        | Quasi-Peak | 150                           | 3                        |
| 216 - 960       | Quasi-Peak | 200                           | 3                        |
| 960 - 1000      | Quasi-Peak | 500                           | 3                        |
| >1000           | Average    | 500                           | 3                        |

#### 3.6.3 Setup

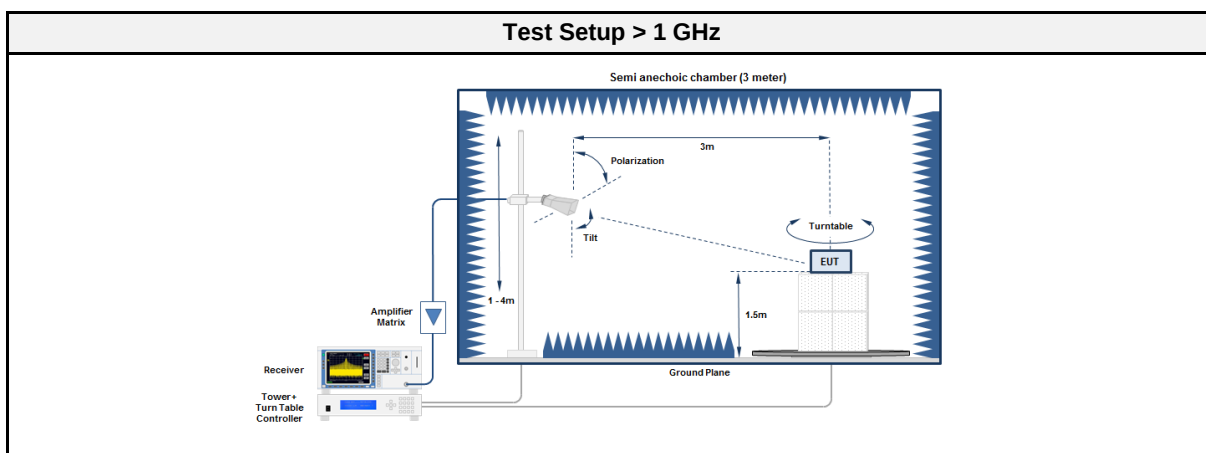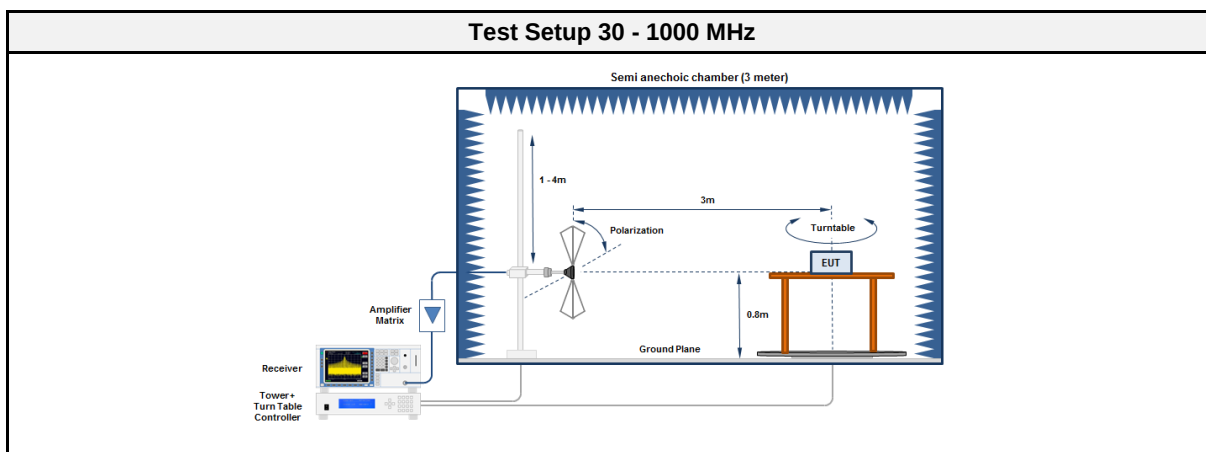

### 3.6.4 Equipment

| Test Equipment 30 - 1000 MHz |              |        |            |           |          |
|------------------------------|--------------|--------|------------|-----------|----------|
| Description                  | Manufacturer | Model  | Identifier | Cal. Date | Cal. Due |
| Anechoic Chamber             | Frankonia    | AC1    | EF00062    | 2017-02   | 2020-02  |
| Measurement Receiver         | R&S          | ESU 26 | EF00887    | 2017-01   | 2018-01  |
| Biconical antenna            | R&S          | HK116  | EF00030    | 2016-04   | 2019-04  |
| LPD antenna                  | R&S          | HL223  | EF00202    | 2016-02   | 2018-02  |

| Test Equipment > 1 GHz |              |            |            |           |          |
|------------------------|--------------|------------|------------|-----------|----------|
| Description            | Manufacturer | Model      | Identifier | Cal. Date | Cal. Due |
| Anechoic Chamber       | Frankonia    | AC1        | EF00062    | 2017-02   | 2020-02  |
| Measurement Receiver   | R&S          | ESU 26     | EF00887    | 2017-01   | 2018-01  |
| Horn antenna           | Schwarzbeck  | BBHA 9120D | EF00019    | 2016-09   | 2018-09  |

### 3.6.5 Procedure

| Test Procedure 30 - 1000 MHz                                                                                                                                                                                                                                                                                                                                                                                                                             |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| <ol style="list-style-type: none"> <li>1. EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground</li> <li>2. EUT set to test mode</li> <li>3. The receiver is set to peak detection with max hold</li> <li>4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m</li> <li>5. All significant emissions are measured again using the corresponding final detector</li> </ol> |  |

| Test Procedure > 1 GHz                                                                                                                                                                                                                                                                                                                                                                                                                                   |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| <ol style="list-style-type: none"> <li>1. EUT is placed on a non conducting support at the center of a turn table 1.5 m above the ground</li> <li>2. EUT set to test mode</li> <li>3. The receiver is set to peak detection with max hold</li> <li>4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m</li> <li>5. All significant emissions are measured again using the corresponding final detector</li> </ol> |  |

### 3.6.6 Results

| Test Results  |                |                |      |      |                |             |
|---------------|----------------|----------------|------|------|----------------|-------------|
| Channel [MHz] | Emission [MHz] | Level [dBμV/m] | Det. | Pol. | Limit [dBμV/m] | Margin [dB] |
| 2441          | 7425           | 49.02          | pk   | hor  | 53.98          | -04.96      |


## ANNEX A Transmitter sprurious emissions

### Spurious emissions according to FCC 15.247

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
EUT Name: Class 2 Bluetooth Low Energy Module  
Model: ENW89837A5KF  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
Antenna: Rohde & Schwarz HK 116, Horizontal  
Measurement distance: 3 m  
Mode: TX; BT, DH5; 2402 MHz  
Test Date: 2017-05-09  
Note:

Index 79

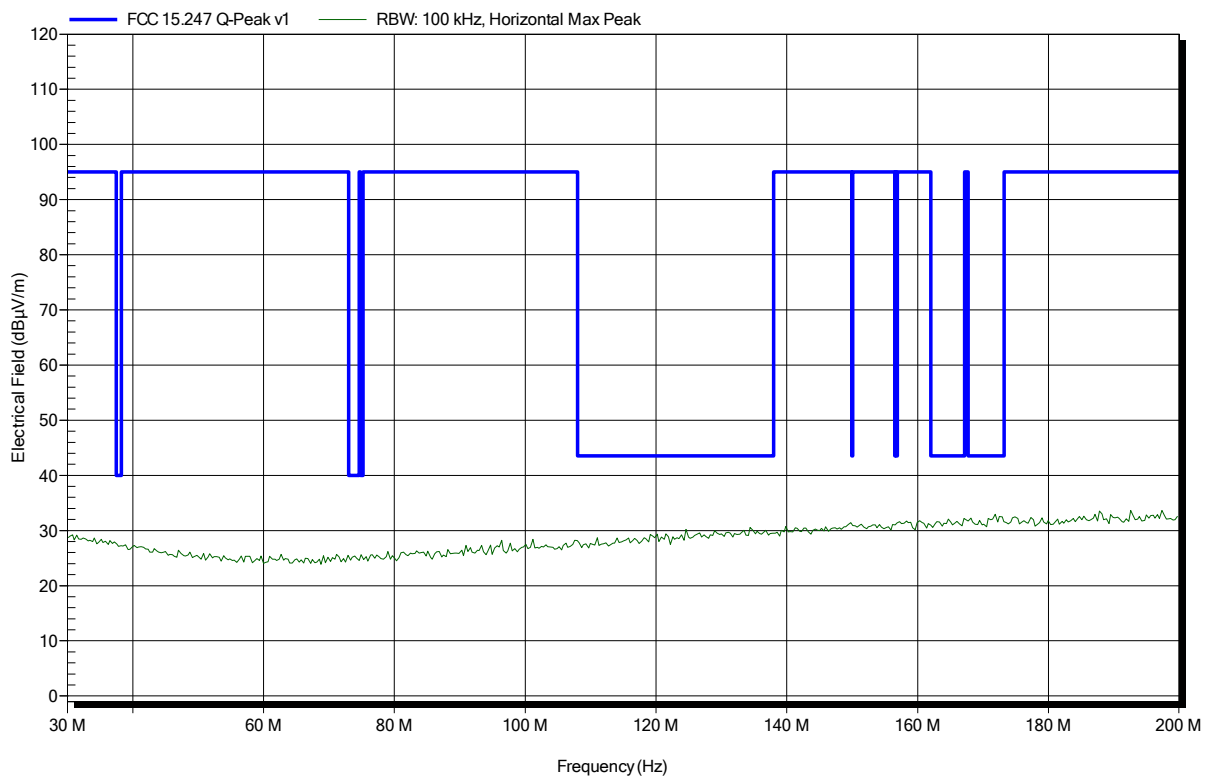


## Spurious emissions according to FCC 15.247

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
EUT Name: Class 2 Bluetooth Low Energy Module  
Model: ENW89837A5KF  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
Antenna: Rohde & Schwarz HK 116, Horizontal  
Measurement distance: 3 m  
Mode: TX; BT, DH5; 2402 MHz  
Test Date: 2017-05-09  
Note:

Index 80

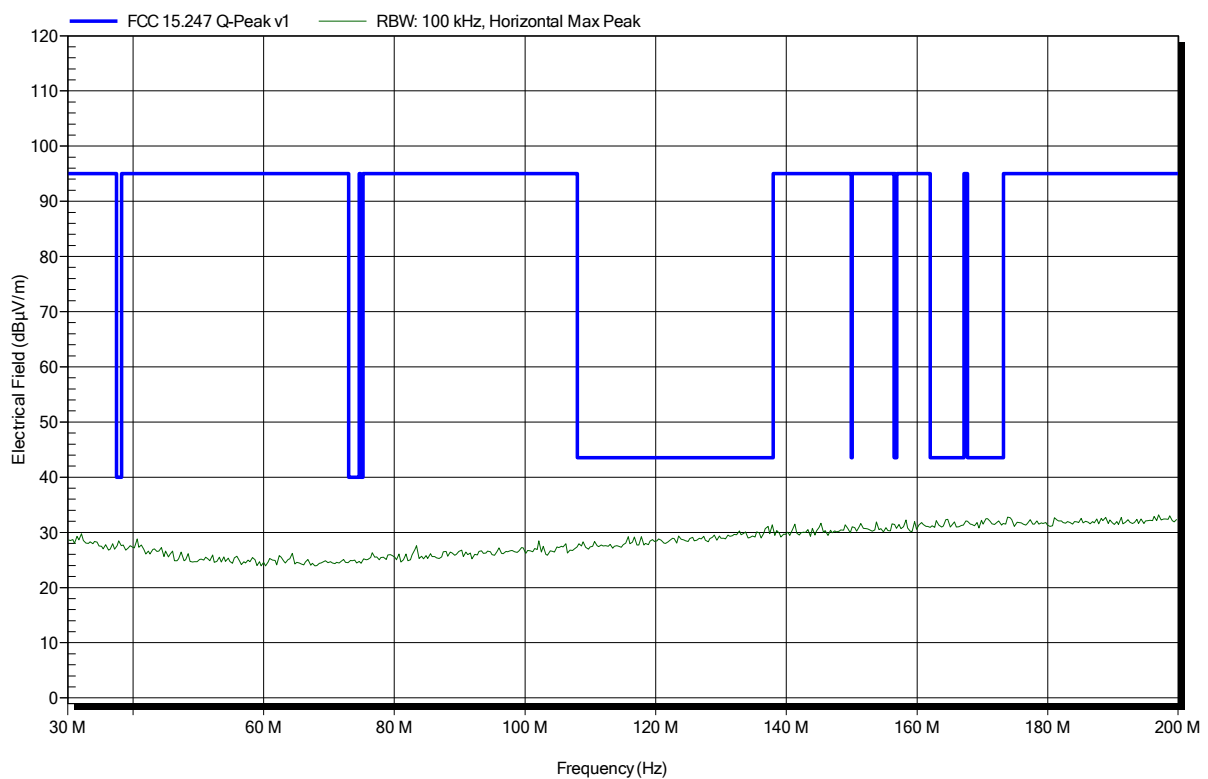


## Spurious emissions according to FCC 15.247

Project number: G0M-1702-6284

|                       |                                                       |
|-----------------------|-------------------------------------------------------|
| Applicant:            | Panasonic Industrial Devices Europe GmbH              |
| EUT Name:             | Class 2 Bluetooth Low Energy Module                   |
| Model:                | ENW89837A5KF                                          |
| Test Site:            | Eurofins Product Service GmbH                         |
| Operator:             | Mr. Treffke                                           |
| Test Conditions:      | Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board) |
| Antenna:              | Rohde & Schwarz HL 223, Horizontal                    |
| Measurement distance: | 3 m                                                   |
| Mode:                 | TX; BT, DH5; 2402 MHz                                 |
| Test Date:            | 2017-05-09                                            |
| Note:                 |                                                       |

Index 81

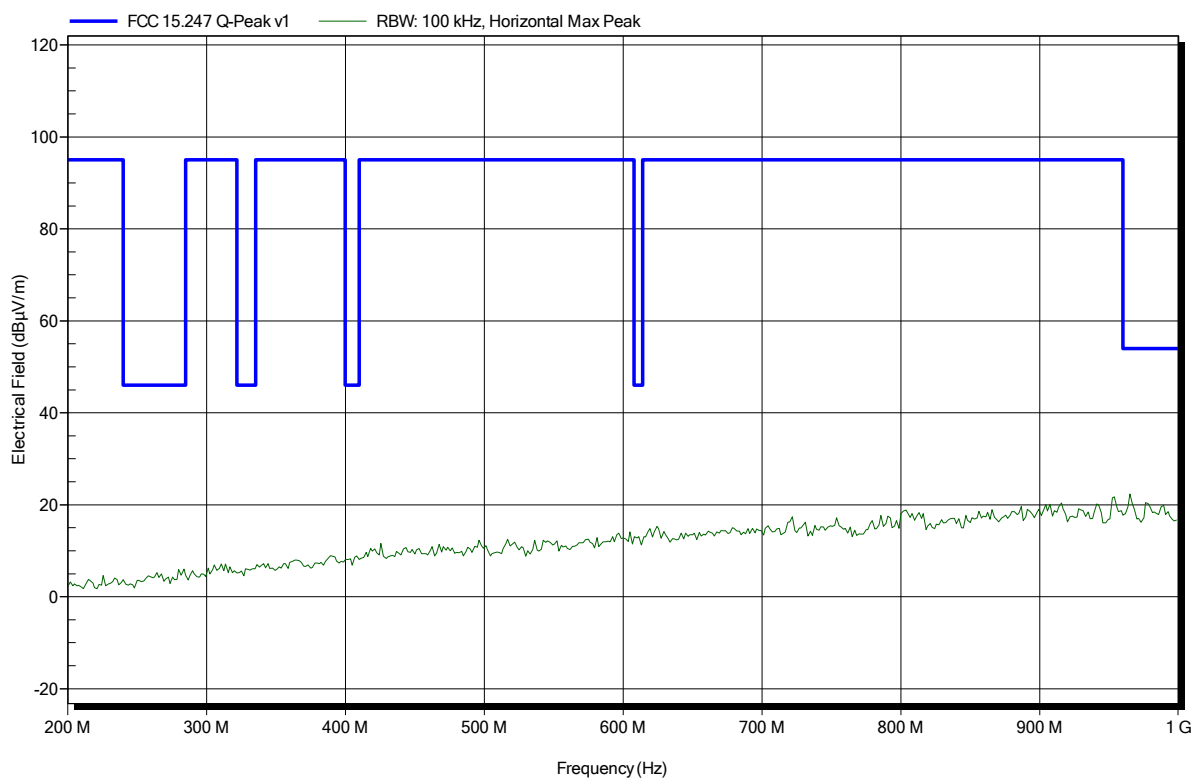


## Spurious emissions according to FCC 15.247

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
EUT Name: Class 2 Bluetooth Low Energy Module  
Model: ENW89837A5KF  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
Antenna: Rohde & Schwarz HL 223, Vertical  
Measurement distance: 3 m  
Mode: TX; BT, DH5; 2402 MHz  
Test Date: 2017-05-09  
Note:

Index 82

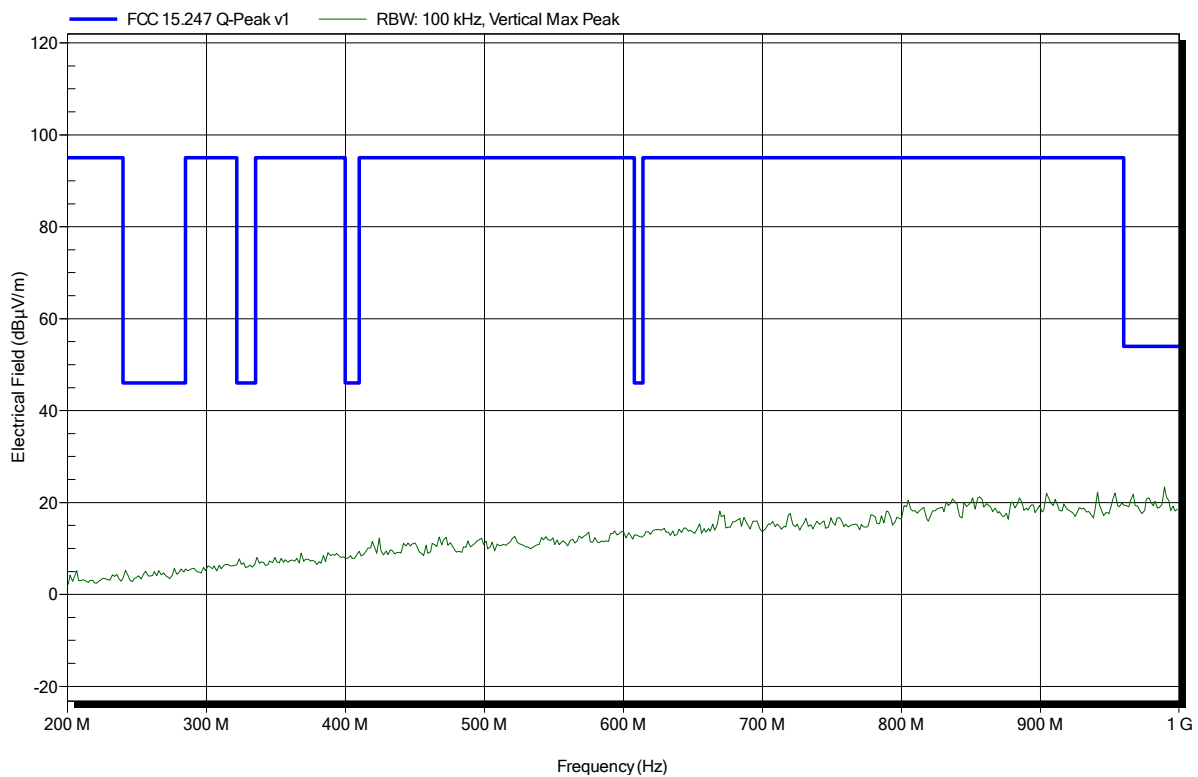


## Spurious emissions according to FCC 15.247

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
 EUT Name: Class 2 Bluetooth Low Energy Module  
 Model: ENW89837A5KF  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT, DH5; 2402 MHz  
 Test Date: 2017-05-09  
 Note:

Index 49

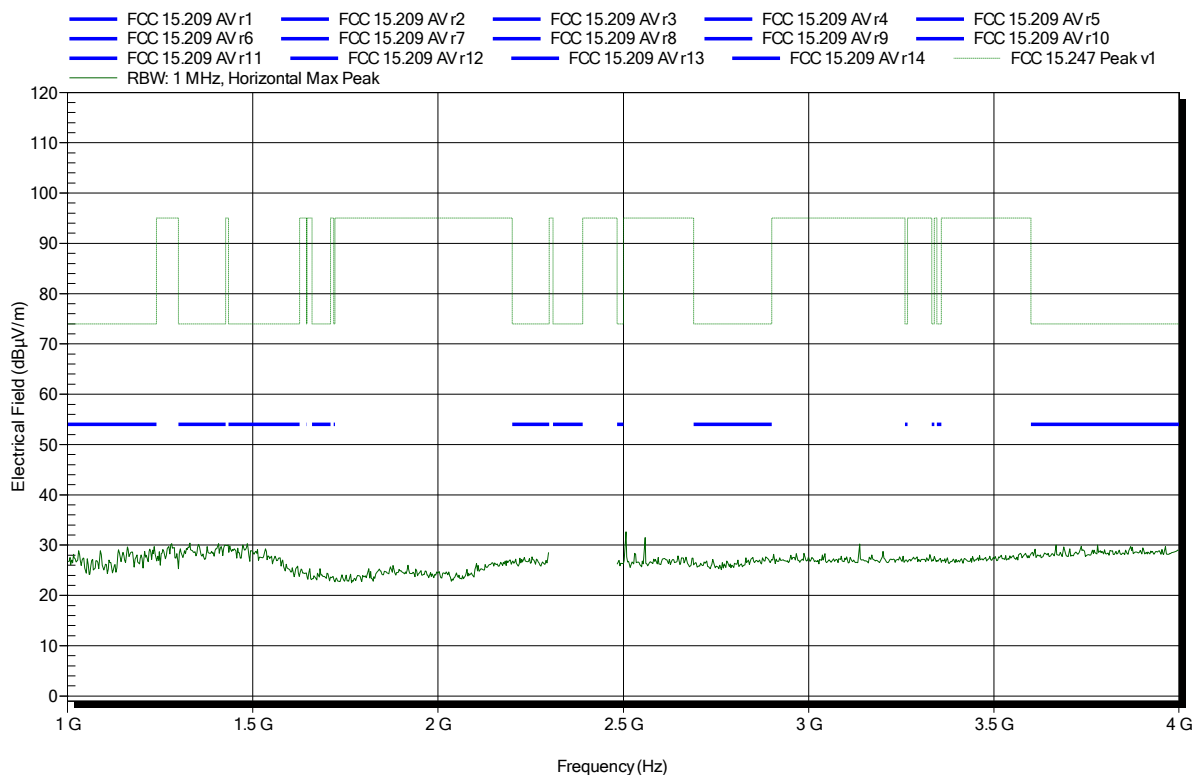


## Spurious emissions according to FCC 15.247

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
 EUT Name: Class 2 Bluetooth Low Energy Module  
 Model: ENW89837A5KF  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT, DH5; 2402 MHz  
 Test Date: 2017-05-09  
 Note:

Index 54

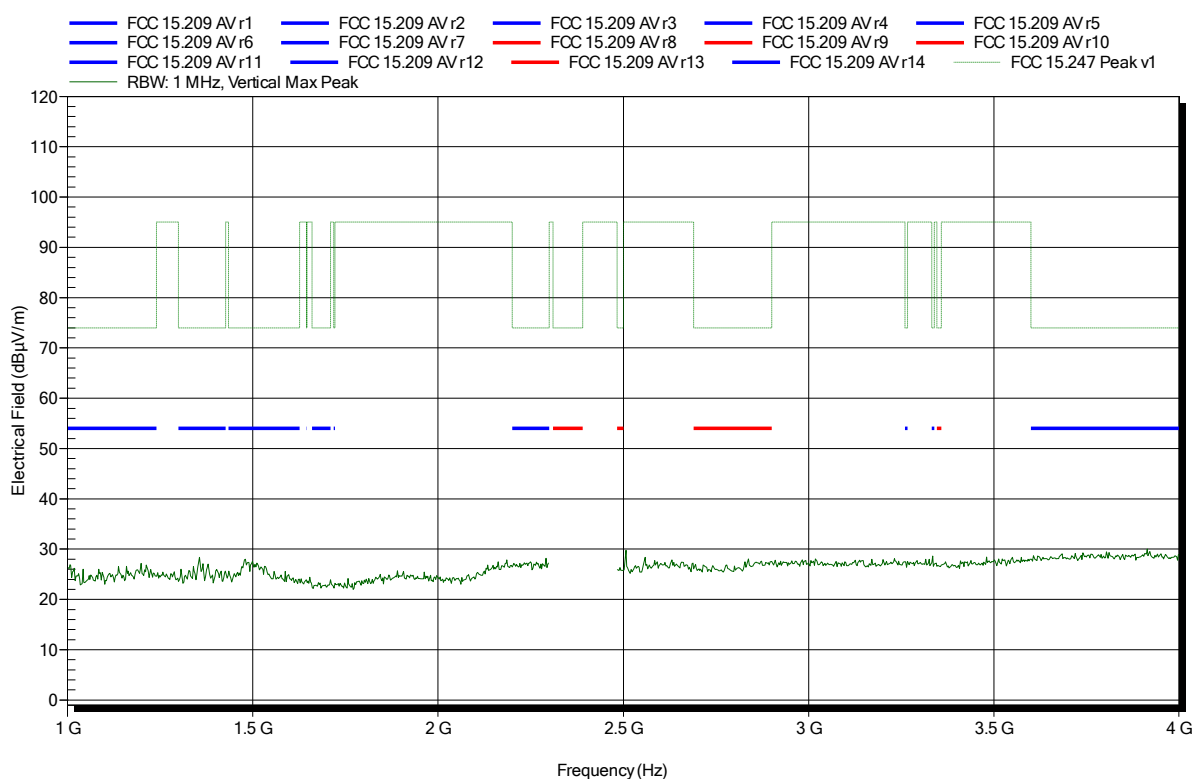


## Spurious emissions according to FCC 15.247

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
 EUT Name: Class 2 Bluetooth Low Energy Module  
 Model: ENW89837A5KF  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT, DH5; 2402 MHz  
 Test Date: 2017-05-09  
 Note: lower bandedge

Index 50

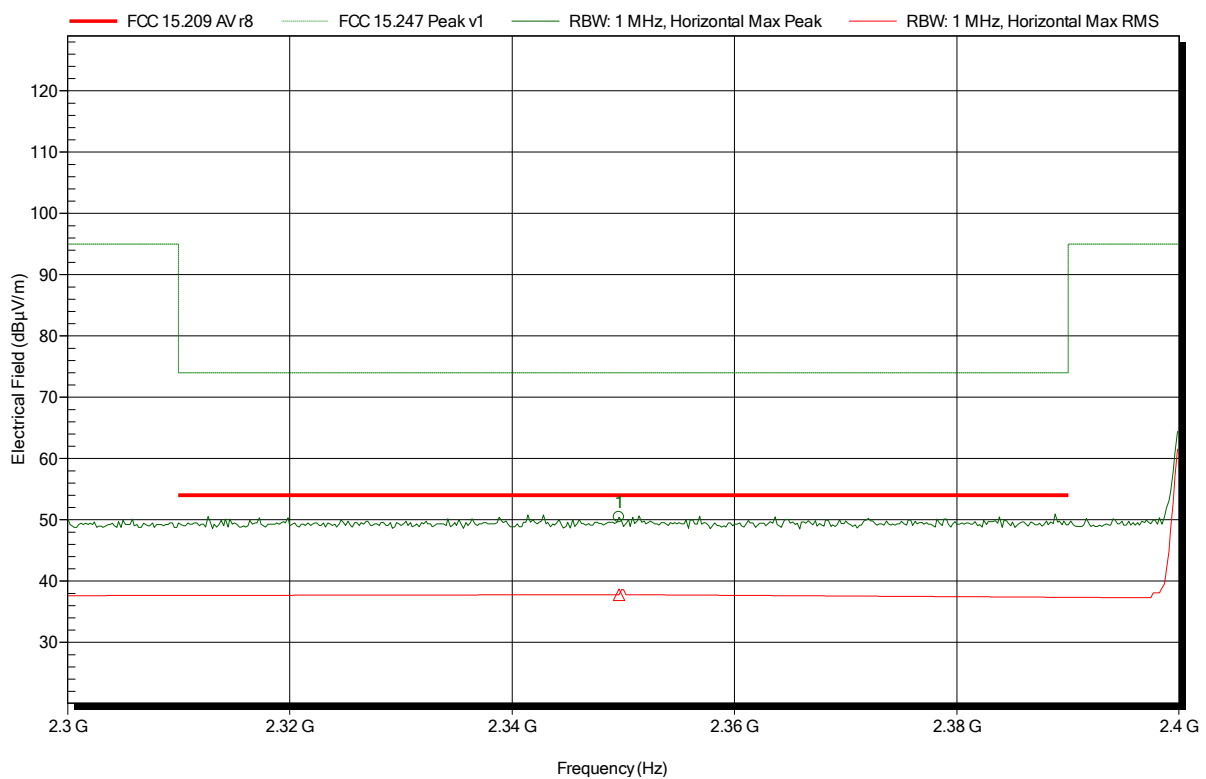


| Frequency  | Peak         | Peak Limit | Peak Difference | Peak Status |
|------------|--------------|------------|-----------------|-------------|
| 2.3496 GHz | 50.45 dBµV/m | 74 dBµV/m  | -23.55 dB       | Pass        |
| Frequency  | RMS          | RMS Limit  | RMS Difference  | RMS Status  |
| 2.3496 GHz | 37.78 dBµV/m | 54 dBµV/m  | -16.22 dB       | Pass        |

## Spurious emissions according to FCC 15.247

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
 EUT Name: Class 2 Bluetooth Low Energy Module  
 Model: ENW89837A5KF  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT, DH5; 2402 MHz  
 Test Date: 2017-05-09  
 Note: lower bandedge

Index 55

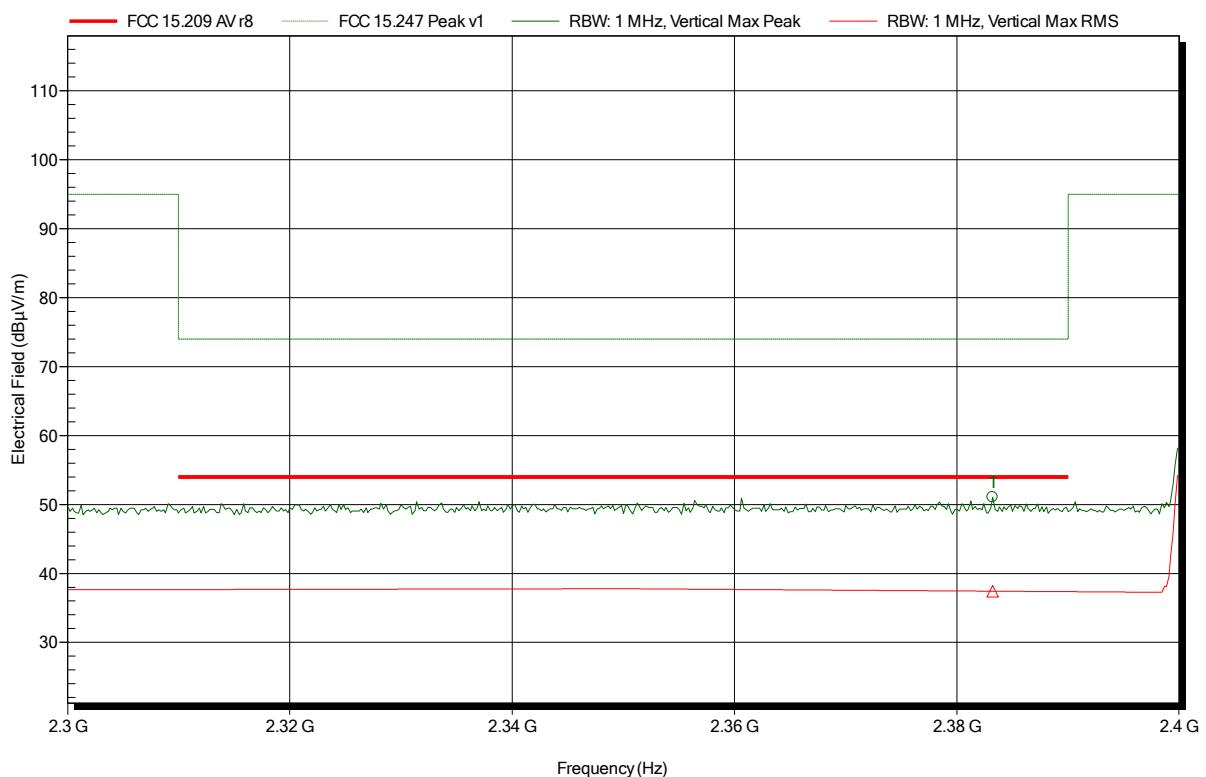


| Frequency  | Peak         | Peak Limit | Peak Difference | Peak Status |
|------------|--------------|------------|-----------------|-------------|
| 2.3832 GHz | 51.05 dBµV/m | 74 dBµV/m  | -22.95 dB       | Pass        |
| Frequency  | RMS          | RMS Limit  | RMS Difference  | RMS Status  |
| 2.3832 GHz | 37.43 dBµV/m | 54 dBµV/m  | -16.57 dB       | Pass        |

## Spurious emissions according to FCC 15.247

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
EUT Name: Class 2 Bluetooth Low Energy Module  
Model: ENW89837A5KF  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
Antenna: Schwarzbeck BBHA 9120D, Horizontal  
Measurement distance: 1 m converted to 3m  
Mode: TX; BT, DH5; 2402 MHz  
Test Date: 2017-05-09  
Note:

Index 51

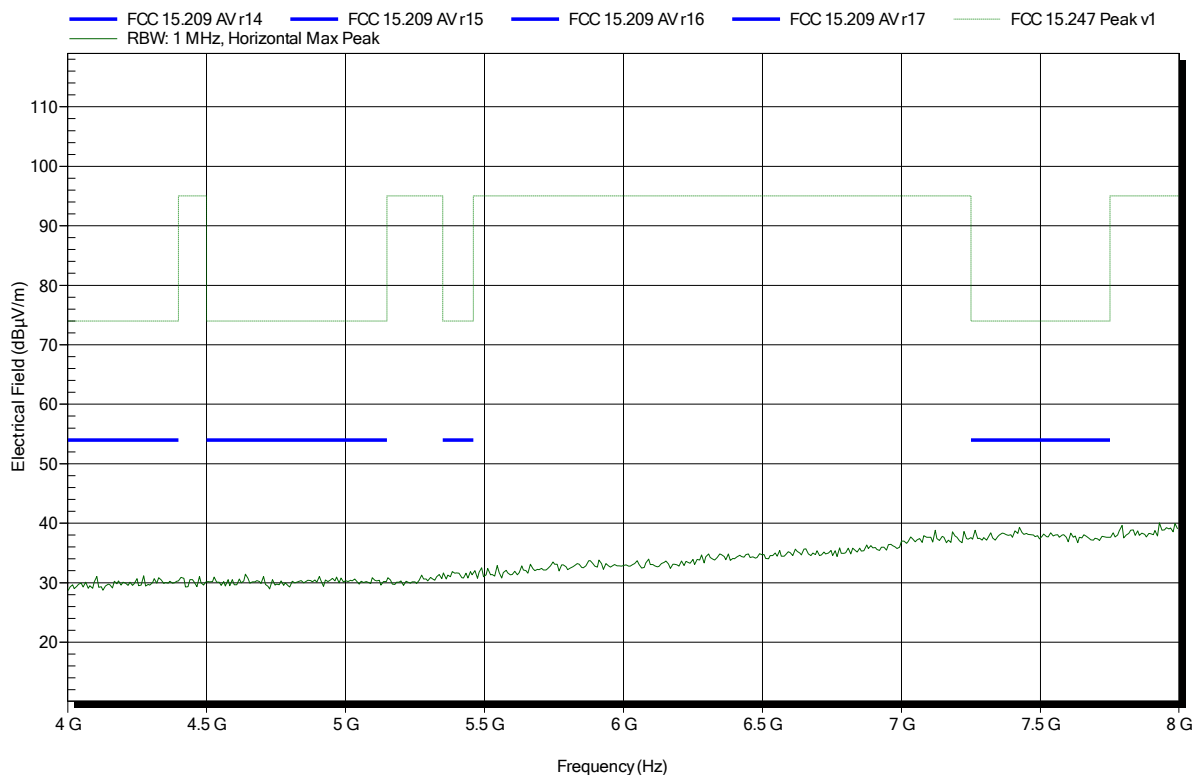


## Spurious emissions according to FCC 15.247

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
EUT Name: Class 2 Bluetooth Low Energy Module  
Model: ENW89837A5KF  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
Antenna: Schwarzbeck BBHA 9120D, Vertical  
Measurement distance: 1 m converted to 3m  
Mode: TX; BT, DH5; 2402 MHz  
Test Date: 2017-05-09  
Note:

Index 58

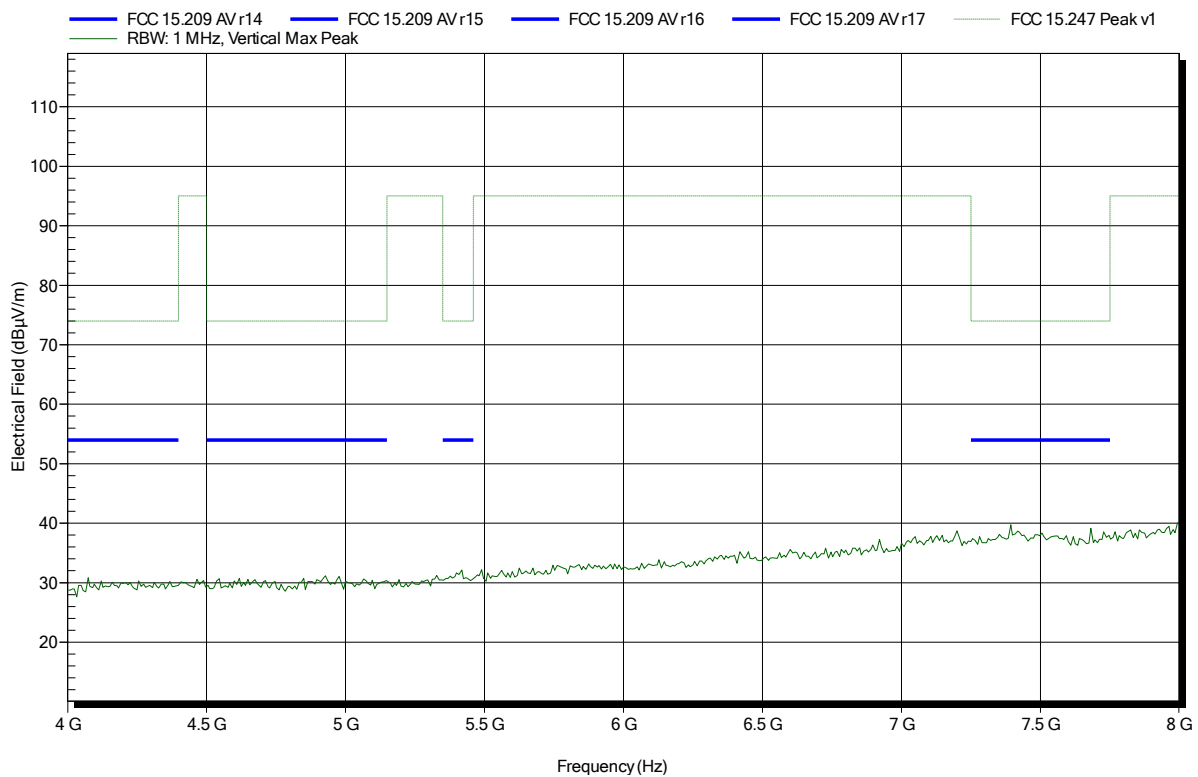


## Spurious emissions according to FCC 15.247

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
EUT Name: Class 2 Bluetooth Low Energy Module  
Model: ENW89837A5KF  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
Antenna: Schwarzbeck BBHA 9120D, Horizontal  
Measurement distance: 1 m converted to 3m  
Mode: TX; BT, DH5; 2402 MHz  
Test Date: 2017-05-09  
Note:

Index 52

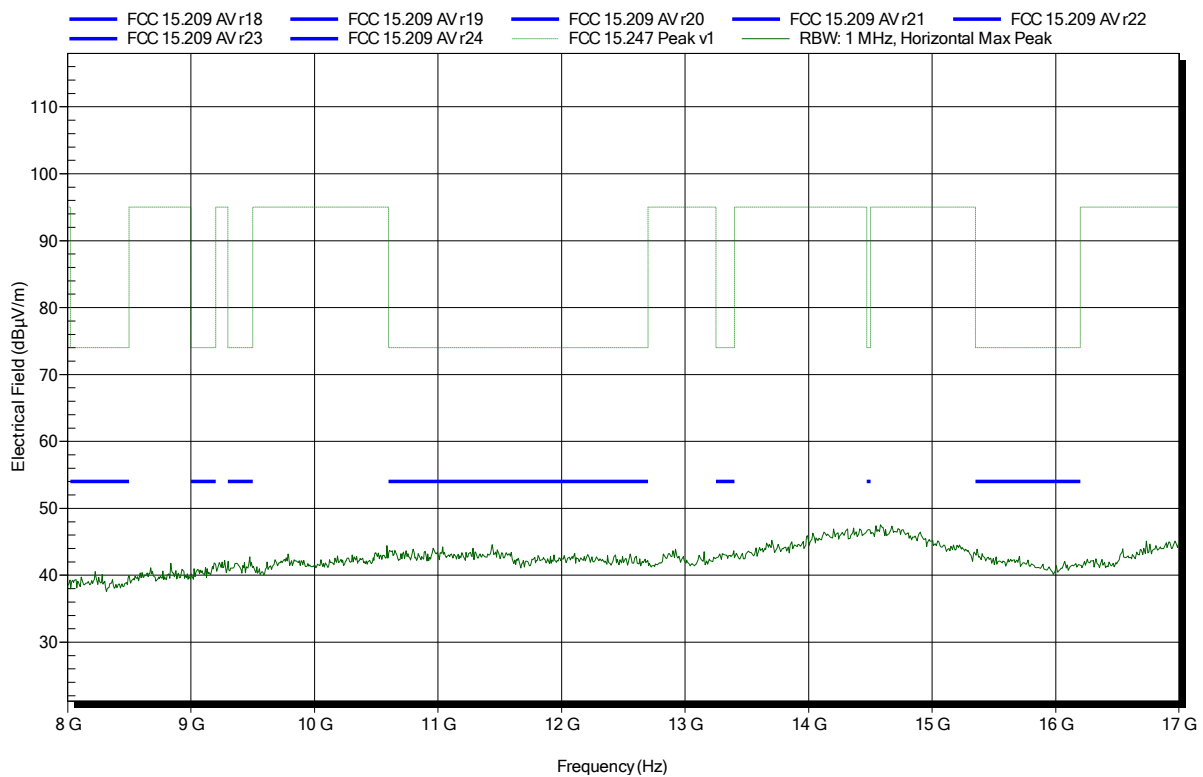


## Spurious emissions according to FCC 15.247

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
EUT Name: Class 2 Bluetooth Low Energy Module  
Model: ENW89837A5KF  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
Antenna: Schwarzbeck BBHA 9120D, Vertical  
Measurement distance: 1 m converted to 3m  
Mode: TX; BT, DH5; 2402 MHz  
Test Date: 2017-05-09  
Note:

Index 59

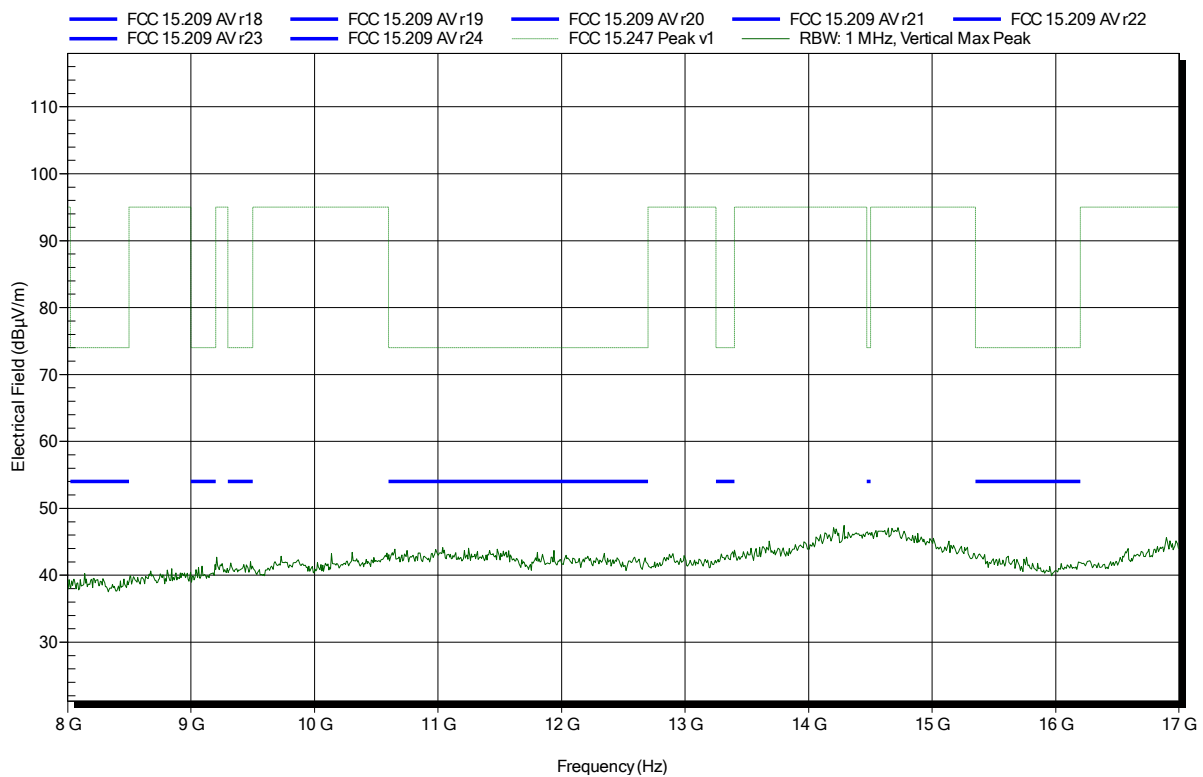


## Spurious emissions according to FCC 15.247

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
 EUT Name: Class 2 Bluetooth Low Energy Module  
 Model: ENW89837A5KF  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
 Antenna: Amplifier Research AT 4560 (old name) / ATH18G40 (new name),  
 Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT, DH5; 2402 MHz  
 Test Date: 2017-05-09  
 Note:

Index 53

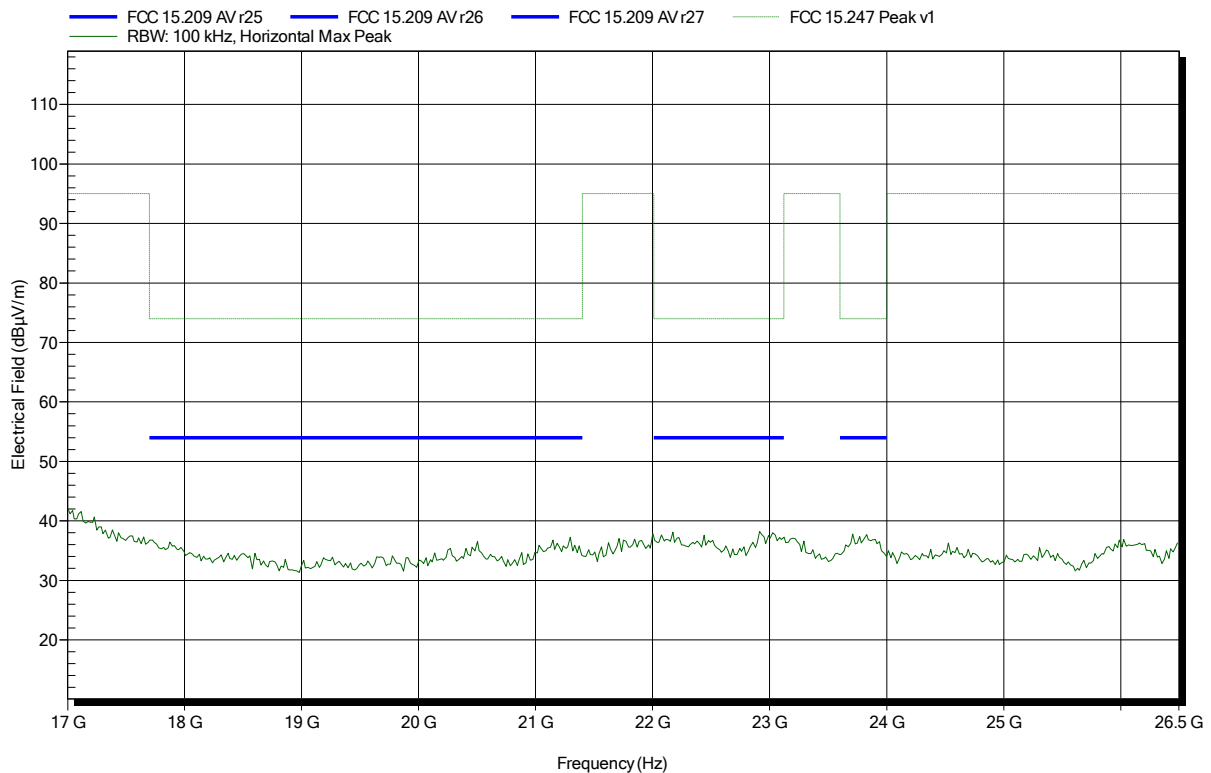


## Spurious emissions according to FCC 15.247

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
EUT Name: Class 2 Bluetooth Low Energy Module  
Model: ENW89837A5KF  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
Antenna: Amplifier Research AT 4560 (old name) / ATH18G40 (new name),  
Vertical  
Measurement distance: 1 m converted to 3m  
Mode: TX; BT, DH5; 2402 MHz  
Test Date: 2017-05-09  
Note:

Index 57

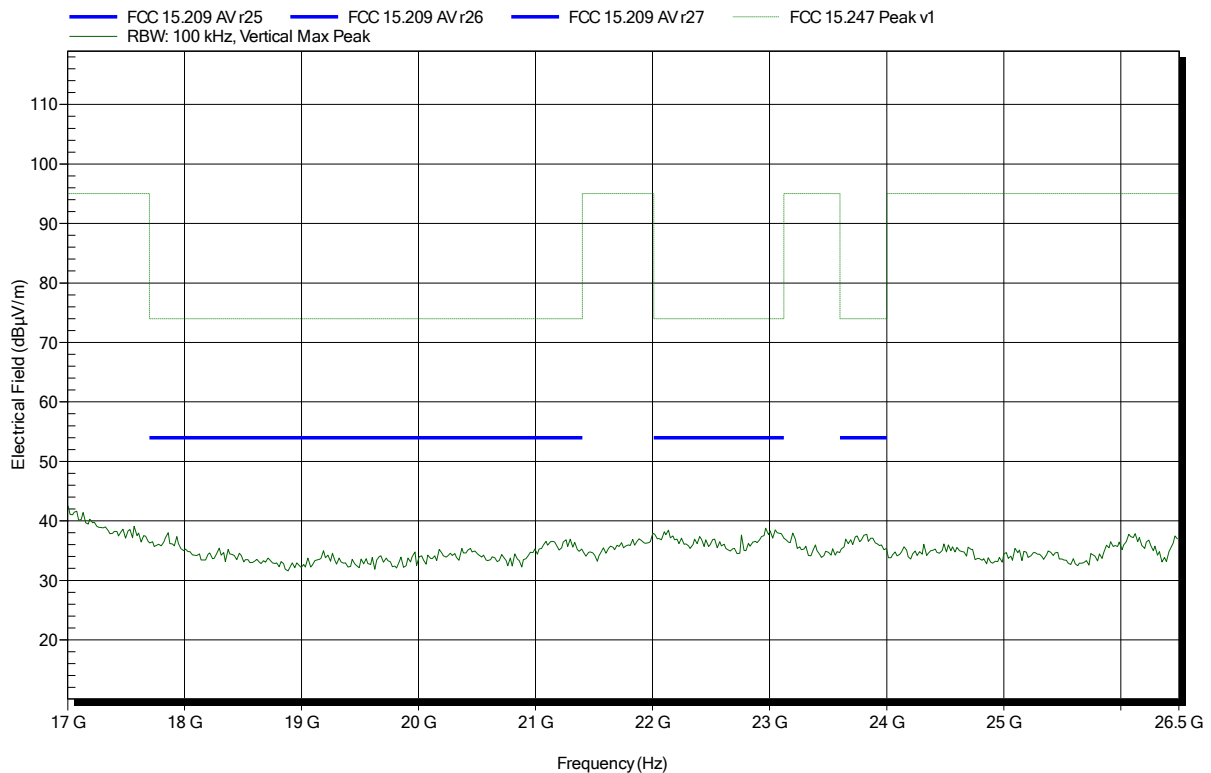


## Spurious emissions according to FCC 15.247

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
 EUT Name: Class 2 Bluetooth Low Energy Module  
 Model: ENW89837A5KF  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT, DH5; 2440 MHz  
 Test Date: 2017-05-09  
 Note:

Index 60

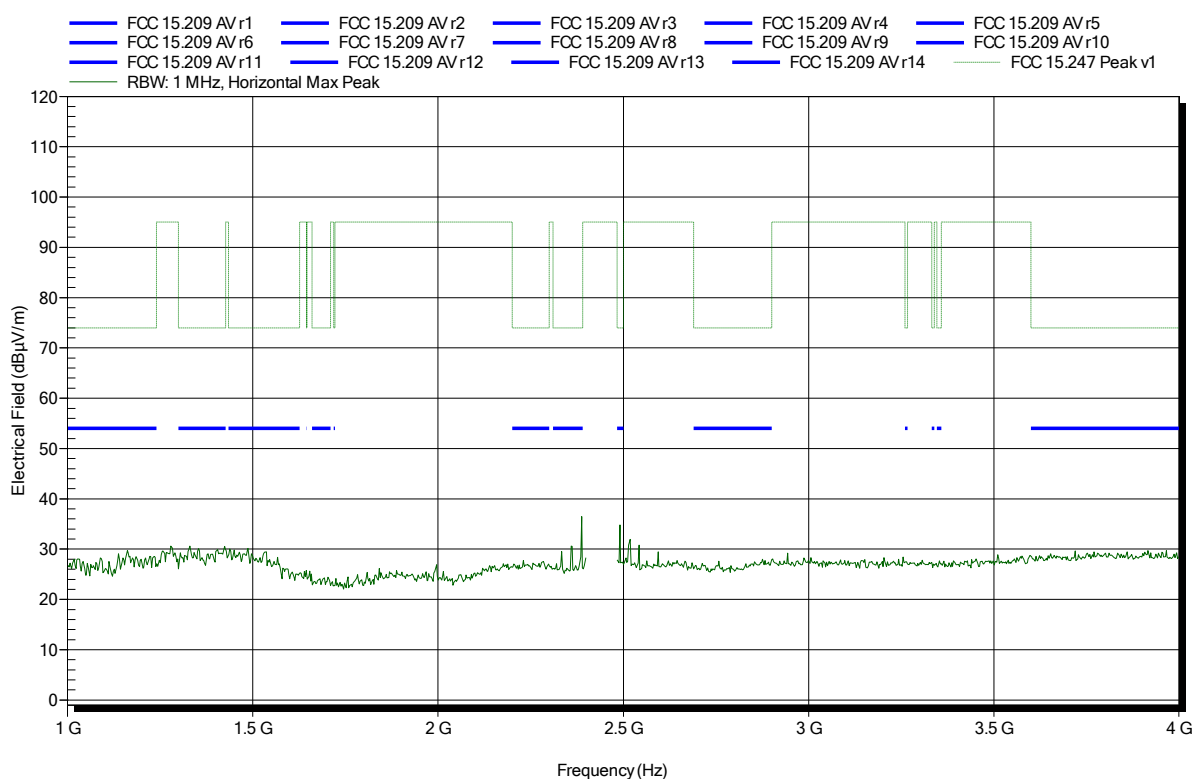


## Spurious emissions according to FCC 15.247

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
EUT Name: Class 2 Bluetooth Low Energy Module  
Model: ENW89837A5KF  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
Antenna: Schwarzbeck BBHA 9120D, Vertical  
Measurement distance: 1 m converted to 3m  
Mode: TX; BT, DH5; 2440 MHz  
Test Date: 2017-05-09  
Note:

Index 64

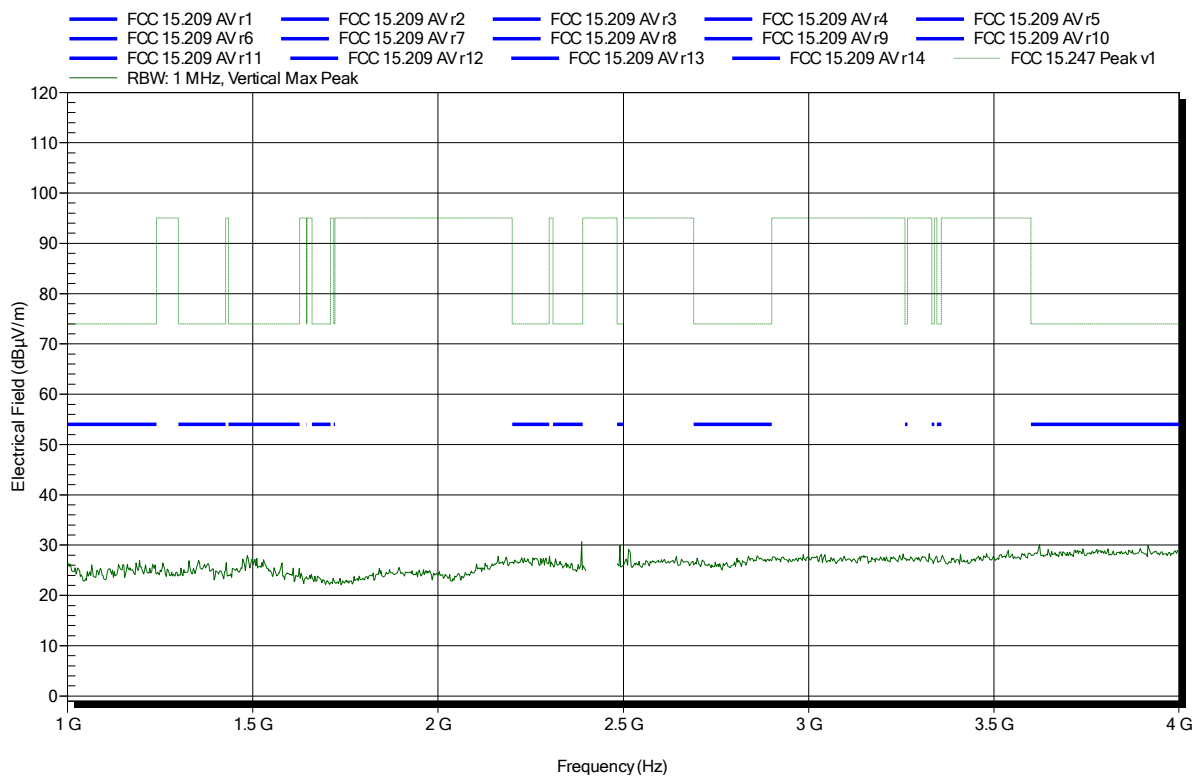


## Spurious emissions according to FCC 15.247

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
EUT Name: Class 2 Bluetooth Low Energy Module  
Model: ENW89837A5KF  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
Antenna: Schwarzbeck BBHA 9120D, Horizontal  
Measurement distance: 1 m converted to 3m  
Mode: TX; BT, DH5; 2440 MHz  
Test Date: 2017-05-09  
Note:

Index 61

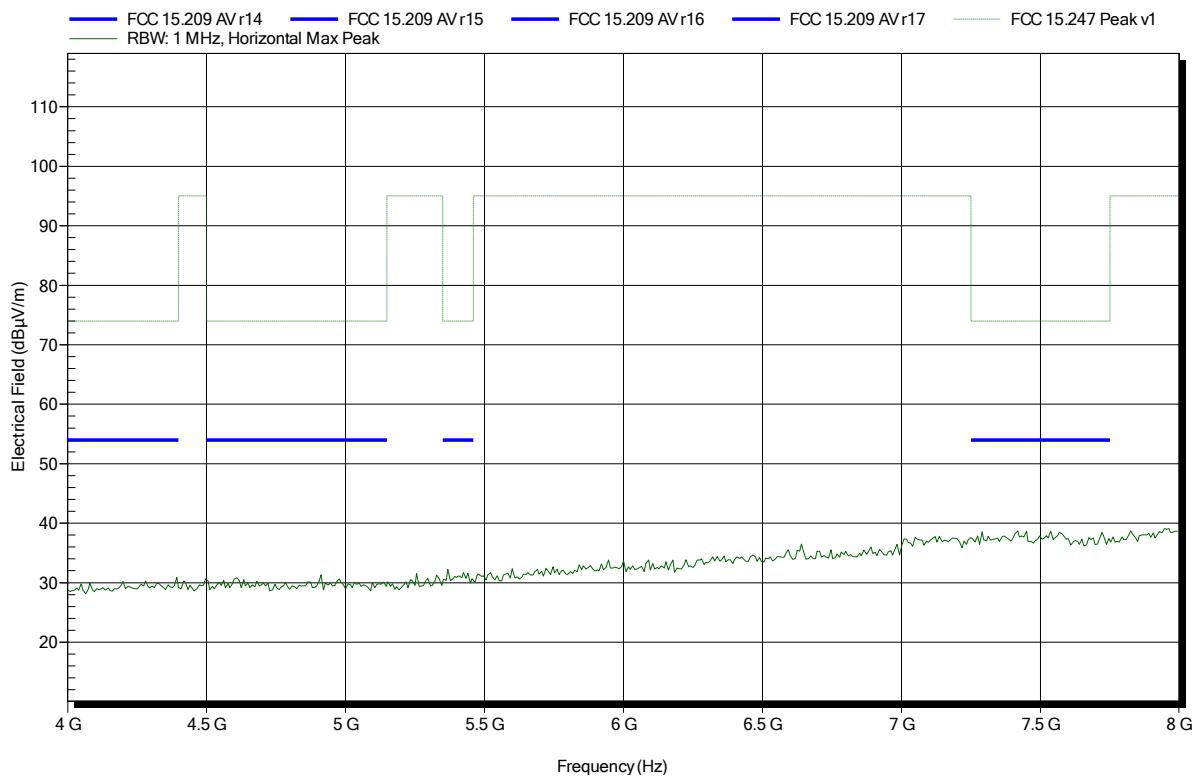


## Spurious emissions according to FCC 15.247

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
EUT Name: Class 2 Bluetooth Low Energy Module  
Model: ENW89837A5KF  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
Antenna: Schwarzbeck BBHA 9120D, Vertical  
Measurement distance: 1 m converted to 3m  
Mode: TX; BT, DH5; 2440 MHz  
Test Date: 2017-05-09  
Note:

Index 65

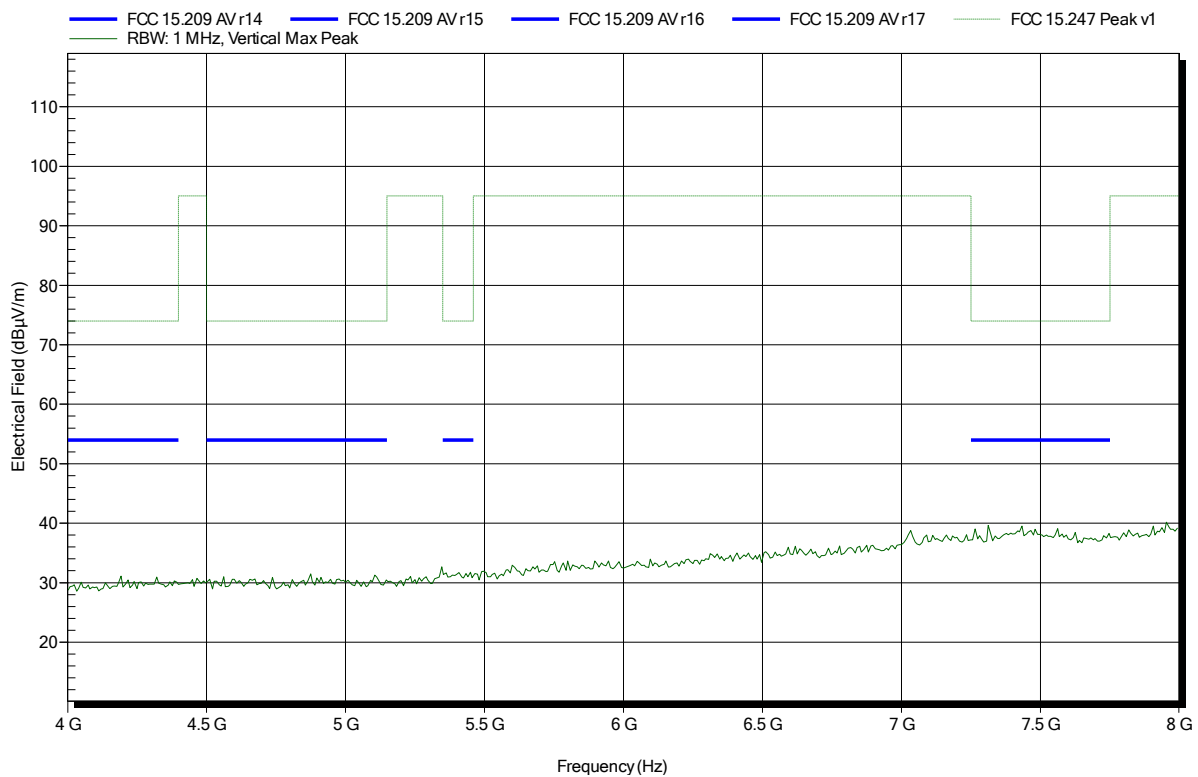


## Spurious emissions according to FCC 15.247

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
EUT Name: Class 2 Bluetooth Low Energy Module  
Model: ENW89837A5KF  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
Antenna: Schwarzbeck BBHA 9120D, Horizontal  
Measurement distance: 1 m converted to 3m  
Mode: TX; BT, DH5; 2440 MHz  
Test Date: 2017-05-09  
Note:

Index 62

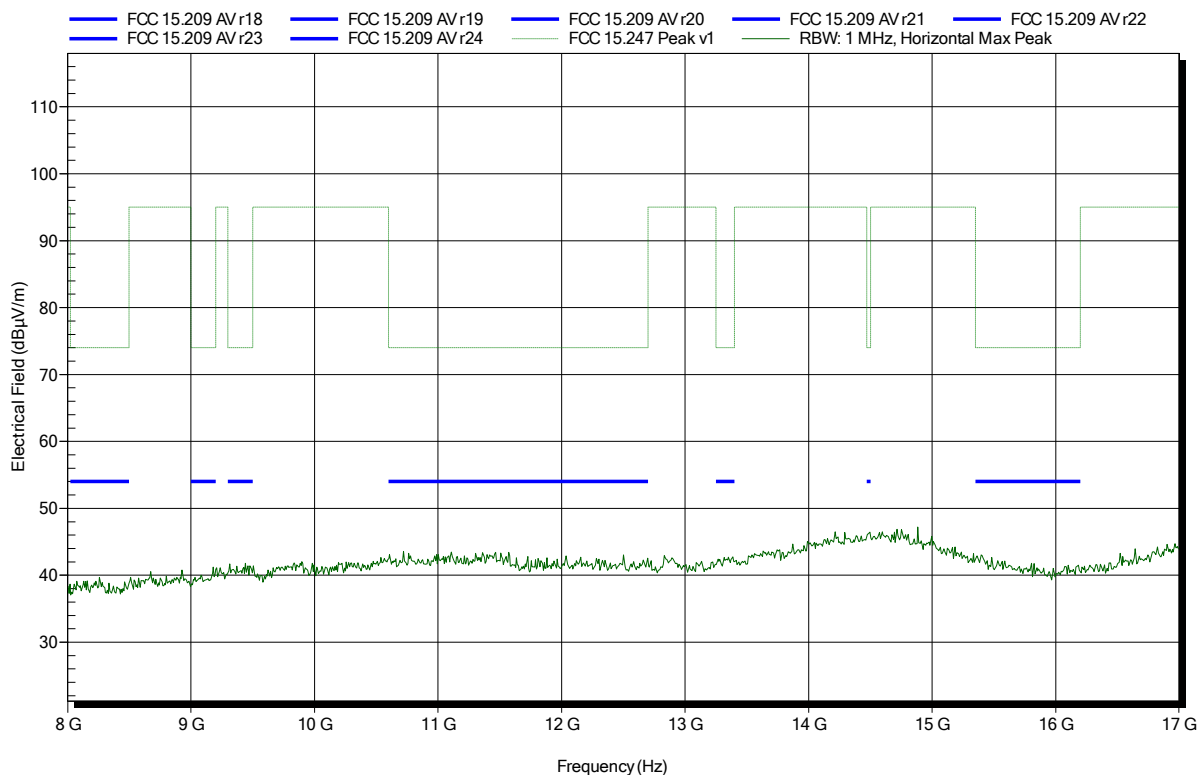


## Spurious emissions according to FCC 15.247

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
EUT Name: Class 2 Bluetooth Low Energy Module  
Model: ENW89837A5KF  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
Antenna: Schwarzbeck BBHA 9120D, Vertical  
Measurement distance: 1 m converted to 3m  
Mode: TX; BT, DH5; 2440 MHz  
Test Date: 2017-05-09  
Note:

Index 66

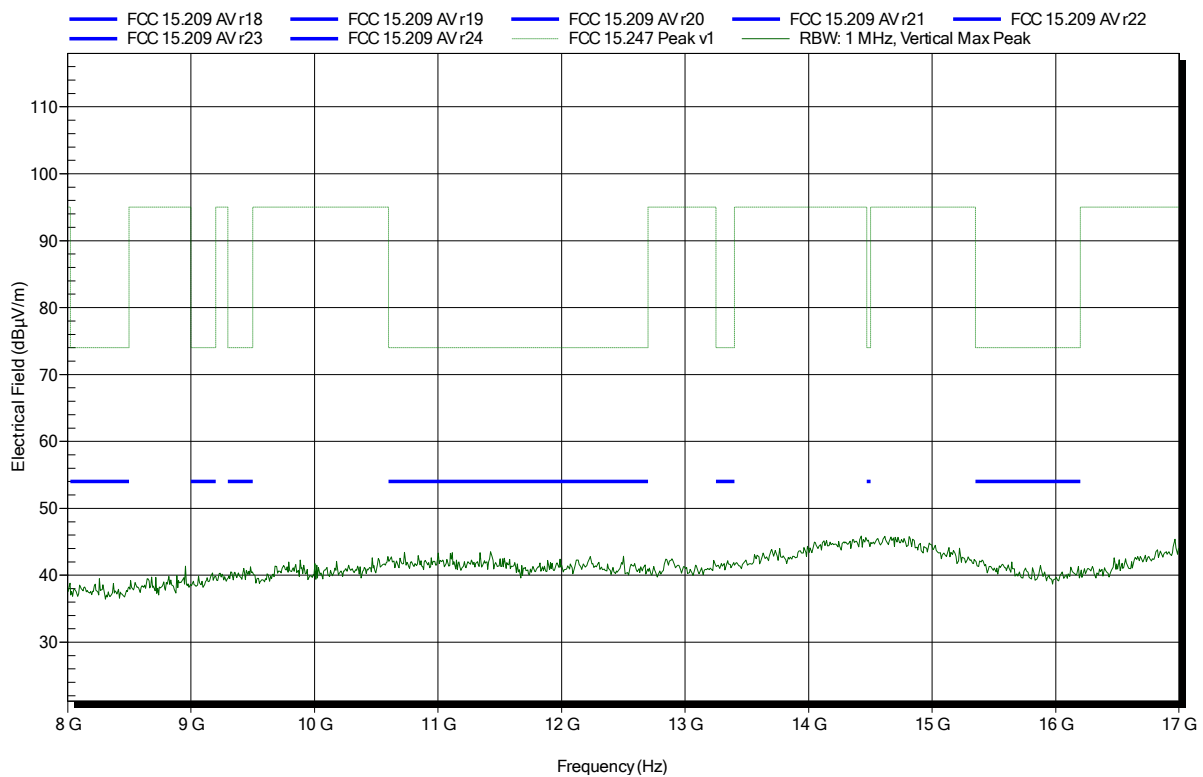


## Spurious emissions according to FCC 15.247

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
EUT Name: Class 2 Bluetooth Low Energy Module  
Model: ENW89837A5KF  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
Antenna: Amplifier Research AT 4560 (old name) / ATH18G40 (new name),  
Horizontal  
Measurement distance: 1 m converted to 3m  
Mode: TX; BT, DH5; 2440 MHz  
Test Date: 2017-05-09  
Note:

Index 63

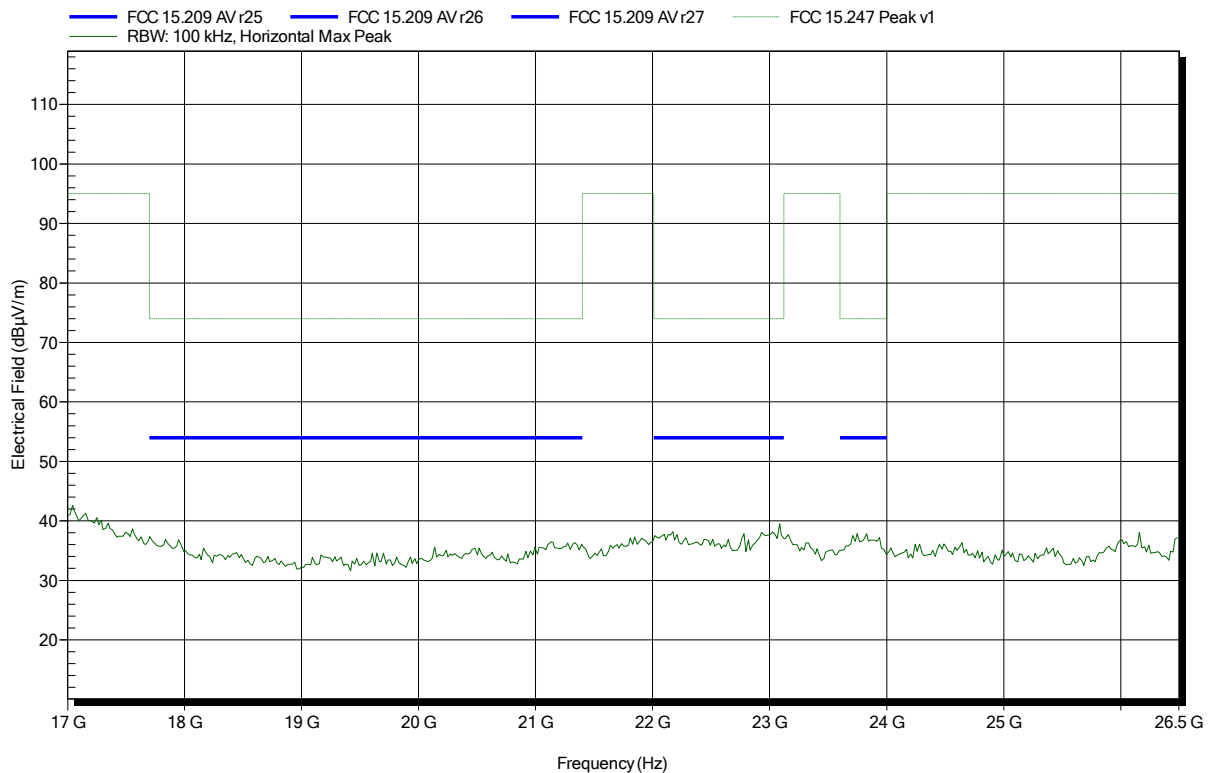


## Spurious emissions according to FCC 15.247

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
EUT Name: Class 2 Bluetooth Low Energy Module  
Model: ENW89837A5KF  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
Antenna: Amplifier Research AT 4560 (old name) / ATH18G40 (new name),  
Vertical  
Measurement distance: 1 m converted to 3m  
Mode: TX; BT, DH5; 2440 MHz  
Test Date: 2017-05-09  
Note:

Index 67

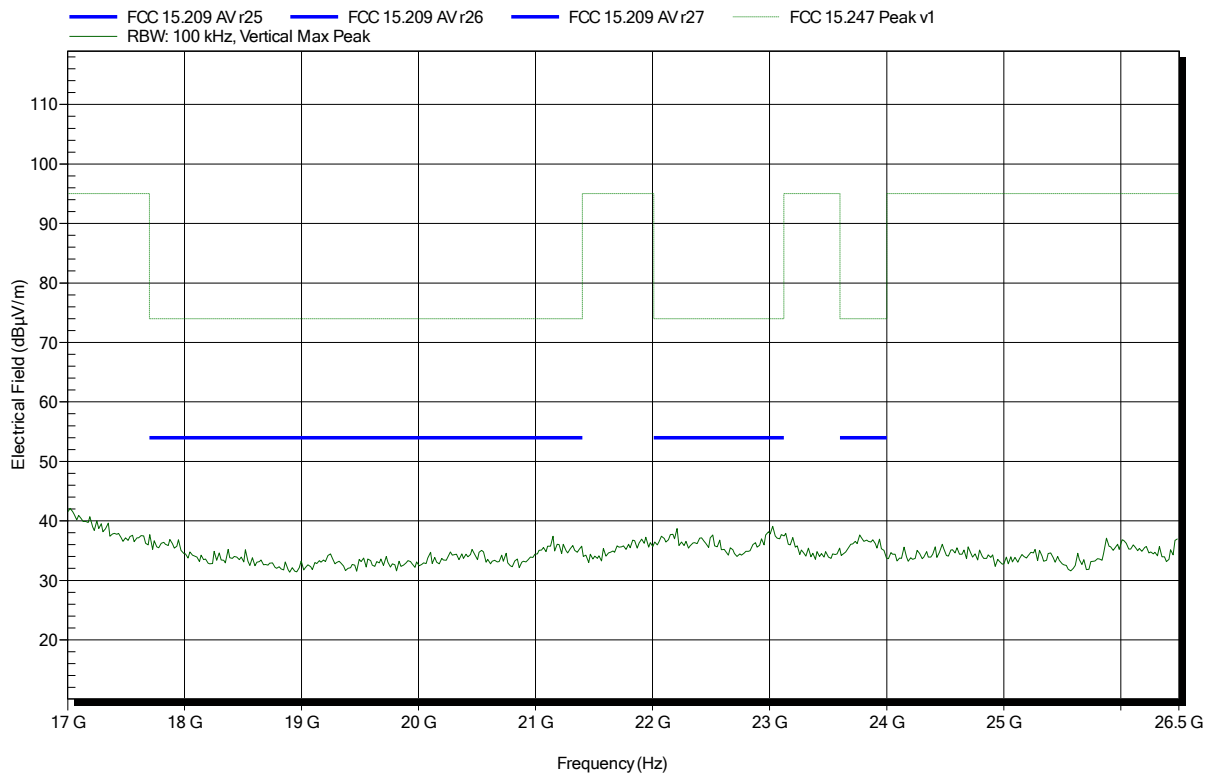


## Spurious emissions according to FCC 15.247

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
EUT Name: Class 2 Bluetooth Low Energy Module  
Model: ENW89837A5KF  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
Antenna: Schwarzbeck BBHA 9120D, Horizontal  
Measurement distance: 1 m converted to 3m  
Mode: TX; BT, DH5; 2480 MHz  
Test Date: 2017-05-09  
Note:

Index 68

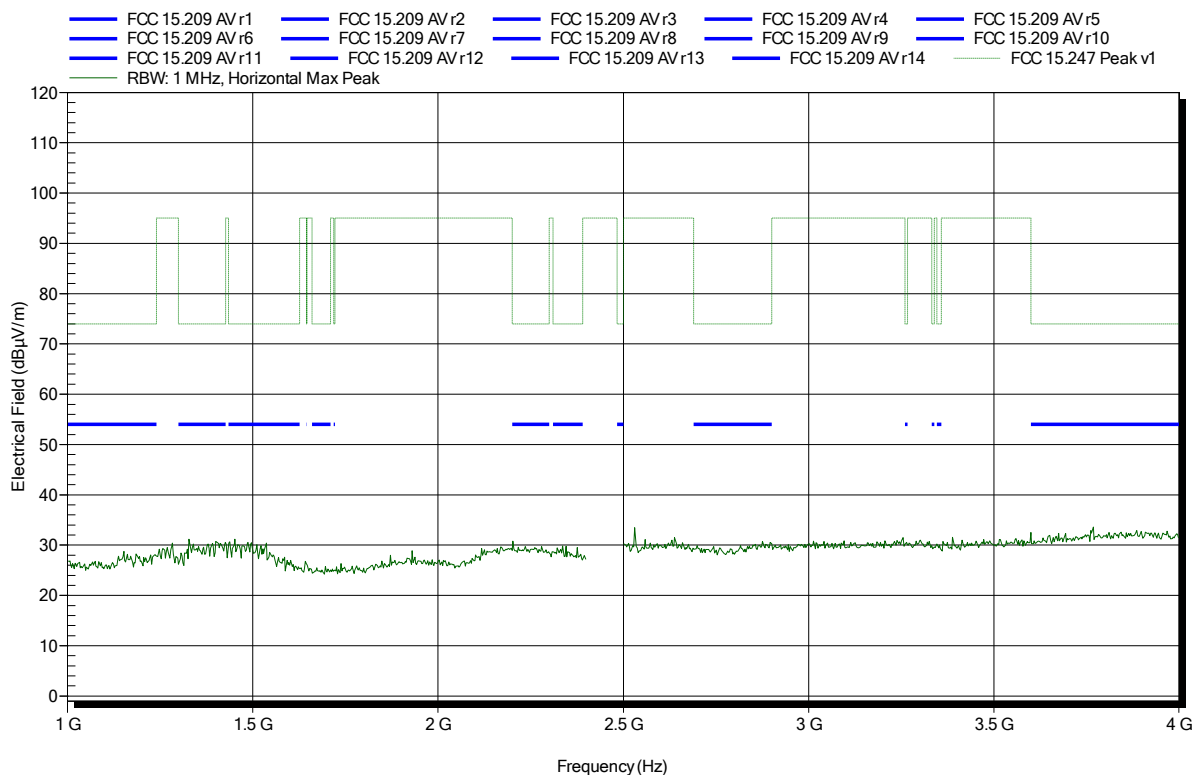


## Spurious emissions according to FCC 15.247

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
 EUT Name: Class 2 Bluetooth Low Energy Module  
 Model: ENW89837A5KF  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT, DH5; 2480 MHz  
 Test Date: 2017-05-09  
 Note:

Index 73

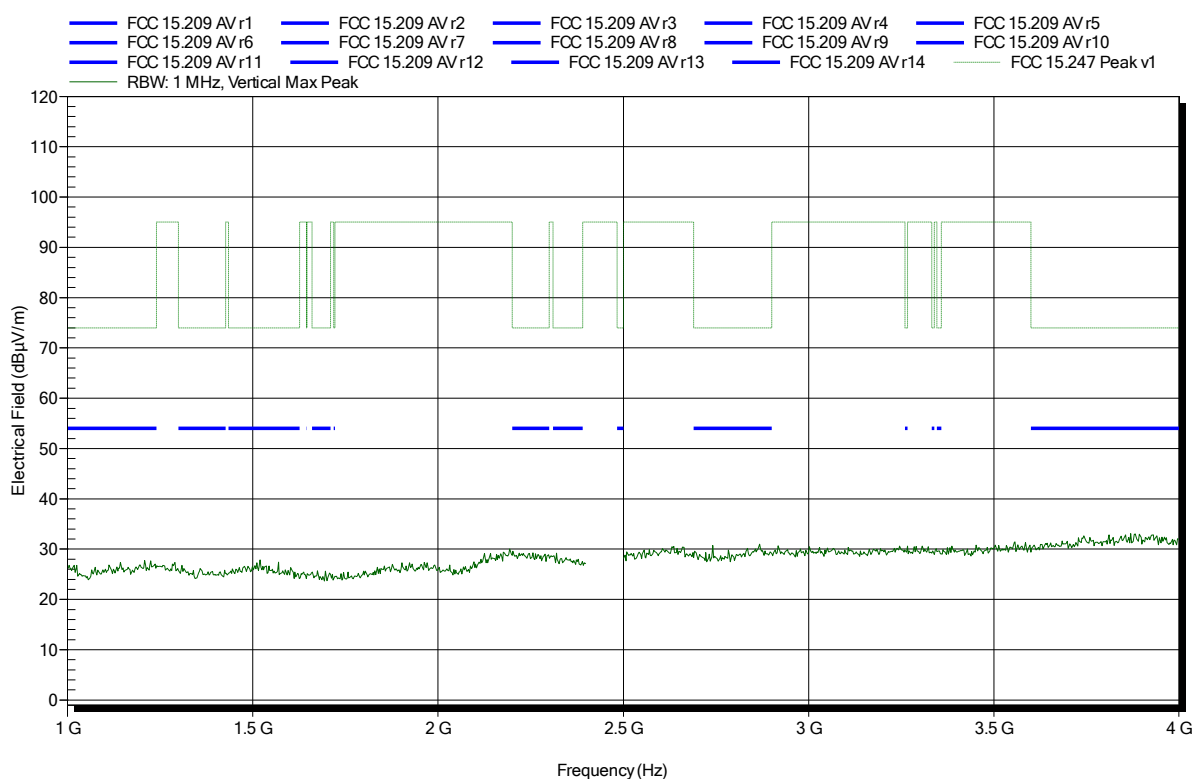


## Spurious emissions according to FCC 15.247

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
EUT Name: Class 2 Bluetooth Low Energy Module  
Model: ENW89837A5KF  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
Antenna: Schwarzbeck BBHA 9120D, Horizontal  
Measurement distance: 1 m converted to 3m  
Mode: TX; BT, DH5; 2480 MHz  
Test Date: 2017-05-09  
Note: upper bandedge

Index 69

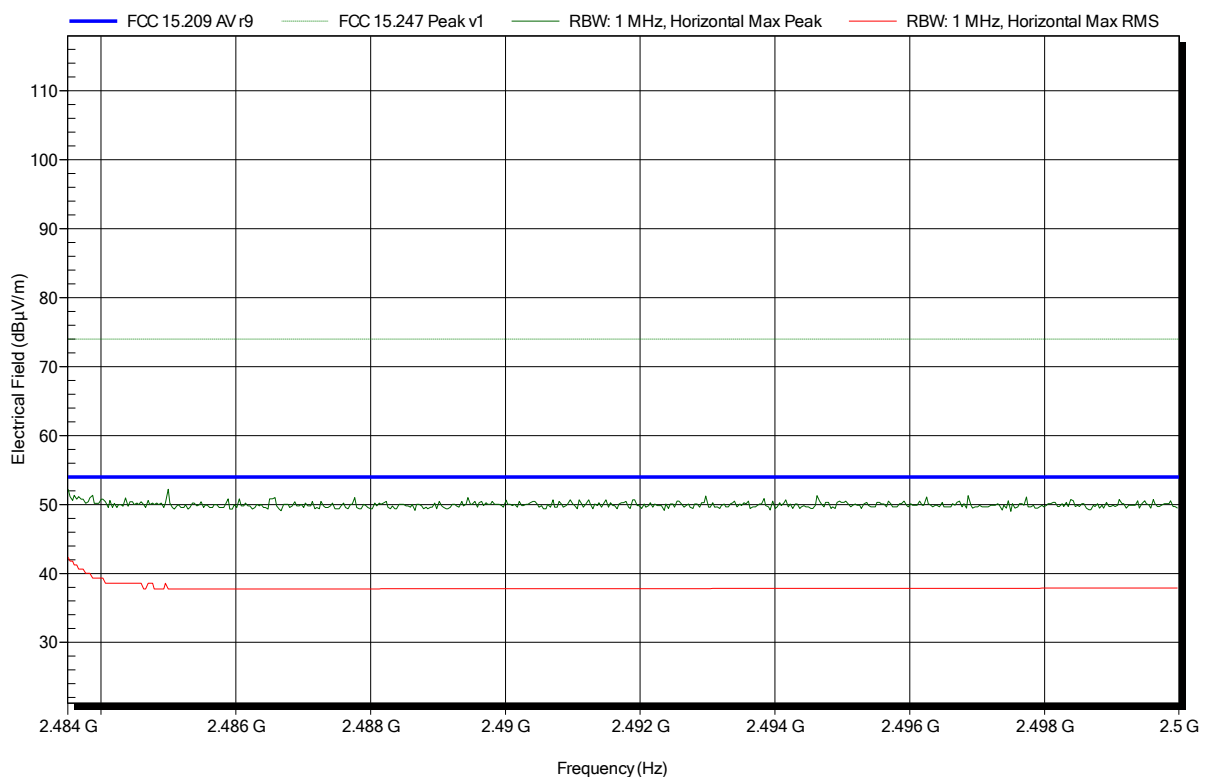


## Spurious emissions according to FCC 15.247

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
 EUT Name: Class 2 Bluetooth Low Energy Module  
 Model: ENW89837A5KF  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT, DH5; 2480 MHz  
 Test Date: 2017-05-09  
 Note: upper bandedge

Index 75

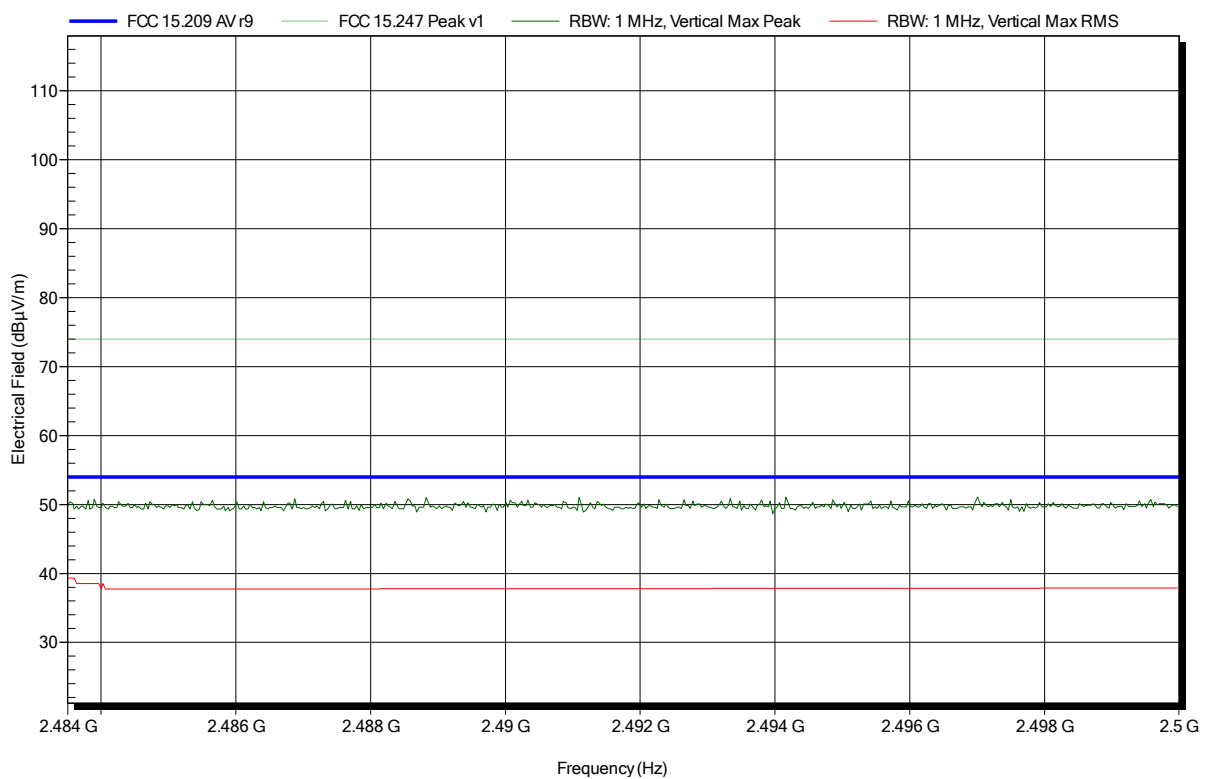


## Spurious emissions according to FCC 15.247

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
EUT Name: Class 2 Bluetooth Low Energy Module  
Model: ENW89837A5KF  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
Antenna: Schwarzbeck BBHA 9120D, Horizontal  
Measurement distance: 1 m converted to 3m  
Mode: TX; BT, DH5; 2480 MHz  
Test Date: 2017-05-09  
Note:

Index 70

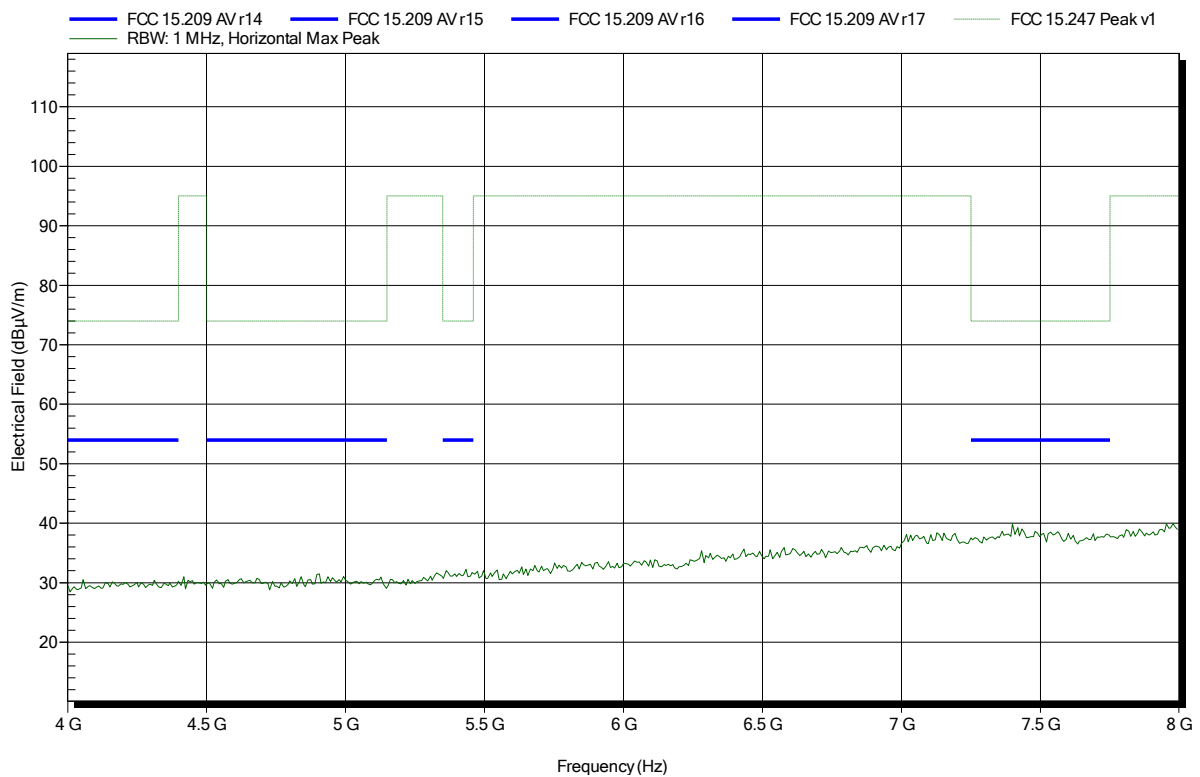


## Spurious emissions according to FCC 15.247

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
EUT Name: Class 2 Bluetooth Low Energy Module  
Model: ENW89837A5KF  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
Antenna: Schwarzbeck BBHA 9120D, Vertical  
Measurement distance: 1 m converted to 3m  
Mode: TX; BT, DH5; 2480 MHz  
Test Date: 2017-05-09  
Note:

Index 76

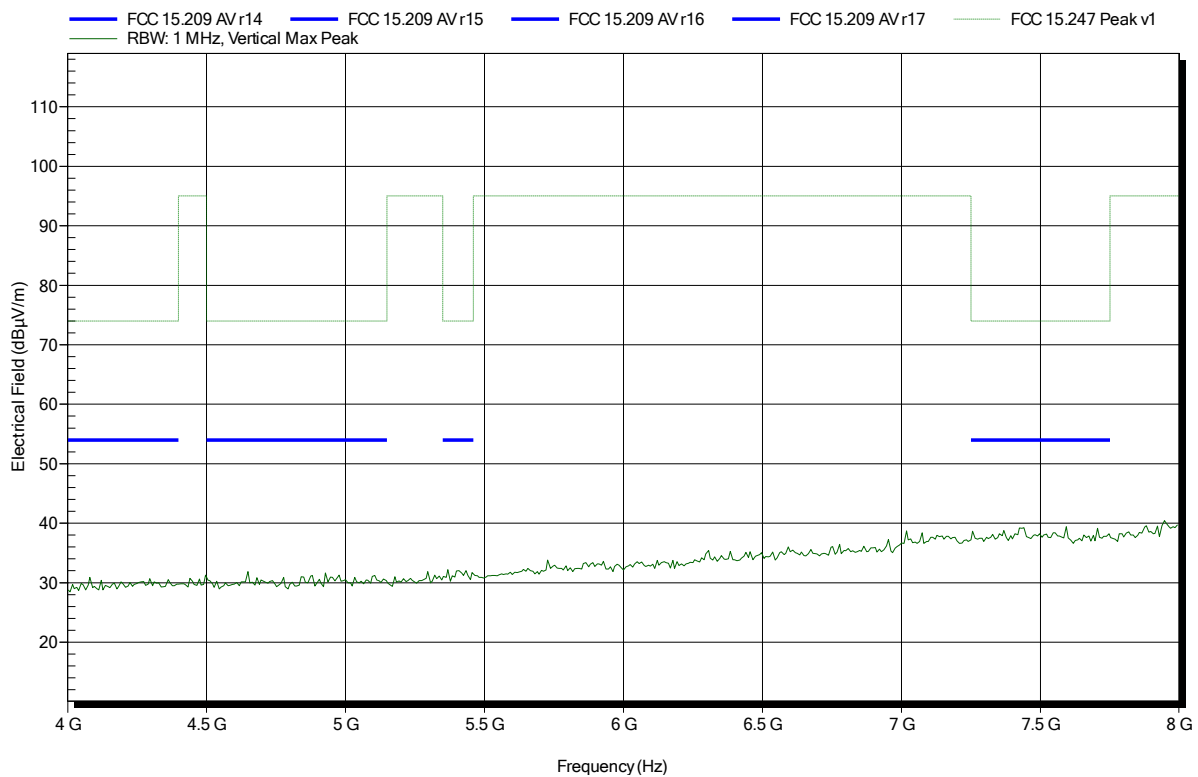


## Spurious emissions according to FCC 15.247

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
EUT Name: Class 2 Bluetooth Low Energy Module  
Model: ENW89837A5KF  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
Antenna: Schwarzbeck BBHA 9120D, Horizontal  
Measurement distance: 1 m converted to 3m  
Mode: TX; BT, DH5; 2480 MHz  
Test Date: 2017-05-09  
Note:

Index 71

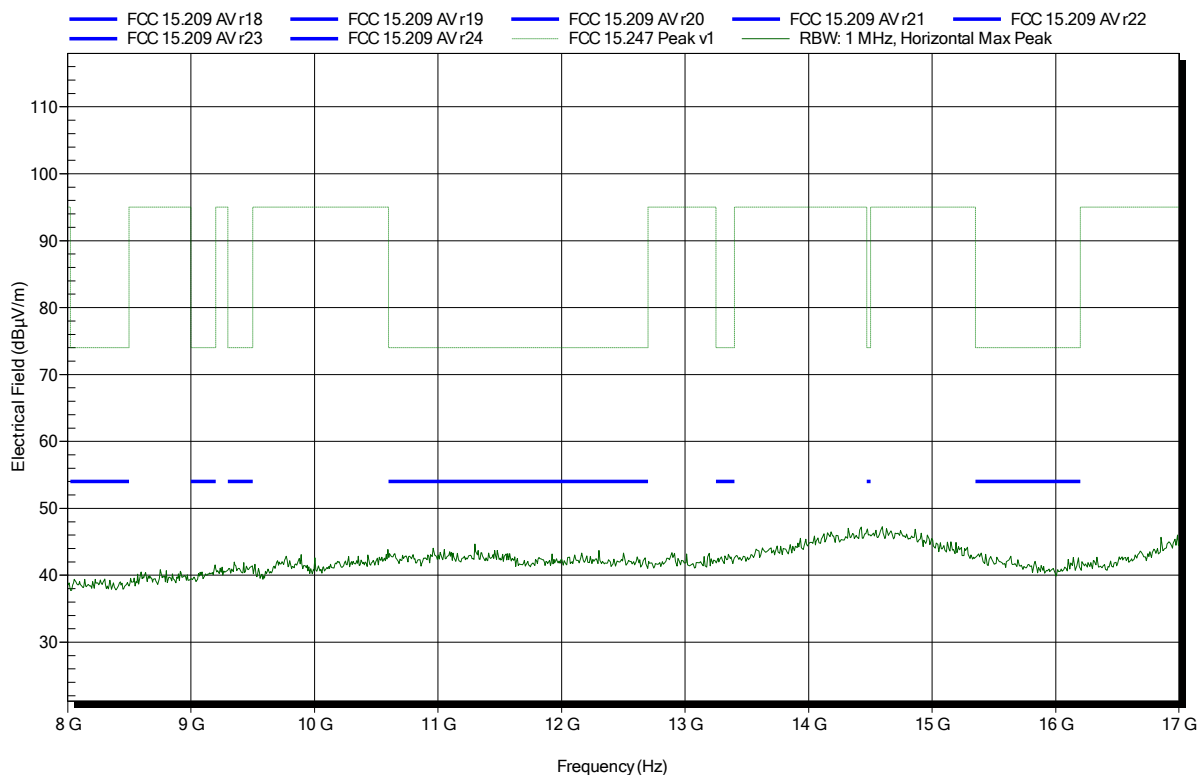


## Spurious emissions according to FCC 15.247

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
EUT Name: Class 2 Bluetooth Low Energy Module  
Model: ENW89837A5KF  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
Antenna: Schwarzbeck BBHA 9120D, Vertical  
Measurement distance: 1 m converted to 3m  
Mode: TX; BT, DH5; 2480 MHz  
Test Date: 2017-05-09  
Note:

Index 77

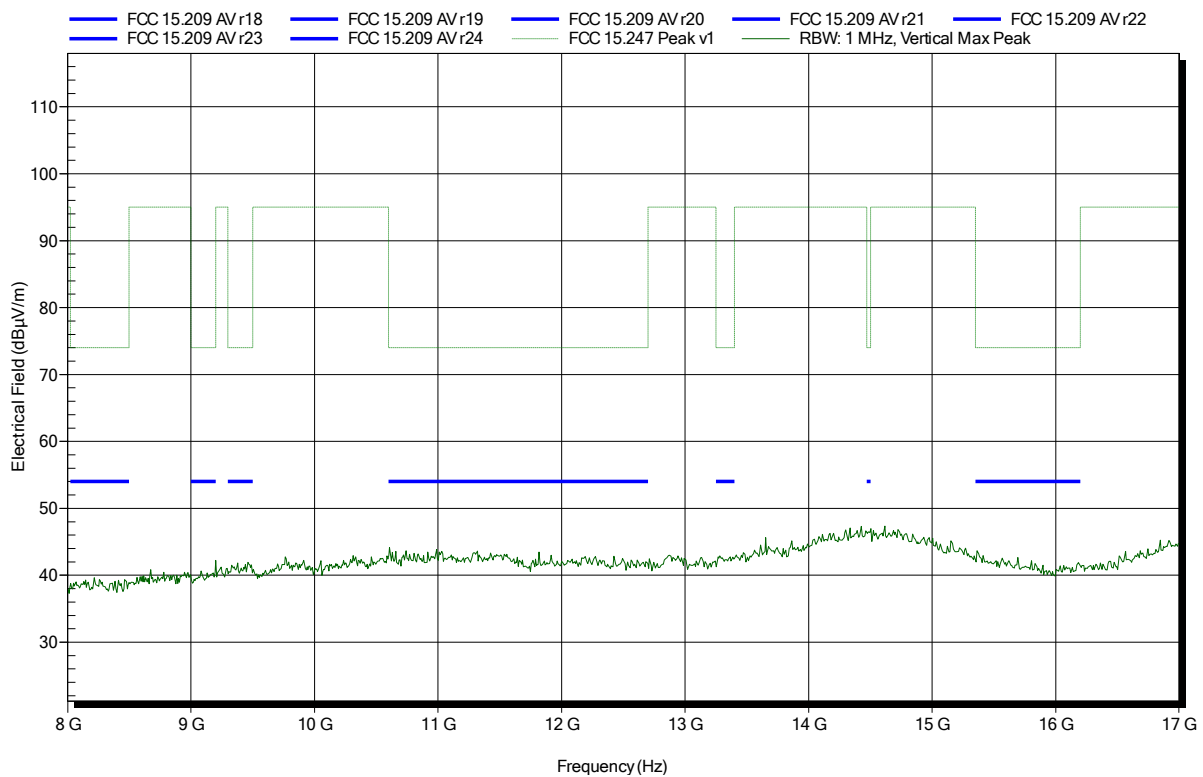


## Spurious emissions according to FCC 15.247

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
 EUT Name: Class 2 Bluetooth Low Energy Module  
 Model: ENW89837A5KF  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
 Antenna: Amplifier Research AT 4560 (old name) / ATH18G40 (new name),  
 Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT, DH5; 2480 MHz  
 Test Date: 2017-05-09  
 Note:

Index 72

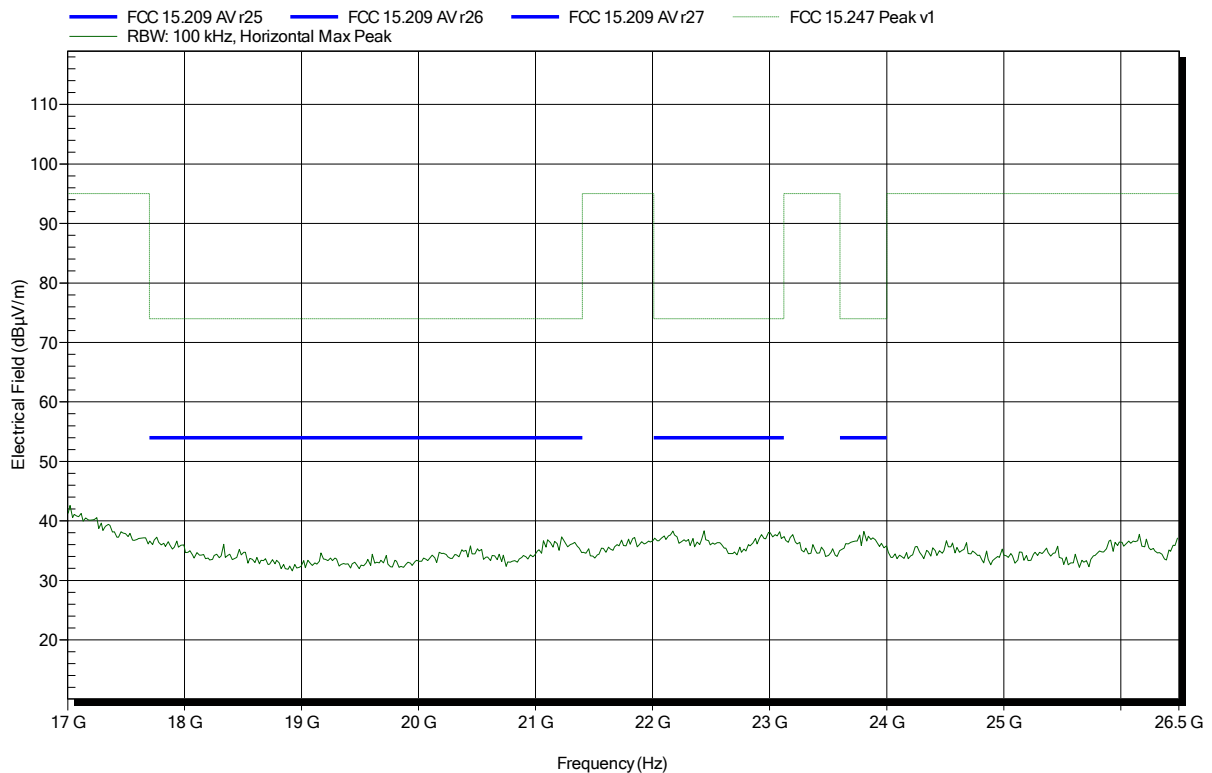


## Spurious emissions according to FCC 15.247

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
EUT Name: Class 2 Bluetooth Low Energy Module  
Model: ENW89837A5KF  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
Antenna: Amplifier Research AT 4560 (old name) / ATH18G40 (new name),  
Vertical  
Measurement distance: 1 m converted to 3m  
Mode: TX; BT, DH5; 2480 MHz  
Test Date: 2017-05-09  
Note:

Index 78

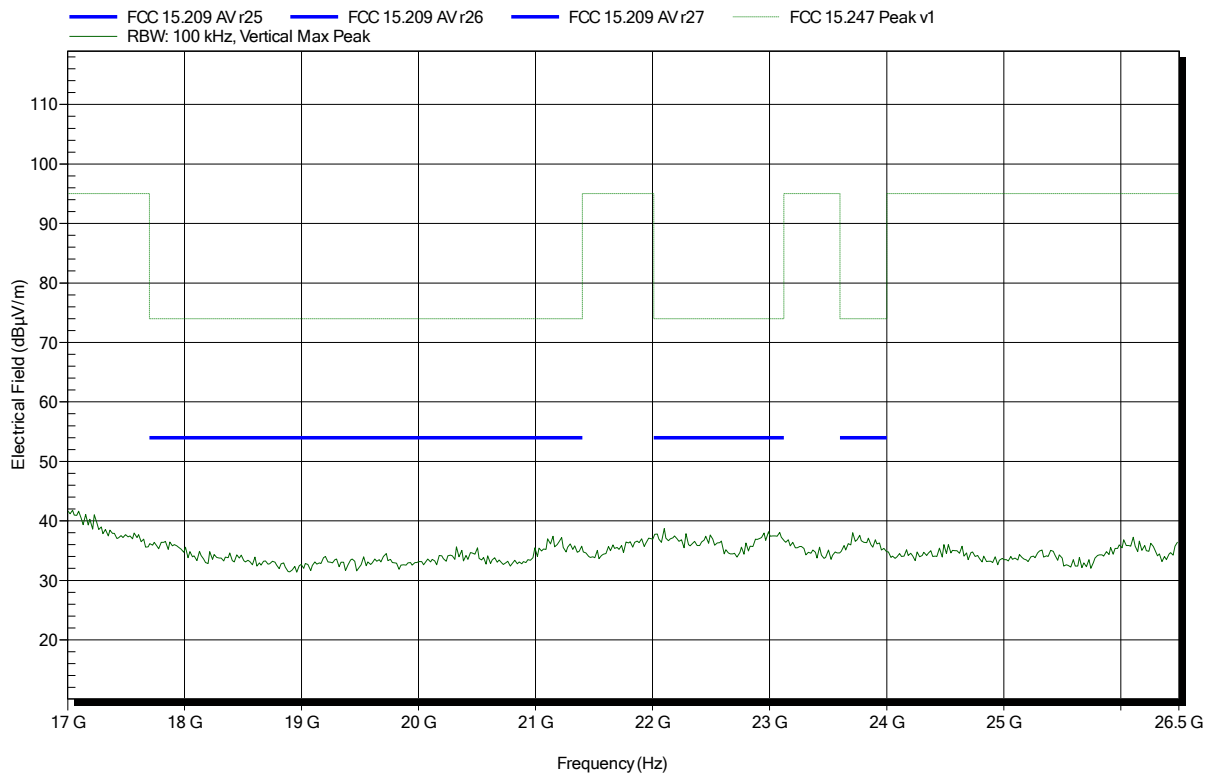


## ANNEX B Receiver sprurious emissions

### Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
EUT Name: Class 2 Bluetooth Low Energy Module  
Model: ENW89837A5KF  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
Antenna: Rohde & Schwarz HK 116, Horizontal  
Measurement distance: 3 m  
Mode: RX; BT; 2441 MHz  
Test Date: 2017-05-09  
Note:

Index 36

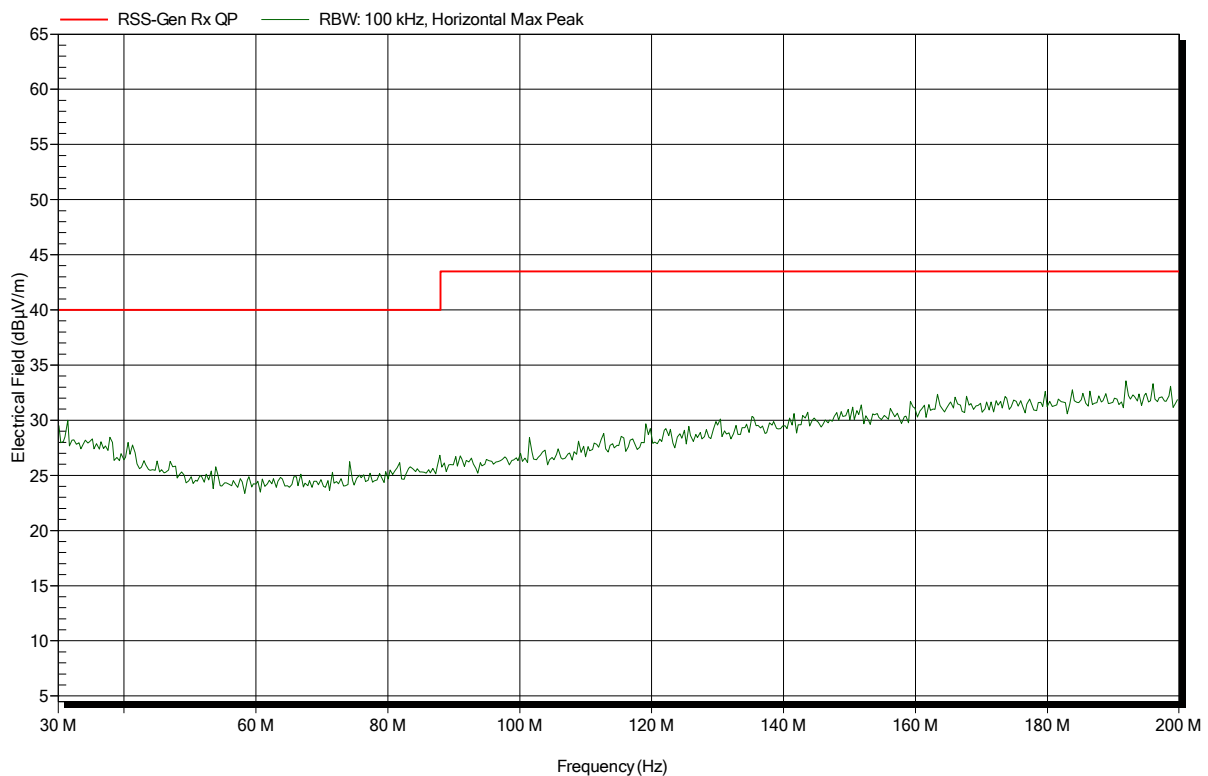


## Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
 EUT Name: Class 2 Bluetooth Low Energy Module  
 Model: ENW89837A5KF  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
 Antenna: Rohde & Schwarz HK 116, Vertical  
 Measurement distance: 3 m  
 Mode: RX; BT; 2441 MHz  
 Test Date: 2017-05-09  
 Note:

Index 37

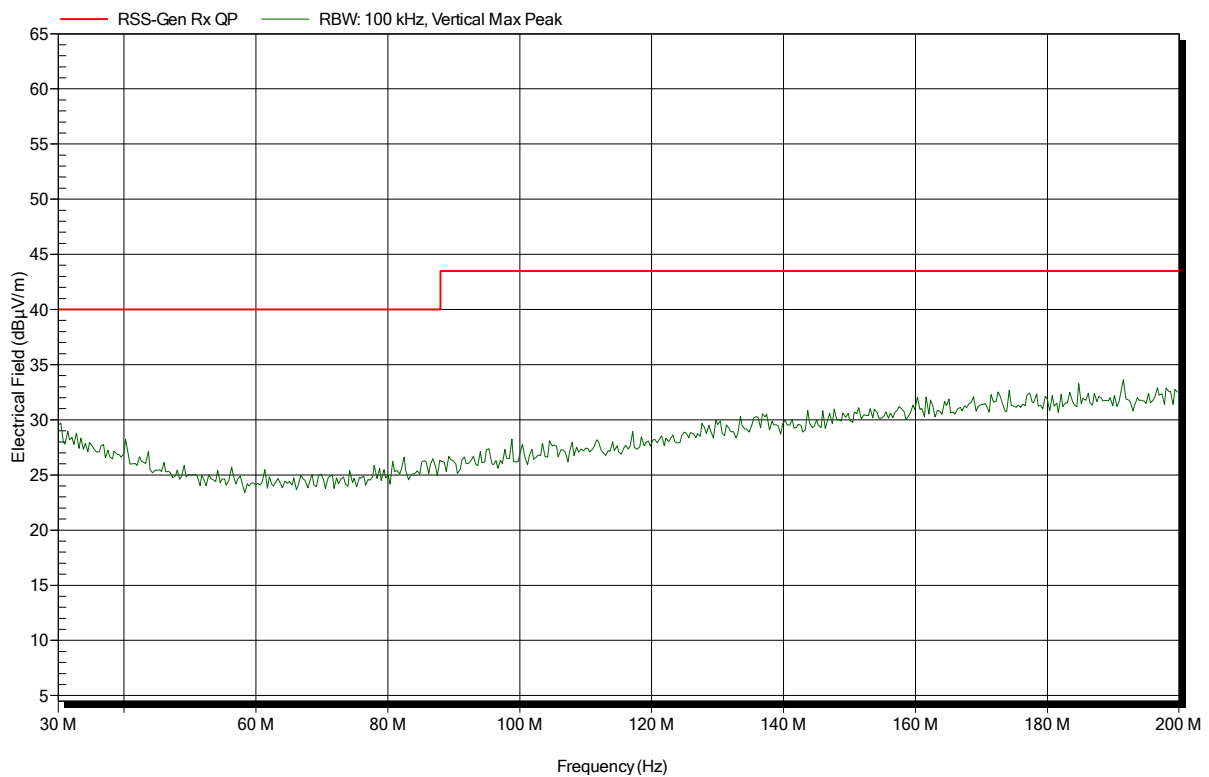


## Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
EUT Name: Class 2 Bluetooth Low Energy Module  
Model: ENW89837A5KF  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
Antenna: Rohde & Schwarz HL 223, Horizontal  
Measurement distance: 3 m  
Mode: RX; BT; 2441 MHz  
Test Date: 2017-05-09  
Note:

Index 39

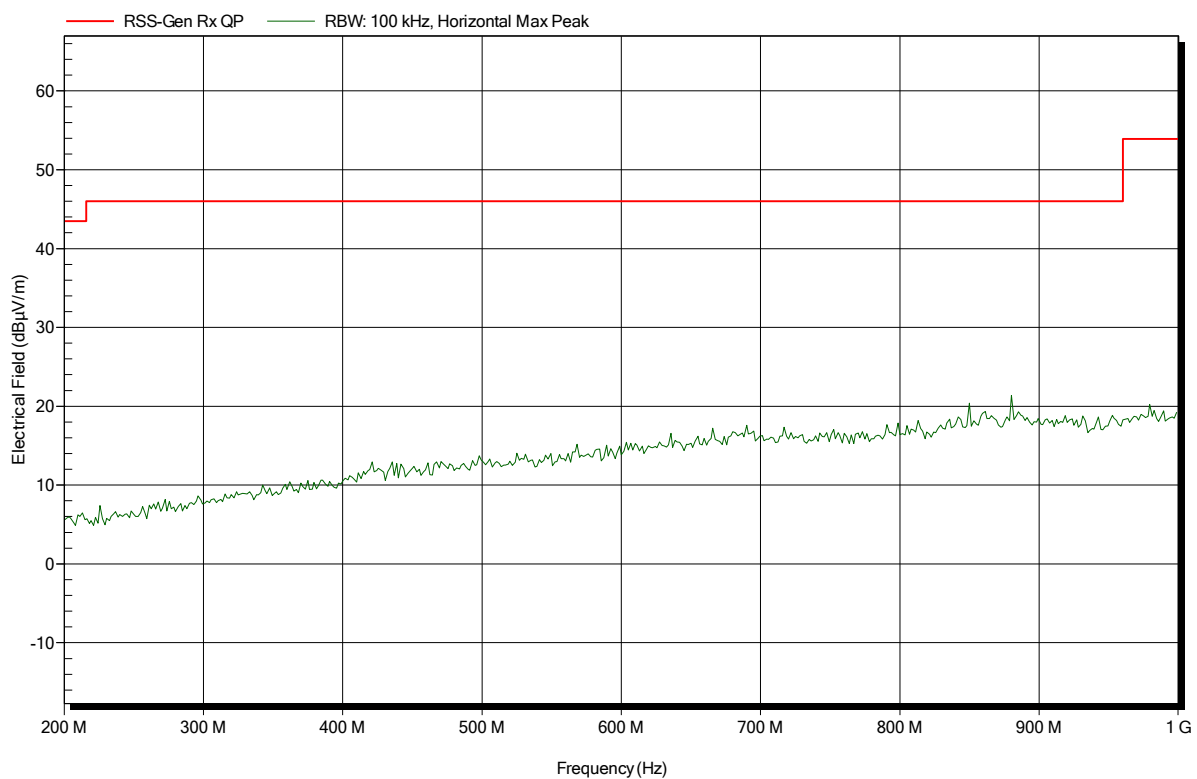


## Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
EUT Name: Class 2 Bluetooth Low Energy Module  
Model: ENW89837A5KF  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
Antenna: Rohde & Schwarz HL 223, Vertical  
Measurement distance: 3 m  
Mode: RX; BT; 2441 MHz  
Test Date: 2017-05-09  
Note:

Index 40

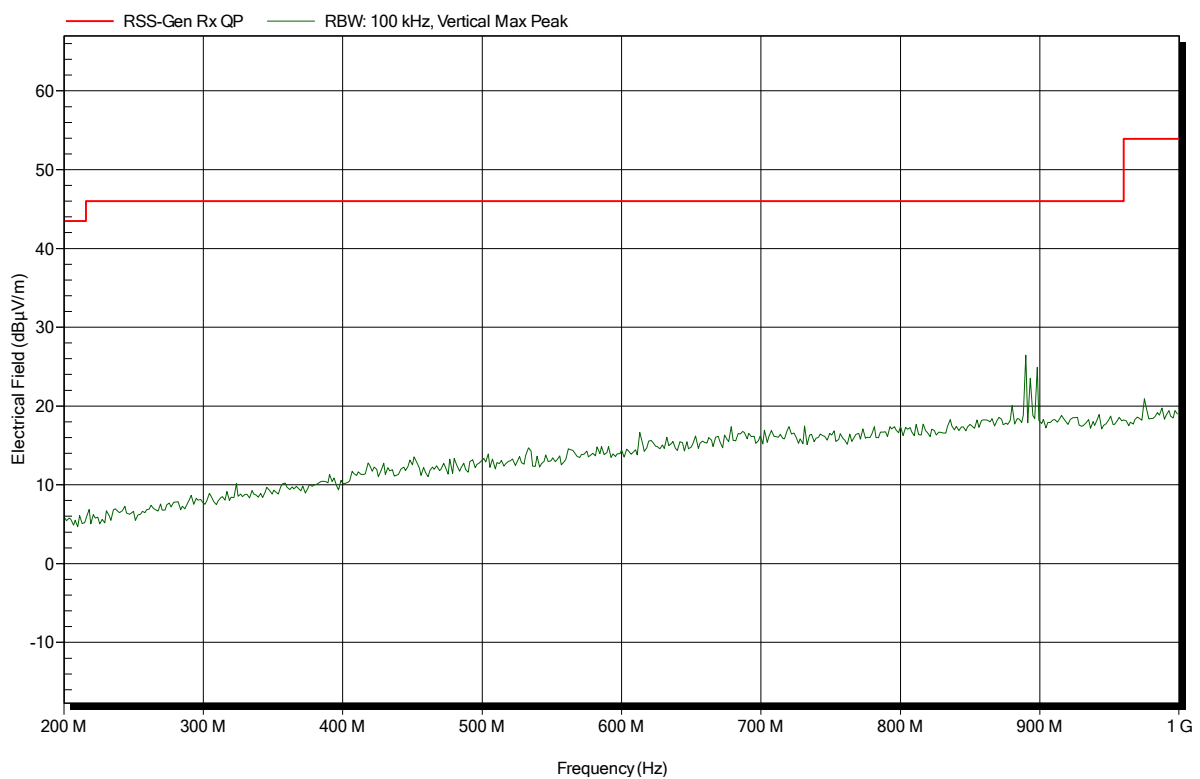


## Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
EUT Name: Class 2 Bluetooth Low Energy Module  
Model: ENW89837A5KF  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
Antenna: Schwarzbeck BBHA 9120D, Horizontal  
Measurement distance: 3 m  
Mode: RX; BT; 2441 MHz  
Test Date: 2017-05-09  
Note:

Index 42

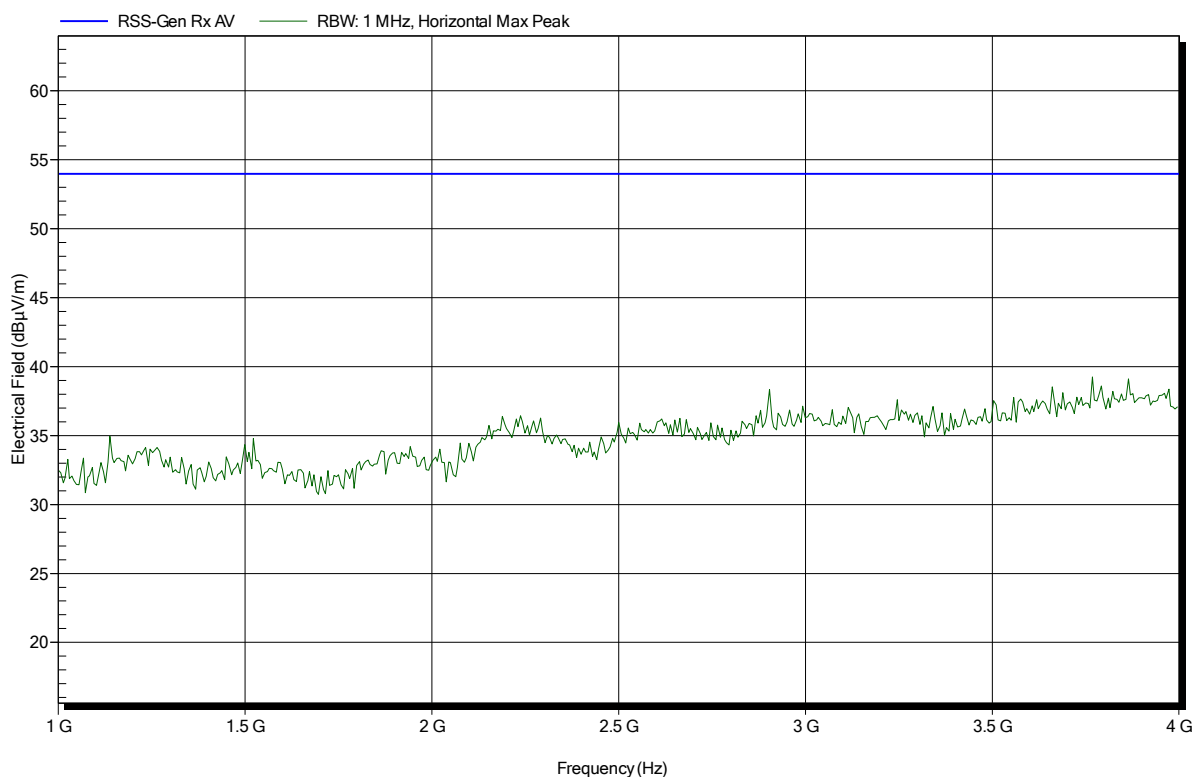


## Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
 EUT Name: Class 2 Bluetooth Low Energy Module  
 Model: ENW89837A5KF  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: RX; BT; 2441 MHz  
 Test Date: 2017-05-09  
 Note:

Index 46

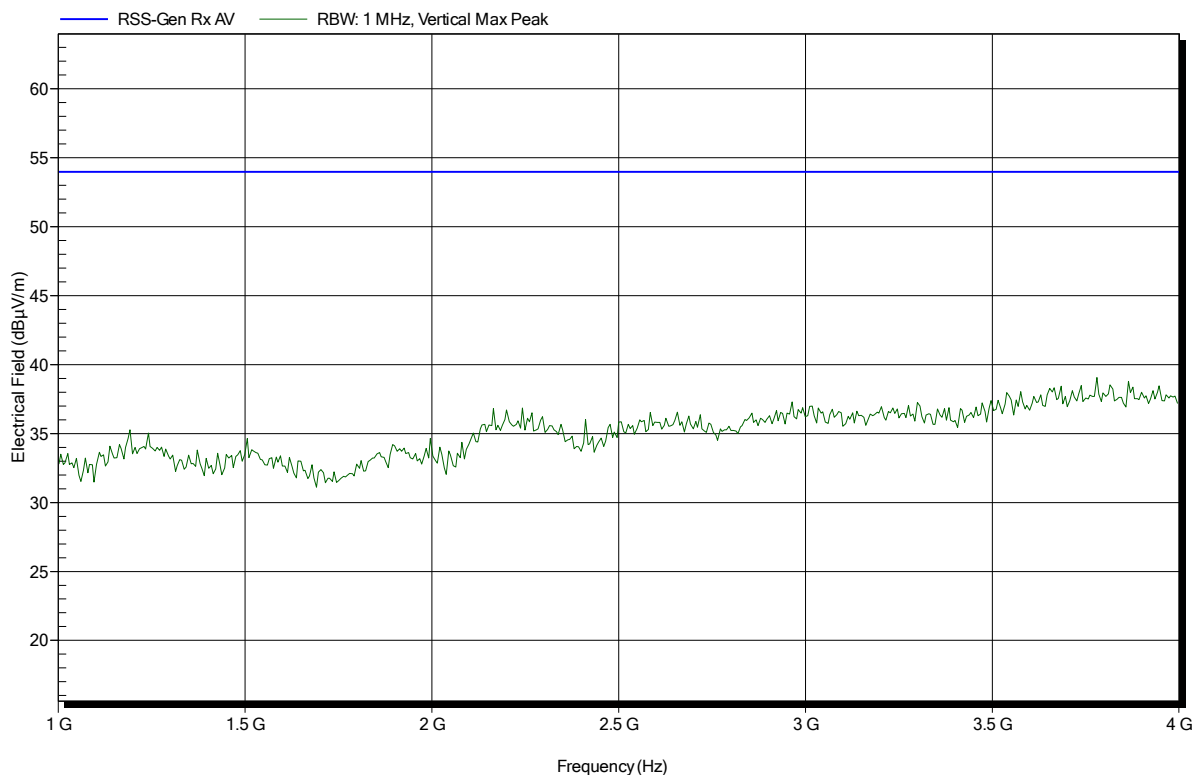


## Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
EUT Name: Class 2 Bluetooth Low Energy Module  
Model: ENW89837A5KF  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
Antenna: Schwarzbek BBHA 9120D, Horizontal  
Measurement distance: 3 m  
Mode: RX; BT; 2441 MHz  
Test Date: 2017-05-09  
Note:

Index 44

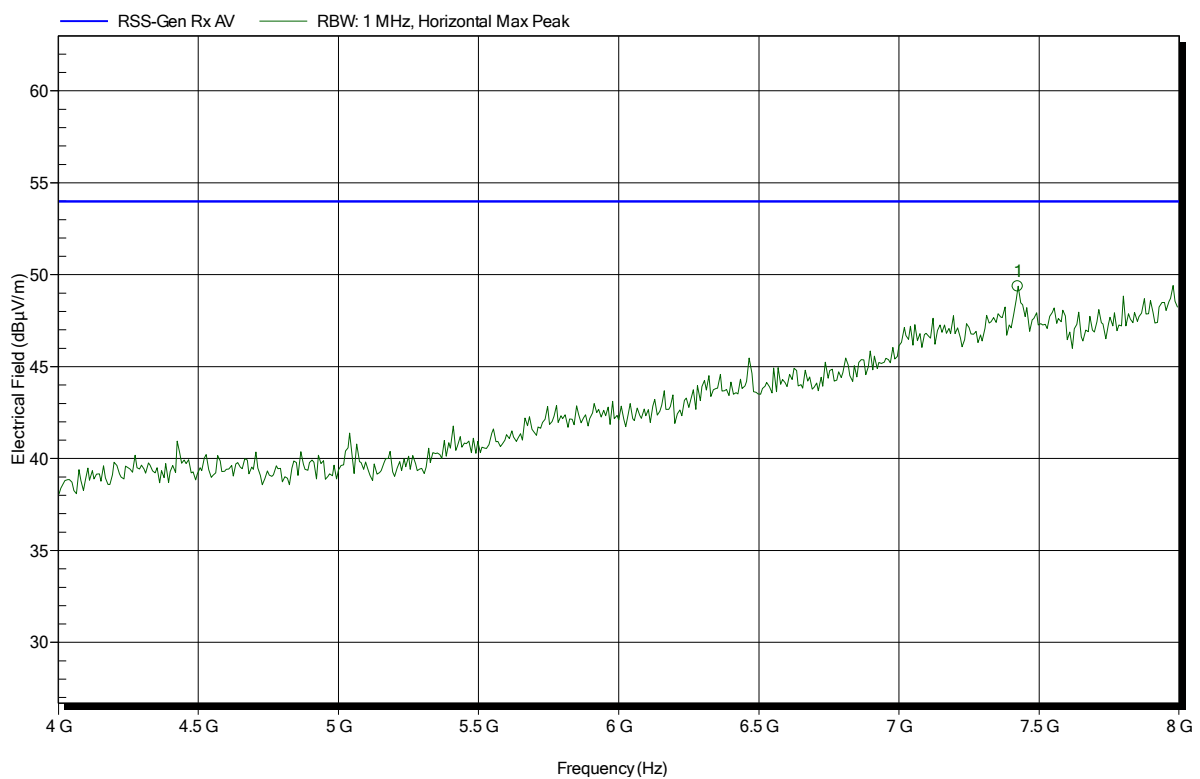


| Frequency | Peak         | Peak Limit   | Peak Difference | Peak Status |
|-----------|--------------|--------------|-----------------|-------------|
| 7.425 GHz | 49.02 dBµV/m | 53.98 dBµV/m | -4.96 dB        | Pass        |

## Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
EUT Name: Class 2 Bluetooth Low Energy Module  
Model: ENW89837A5KF  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
Antenna: Schwarzbeck BBHA 9120D, Vertical  
Measurement distance: 3 m  
Mode: RX; BT; 2441 MHz  
Test Date: 2017-05-09  
Note:

Index 47

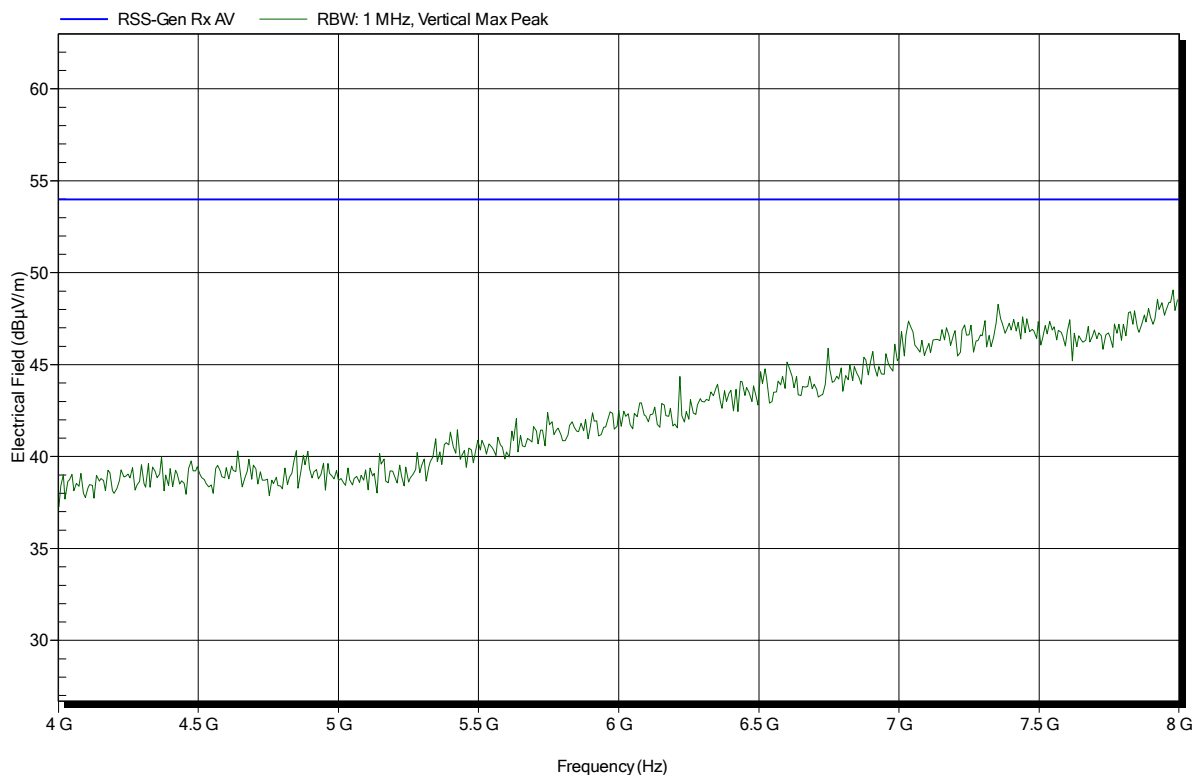


## Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
EUT Name: Class 2 Bluetooth Low Energy Module  
Model: ENW89837A5KF  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
Antenna: Schwarzbeck BBHA 9120D, Horizontal  
Measurement distance: 1 m converted to 3m  
Mode: RX; BT; 2441 MHz  
Test Date: 2017-05-09  
Note:

Index 45

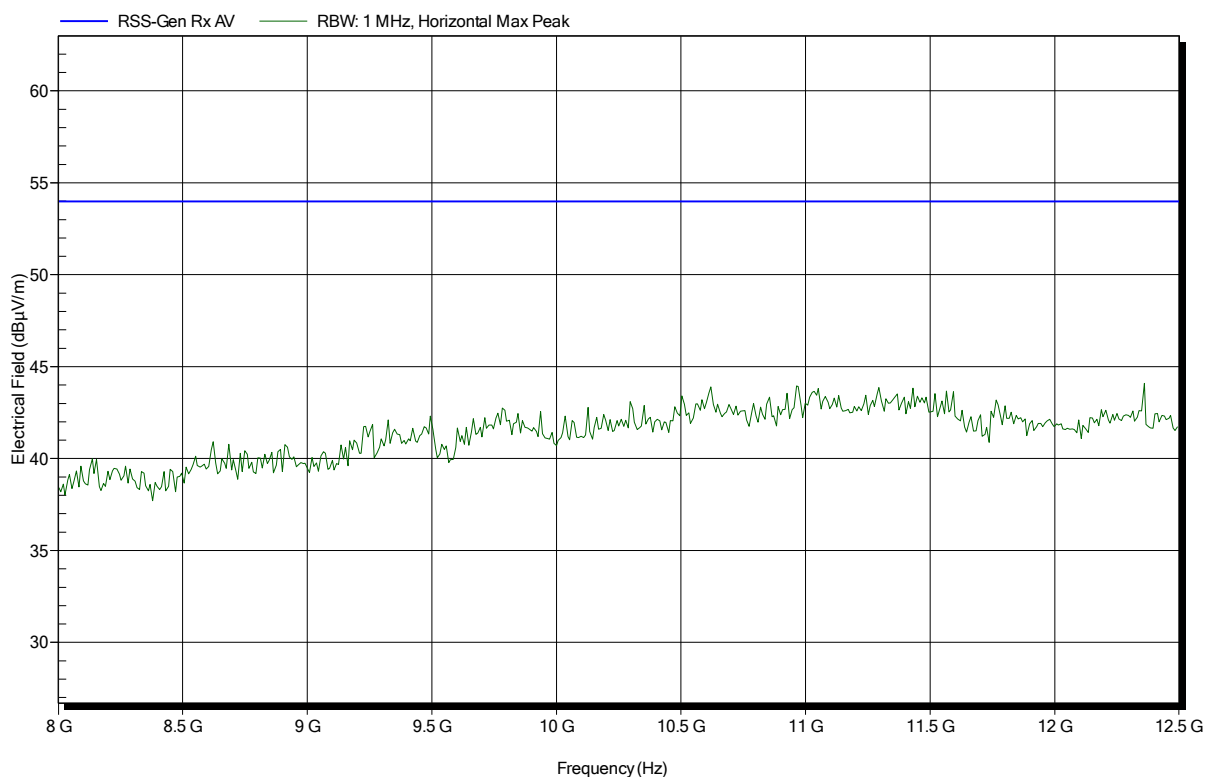

## Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1702-6284

Applicant: Panasonic Industrial Devices Europe GmbH  
EUT Name: Class 2 Bluetooth Low Energy Module  
Model: ENW89837A5KF  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Treffke  
Test Conditions: Tnom: 24°C, Vnom: 3.3 VDC (5.0V USB evaluation board)  
Antenna: Schwarzbeck BBHA 9120D, Vertical  
Measurement distance: 1 m converted to 3m  
Mode: RX; BT; 2441 MHz  
Test Date: 2017-05-09  
Note:

Index 48

