



MOTOROLA

HAC Test Report for Near Field Emissions IHDP56JX1

Date of test: Aug-24-2008 to Aug-29-2008
Date of Report: Sep-08-2008

Laboratory: Motorola Mobile Devices Business Product Safety & Compliance Laboratory
600 N. US Highway 45
Room: MW113
Libertyville, Illinois 60048

Test Responsible: Thomas Knipple
Senior RF Engineer

Statement of Compliance: Motorola declares under its sole responsibility that portable cellular telephone FCC IHDP56JX1 to which this declaration relates, complies with recommendations and guidelines FCC 47 CFR §20.19. The measurements were performed to ensure compliance to the ANSI C63.19-2007. It also declares that the product was tested in accordance with the appropriate measurement standards, guidelines and recommended practices. Any deviations from these standards, guidelines and recommended practices are noted below:

(none)

Results Summary: M Category = M4

©Motorola, Inc. 2008

This test report shall not be reproduced except in full, without written approval of the laboratory.

The results and statements contained herein relate only to the items tested. The names of individuals involved may be mentioned only in connection with the statements or results from this report.

Motorola encourages all feedback, both positive and negative, on this test report.

Table of Contents

1. INTRODUCTION3

2. DESCRIPTION OF THE DEVICE UNDER TEST.....3

3. TEST EQUIPMENT USED.....4

4. VALIDATION5

5. PROBE MODULATION FACTOR6

6. TEST RESULTS.....8

7. MEASUREMENTS FOR CERTIFICATION OF 3G DEVICES.....11

APPENDIX 1: DETAILS JUSTIFYING THE CONVERSION TO PEAK12

A1.1 Procedure for PMF measurements.....13

A1.2 0-Span Spectrum Plots for PMF measurements.....14

APPENDIX 2: HAC DISTRIBUTION PLOTS FOR VALIDATION16

APPENDIX 3: HAC DISTRIBUTION PLOTS FOR E-FIELD AND H-FIELD17

APPENDIX 4: MOTOROLA UNCERTAINTY BUDGET18

A4.1 Motorola Uncertainty Budget for RF HAC Testing19

A4.2 Probe Rotation Contributions to Isotropy Error20

APPENDIX 5: PICTURES OF TEST SETUP21

APPENDIX 6: PROBE CALIBRATION CERTIFICATES.....22

APPENDIX 7: DIPOLE CHARACTERIZATION CERTIFICATE23

1. Introduction

The Motorola Mobile Devices Business Product Safety Laboratory has performed Hearing Aid Compatibility (HAC) measurements for the portable cellular phone (FCC ID IHDP56JX1). The portable cellular phone was tested in accordance with ANSI PC63.19-2007 standard. The test results presented herein clearly demonstrate compliance FCC 47 CFR § 20.19. This report demonstrates compliance for near-field emissions only and not for Telecoil performance compliance.

2. Description of the Device Under Test

Table 1: Information for the Device Under Test

| | | | | | |
|---|-----------------------------------|--------------------------|------------------------|--------------------------|------------------------|
| Serial number | 80F4D4CA, 80D7CFE5 | | | | |
| Mode(s) of Operation | 800 CDMA | 1900 CDMA | 800 EV-DO Rel. O | 1900 EV-DO Rel. O | Bluetooth |
| Modulation Mode(s) | QPSK | QPSK | QPSK | QPSK | GMSK |
| Maximum Output Power Setting | 25.00 dBm | 25.00 dBm | 25.00 dBm | 25.00 dBm | 8.00 dBm |
| Duty Cycle | 1:1 | 1:1 | 1:1 | 1:1 | 1:1 |
| Transmitting Frequency Range(s) | 824.70 – 848.31 MHz | 1851.25 – 1908.75 MHz | 824.70 – 848.31 MHz | 1851.25 – 1908.75 MHz | 2400.0 - 2483.5 MHz |
| Production Unit or Identical Prototype (47 CFR §2.908) | Identical Prototype | | | | |
| Device Category | Portable | | | | |
| RF Exposure Limits | General Population / Uncontrolled | | | | |

Note: No Bluetooth profile exists in this phone that will allow a Bluetooth link while in a cellular call that passes audio to the earpiece. If the user had Bluetooth enabled and a link established, they could not be listening to the phone through the earpiece.

3. Test Equipment Used

The Motorola Mobile Devices Business Product Safety & Compliance Laboratory utilizes a Dosimetric Assessment System (Dasy4™ v4.7) manufactured by Schmid & Partner Engineering AG (SPEAG™), of Zurich Switzerland. All the HAC measurements are taken within a shielded enclosure. The measurement uncertainty budget is given in Appendix 4. The list of calibrated equipment used for the measurements is shown below.

Table 2: Dosimetric System Equipment

| Description | Serial Number | Cal Due Date |
|--------------------------|---------------|--------------|
| E-Field Probe ER3DV6R | 2245 | Nov-20-2008 |
| H-Field Probe H3DV6 | 6075 | Nov-20-2008 |
| DAE3 | 440 | Jan-28-2009 |
| DAE3 | 639 | Nov-13-2008 |
| DAE3 | 437 | Jul-11-2009 |
| 835 MHz Dipole CD835V3 | 1076 | Nov-21-2008 |
| 1880 MHz Dipole CD1880V3 | 1059 | Jul-16-2009 |

Table 3: Additional Test Equipment

| Description | Serial Number | Cal Due Date |
|--------------------------|---------------|--------------|
| Power Supply 6623A | US37360826 | Nov-16-2008 |
| Signal Generator E4438C | MY45090104 | Sep-12-2009 |
| Amplifier ZHL-42-SMA | 1040 | |
| 3 db Attenuator 8491A | 50577 | Nov-14-2008 |
| Directional Coupler 778D | 18625 | Nov-08-2008 |
| Power Meter E4417A | MY45100481 | Mar-07-2009 |
| Power Sensor #1 – E9323A | MY44420676 | Nov-06-2008 |
| Power Sensor #2 - E9323A | MY44420704 | Nov-06-2008 |
| 10 db attenuator 8491A | 3929M50704 | Dec-31-2008 |
| Spectrum Analyzer E4403B | US39440480 | Jan-29-2009 |

4. Validation

Validations of the DASY4 v4.7 test system were performed using the measurement equipment listed in Section 3.1. All validations occur in free space using the DASY4 test arch. Note that the 10 mm probe to dipole separation is measured from the top edge of the dipole to the calibration reference point of the probe. SPEAG uses the center point of the probe sensor(s) as the reference point when establishing targets for their dipoles. Therefore, because SPEAG’s dipoles and targets are used, it is appropriate to measure the 10 mm separation distance to the center of the sensors as they do. This reference point was used for validation only. Validations were performed at 835 MHz and/or 1880 MHz. These frequencies are within each operating band and are within 2 MHz of the mid-band frequency of the test device. The obtained results from the validations are displayed in the table below. The field contour plots are included in Appendix 2.

Validations were performed to verify that measured E-field and H-field values are within +/- 25% from the target reference values provided by the manufacturer (Ref: Appendix 7). Per Section 4.3.2.1 of the C63.19 standard, “Values within +/-25% are acceptable, of which 12% is deviation and 13% is measurement uncertainty.” Therefore, the E- and H-Field dipole verification results, shown in Table 4, are in accordance with the acceptable parameters defined by the standard.

Table 4: Dipole Measurement Summary

| Dipole | F (MHz) | Protocol | Input Power (mW) | E-Field Results (V/m) | Target for Dipole (V/m) | % Deviation |
|---------|---------|----------|------------------|-----------------------|-------------------------|-------------|
| SN 1076 | 835 | CW | 100 | 165.35 | 159.0 | 4.0 |
| SN 1059 | 1880 | CW | 100 | 132.65 | 141.7 | -6.4 |

| Dipole | F (MHz) | Protocol | Input Power (mW) | H-Field Results (A/m) | Target for Dipole (A/m) | % Deviation |
|---------|---------|----------|------------------|-----------------------|-------------------------|-------------|
| SN 1076 | 835 | CW | 100 | 0.468 | 0.445 | 5.2 |
| SN 1059 | 1880 | CW | 100 | 0.467 | 0.471 | -0.8 |

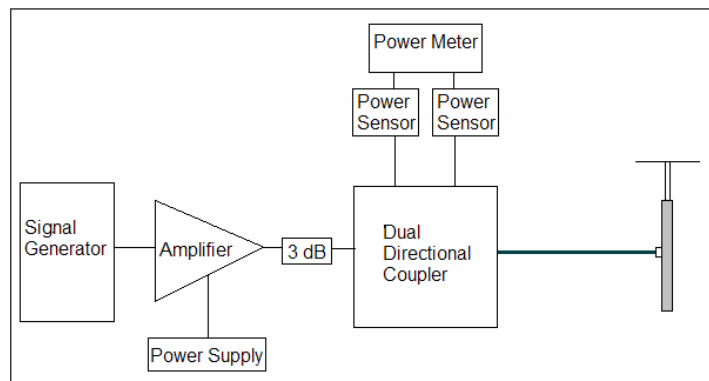


Figure 1: Setup for Validation

5. Probe Modulation Factor

After every probe calibration, the response of the probe to each applicable modulated signal (CDMA, GSM, etc) must be assessed at both 835 MHz and 1880 MHz. The response of the probe system to a CW field at the frequency(s) of interest is compared to its response to a modulated signal with equal peak amplitude. For each PMF assessment, a Signal Generator was used to replace the original CW signal with the desired modulated signal. The PMF results applicable to this test document are shown in Tables 5.

RF Field Probe Modulation Response was measured with the field probe and associated measurement equipment. The PMF was measured using a signal generator as follows:

1. Illuminate a dipole with a CW signal at the intended measured frequency.
2. Fix the probe at a set location relative to the dipole; typically located at the field reference point.
3. Record the reading of the probe measurement system of the CW signal.
4. Substitute a modulated signal of the same amplitude, using the same modulation as that used by the intended WD for the CW signal.
5. Record the reading of the probe measurement system of the modulated signal.
6. The ratio of the CW to modulated signal reading is the probe modulation factor.

Using dual directional coupler, the forward power and reverse power are measured and adjusted when connected to the dipole.

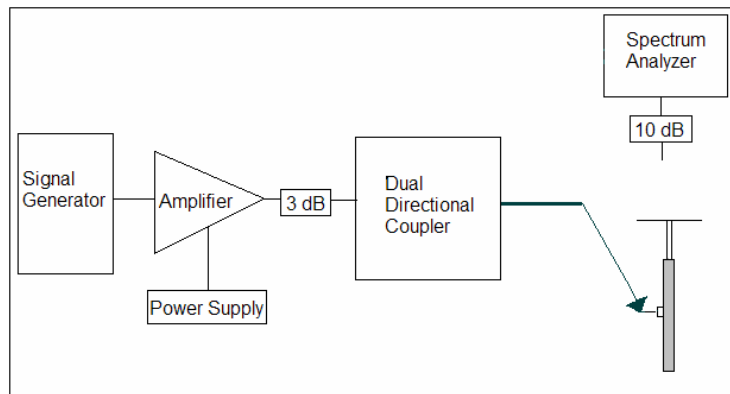


Figure 2a: Setup to Dipole

A spectrum analyzer is used to set the peak amplitude of the modulated signal equal to the amplitude of the CW signal. The procedure, used to ensure that the amplitude is the same, is shown in Appendix 1. The 0-span spectrum plots are also provided in Appendix 1.

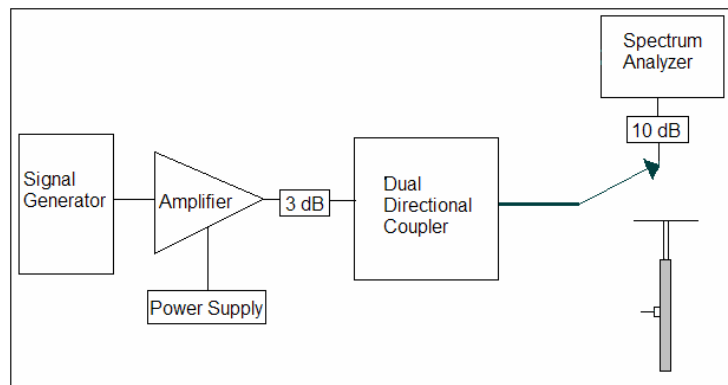


Figure 2b: Setup for Desired Peak Power using Spectrum Analyzer

When measuring PMFs, the signal is injected into the dipole. When peak power level produces the field strength less or around M3 limit, the peak power level is used. When peak power level produces the field strength much greater than M3 limit, the power level which gives the field strength around M3 limit is used.

Table 5: PMF Measurement Summary

| f (MHz) | Protocol | E-Field Probe SN 2245 | | H-Field Probe SN 6075 | |
|------------|-------------------------|--------------------------|---------------------------------|--------------------------|---------------------------------|
| | | E-Field (V/m) | E-Field Modulation Factor | H-Field (A/m) | H-Field Modulation Factor |
| 835 | CW | 198.7 | | 0.8996 | |
| | CDMA, Full Rate Vocoder | 192.0 | 1.03 | 0.8746 | 1.03 |
| | CDMA, 1/8 Rate Vocoder | 71.4 | 2.78 | 0.3544 | 2.54 |
| 1880 | CW | 103.3 | | 0.3411 | |
| | CDMA, Full Rate Vocoder | 96.42 | 1.07 | 0.3391 | 1.01 |
| | CDMA, 1/8 Rate Vocoder | 35.77 | 2.89 | 0.1343 | 2.54 |

| f (MHz) | Protocol | E-Field Probe SN 2245 | | H-Field Probe SN 6075 | |
|------------|----------|--------------------------|---------------------------------|--------------------------|---------------------------------|
| | | E-Field (V/m) | E-Field Modulation Factor | H-Field (A/m) | H-Field Modulation Factor |
| 835 | CW | 106.8 | | 0.4990 | |
| | 80% AM | 66.37 | 1.61 | 0.3187 | 1.57 |
| 1880 | CW | 145.7 | | 0.4840 | |
| | 80% AM | 90.41 | 1.61 | 0.3193 | 1.52 |

6. Test Results

The phone was tested in normal configurations for the ear use. When applicable, configurations are tested with the antenna in its fully extended position. These test configurations are tested at the high, middle and low frequency channels of each applicable operating mode; for example, GSM, CDMA, and TDMA.

The signal was set up by creating and maintaining an over-the-air connection between the DUT and an Agilent 8960 Wireless Communications Test Set. The CDMA radio is available on CDMA 2000(1X) and IS-95. The test equipment was configured to use "all up bits" for RC1 / SO2 on J-STD-008 for CDMA 1900 and TSB-84 for CDMA 800 MHz.

The Cellular Phone model covered by this report has the following battery options:

Battery #1 - SNN5833A - 930 mAH Battery

The DASY4 v4.7 measurement system specified in section 3.1 was utilized within the intended operations as set by the SPEAG™ setup. The default settings for the grid spacing of the scan were set to 5 mm as shown in the Field plots included in Appendix 2 and 3. The 5 cm x 5 cm area measurement grid is centered on the acoustic output of the device. The Test Arch provided by SPEAG is used to position the DUT. The pictures of the setup are included in Appendix 5. The WD reference plane is parallel to the device and contains the highest point on its contour in the area of the phone that normally rests against the user's ear. The measurement plane contains the center point of the probe sensor(s). The device is positioned such that the WD reference plane is located 15 mm from, and parallel to, the measurement plane. This is in accordance with section 4.4 of the standard, which states that "The WD reference plane is a plane parallel with the front "face" of the WD and containing the highest point on its contour in the area of the phone that normally rests against the user's ear."

The HAC Rating results for E-Field and H-field are shown in Tables 6 through 9. Also shown are the measured conducted output powers, the measured drifts, excluded areas, and the peak fields. PMF measurements are taken from Section 5. The worst-case test conditions are indicated with **bold numbers** in the tables and are detailed in Appendix 3: HAC distribution plots for E-Field and H-Field.

Drift was measured using the typical DASY4 v4.7 measurement routines. The field is measured at the reference location (center of the ear piece) at the beginning of the test. After completion of the E or H field measurement the probe returns to the same reference location and takes another measurement. The drift is the delta between these two values and is included in the test report scans.

Per SPEAG's recommendation, the phone plots in Appendix 3 use the standard GSM transmitter ratio 1:8 and standard CDMA transmitter ratio 1:1 as "Duty Cycle." Per SPEAG's recommendation, in order to account for probe modulation response, PMF is applied during the SEMCAD (post-processing) portion. PMF also appears in the phone plots in Appendix 3.

| CDMA 800 Emissions Limits | |
|---------------------------|-------------------|
| Rating | E-Field |
| M3 | 199.5 – 354.8 V/m |
| M4 | < 199.5 V/m |

| CDMA 1900 Emissions Limits | |
|----------------------------|------------------|
| Rating | E-Field |
| M3 | 63.1 – 112.2 V/m |
| M4 | < 63.1 V/m |

Table 6: HAC E-Field measurement results for the portable cellular telephone at highest possible output power (Full Rate).

| Frequency Band (MHz) | Slider position | Channel Setting | Measured PMF | Drift (dB) | Excluded Cells | Peak Field (V/m) | Rating |
|----------------------|-----------------|-----------------|--------------|---------------|----------------|------------------|--------|
| CDMA 800 MHz | Extended | 1013 | 1.03 | -0.194 | 6,9 | 96.2 | M4 |
| | | 384 | | -0.021 | 6,9 | 99.8 | M4 |
| | | 777 | | -0.089 | 6,9 | 95.8 | M4 |
| | Retracted | 1013 | | 0.075 | 3,6 | 69.0 | M4 |
| | | 384 | | 0.129 | 3,6 | 82.6 | M4 |
| | | 777 | | 0.003 | 6,9 | 76.1 | M4 |
| CDMA 1900 MHz | Extended | 25 | 1.07 | 0.413 | 8,9 | 19.6 | M4 |
| | | 600 | | 0.272 | 7,8 | 23.2 | M4 |
| | | 1175 | | -0.262 | 7,8 | 27.8 | M4 |
| | Retracted | 25 | | -0.035 | 6,8,9 | 37.3 | M4 |
| | | 600 | | 0.020 | 6,8,9 | 40.1 | M4 |
| | | 1175 | | -0.179 | 8,9 | 48.7 | M4 |

Table 7: HAC E-Field measurement results for the portable cellular telephone at highest possible output power (1/8 Rate).

| Frequency Band (MHz) | Slider position | Channel Setting | Measured PMF | Drift (dB) | Excluded Cells | Peak Field (V/m) | Rating |
|----------------------|-----------------|-----------------|--------------|---------------|----------------|------------------|--------|
| CDMA 800 MHz | Extended | 1013 | 2.78 | -0.202 | 6,9 | 93.2 | M4 |
| | | 384 | | 0.077 | 6,9 | 102.5 | M4 |
| | | 777 | | -0.020 | 6,9 | 94.8 | M4 |
| | Retracted | 1013 | | 0.024 | 6,9 | 66.5 | M4 |
| | | 384 | | 0.021 | 6,9 | 78.7 | M4 |
| | | 777 | | -0.093 | 6,9 | 72.5 | M4 |
| CDMA 1900 MHz | Extended | 25 | 2.89 | -0.047 | 8,9 | 18.7 | M4 |
| | | 600 | | -0.036 | 8,9 | 21.7 | M4 |
| | | 1175 | | -0.233 | 7,8 | 26.7 | M4 |
| | Retracted | 25 | | -0.092 | 6,8,9 | 36.0 | M4 |
| | | 600 | | 0.093 | 8,9 | 38.6 | M4 |
| | | 1175 | | 0.116 | 8,9 | 46.2 | M4 |

| CDMA 800 Emissions Limits | |
|---------------------------|-----------------|
| Rating | H-Field |
| M3 | 0.60 – 1.07 A/m |
| M4 | < 0.60 A/m |

| CDMA 1900 Emissions Limits | |
|----------------------------|-----------------|
| Rating | H-Field |
| M3 | 0.19 – 0.34 A/m |
| M4 | < 0.19 A/m |

Table 8: HAC H-Field measurement results for the portable cellular telephone at highest possible output power (Full Rate).

| Frequency Band (MHz) | Slider position | Channel Setting | Measured PMF | Drift (dB) | Excluded Cells | Peak Field (A/m) | Rating |
|----------------------|-----------------|-----------------|--------------|---------------|----------------|------------------|--------|
| CDMA 800 MHz | Extended | 1013 | 1.03 | 0.017 | 1,4,7 | 0.134 | M4 |
| | | 384 | | 0.049 | 1,4,7 | 0.133 | M4 |
| | | 777 | | 0.110 | 1,4,7 | 0.135 | M4 |
| | Retracted | 1013 | | -0.067 | 1,4,7 | 0.103 | M4 |
| | | 384 | | 0.074 | 1,4,7 | 0.113 | M4 |
| | | 777 | | 0.028 | 1,4,7 | 0.107 | M4 |
| CDMA 1900 MHz | Extended | 25 | 1.01 | -0.339 | 1,2,3 | 0.041 | M4 |
| | | 600 | | -0.006 | 1,2,3 | 0.048 | M4 |
| | | 1175 | | -0.156 | 2,3,6 | 0.059 | M4 |
| | Retracted | 25 | | -0.031 | 2,3,6 | 0.127 | M4 |
| | | 600 | | 0.110 | 2,3,6 | 0.130 | M4 |
| | | 1175 | | -0.086 | 2,3,6 | 0.163 | M4 |

Table 9: HAC H-Field measurement results for the portable cellular telephone at highest possible output power (1/8 Rate).

| Frequency Band (MHz) | Slider position | Channel Setting | Measured PMF | Drift (dB) | Excluded Cells | Peak Field (A/m) | Rating |
|----------------------|-----------------|-----------------|--------------|---------------|----------------|------------------|--------|
| CDMA 800 MHz | Extended | 1013 | 2.54 | -0.103 | 1,4,7 | 0.115 | M4 |
| | | 384 | | 0.112 | 1,4,7 | 0.120 | M4 |
| | | 777 | | -0.024 | 1,4,7 | 0.121 | M4 |
| | Retracted | 1013 | | -0.096 | 1,4,7 | 0.085 | M4 |
| | | 384 | | -0.006 | 1,4,7 | 0.108 | M4 |
| | | 777 | | 0.006 | 1,4,7 | 0.094 | M4 |
| CDMA 1900 MHz | Extended | 25 | 2.54 | 0.517 | 1,2,3 | 0.033 | M4 |
| | | 600 | | -0.002 | 1,2,3 | 0.042 | M4 |
| | | 1175 | | -0.231 | 2,3,6 | 0.048 | M4 |
| | Retracted | 25 | | 0.005 | 2,3,6 | 0.113 | M4 |
| | | 600 | | -0.065 | 2,3,6 | 0.119 | M4 |
| | | 1175 | | 0.002 | 2,3,6 | 0.153 | M4 |

7. Measurements for Certification of 3G Devices

For CDMA devices, RC1 and RC3 CDMA modes are considered in S055 service option. In addition, RC1 and RC3 modes are considered in S02 service option. The conducted power measurements for each mode are shown in the table below.

| Conducted power (dBm) for CDMA modes | | | | | | |
|--------------------------------------|---------|-------|-------|-------|-------|--|
| | Channel | RC1 | | RC3 | | RC3 (FCH + SCH) |
| | | S02 | S055 | S02 | S055 | |
| CDMA 800 | 1013 | 24.99 | 24.95 | 24.93 | 24.92 | Per Motorola designs, the maximum power, when in a mode that allows supplemental channels, will always be less than the RC3/RC1 maximum conducted power limit. |
| | 384 | 24.84 | 24.83 | 24.86 | 24.93 | |
| | 777 | 24.87 | 24.91 | 24.96 | 24.94 | |
| CDMA 1900 | 25 | 24.92 | 24.93 | 24.92 | 24.93 | |
| | 600 | 24.88 | 24.88 | 24.79 | 24.82 | |
| | 1175 | 24.82 | 24.83 | 24.82 | 24.87 | |

Appendix 1


Details justifying the conversion to peak

A1.1 Procedure for PMF measurements


1. Setup the HAC validation rack as you would for a normal CW HAC validation with forward power = 100 mW
2. Setup the dipole and phantom as you would for a normal CW HAC validation.
3. Open the "HAC Probe Mod Factor" template and verify the following parameters:
Medium = "Air";
Communication System = "HAC – Dipole";
Ensure the proper probe & DAE are installed and laser aligned
4. **MEASURE CW:** Using the original CW signal, run the jobs in the "CW Measurement" procedure.
5. Do **not** turn off the signal generator power
6. **Setting the CW Reference Level on the Spectrum Analyzer:** To set the Reference level on the Spectrum Analyzer, remove the Validation Rack's Main Cable from the dipole and connect to the Spectrum Analyzer INPUT using a 10 dB attenuator and an adapter.
7. Set up the Spectrum Analyzer for the following Settings:
Frequency: Freq. being tested (EX: 835/1880)
Span: Zero Span
Res BW: iDEN – 100 kHz; GSM – 300 kHz; CDMA – 3 MHz; WCDMA – 5 MHz;
Video BW: iDEN – 300 kHz; GSM – 1MHz; CDMA and WCDMA – 30 kHz**;
Sweep Time: 20 ms; 120 ms for iDEN
Scale: 1dB
Detector: PEAK / Manual
8. Adjust REF level until the CW signal is aligned with the Center Line (approx. 15 dB). NOTE: After this point, the Reference Line must remain fixed. Do not change it.
9. **MEASURE THE MODULATED SIGNAL(S):**
 - 9.1. Change the signal generator to the desired modulation.
 - 9.2. Set the Spectrum Analyzer Sweep Time to 20ms.
 - 9.3. With the Main cable still connected to the Spectrum Analyzer, adjust the amplitude of the power on the signal generator so that the PEAK of the modulated signal is at the CW Reference Line:
 - 9.3.1 On the Spectrum Analyzer, press the [View Trace] button and then select (Max Hold), this will show only the Peak output.
 - 9.3.2 Press (Clear Write) and then (Max Hold) each time an amplitude adjustment is made.
 - 9.4. Allow the Max Hold line to stabilize. Then check that the highest peak of the Max Hold line corresponds with the CW Reference Line (without going over). If not correct, repeat section 6.
 - 9.5. Remove the validation main cable from the spectrum analyzer and re-connect it to the Dipole.
10. Repeat 9 until all remaining modulation(s) have been completed.

** The use of 30 kHz VBW is validated. The power measurements are verified using an average power meter.


A1.2 0-span Spectrum Plots for PMF measurements

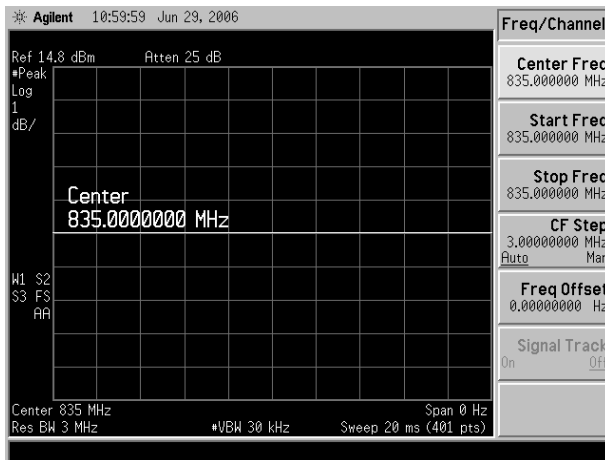


CW 835 MHz

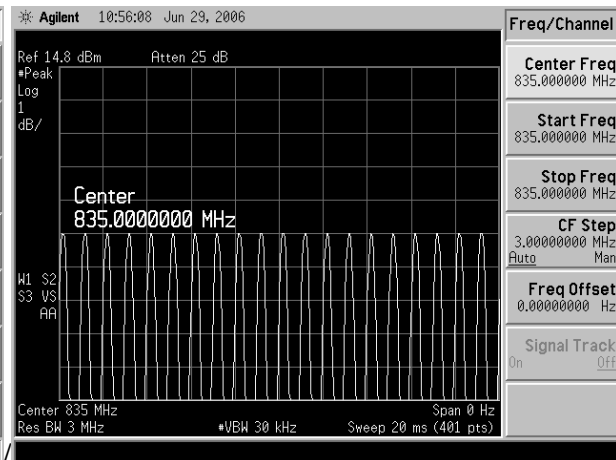


80% AM 835 MHz

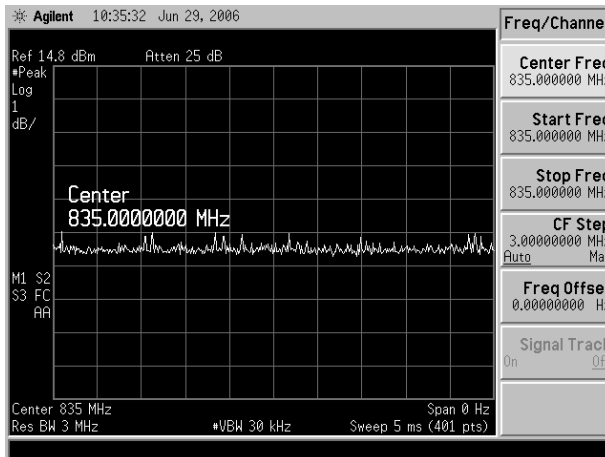


CDMA 835 MHz (full rate)

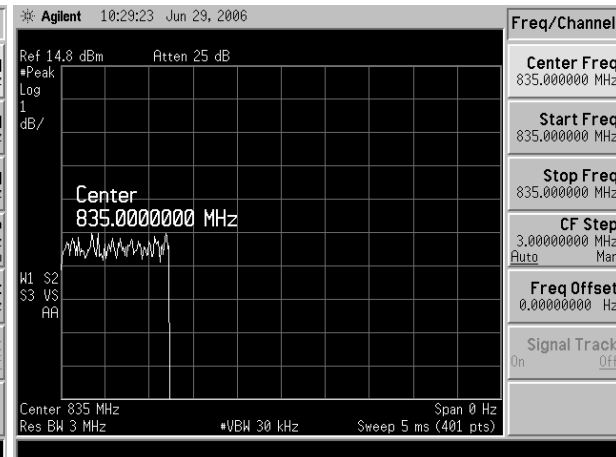


CDMA 835 MHz (1/8 rate)

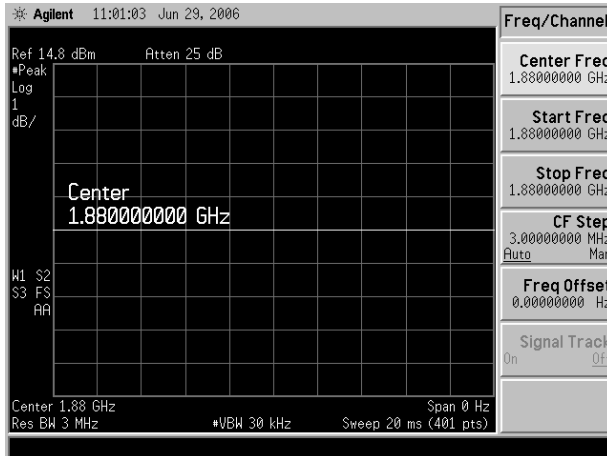


CW 1880 MHz

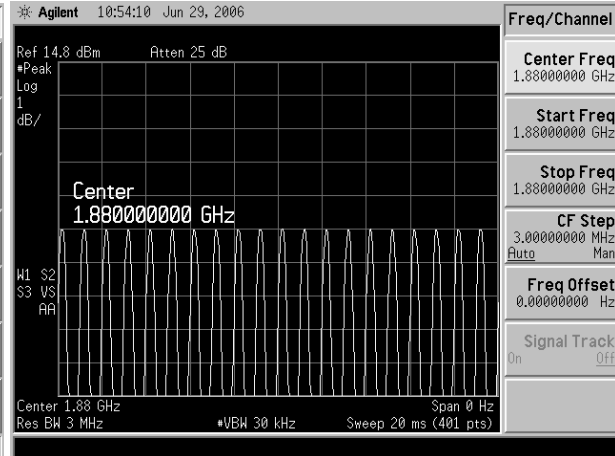

80% AM 1880 MHz

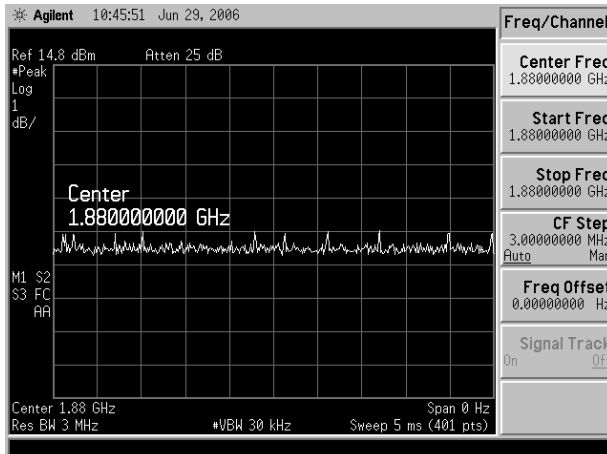

CDMA 1880 MHz (full rate)

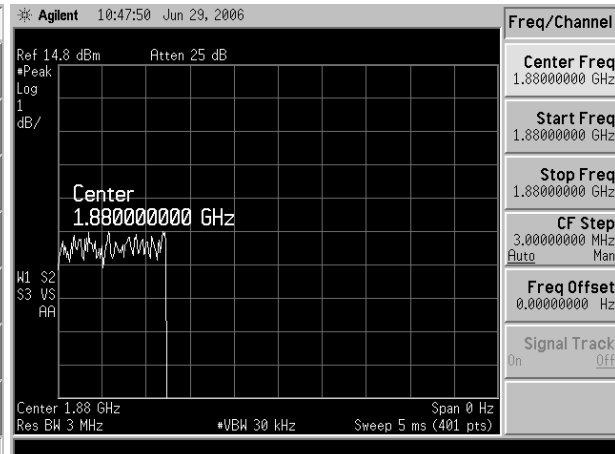

CDMA 1880 MHz (1/8 rate)

Appendix 2

HAC distribution plots for Validation

Date/Time: 8/24/2008 6:12:28 AM

Test Laboratory: Motorola - 082408, E - 835 CW +4.0% GOOD

DUT: HAC-Dipole 835 MHz; Type: CD835V3; Serial: 1076; FCC ID: IHDP56JX1

Procedure Notes: 835 MHz HAC Validation; Dipole Sn# 1076; Input Power = 100 mW

Communication System: CW - HAC; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Air; Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

DASY4 Configuration:

- Probe: ER3DV6R - SN2245; ConvF(1, 1, 1); Calibrated: 11/20/2007
- Sensor-Surface: 0mm (Fix Surface)Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn440; Calibrated: 1/28/2008
- Phantom: R-3, HAC Test Arch (rev.2); Type: SD HAC P01 BA; Serial: 1071;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

E Scan - Probe center 10mm above Dipole/Hearing Aid Compatibility Test (41x361x1):

Measurement grid: dx=5mm, dy=5mm; Probe Modulation Factor = 1.00



Device Reference Point: 0.000, 0.000, -6.30 mm; Reference Value = 104.0 V/m; Power Drift = 0.093 dB

Maximum value of Total (interpolated) = 165.4 V/m

Average value of Total (interpolated) = $(165.4 + 165.3) / 2 = 165.35$ V/m

Peak E-field in V/m

| | | |
|---------------------------|----------------------------------|---------------------------|
| Grid 1 151.6 M4 | Grid 2 165.4 M4 | Grid 3 163.9 M4 |
| Grid 4 84.0 M4 | Grid 5 87.9 M4 | Grid 6 86.9 M4 |
| Grid 7 155.9 M4 | Grid 8 165.3 M4 | Grid 9 162.9 M4 |

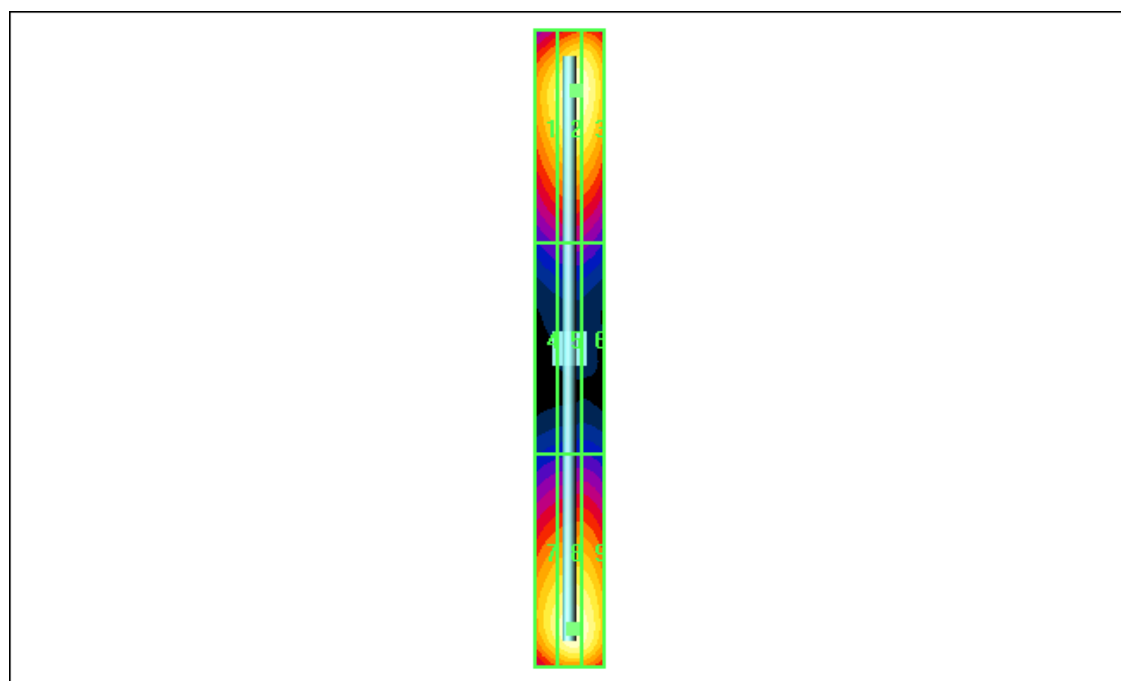

Date/Time: 8/24/2008 7:06:29 AM

Test Laboratory: Motorola - 082408, E - 1880 CW -6.4% GOOD

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: 1059; FCC ID: IHDP56JX1

Procedure Notes: 1880 MHz HAC Validation; Dipole Sn# 1059; Input Power = 100 mW

Communication System: CW - HAC; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air; Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

DASY4 Configuration:

- Probe: ER3DV6R - SN2245; ConvF(1, 1, 1); Calibrated: 11/20/2007
- Sensor-Surface: 0mm (Fix Surface)Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn440; Calibrated: 1/28/2008
- Phantom: R-3, HAC Test Arch (rev.2); Type: SD HAC P01 BA; Serial: 1071;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

E Scan - Probe center 10mm above Dipole/Hearing Aid Compatibility Test (41x181x1):

Measurement grid: dx=5mm, dy=5mm; Probe Modulation Factor = 1.00



Device Reference Point: 0.000, 0.000, -6.30 mm; Reference Value = 146.8 V/m; Power Drift = 0.009 dB

Maximum value of Total (interpolated) = 133.6 V/m

Average value of Total (interpolated) = $(133.6 + 131.7) / 2 = 132.65$ V/m

Peak E-field in V/m

| | | |
|---------------------------|----------------------------------|---------------------------|
| Grid 1 125.9 M2 | Grid 2 133.6 M2 | Grid 3 132.2 M2 |
| Grid 4 86.0 M3 | Grid 5 90.4 M3 | Grid 6 87.9 M3 |
| Grid 7 123.8 M2 | Grid 8 131.7 M2 | Grid 9 130.4 M2 |

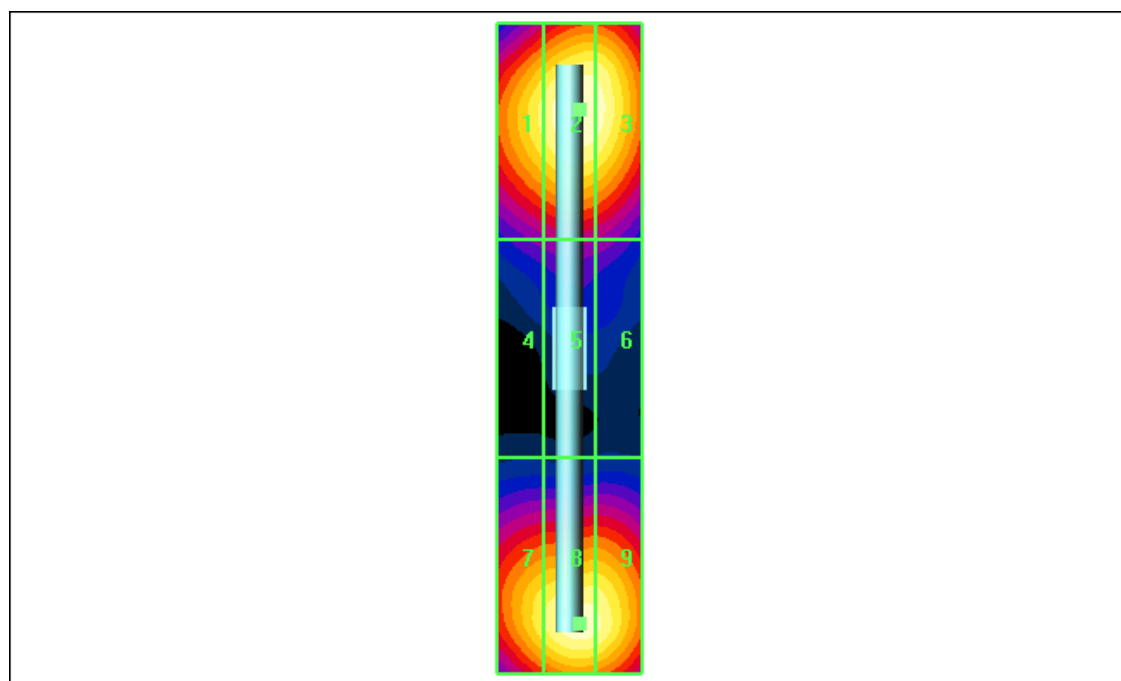

Date/Time: 8/24/2008 6:30:08 AM

Test Laboratory: Motorola - 082408, H - 835 CW +5.1% GOOD

DUT: HAC-Dipole 835 MHz; Type: CD835V3; Serial: 1076; FCC ID: IHDP56JX1

Procedure Notes: 835 MHz HAC Validation; Dipole Sn# 1076; Input Power = 100 mW

Communication System: CW - HAC; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Air; Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

DASY4 Configuration:

- Probe: H3DV6 - SN6075; ; Calibrated: 11/20/2007
- Sensor-Surface: 0mm (Fix Surface)Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn639; Calibrated: 11/13/2007
- Phantom: R-3, HAC Test Arch (rev.2); Type: SD HAC P01 BA; Serial: 1071;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

H Scan - Probe center 10mm above Dipole/Hearing Aid Compatibility Test (41x361x1):



Measurement grid: dx=5mm, dy=5mm; Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm; Reference Value = 0.496 A/m; Power Drift = 0.031 dB

Maximum value of Total (interpolated) = 0.468 A/m

Peak H-field in A/m

| | | |
|---------------------------|---------------------------|---------------------------|
| Grid 1 0.384 M4 | Grid 2 0.420 M4 | Grid 3 0.407 M4 |
| Grid 4 0.433 M4 | Grid 5 0.468 M4 | Grid 6 0.453 M4 |
| Grid 7 0.385 M4 | Grid 8 0.416 M4 | Grid 9 0.400 M4 |

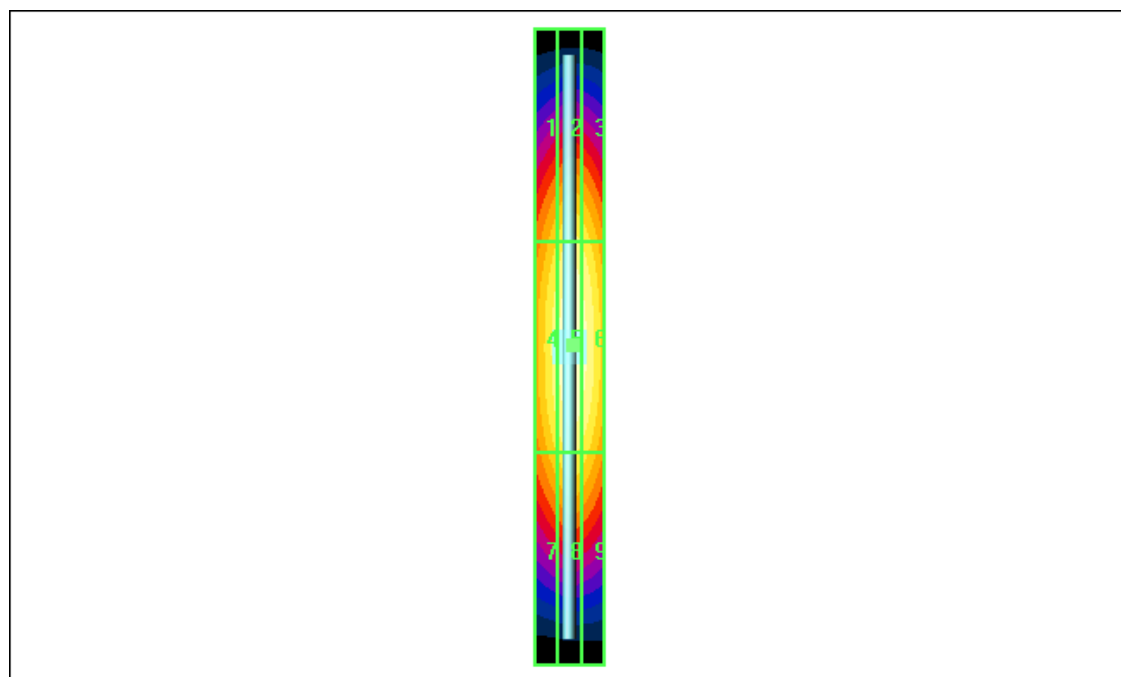

Date/Time: 8/24/2008 6:53:50 AM

Test Laboratory: Motorola - 082408, H - 1880 CW -0.8% GOOD

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: 1059; FCC ID: IHDP56JX1

Procedure Notes: 1880 MHz HAC Validation; Dipole Sn# 1059; Input Power = 100 mW

Communication System: CW - HAC; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air; Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

DASY4 Configuration:

- Probe: H3DV6 - SN6075; ; Calibrated: 11/20/2007
- Sensor-Surface: 0mm (Fix Surface)Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn639; Calibrated: 11/13/2007
- Phantom: R-3, HAC Test Arch (rev.2); Type: SD HAC P01 BA; Serial: 1071;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

H Scan - Probe center 10mm above Dipole/Hearing Aid Compatibility Test (41x181x1):



Measurement grid: dx=5mm, dy=5mm; Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm; Reference Value = 0.492 A/m; Power Drift = 0.024 dB

Maximum value of Total (interpolated) = 0.467 A/m

Peak H-field in A/m

| | | |
|---------------------------|----------------------------------|---------------------------|
| Grid 1 0.406 M2 | Grid 2 0.438 M2 | Grid 3 0.423 M2 |
| Grid 4 0.435 M2 | Grid 5 0.467 M2 | Grid 6 0.451 M2 |
| Grid 7 0.386 M2 | Grid 8 0.417 M2 | Grid 9 0.403 M2 |

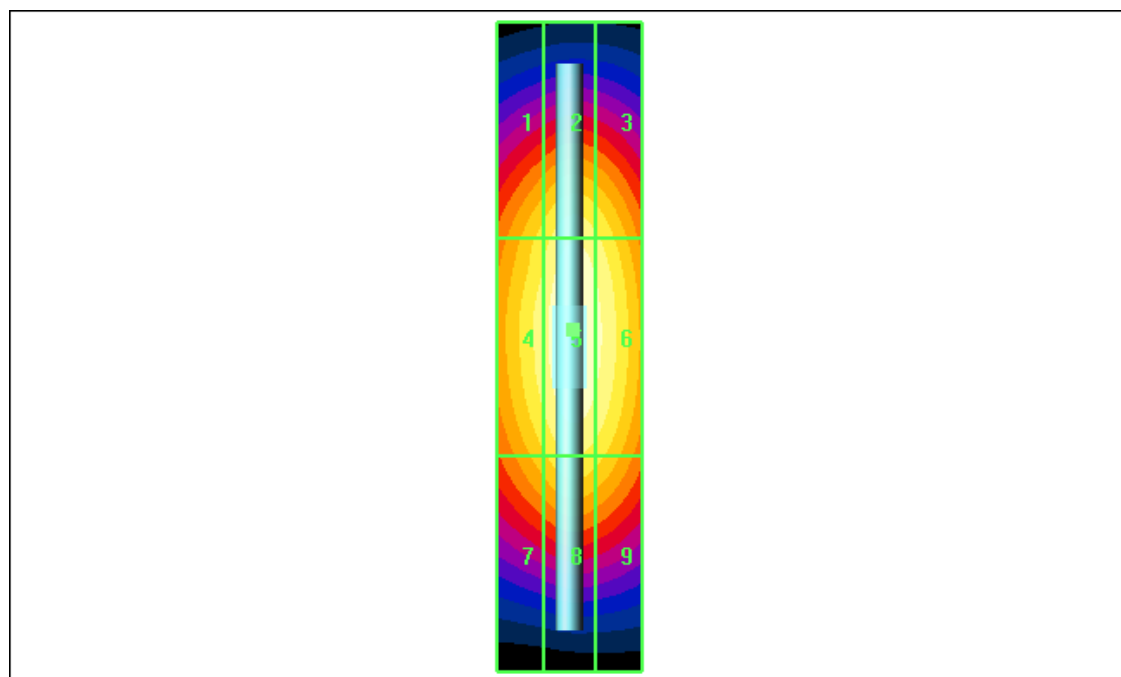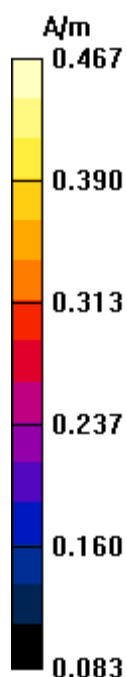

Appendix 3

HAC distribution plots for E-Field and H-Field

Date/Time: 8/25/2008 1:31:19 AM

Test Laboratory: Motorola - CDMA 800 E-Field, Slider Extended

Serial: 80F4D4CA; FCC ID: IHDP56JX1

Pwr Step: All Up Bits; Antenna Position: Internal; Battery Model #: SNN5833A

Vocoder Rate: FULL; PMF Value: 1.03; Positioner: SPEAG Clamp

Communication System: CDMA 835; Frequency: 836.52 MHz; Channel Number: 384; Duty Cycle: 1:1

Medium: Air; Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

DASY4 Configuration:

- Probe: ER3DV6R - SN2245; ConvF(1, 1, 1); Calibrated: 11/20/2007
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn440; Calibrated: 1/28/2008
- Phantom: R-3, HAC Test Arch (rev.2); Type: SD HAC P01 BA; Serial: 1071;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

E Scan - Sensor center 15mm above WD, Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm, dy=5mm


Maximum value of peak Total field = 99.8 V/m; Probe Modulation Factor = 1.03

Device Reference Point: 0.000, 0.000, -6.30 mm; Reference Value = 116.2 V/m; Power Drift = -0.021 dB

Hearing Aid Near-Field Category: **M4 (AWF 0 dB)**

Peak E-field in V/m

| | | |
|--------------------------|--------------------------|--------------------------|
| Grid 1 80.9 M4 | Grid 2 97.7 M4 | Grid 3 97.3 M4 |
| Grid 4 81.8 M4 | Grid 5 99.8 M4 | Grid 6 99.8 M4 |
| Grid 7 82.4 M4 | Grid 8 98.8 M4 | Grid 9 98.8 M4 |

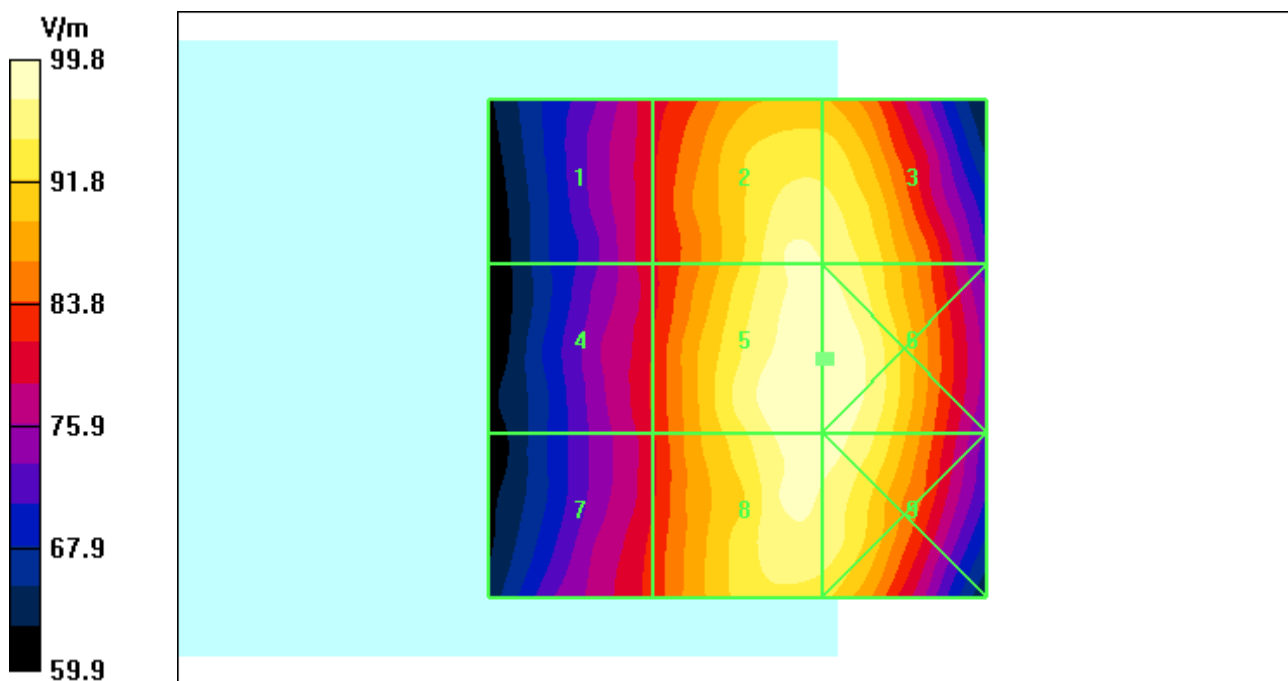

Date/Time: 8/29/2008 8:27:38 AM

Test Laboratory: Motorola - CDMA 800 E-Field, Slider Retracted

Serial: 80F4D4CA; FCC ID: IHDP56JX1

Pwr Step: All Up Bits; Antenna Position: Internal; Battery Model #: SNN5833A

Vocoder Rate: FULL; PMF Value: 1.03; Positioner: SPEAG Clamp

Communication System: CDMA 835; Frequency: 836.52 MHz; Channel Number: 384; Duty Cycle: 1:1

Medium: Air; Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

DASY4 Configuration:

- Probe: ER3DV6R - SN2245; ConvF(1, 1, 1); Calibrated: 11/20/2007
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn440; Calibrated: 1/28/2008
- Phantom: R-3, HAC Test Arch (rev.2); Type: SD HAC P01 BA; Serial: 1071;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

E Scan - Sensor center 15mm above WD, Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm, dy=5mm


Maximum value of peak Total field = 82.6 V/m; Probe Modulation Factor = 1.03

Device Reference Point: 0.000, 0.000, -6.30 mm; Reference Value = 89.8 V/m; Power Drift = 0.129 dB

Hearing Aid Near-Field Category: **M4 (AWF 0 dB)**

Peak E-field in V/m

| | | |
|--------------------------|--------------------------|--------------------------|
| Grid 1 68.7 M4 | Grid 2 80.4 M4 | Grid 3 79.7 M4 |
| Grid 4 68.7 M4 | Grid 5 82.6 M4 | Grid 6 84.1 M4 |
| Grid 7 68.6 M4 | Grid 8 78.7 M4 | Grid 9 79.5 M4 |

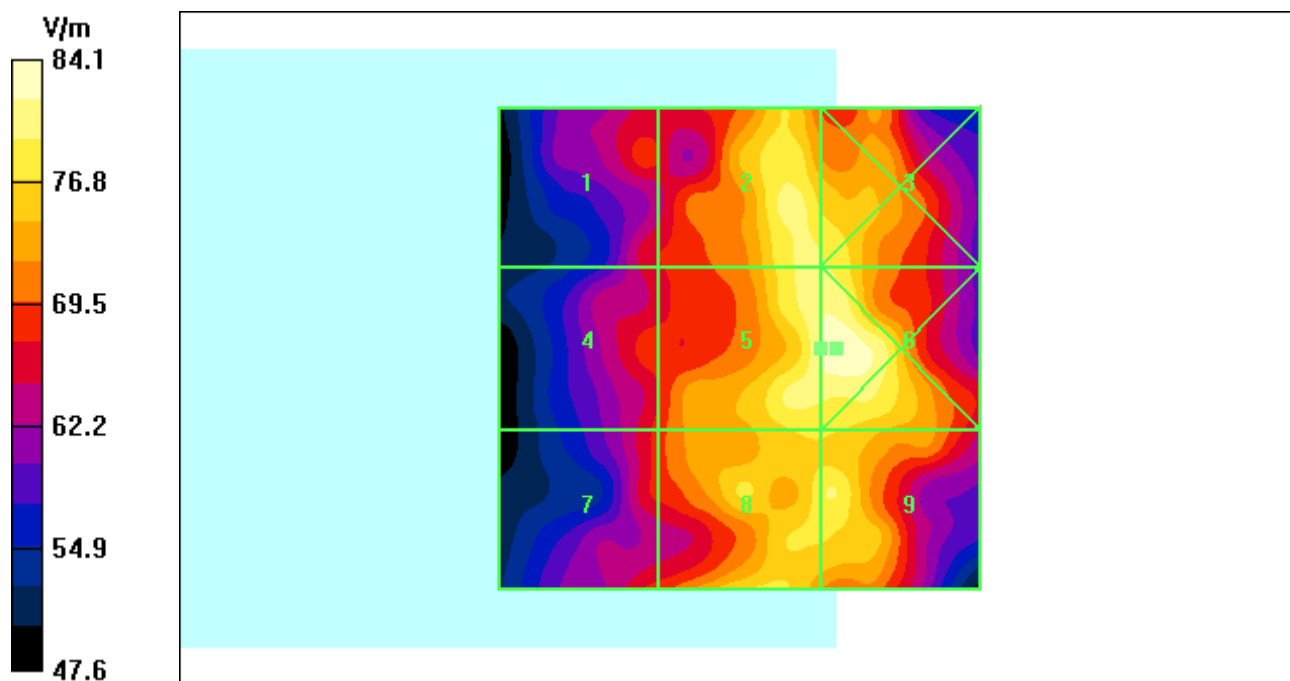

Date/Time: 8/25/2008 3:08:16 AM

Test Laboratory: Motorola - CDMA 1900 E-Field, Slider Extended

Serial: 80F4D4CA; FCC ID: IHDP56JX1

Pwr Step: All Up Bits; Antenna Position: Internal; Battery Model #: SNN5833A

Vocoder Rate: FULL; PMF Value: 1.07; Positioner: SPEAG Clamp

Communication System: CDMA 1900; Frequency: 1908.75 MHz; Channel Number: 1175; Duty Cycle: 1:1

Medium: Air; Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

DASY4 Configuration:

- Probe: ER3DV6R - SN2245; ConvF(1, 1, 1); Calibrated: 11/20/2007
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn440; Calibrated: 1/28/2008
- Phantom: R-3, HAC Test Arch (rev.2); Type: SD HAC P01 BA; Serial: 1071;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

E Scan - Sensor center 15mm above WD, Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm, dy=5mm


Maximum value of peak Total field = 27.8 V/m; Probe Modulation Factor = 1.07

Device Reference Point: 0.000, 0.000, -6.30 mm; Reference Value = 26.1 V/m; Power Drift = -0.262 dB

Hearing Aid Near-Field Category: **M4 (AWF 0 dB)**

Peak E-field in V/m

| | | |
|----------------|----------------|----------------|
| Grid 1 | Grid 2 | Grid 3 |
| 20.8 M4 | 19.5 M4 | 18.4 M4 |
| Grid 4 | Grid 5 | Grid 6 |
| 26.2 M4 | 26.4 M4 | 25.4 M4 |
| Grid 7 | Grid 8 | Grid 9 |
| 28.8 M4 | 29.6 M4 | 27.8 M4 |

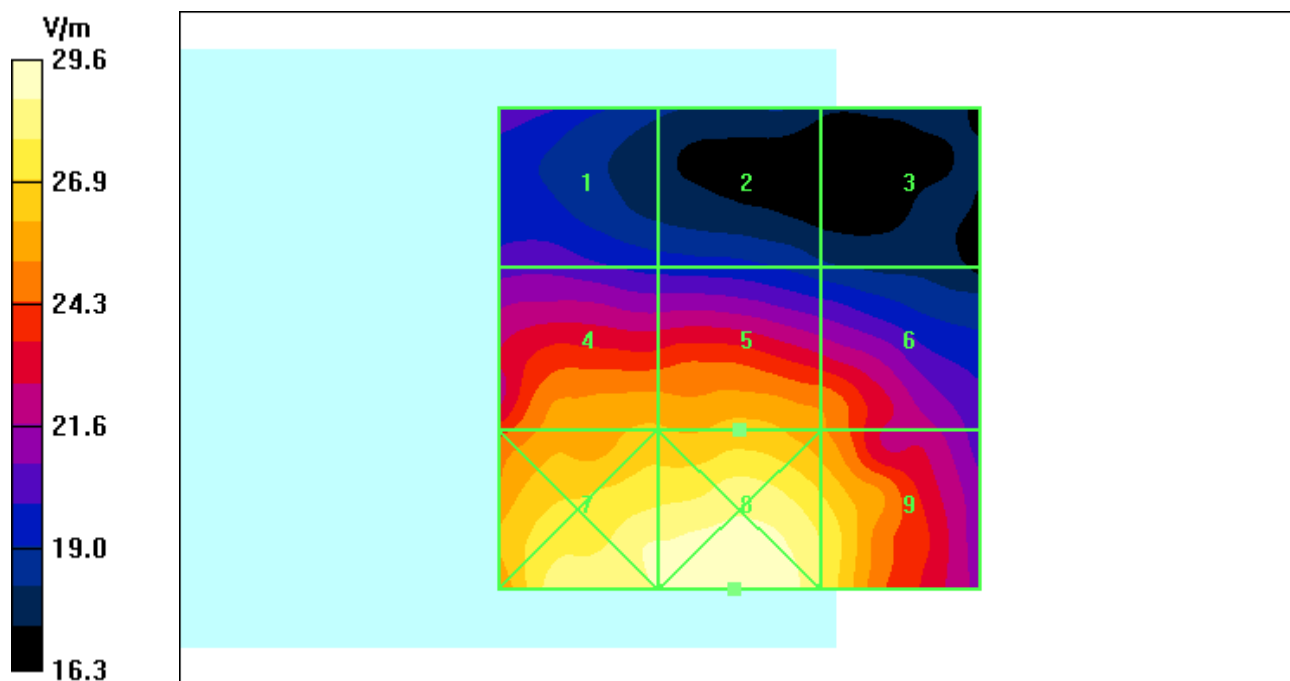

Date/Time: 8/29/2008 10:09:12 AM

Test Laboratory: Motorola - CDMA 1900 E-Field, Slider Retracted

Serial: 80F4D4CA; FCC ID: IHDP56JX1

Pwr Step: All Up Bits; Antenna Position: Internal; Battery Model #: SNN5833A

Vocoder Rate: FULL; PMF Value: 1.07; Positioner: SPEAG Clamp

Communication System: CDMA 1900; Frequency: 1908.75 MHz; Channel Number: 1175; Duty Cycle: 1:1

Medium: Air; Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

DASY4 Configuration:

- Probe: ER3DV6R - SN2245; ConvF(1, 1, 1); Calibrated: 11/20/2007
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn440; Calibrated: 1/28/2008
- Phantom: R-3, HAC Test Arch (rev.2); Type: SD HAC P01 BA; Serial: 1071;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

E Scan - Sensor center 15mm above WD, Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm, dy=5mm


Maximum value of peak Total field = 48.7 V/m; Probe Modulation Factor = 1.07

Device Reference Point: 0.000, 0.000, -6.30 mm; Reference Value = 34.0 V/m; Power Drift = -0.179 dB

Hearing Aid Near-Field Category: **M4 (AWF 0 dB)**

Peak E-field in V/m

| | | |
|--------------------------|--------------------------|--------------------------|
| Grid 1 37.0 M4 | Grid 2 38.8 M4 | Grid 3 39.1 M4 |
| Grid 4 34.7 M4 | Grid 5 42.4 M4 | Grid 6 42.4 M4 |
| Grid 7 48.7 M4 | Grid 8 61.2 M4 | Grid 9 60.2 M4 |

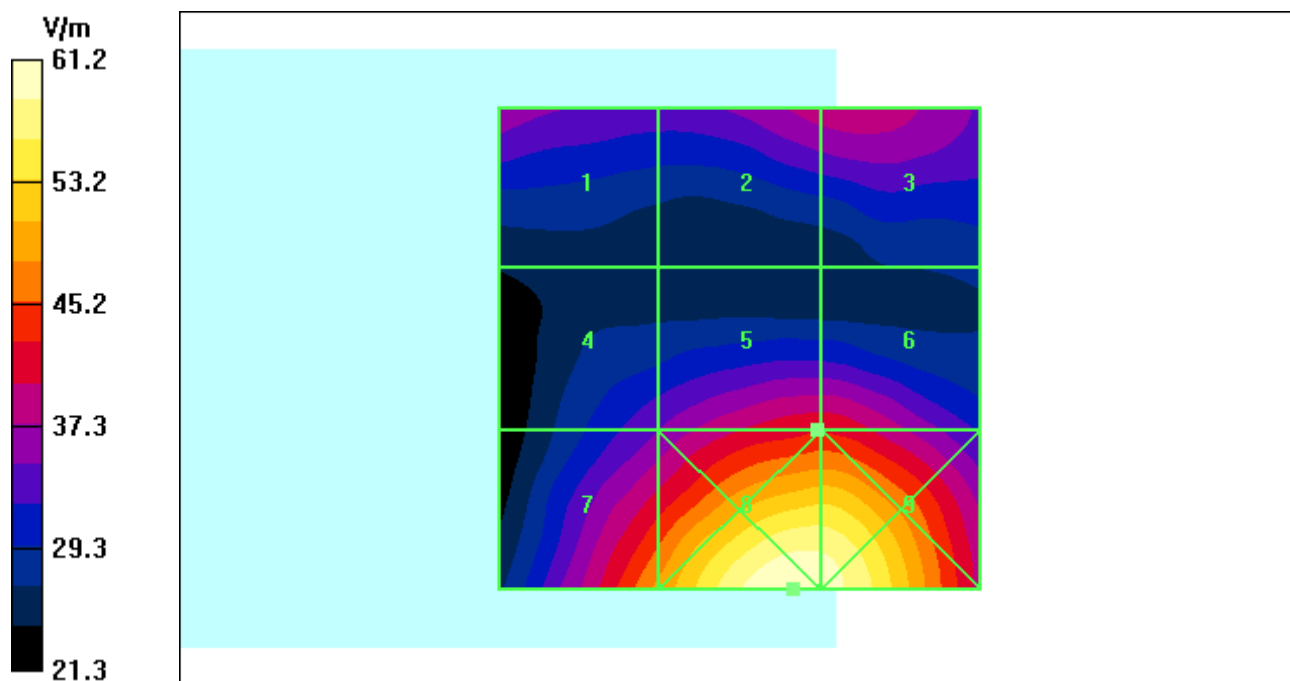

Date/Time: 8/25/2008 2:01:40 AM

Test Laboratory: Motorola - CDMA 800 E-Field, Slider Extended

Serial: 80F4D4CA; FCC ID: IHDP56JX1

Pwr Step: All Up Bits; Antenna Position: Internal; Battery Model #: SNN5833A

Vocoder Rate: 1/8th Rate; PMF Value: 2.78; Positioner: SPEAG Clamp

Communication System: CDMA 835; Frequency: 836.52 MHz; Channel Number: 384; Duty Cycle: 1:8

Medium: Air; Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

DASY4 Configuration:

- Probe: ER3DV6R - SN2245; ConvF(1, 1, 1); Calibrated: 11/20/2007
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn440; Calibrated: 1/28/2008
- Phantom: R-3, HAC Test Arch (rev.2); Type: SD HAC P01 BA; Serial: 1071;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

E Scan - Sensor center 15mm above WD, Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm, dy=5mm


Maximum value of peak Total field = 102.5 V/m; Probe Modulation Factor = 2.78

Device Reference Point: 0.000, 0.000, -6.30 mm; Reference Value = 43.3 V/m; Power Drift = 0.077 dB

Hearing Aid Near-Field Category: **M4 (AWF 0 dB)**

Peak E-field in V/m

| | | |
|--------------------------|---------------------------|---------------------------|
| Grid 1 81.4 M4 | Grid 2 98.3 M4 | Grid 3 97.5 M4 |
| Grid 4 83.7 M4 | Grid 5 102.5 M4 | Grid 6 102.5 M4 |
| Grid 7 82.9 M4 | Grid 8 101.2 M4 | Grid 9 100.9 M4 |

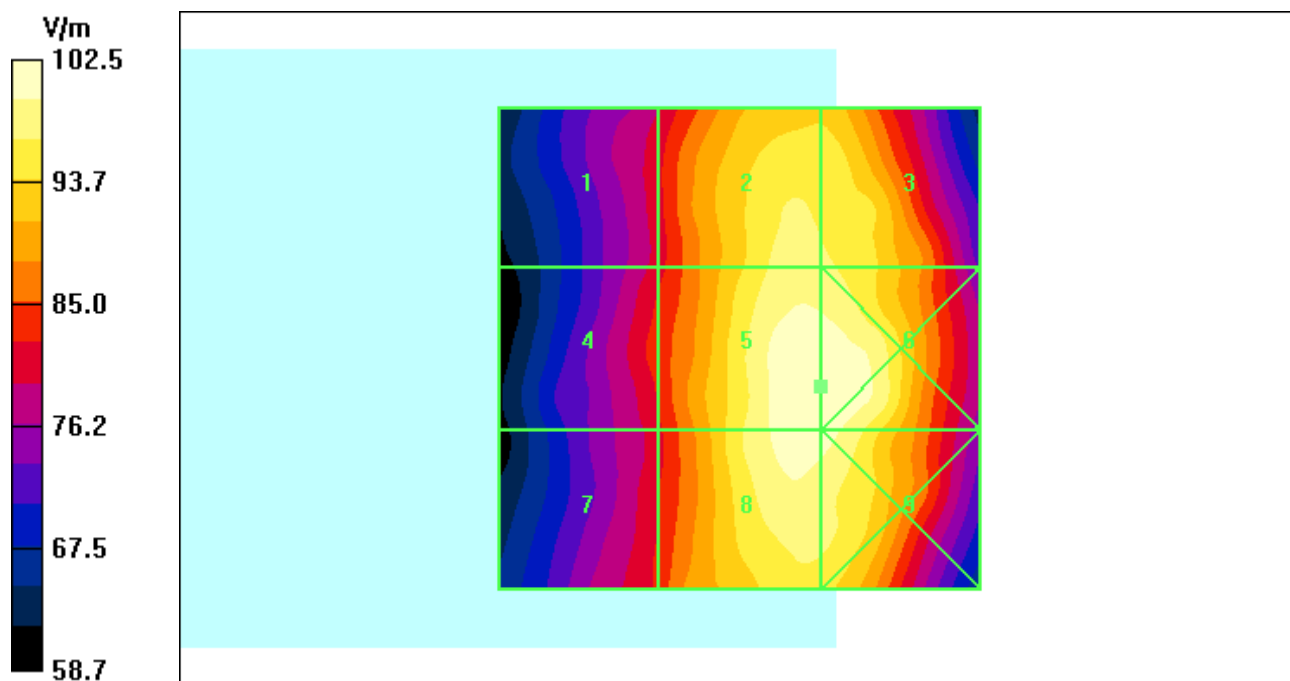

Date/Time: 8/29/2008 9:04:46 AM

Test Laboratory: Motorola - CDMA 800 E-Field, Slider Retracted

Serial: 80F4D4CA; FCC ID: IHDP56JX1

Pwr Step: All Up Bits; Antenna Position: Internal; Battery Model #: SNN5833A

Vocoder Rate: 1/8th Rate; PMF Value: 2.78; Positioner: SPEAG Clamp

Communication System: CDMA 835; Frequency: 836.52 MHz; Channel Number: 384; Duty Cycle: 1:8

Medium: Air; Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

DASY4 Configuration:

- Probe: ER3DV6R - SN2245; ConvF(1, 1, 1); Calibrated: 11/20/2007
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn440; Calibrated: 1/28/2008
- Phantom: R-3, HAC Test Arch (rev.2); Type: SD HAC P01 BA; Serial: 1071;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

E Scan - Sensor center 15mm above WD, Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm, dy=5mm


Maximum value of peak Total field = 78.7 V/m; Probe Modulation Factor = 2.78

Device Reference Point: 0.000, 0.000, -6.30 mm; Reference Value = 33.0 V/m; Power Drift = 0.021 dB

Hearing Aid Near-Field Category: **M4 (AWF 0 dB)**

Peak E-field in V/m

| | | |
|--------------------------|--------------------------|--------------------------|
| Grid 1 67.1 M4 | Grid 2 76.9 M4 | Grid 3 76.9 M4 |
| Grid 4 66.8 M4 | Grid 5 78.7 M4 | Grid 6 79.5 M4 |
| Grid 7 65.5 M4 | Grid 8 77.2 M4 | Grid 9 78.3 M4 |

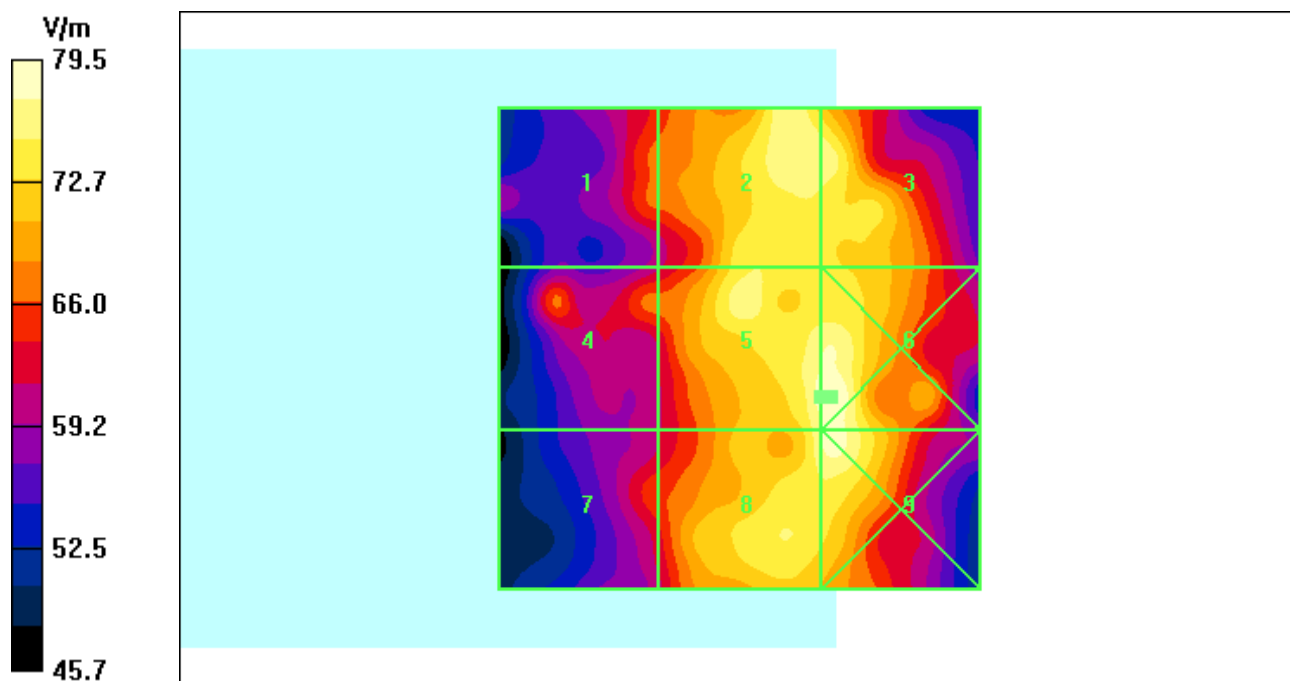

Date/Time: 8/25/2008 2:47:51 AM

Test Laboratory: Motorola - CDMA 1900 E-Field, Slider Extended

Serial: 80F4D4CA; FCC ID: IHDP56JX1

Pwr Step: All Up Bits; Antenna Position: Internal; Battery Model #: SNN5833A

Vocoder Rate: 1/8th Rate; PMF Value: 2.89; Positioner: SPEAG Clamp

Communication System: CDMA 1900; Frequency: 1908.75 MHz; Channel Number: 1175; Duty Cycle: 1:8

Medium: Air; Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

DASY4 Configuration:

- Probe: ER3DV6R - SN2245; ConvF(1, 1, 1); Calibrated: 11/20/2007
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn440; Calibrated: 1/28/2008
- Phantom: R-3, HAC Test Arch (rev.2); Type: SD HAC P01 BA; Serial: 1071;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

E Scan - Sensor center 15mm above WD, Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm, dy=5mm


Maximum value of peak Total field = 26.7 V/m; Probe Modulation Factor = 2.89

Device Reference Point: 0.000, 0.000, -6.30 mm; Reference Value = 8.96 V/m; Power Drift = -0.233 dB

Hearing Aid Near-Field Category: **M4 (AWF 0 dB)**

Peak E-field in V/m

| | | |
|--------------------------|--------------------------|--------------------------|
| Grid 1 18.0 M4 | Grid 2 17.8 M4 | Grid 3 17.3 M4 |
| Grid 4 24.0 M4 | Grid 5 24.8 M4 | Grid 6 24.9 M4 |
| Grid 7 27.6 M4 | Grid 8 28.0 M4 | Grid 9 26.7 M4 |

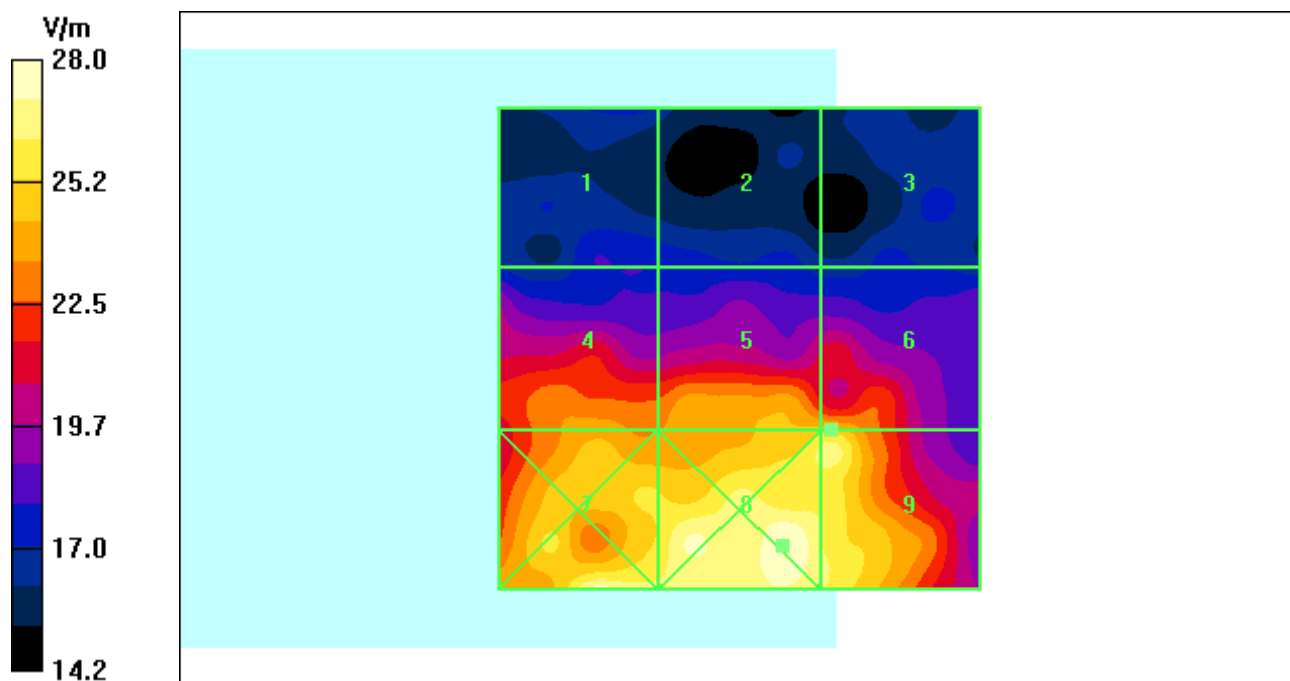

Date/Time: 8/29/2008 10:42:54 AM

Test Laboratory: Motorola - CDMA 1900 E-Field, Slider Retracted

Serial: 80F4D4CA; FCC ID: IHDP56JX1

Pwr Step: All Up Bits; Antenna Position: Internal; Battery Model #: SNN5833A

Vocoder Rate: 1/8th Rate; PMF Value: 2.89; Positioner: SPEAG Clamp

Communication System: CDMA 1900; Frequency: 1908.75 MHz; Channel Number: 1175; Duty Cycle: 1:8

Medium: Air; Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

DASY4 Configuration:

- Probe: ER3DV6R - SN2245; ConvF(1, 1, 1); Calibrated: 11/20/2007
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn440; Calibrated: 1/28/2008
- Phantom: R-3, HAC Test Arch (rev.2); Type: SD HAC P01 BA; Serial: 1071;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

E Scan - Sensor center 15mm above WD, Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm, dy=5mm


Maximum value of peak Total field = 46.2 V/m; Probe Modulation Factor = 2.89

Device Reference Point: 0.000, 0.000, -6.30 mm; Reference Value = 12.1 V/m; Power Drift = 0.116 dB

Hearing Aid Near-Field Category: **M4 (AWF 0 dB)**

Peak E-field in V/m

| | | |
|--------------------------|--------------------------|--------------------------|
| Grid 1 35.9 M4 | Grid 2 37.4 M4 | Grid 3 38.1 M4 |
| Grid 4 33.4 M4 | Grid 5 40.5 M4 | Grid 6 40.5 M4 |
| Grid 7 46.2 M4 | Grid 8 57.8 M4 | Grid 9 57.8 M4 |

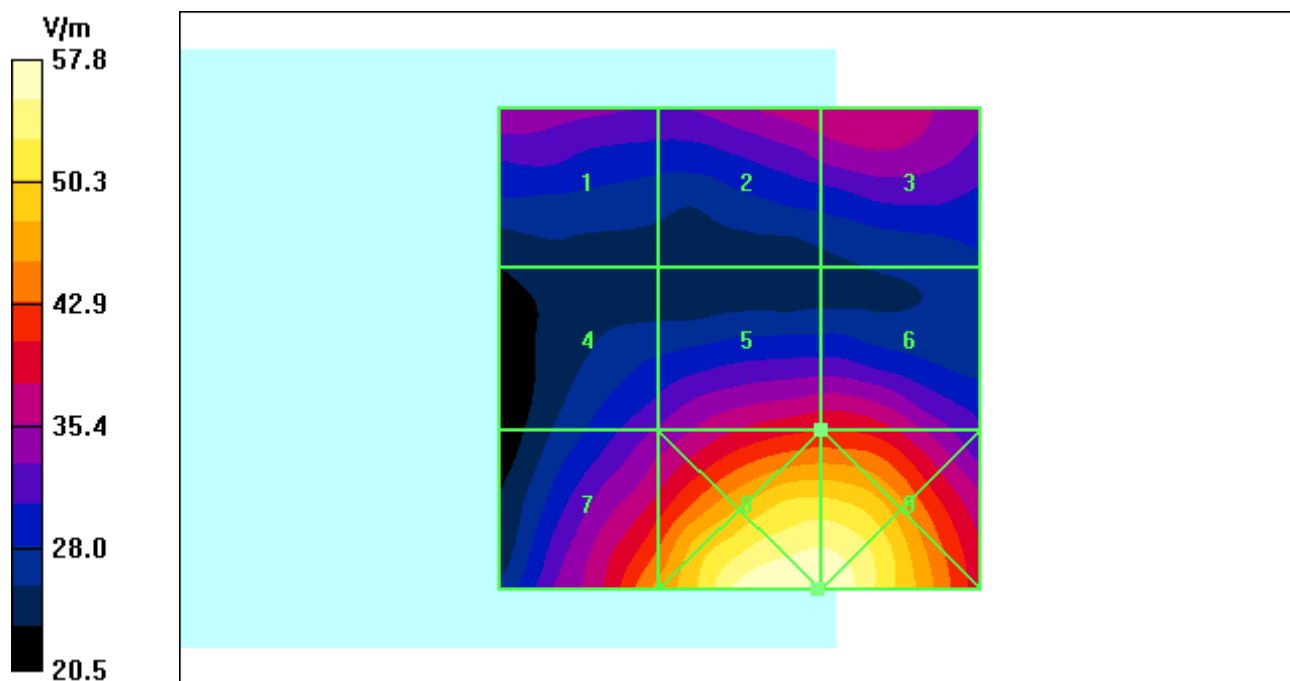

Date/Time: 8/24/2008 11:40:19 PM

Test Laboratory: Motorola - CDMA 800 H-Field, Slider Extended

Serial: 80F4D4CA; FCC ID: IHDP56JX1

Pwr Step: All Up Bits; Antenna Position: Internal; Battery Model #: SNN5833A

Vocoder Rate: FULL; PMF Value: 1.03; Positioner: SPEAG Clamp

Communication System: CDMA 835; Frequency: 848.31 MHz; Channel Number: 777; Duty Cycle: 1:1

Medium: Air; Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

DASY4 Configuration:

- Probe: H3DV6 - SN6075; ; Calibrated: 11/20/2007
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn639; Calibrated: 11/13/2007
- Phantom: R-3, HAC Test Arch (rev.2); Type: SD HAC P01 BA; Serial: 1071;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

H Scan - Sensor center 15mm above WD, Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm, dy=5mm


Maximum value of peak Total field = 0.135 A/m; Probe Modulation Factor = 1.03

Device Reference Point: 0.000, 0.000, -6.30 mm; Reference Value = 0.092 A/m; Power Drift = 0.110 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

| | | |
|---------------------------|---------------------------|---------------------------|
| Grid 1 0.184 M4 | Grid 2 0.135 M4 | Grid 3 0.085 M4 |
| Grid 4 0.166 M4 | Grid 5 0.122 M4 | Grid 6 0.074 M4 |
| Grid 7 0.182 M4 | Grid 8 0.132 M4 | Grid 9 0.082 M4 |

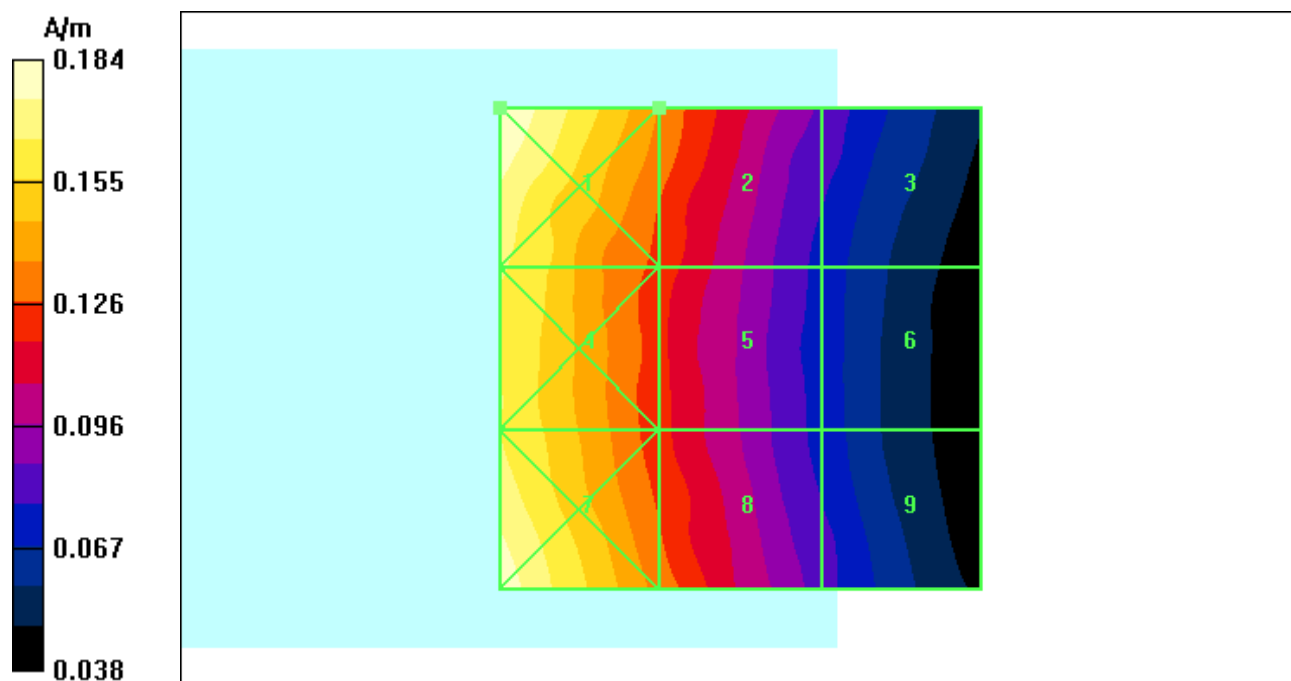

Date/Time: 8/29/2008 1:04:06 PM

Test Laboratory: Motorola - CDMA 800 H-Field, Slider Retracted

Serial: 80F4D4CA; FCC ID: IHDP56JX1

Pwr Step: All Up Bits; Antenna Position: Internal; Battery Model #: SNN5833A

Vocoder Rate: FULL; PMF Value: 1.03; Positioner: SPEAG Clamp

Communication System: CDMA 835; Frequency: 836.52 MHz; Channel Number: 384; Duty Cycle: 1:1

Medium: Air; Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

DASY4 Configuration:

- Probe: H3DV6 - SN6075; ; Calibrated: 11/20/2007
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn437; Calibrated: 7/11/2008
- Phantom: R-3, HAC Test Arch (rev.2); Type: SD HAC P01 BA; Serial: 1071;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

H Scan - Sensor center 15mm above WD, Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm, dy=5mm


Maximum value of peak Total field = 0.113 A/m; Probe Modulation Factor = 1.03

Device Reference Point: 0.000, 0.000, -6.30 mm; Reference Value = 0.076 A/m; Power Drift = 0.074 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

| | | |
|---------------------------|---------------------------|---------------------------|
| Grid 1 0.149 M4 | Grid 2 0.101 M4 | Grid 3 0.066 M4 |
| Grid 4 0.130 M4 | Grid 5 0.098 M4 | Grid 6 0.061 M4 |
| Grid 7 0.156 M4 | Grid 8 0.113 M4 | Grid 9 0.074 M4 |

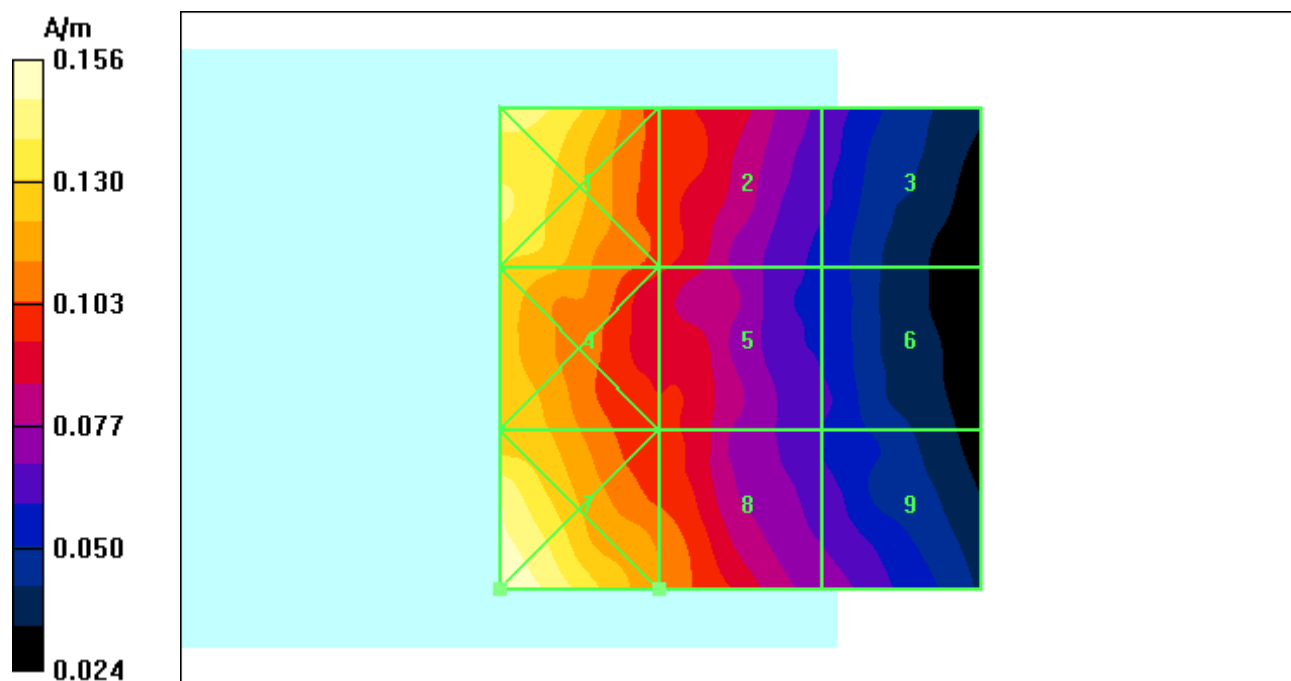

Date/Time: 8/25/2008 1:06:12 AM

Test Laboratory: Motorola - CDMA 1900 H-Field, Slider Extended

Serial: 80F4D4CA; FCC ID: IHDP56JX1

Pwr Step: All Up Bits; Antenna Position: Internal; Battery Model #: SNN5833A

Vocoder Rate: FULL; PMF Value: 1.01; Positioner: SPEAG Clamp

Communication System: CDMA 1900; Frequency: 1908.75 MHz; Channel Number: 1175; Duty Cycle: 1:1

Medium: Air; Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

DASY4 Configuration:

- Probe: H3DV6 - SN6075; ; Calibrated: 11/20/2007
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn639; Calibrated: 11/13/2007
- Phantom: R-3, HAC Test Arch (rev.2); Type: SD HAC P01 BA; Serial: 1071;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

H Scan - Sensor center 15mm above WD, Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm, dy=5mm


Maximum value of peak Total field = 0.059 A/m; Probe Modulation Factor = 1.01

Device Reference Point: 0.000, 0.000, -6.30 mm; Reference Value = 0.048 A/m; Power Drift = -0.156 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

| | | |
|---------------------------|---------------------------|---------------------------|
| Grid 1 0.057 M4 | Grid 2 0.065 M4 | Grid 3 0.065 M4 |
| Grid 4 0.041 M4 | Grid 5 0.059 M4 | Grid 6 0.059 M4 |
| Grid 7 0.033 M4 | Grid 8 0.039 M4 | Grid 9 0.044 M4 |

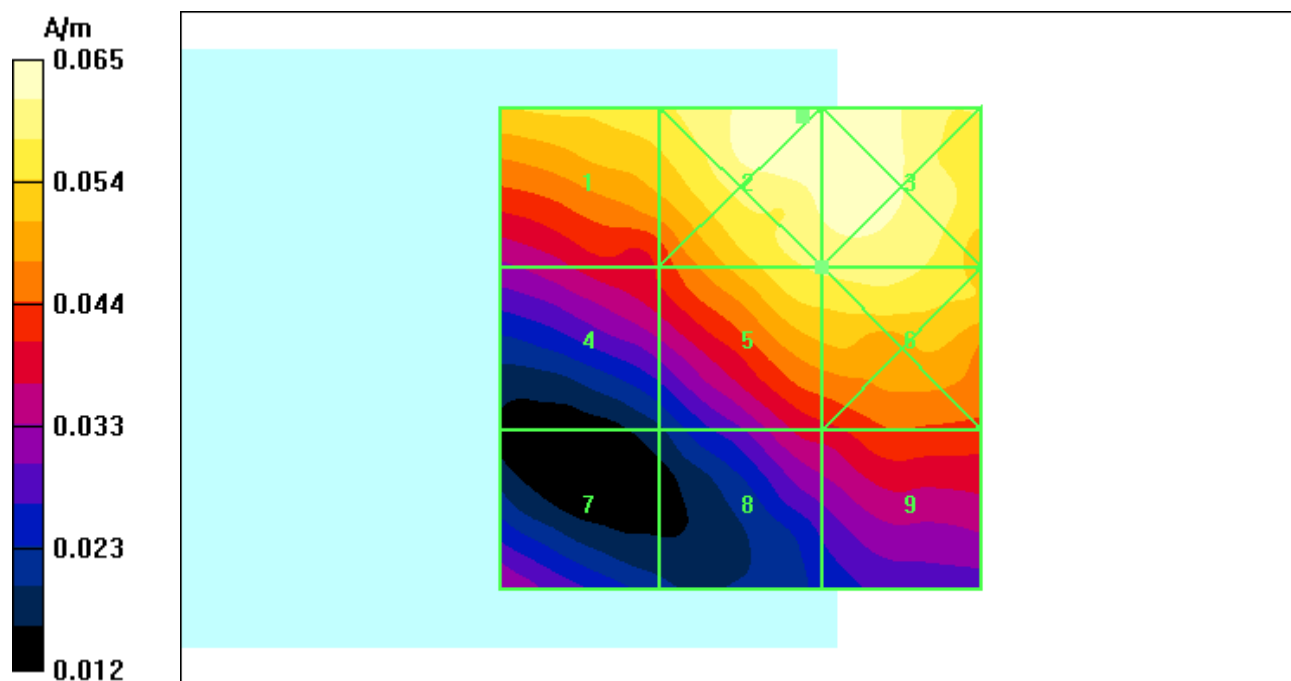

Date/Time: 8/29/2008 2:38:18 PM

Test Laboratory: Motorola - CDMA 1900 H-Field, Slider Retracted

Serial: 80F4D4CA; FCC ID: IHDP56JX1

Pwr Step: All Up Bits; Antenna Position: Internal; Battery Model #: SNN5833A

Vocoder Rate: FULL; PMF Value: 1.01; Positioner: SPEAG Clamp

Communication System: CDMA 1900; Frequency: 1908.75 MHz; Channel Number: 1175; Duty Cycle: 1:1

Medium: Air; Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

DASY4 Configuration:

- Probe: H3DV6 - SN6075; ; Calibrated: 11/20/2007
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn437; Calibrated: 7/11/2008
- Phantom: R-3, HAC Test Arch (rev.2); Type: SD HAC P01 BA; Serial: 1071;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

H Scan - Sensor center 15mm above WD, Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm, dy=5mm


Maximum value of peak Total field = 0.163 A/m; Probe Modulation Factor = 1.01

Device Reference Point: 0.000, 0.000, -6.30 mm; Reference Value = 0.155 A/m; Power Drift = -0.086 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

| | | |
|---------------------------|---------------------------|---------------------------|
| Grid 1 0.112 M4 | Grid 2 0.163 M4 | Grid 3 0.173 M4 |
| Grid 4 0.091 M4 | Grid 5 0.163 M4 | Grid 6 0.177 M4 |
| Grid 7 0.122 M4 | Grid 8 0.146 M4 | Grid 9 0.160 M4 |

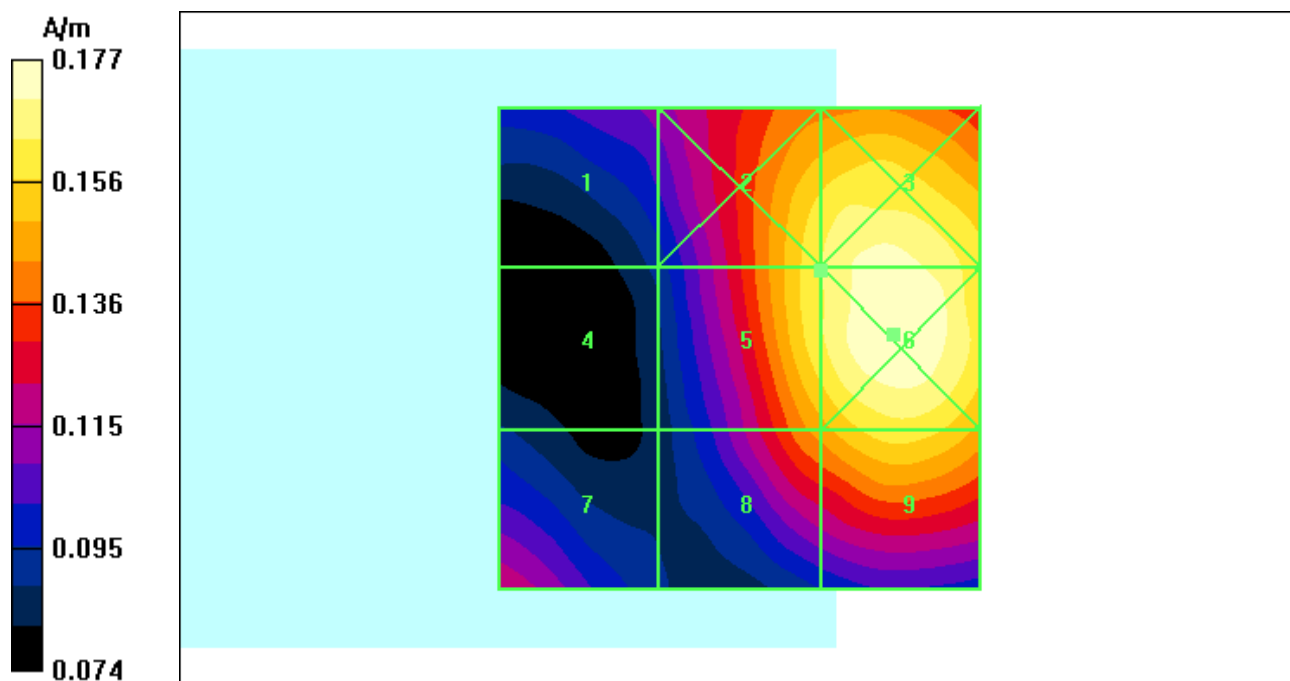

Date/Time: 8/25/2008 12:18:51 AM

Test Laboratory: Motorola - CDMA 800 H-Field, Slider Extended

Serial: 80F4D4CA; FCC ID: IHDP56JX1

Pwr Step: All Up Bits; Antenna Position: Internal; Battery Model #: SNN5833A

Vocoder Rate: 1/8th Rate; PMF Value: 2.54; Positioner: SPEAG Clamp

Communication System: CDMA 835; Frequency: 848.31 MHz; Channel Number: 777; Duty Cycle: 1:8

Medium: Air; Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

DASY4 Configuration:

- Probe: H3DV6 - SN6075; ; Calibrated: 11/20/2007
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn639; Calibrated: 11/13/2007
- Phantom: R-3, HAC Test Arch (rev.2); Type: SD HAC P01 BA; Serial: 1071;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

H Scan - Sensor center 15mm above WD, Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm, dy=5mm


Maximum value of peak Total field = 0.121 A/m; Probe Modulation Factor = 2.54

Device Reference Point: 0.000, 0.000, -6.30 mm; Reference Value = 0.033 A/m; Power Drift = -0.024 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

| | | |
|---------------------------|---------------------------|---------------------------|
| Grid 1 0.166 M4 | Grid 2 0.121 M4 | Grid 3 0.073 M4 |
| Grid 4 0.150 M4 | Grid 5 0.109 M4 | Grid 6 0.065 M4 |
| Grid 7 0.159 M4 | Grid 8 0.118 M4 | Grid 9 0.072 M4 |

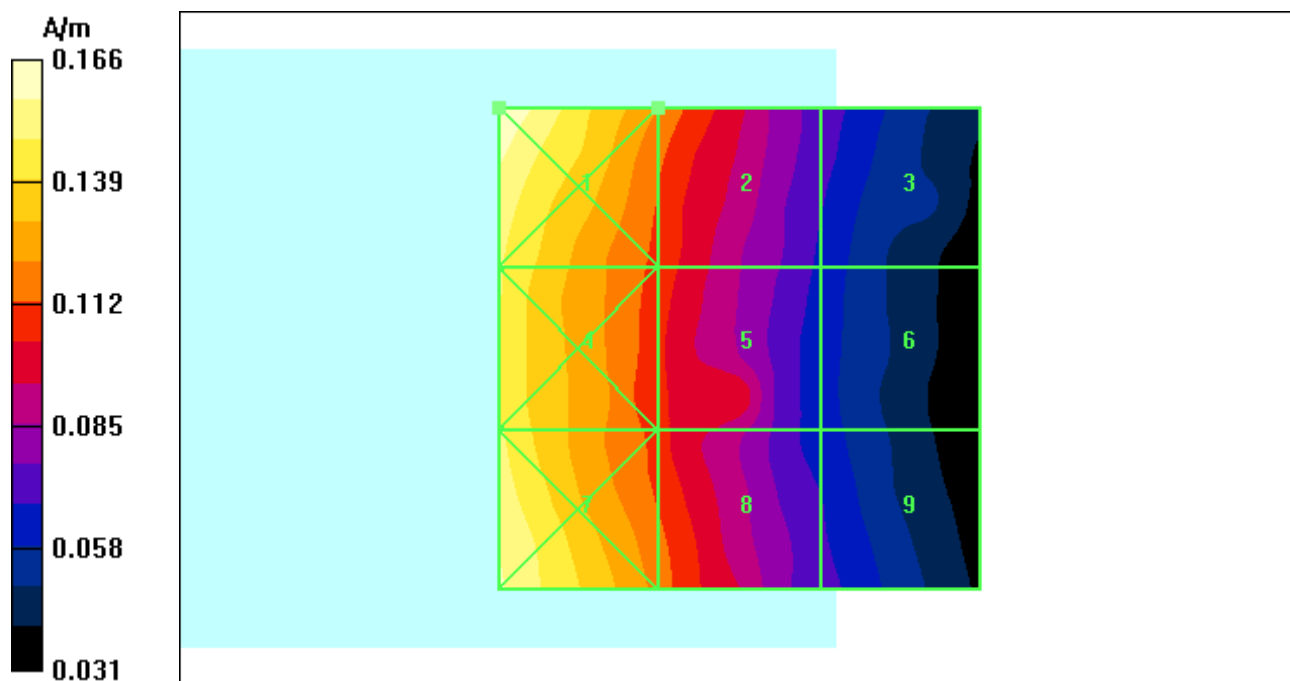

Date/Time: 8/29/2008 1:27:34 PM

Test Laboratory: Motorola - CDMA 800 H-Field, Slider Retracted

Serial: 80F4D4CA; FCC ID: IHDP56JX1

Pwr Step: All Up Bits; Antenna Position: Internal; Battery Model #: SNN5833A

Vocoder Rate: 1/8th Rate; PMF Value: 2.54; Positioner: SPEAG Clamp

Communication System: CDMA 835; Frequency: 836.52 MHz; Channel Number: 384; Duty Cycle: 1:8

Medium: Air; Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

DASY4 Configuration:

- Probe: H3DV6 - SN6075; ; Calibrated: 11/20/2007
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn437; Calibrated: 7/11/2008
- Phantom: R-3, HAC Test Arch (rev.2); Type: SD HAC P01 BA; Serial: 1071;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

H Scan - Sensor center 15mm above WD, Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm, dy=5mm


Maximum value of peak Total field = 0.108 A/m; Probe Modulation Factor = 2.54

Device Reference Point: 0.000, 0.000, -6.30 mm; Reference Value = 0.027 A/m; Power Drift = -0.006 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

| | | |
|---------------------------|---------------------------|---------------------------|
| Grid 1 0.125 M4 | Grid 2 0.108 M4 | Grid 3 0.058 M4 |
| Grid 4 0.121 M4 | Grid 5 0.084 M4 | Grid 6 0.055 M4 |
| Grid 7 0.138 M4 | Grid 8 0.103 M4 | Grid 9 0.064 M4 |

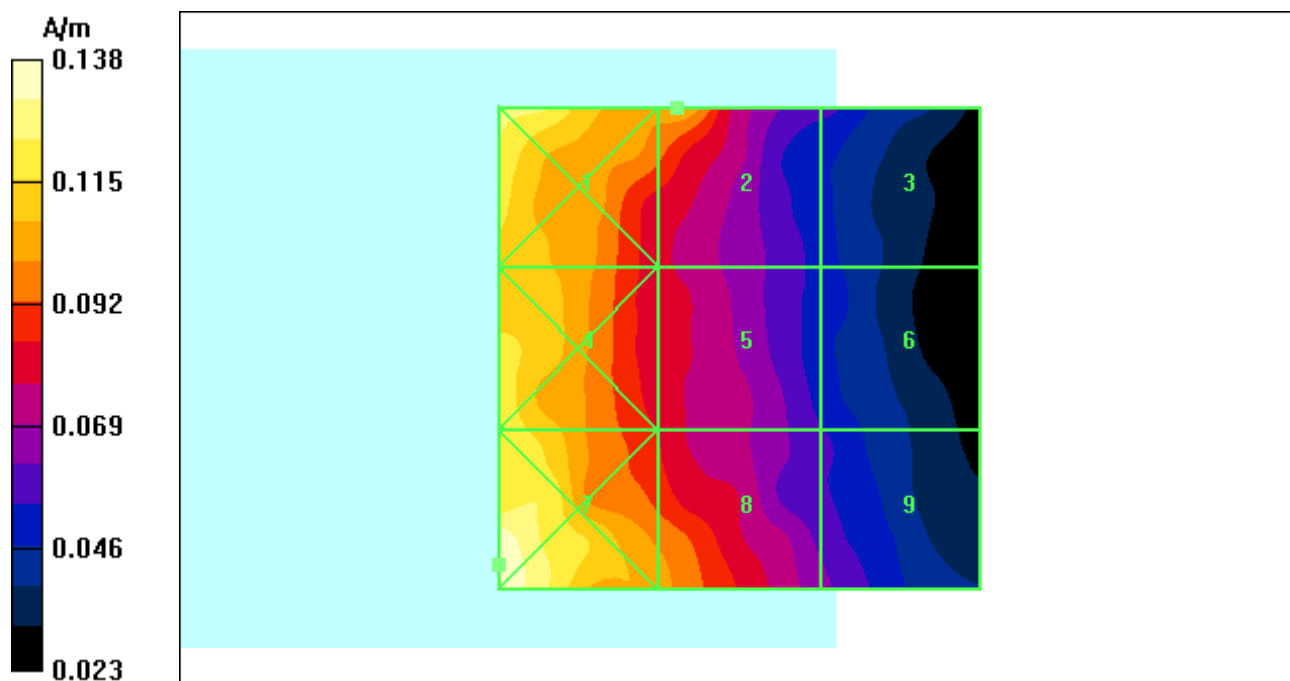

Date/Time: 8/25/2008 12:45:56 AM

Test Laboratory: Motorola - CDMA 1900 H-Field, Slider Extended

Serial: 80F4D4CA; FCC ID: IHDP56JX1

Pwr Step: All Up Bits; Antenna Position: Internal; Battery Model #: SNN5833A

Vocoder Rate: 1/8th Rate; PMF Value: 2.54; Positioner: SPEAG Clamp

Communication System: CDMA 1900; Frequency: 1908.75 MHz; Channel Number: 1175; Duty Cycle: 1:8

Medium: Air; Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

DASY4 Configuration:

- Probe: H3DV6 - SN6075; ; Calibrated: 11/20/2007
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn639; Calibrated: 11/13/2007
- Phantom: R-3, HAC Test Arch (rev.2); Type: SD HAC P01 BA; Serial: 1071;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

H Scan - Sensor center 15mm above WD, Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm, dy=5mm


Maximum value of peak Total field = 0.048 A/m; Probe Modulation Factor = 2.54

Device Reference Point: 0.000, 0.000, -6.30 mm; Reference Value = 0.016 A/m; Power Drift = -0.231 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

| | | |
|---------------------------|---------------------------|---------------------------|
| Grid 1 0.048 M4 | Grid 2 0.056 M4 | Grid 3 0.056 M4 |
| Grid 4 0.038 M4 | Grid 5 0.047 M4 | Grid 6 0.050 M4 |
| Grid 7 0.030 M4 | Grid 8 0.032 M4 | Grid 9 0.038 M4 |

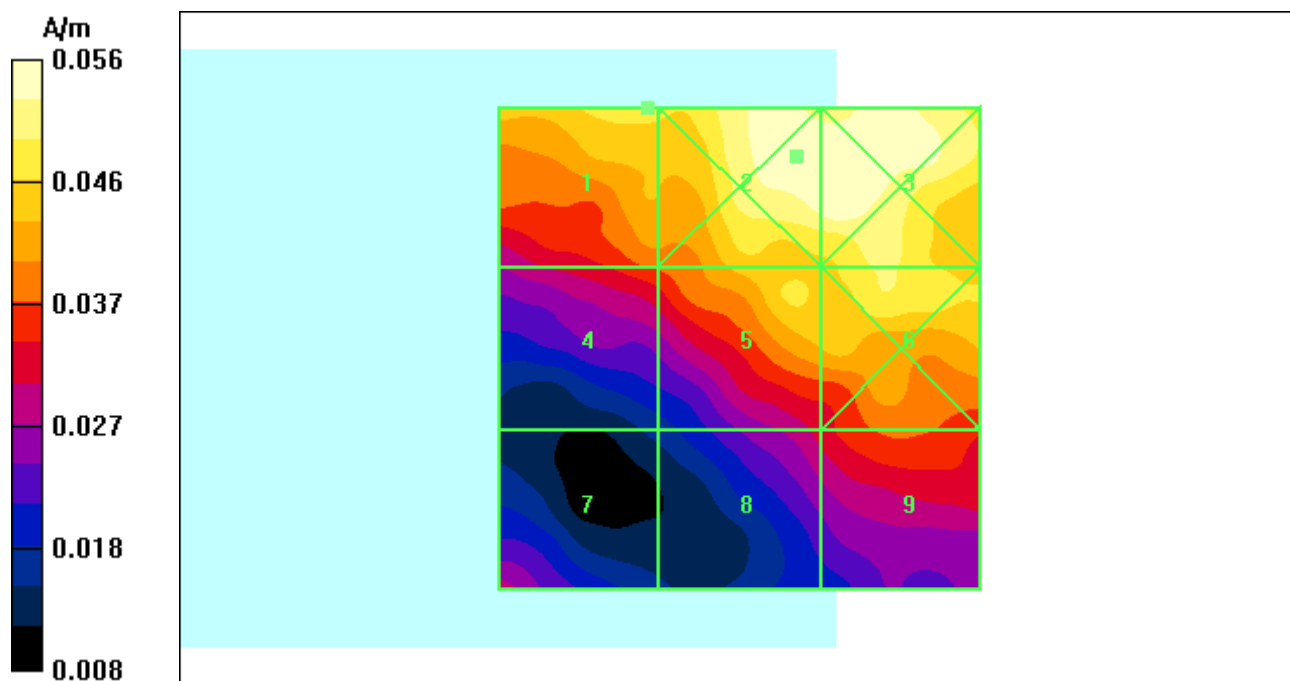

Date/Time: 8/29/2008 2:59:46 PM

Test Laboratory: Motorola - CDMA 1900 H-Field, Slider Retracted

Serial: 80F4D4CA; FCC ID: IHDP56JX1

Pwr Step: All Up Bits; Antenna Position: Internal; Battery Model #: SNN5833A

Vocoder Rate: 1/8th Rate; PMF Value: 2.54; Positioner: SPEAG Clamp

Communication System: CDMA 1900; Frequency: 1908.75 MHz; Channel Number: 1175; Duty Cycle: 1:8

Medium: Air; Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

DASY4 Configuration:

- Probe: H3DV6 - SN6075; ; Calibrated: 11/20/2007
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn437; Calibrated: 7/11/2008
- Phantom: R-3, HAC Test Arch (rev.2); Type: SD HAC P01 BA; Serial: 1071;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

H Scan - Sensor center 15mm above WD, Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm, dy=5mm


Maximum value of peak Total field = 0.153 A/m; Probe Modulation Factor = 2.54

Device Reference Point: 0.000, 0.000, -6.30 mm; Reference Value = 0.056 A/m; Power Drift = 0.002 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

| | | |
|---------------------------|---------------------------|---------------------------|
| Grid 1 0.105 M4 | Grid 2 0.153 M4 | Grid 3 0.162 M4 |
| Grid 4 0.086 M4 | Grid 5 0.153 M4 | Grid 6 0.165 M4 |
| Grid 7 0.110 M4 | Grid 8 0.136 M4 | Grid 9 0.153 M4 |

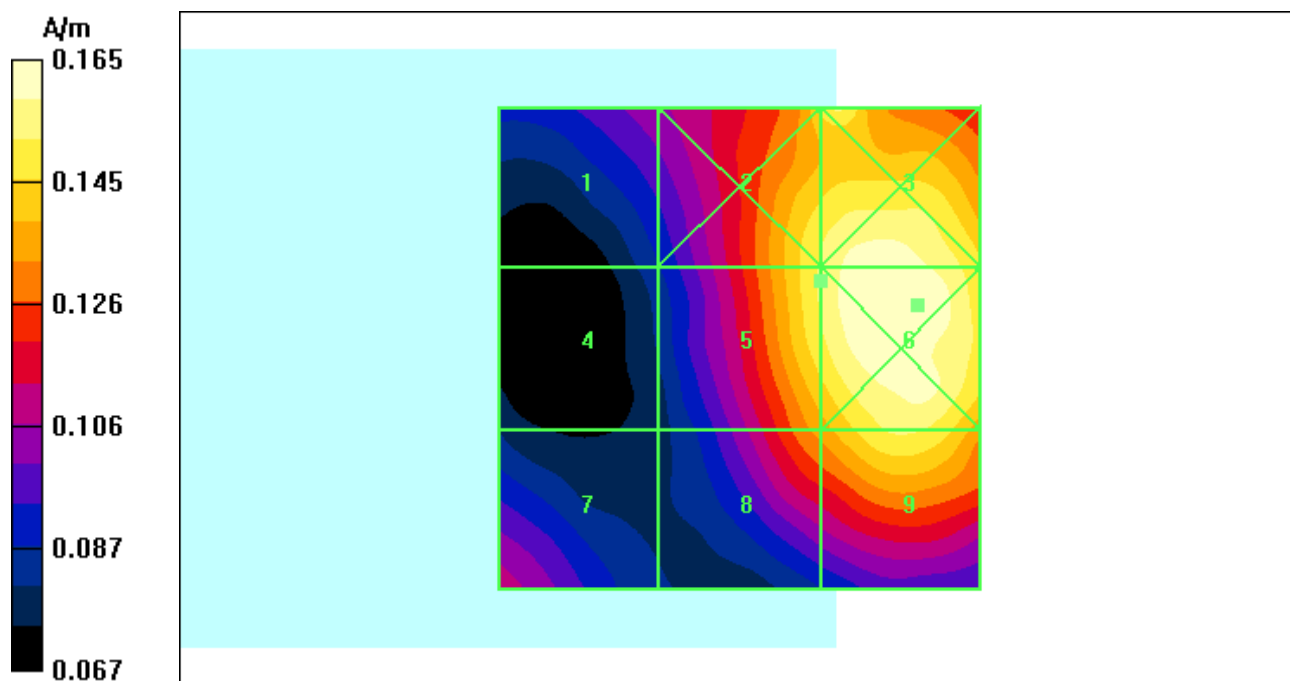

Appendix 4

Measurement Uncertainty Budget

A4.1 Motorola Uncertainty Budget for RF HAC Testing

TABLE A4.1: Motorola Uncertainty Budget

| UNCERTAINTY DESCRIPTION | Uncertainty Value (+/- %) | Prob . Dist. | Div. | (ci) E | (ci) H | Std. Unc. E | Std. Unc. H |
|---|---------------------------|--------------|--------|--------|--------|-------------|-------------|
| MEASUREMENT SYSTEM | | | | | | | |
| Probe Calibration | 5.1% | N | 1.0000 | 1 | 1 | 5.1% | 5.1% |
| Axial Isotropy | 7.8% | R | 1.7321 | 1 | 0.786 | 4.5% | 3.5% |
| Sensor Displacement | 16.5% | R | 1.7321 | 1 | 0.145 | 9.5% | 1.4% |
| Test Arch | 7.2% | R | 1.7321 | 1 | 0 | 4.2% | 0.0% |
| Linearity | 4.7% | R | 1.7321 | 1 | 1 | 2.7% | 2.7% |
| Scaling to Peak Envelope Power | 2.0% | R | 1.7321 | 1 | 1 | 1.2% | 1.2% |
| System Detection Limit | 1.0% | R | 1.7321 | 1 | 1 | 0.6% | 0.6% |
| Readout Electronics | 0.3% | N | 1.0000 | 1 | 1 | 0.3% | 0.3% |
| Response Time | 0.8% | R | 1.7321 | 1 | 1 | 0.5% | 0.5% |
| Integration Time | 2.6% | R | 1.7321 | 1 | 1 | 1.5% | 1.5% |
| RF Reflections | 5.6% | R | 1.7321 | 1 | 1 | 3.2% | 3.2% |
| Probe Positioner | 1.2% | R | 1.7321 | 1 | 0.67 | 0.7% | 0.5% |
| Probe Positioning | 4.7% | R | 1.7321 | 1 | 0.67 | 2.7% | 1.8% |
| Extrap. & Interpolation | 1.0% | R | 1.7321 | 1 | 1 | 0.6% | 0.6% |
| TEST SAMPLE RELATED | | | | | | | |
| Total Device Positioning | 3.2% | R | 1.7321 | 1 | 1.306 | 1.8% | 2.4% |
| Device Holder & Phantom | 2.4% | R | 1.7321 | 1 | 1 | 1.4% | 1.4% |
| Power Drift | 5.0% | R | 1.7321 | 1 | 1 | 2.9% | 2.9% |
| PHANTOM AND SETUP RELATED | | | | | | | |
| Phantom Thickness | 2.4% | R | 1.7321 | 1 | 0.67 | 1.4% | 0.9% |
| Combined Std.Uncertainty on Power | | | | | | 14.1% | 9.1% |
| Combined Std.Uncertainty on Field | | | | | | 7.1% | 4.6% |
| Expanded Std. Uncertainty on Power | | | | | | 28.3% | 18.2% |
| Expanded Std. Uncertainty on Field | | | | | | 14.1% | 9.1% |

A4.2 Probe Rotation Contributions to Isotropy Error

Probe rotation data was taken “for special focus on spherical isotropicity in measurement uncertainty and perturbation of EM fields.” This data was taken at the interpolated maximum and directly accounted for in the uncertainty budget as “Axial Isotropy.” Thirteen mobile devices were used to determine the probe isotropy uncertainty factors in section A4.1. Based on the resulting 82 E-Field probe rotations and 82 H-Field probe rotations, the upper 95% confidence interval value was calculated for each. These values represent a conservative assessment of the effect of the probe isotropy and have been appropriately included in the respective E- and H-uncertainty budgets.

TABLE A4.2: Probe Rotation Data Summary

| | AVE | ST.DE V | Sample Size (n) | 2σ | (ci) | Standard Uncertainty |
|---------|------------|----------------|------------------------|-----------|-------------|-----------------------------|
| E-field | 4.4% | 1.7% | 82 | 7.8% | 1 | 4.5% |
| H-field | 3.8% | 1.2% | 82 | 6.1% | 0.786 | 3.5% |

Isotropy error measurements were taken for 13 products across the respective frequency bands. The +2σ values of all measurements was used as a worst case value for the uncertainty budget. Any significant differences between bands were also evaluated.

Appendix 5
Pictures of Test Setup

See Exhibit 7B

Appendix 6
Probe Calibration Certificates



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Motorola MDb**

Certificate No: **ER3-2245_Nov07**

CALIBRATION CERTIFICATE

Object: **ER3DV6R - SN:2245**

Calibration procedure(s): **QA CAL-02.v5**
Calibration procedure for E-field probes optimized for close near field evaluations in air

Calibration date: **November 20, 2007**

Condition of the calibrated item: **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Calibrated by, Certificate No.) | Scheduled Calibration |
|----------------------------|-----------------|---|-----------------------|
| Power meter E4419B | GB41293874 | 29-Mar-07 (METAS, No. 217-00670) | Mar-08 |
| Power sensor E4412A | MY41495277 | 29-Mar-07 (METAS, No. 217-00670) | Mar-08 |
| Power sensor E4412A | MY41498087 | 29-Mar-07 (METAS, No. 217-00670) | Mar-08 |
| Reference 3 dB Attenuator | SN: S5054 (3c) | 8-Aug-07 (METAS, No. 217-00719) | Aug-08 |
| Reference 20 dB Attenuator | SN: S5086 (20b) | 29-Mar-07 (METAS, No. 217-00671) | Mar-08 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 8-Aug-07 (METAS, No. 217-00720) | Aug-08 |
| Reference Probe ER3DV6 | SN: 2328 | 2-Oct-07 (SPEAG, No. ER3-2328_Oct07) | Oct-08 |
| DAE4 | SN: 654 | 20-Apr-07 (SPEAG, No. DAE4-654_Apr07) | Apr-08 |

| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
|---------------------------|--------------|--|------------------------|
| RF generator HP 8648C | US3642U01700 | 4-Aug-99 (SPEAG, in house check Oct-07) | In house check: Oct-09 |
| Network Analyzer HP 8753E | US37390585 | 18-Oct-01 (SPEAG, in house check Oct-07) | In house check: Oct-08 |

Calibrated by: **Katja Pokovic** (Name), **Technical Manager** (Function), *[Signature]* (Signature)

Approved by: **Niels Kuster** (Name), **Quality Manager** (Function), *[Signature]* (Signature)

Issued: November 20, 2007

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

| | |
|--------------------------|--|
| NORM _{x,y,z} | sensitivity in free space |
| DCP | diode compression point |
| Polarization φ | φ rotation around probe axis |
| Polarization ϑ | ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle | information used in DASY system to align probe sensor X to the robot coordinate system |

Calibration is Performed According to the Following Standards:

- IEEE Std 1309-2005, "IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", December 2005.

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}*: Assessed for E-field polarization $\vartheta = 0$ for XY sensors and $\vartheta = 90$ for Z sensor ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide).
- NORM(f)_{x,y,z}* = *NORM_{x,y,z}* * *frequency_response* (see Frequency Response Chart).
- DCP_{x,y,z}*: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency.
- Spherical isotropy (3D deviation from isotropy)*: in a locally homogeneous field realized using an open waveguide setup.
- Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle*: The angle is assessed using the information gained by determining the *NORM_x* (no uncertainty required).

Probe ER3DV6R

SN:2245

| | |
|------------------|--------------------|
| Manufactured: | February 1, 2000 |
| Last calibrated: | September 20, 2006 |
| Recalibrated: | November 20, 2007 |

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

DASY - Parameters of Probe: ER3DV6R SN:2245

| Sensitivity in Free Space [$\mu\text{V}/(\text{V}/\text{m})^2$] | | Diode Compression ^A | |
|---|--------------------------------|--------------------------------|--------------|
| NormX | 1.60 \pm 10.1 % (k=2) | DCP X | 94 mV |
| NormY | 1.53 \pm 10.1 % (k=2) | DCP Y | 94 mV |
| NormZ | 2.01 \pm 10.1 % (k=2) | DCP Z | 97 mV |

Frequency Correction

| | |
|---|------------|
| X | 0.0 |
| Y | 0.0 |
| Z | 0.0 |

Sensor Offset (Probe Tip to Sensor Center)

| | |
|---|---------------|
| X | 2.5 mm |
| Y | 2.5 mm |
| Z | 2.5 mm |


Connector Angle **-323** °

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A numerical linearization parameter: uncertainty not required



Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide R22)


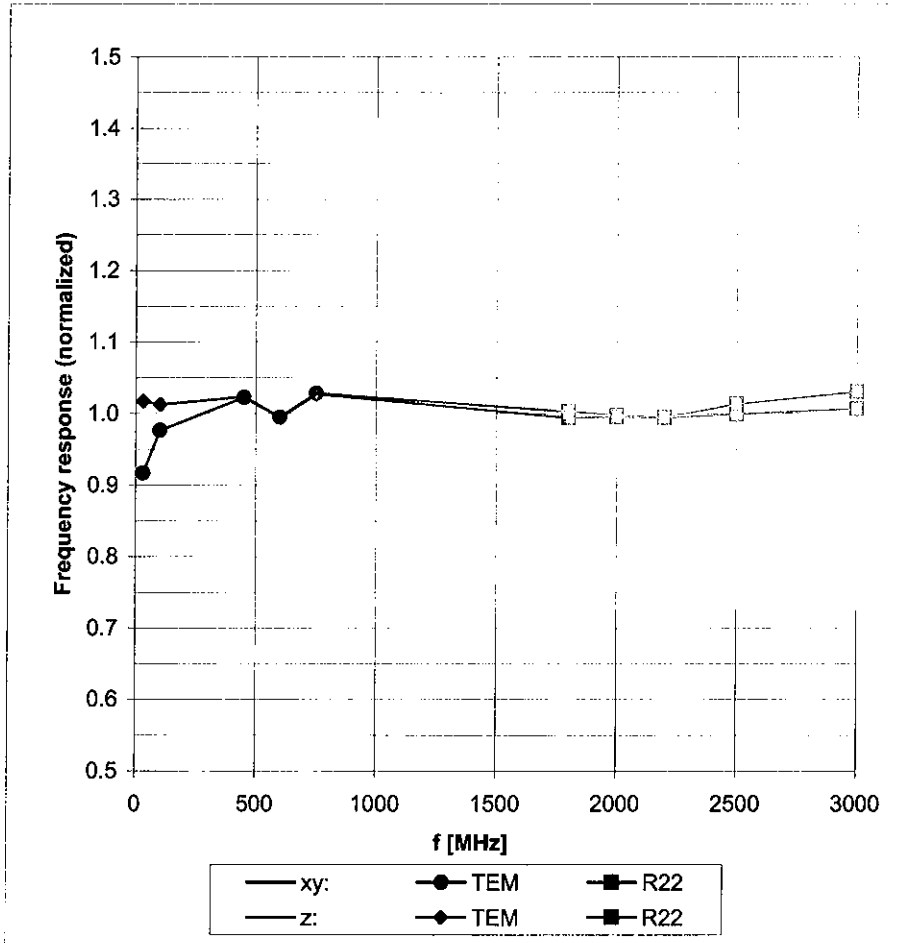


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)


Receiving Pattern (ϕ), $\vartheta = 0^\circ$

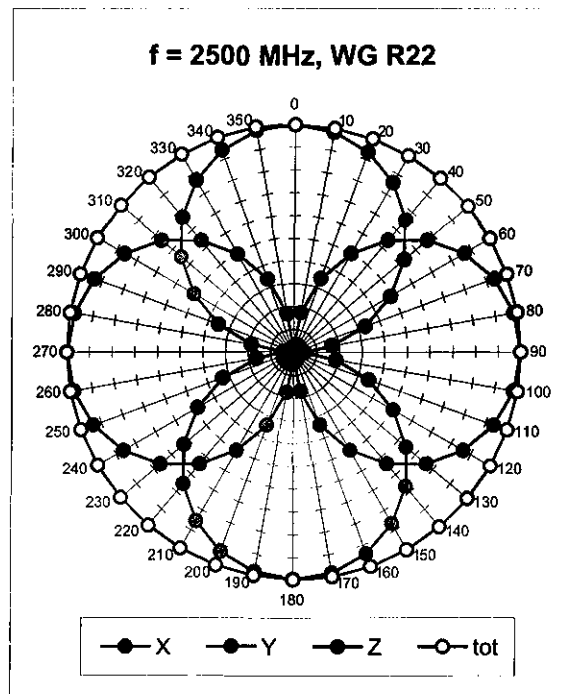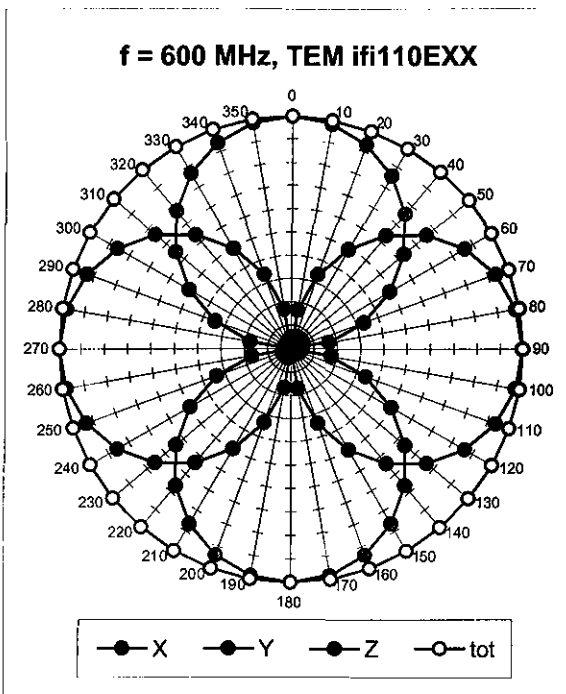

Receiving Pattern (ϕ), $\vartheta = 90^\circ$

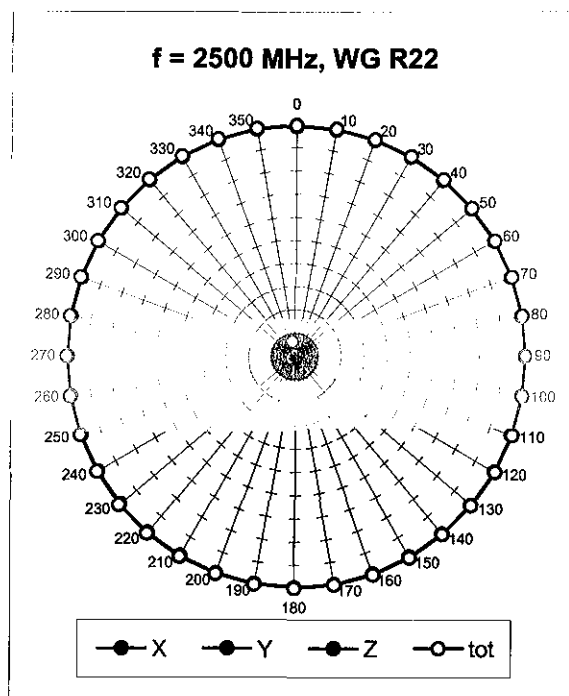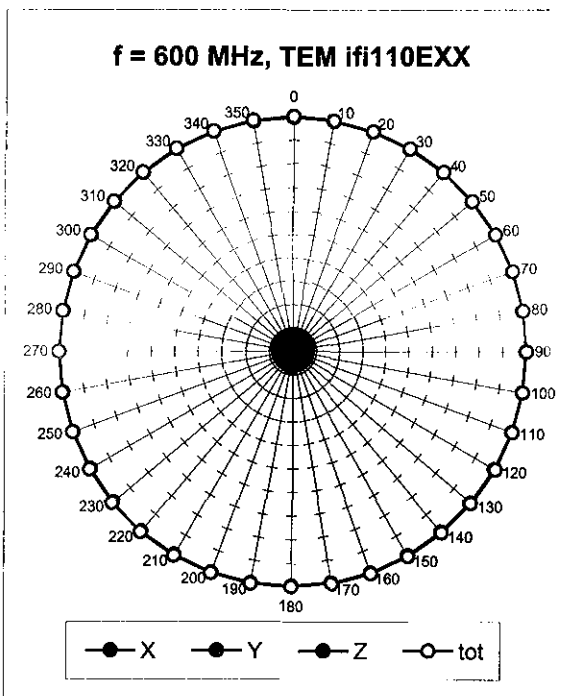


Receiving Pattern (ϕ), $\vartheta = 0^\circ$

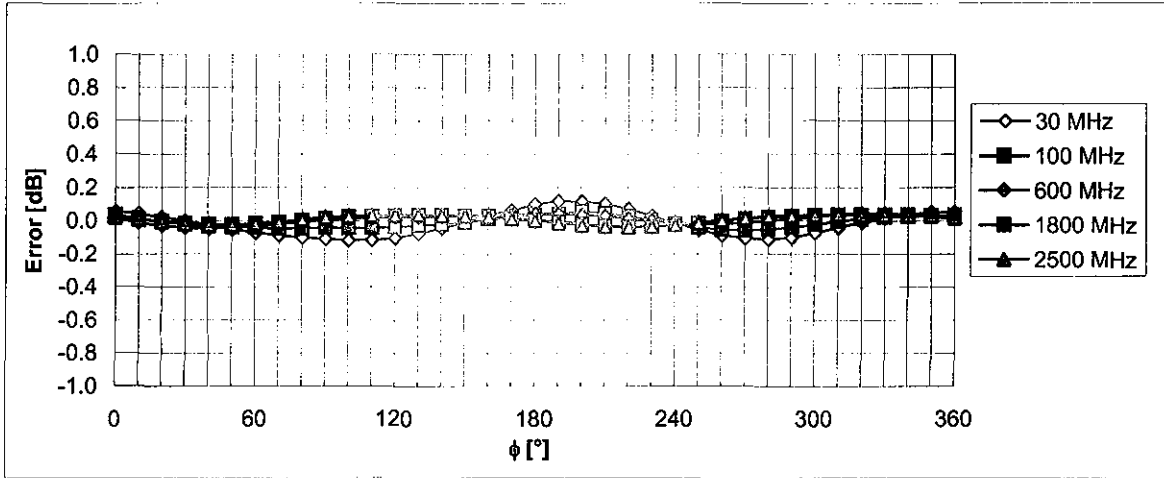



Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Receiving Pattern (ϕ), $\vartheta = 90^\circ$

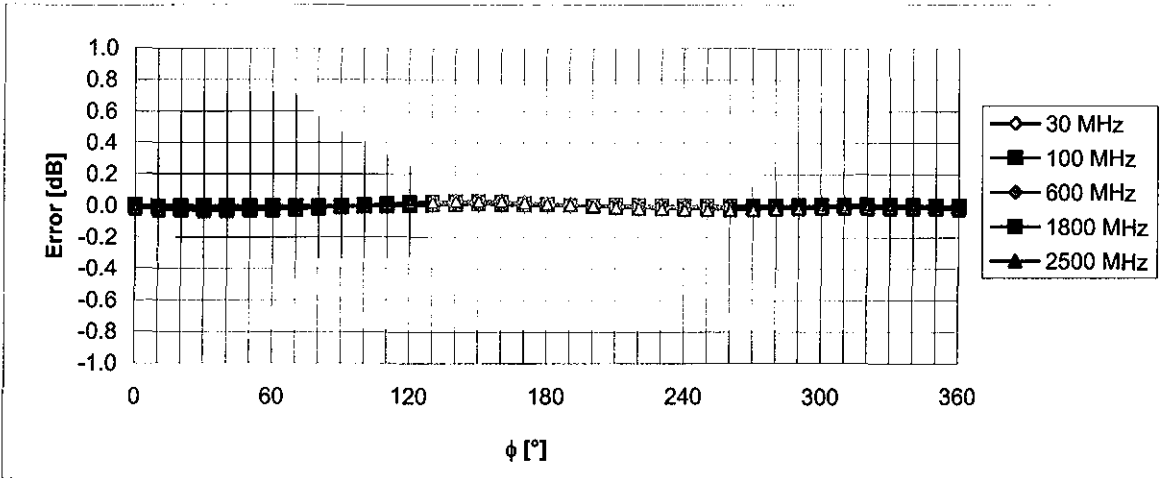


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range f(E-field) (Waveguide R22, f = 1800 MHz)

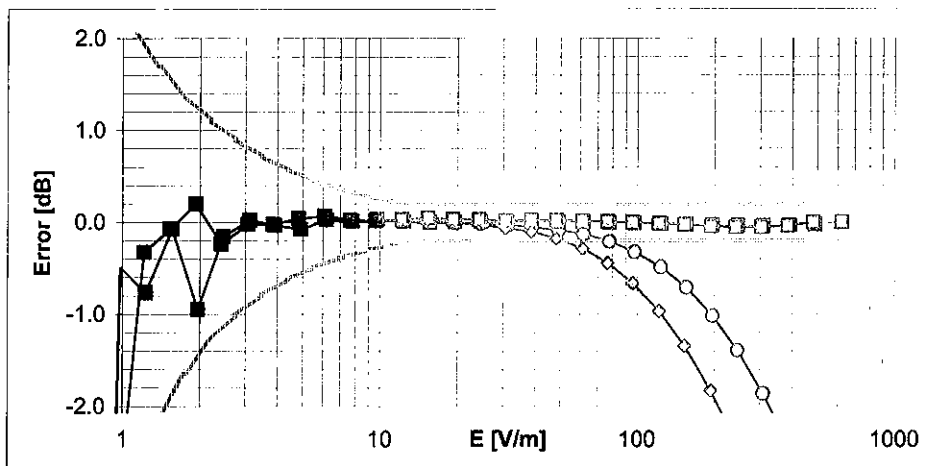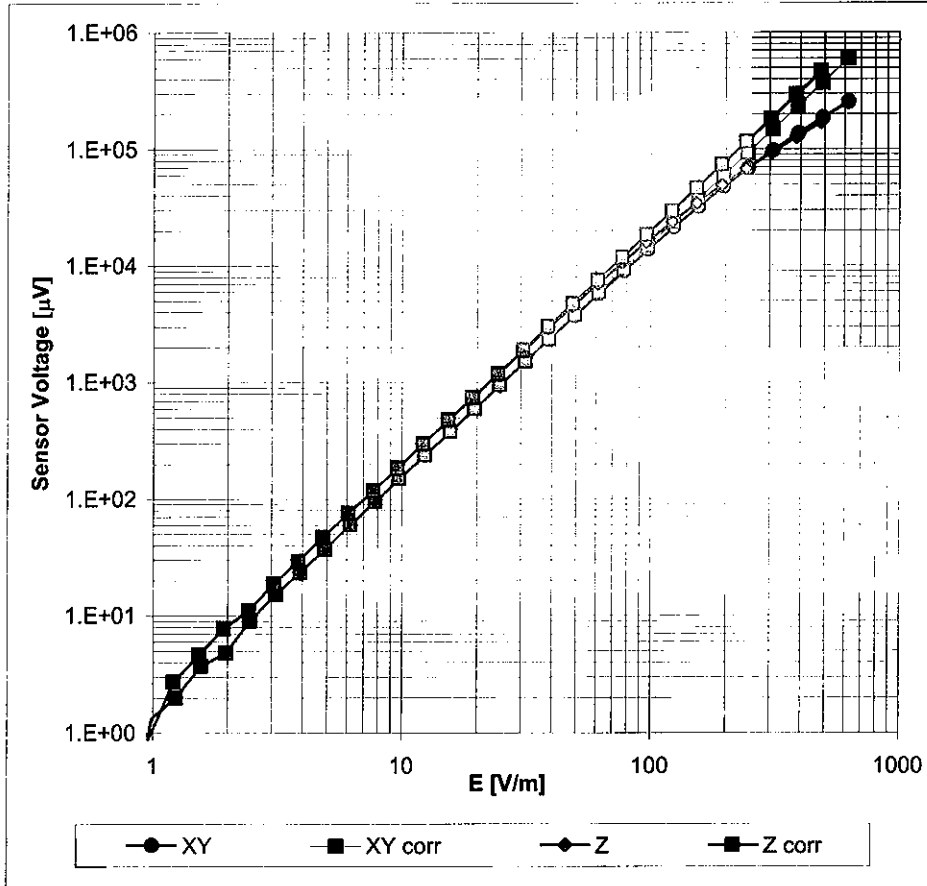

Uncertainty of Linearity Assessment: $\pm 0.6\%$ (k=2)

Deviation from Isotropy in Air Error (ϕ, ϑ), $f = 900 \text{ MHz}$

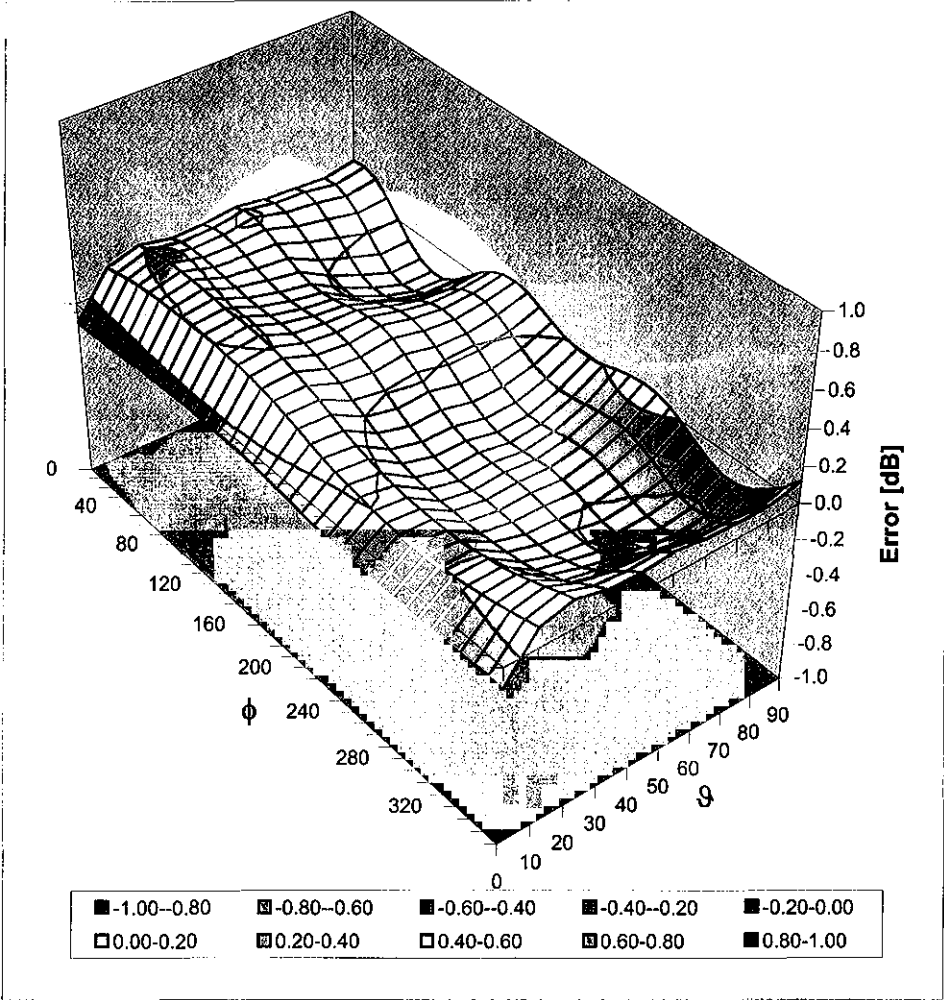

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Motorola MDb**

Certificate No: **H3-6075_Nov07**

CALIBRATION CERTIFICATE

Object: **H3DV6 - SN:6075**

Calibration procedure(s): **QA CAL-03.v5**
Calibration procedure for H-field probes optimized for close near field evaluations in air

Calibration date: **November 20, 2007**


Condition of the calibrated item: **In Tolerance**


This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Calibrated by, Certificate No.) | Scheduled Calibration |
|----------------------------|-----------------|---|------------------------|
| Power meter E4419B | GB41293874 | 29-Mar-07 (METAS, No. 217-00670) | Mar-08 |
| Power sensor E4412A | MY41495277 | 29-Mar-07 (METAS, No. 217-00670) | Mar-08 |
| Power sensor E4412A | MY41498087 | 29-Mar-07 (METAS, No. 217-00670) | Mar-08 |
| Reference 3 dB Attenuator | SN: S5054 (3c) | 8-Aug-07 (METAS, No. 217-00719) | Aug-08 |
| Reference 20 dB Attenuator | SN: S5086 (20b) | 29-Mar-07 (METAS, No. 217-00671) | Mar-08 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 8-Aug-07 (METAS, No. 217-00720) | Aug-08 |
| Reference Probe H3DV6 | SN: 6182 | 2-Oct-07 (SPEAG, No. H3-6182_Oct07) | Oct-08 |
| DAE4 | SN: 654 | 20-Apr-07 (SPEAG, No. DAE4-654_Apr07) | Apr-08 |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
| RF generator HP 8648C | US3642U01700 | 4-Aug-99 (SPEAG, in house check Oct-07) | In house check: Oct-09 |
| Network Analyzer HP 8753E | US37390585 | 18-Oct-01 (SPEAG, in house check Oct-07) | In house check: Oct-08 |

Calibrated by: **Katja Pokovic** (Name), **Technical Manager** (Function),  (Signature)

Approved by: **Niels Kuster** (Name), **Quality Manager** (Function),  (Signature)

Issued: November 20, 2007

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

| | |
|--------------------------|--|
| NORM _{x,y,z} | sensitivity in free space |
| DCP | diode compression point |
| Polarization φ | φ rotation around probe axis |
| Polarization ϑ | ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle | information used in DASY system to align probe sensor X to the robot coordinate system |

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1309-2005, "IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", December 2005.

Methods Applied and Interpretation of Parameters:

- X, Y, Z_{a0a1a2} : Assessed for E-field polarization $\vartheta = 90$ for XY sensors and $\vartheta = 0$ for Z sensor ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide).
- $X, Y, Z(f)_{a0a1a2} = X, Y, Z_{a0a1a2} * \text{frequency_response}$ (see Frequency Response Chart).
- $DCP_{x,y,z}$: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency.
- *Spherical isotropy (3D deviation from isotropy)*: in a locally homogeneous field realized using an open waveguide setup.
- *Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- *Connector Angle*: The angle is assessed using the information gained by determining the X_{a0a1a2} (no uncertainty required).

Probe H3DV6

SN:6075

| | |
|------------------|--------------------|
| Manufactured: | October 2, 2000 |
| Last calibrated: | September 20, 2006 |
| Recalibrated: | November 20, 2007 |

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

DASY - Parameters of Probe: H3DV6 SN:6075Sensitivity in Free Space [A/m / $\sqrt{(\mu\text{V})}$]

| | a0 | a1 | a2 |
|---|-----------|-----------|-----------------------------|
| X | 2.783E-03 | 7.531E-6 | -1.972E-5 \pm 5.1 % (k=2) |
| Y | 2.610E-03 | -1.024E-4 | -1.923E-5 \pm 5.1 % (k=2) |
| Z | 2.981E-03 | -2.312E-4 | -1.796E-4 \pm 5.1 % (k=2) |

Diode Compression¹

| | |
|-------|-------|
| DCP X | 85 mV |
| DCP Y | 85 mV |
| DCP Z | 82 mV |

Sensor Offset (Probe Tip to Sensor Center)

| | |
|---|--------|
| X | 3.0 mm |
| Y | 3.0 mm |
| Z | 3.0 mm |


Connector Angle -201 °

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

¹ numerical linearization parameter: uncertainty not required



Frequency Response of H-Field

(TEM-Cell:ifi110, Waveguide R22)


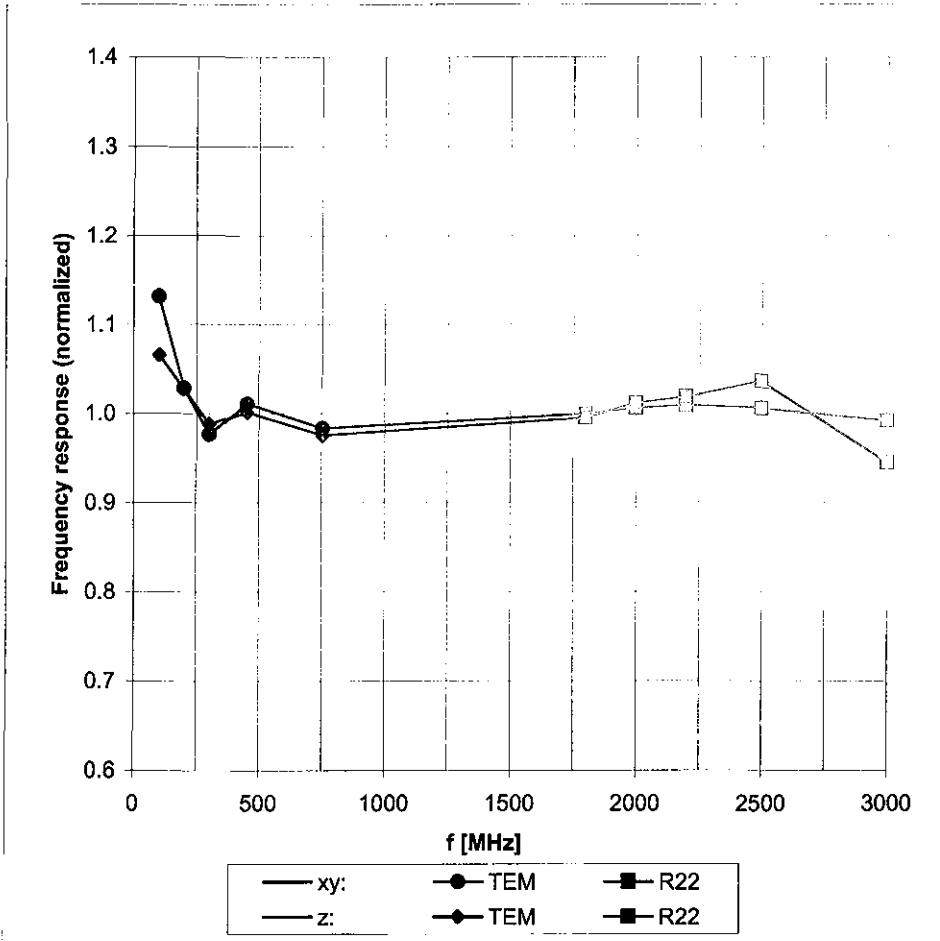


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)


Receiving Pattern (ϕ), $\vartheta = 90^\circ$

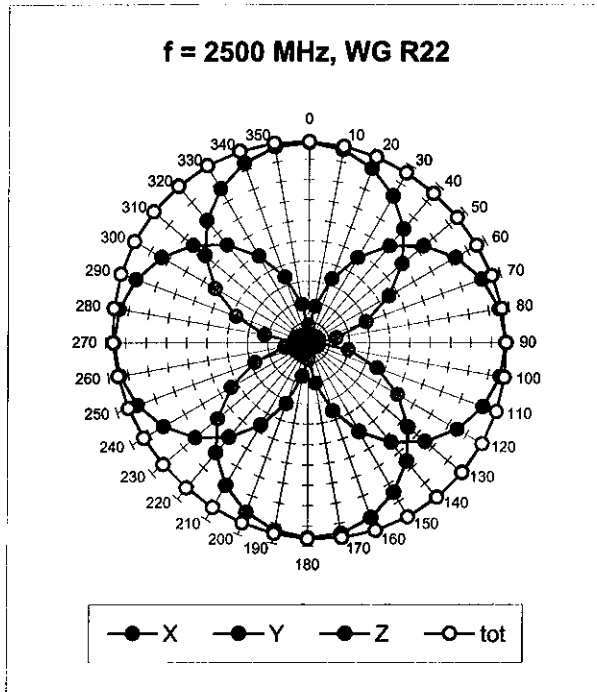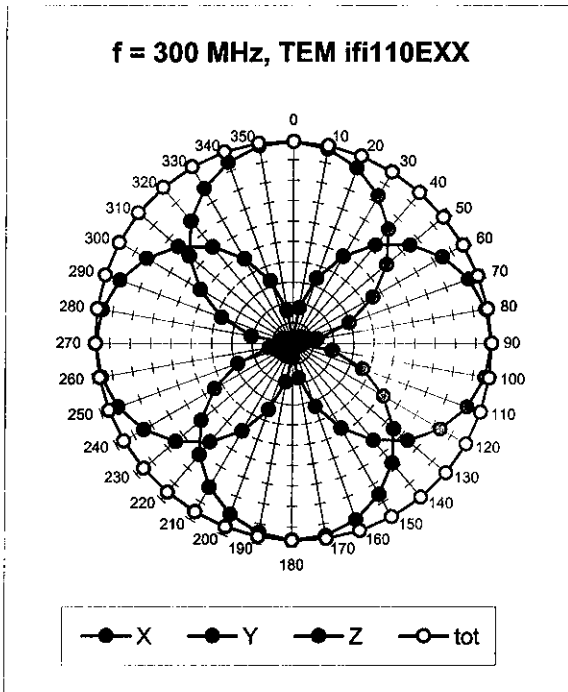

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

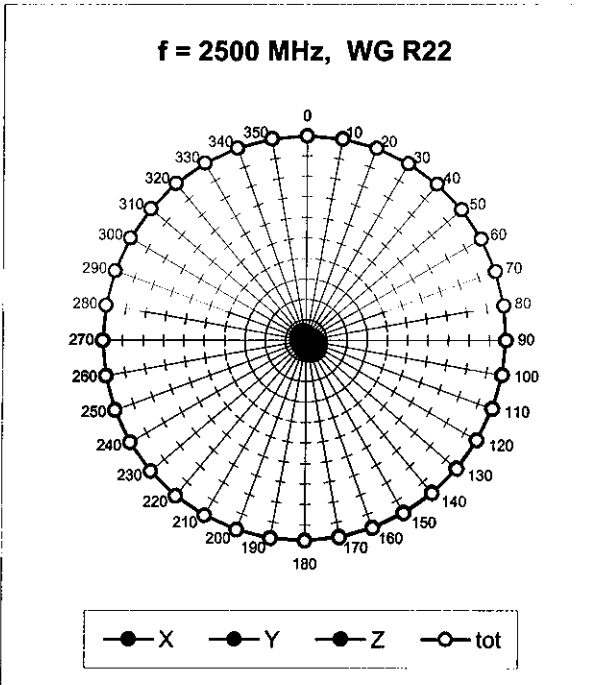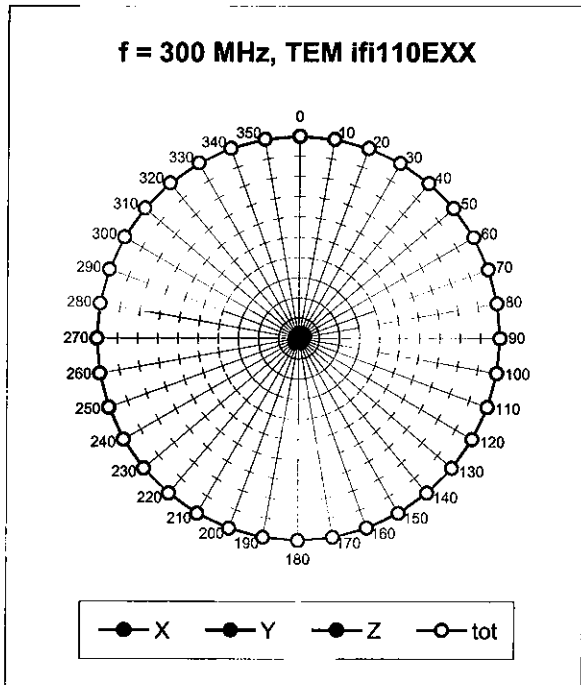


Receiving Pattern (ϕ), $\vartheta = 90^\circ$

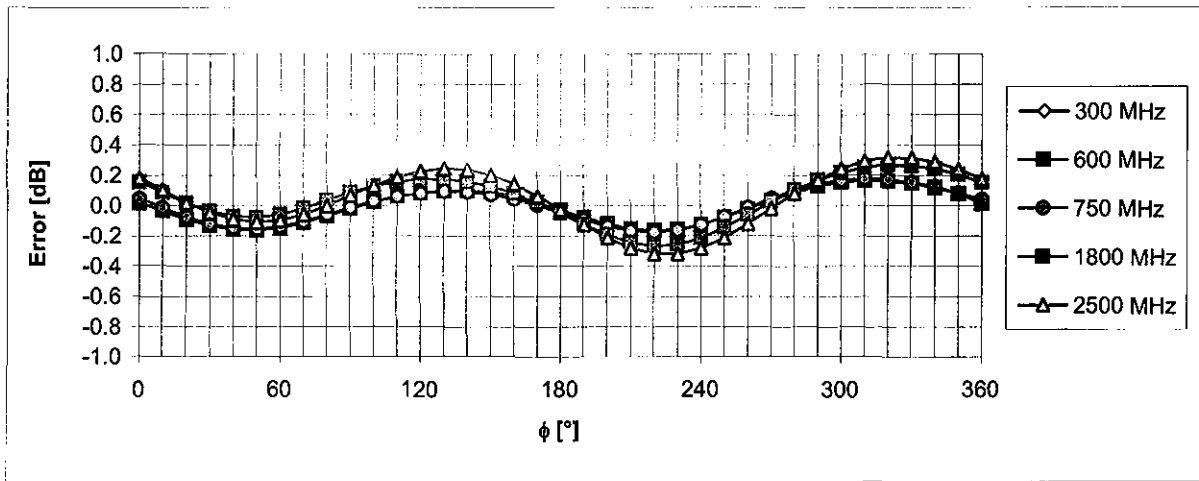



Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

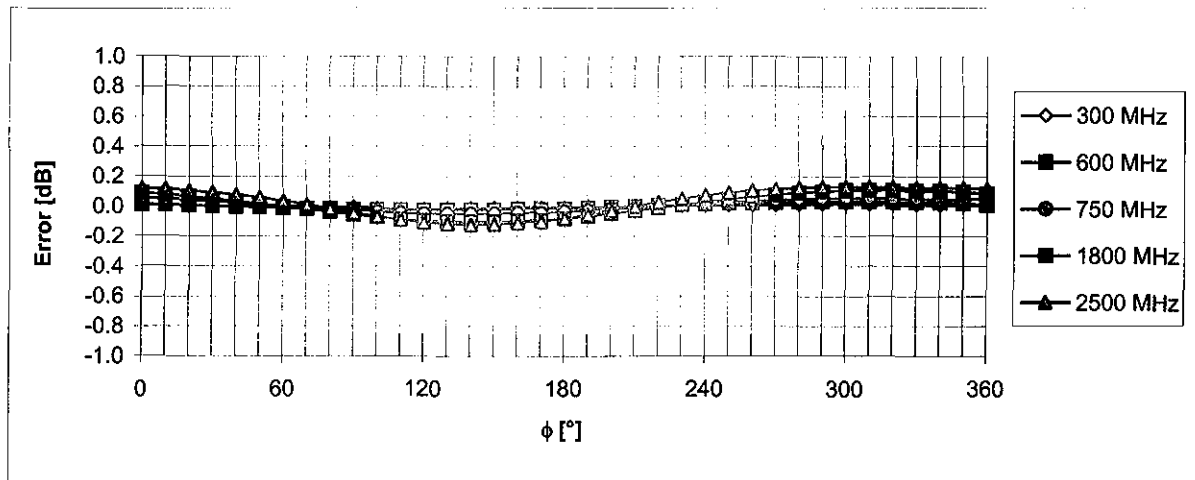

Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range f(H-field) (Waveguide R22, f = 1800 MHz)

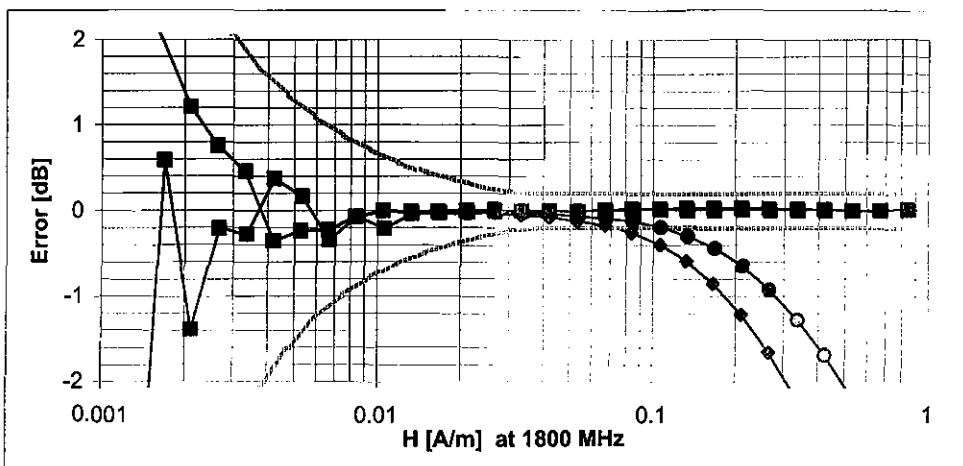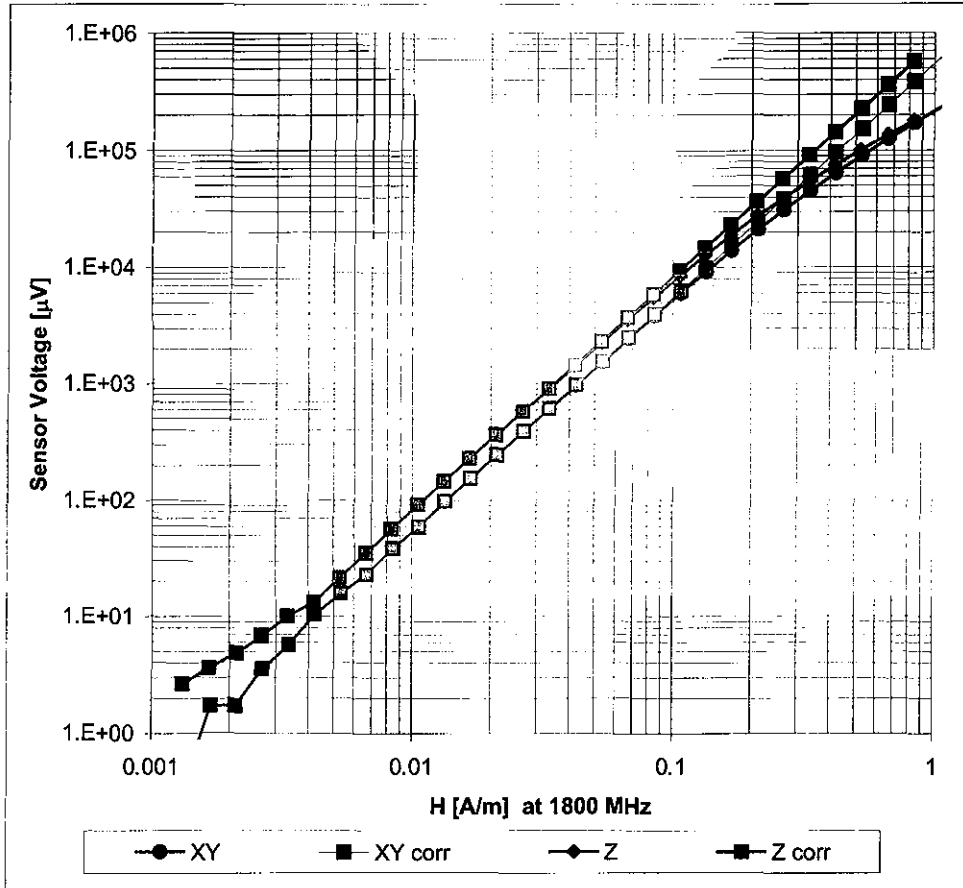

Uncertainty of Linearity Assessment: $\pm 0.6\%$ (k=2)

Appendix 7

Dipole Characterization Certificate



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Motorola MDB**

Certificate No: **CD835V3-1076_Mar08**

CALIBRATION CERTIFICATE

Object **CD835V3 - SN: 1076**

Calibration procedure(s) **QA CAL-20.v4
Calibration procedure for dipoles in air**

Calibration date: **March 11, 2008**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Calibrated by, Certificate No.) | Scheduled Calibration |
|-----------------------|------------|---|-----------------------|
| Power meter EPM-442A | GB37480704 | 04-Oct-07 (METAS, No. 217-00736) | Oct-08 |
| Power sensor HP 8481A | US37292783 | 04-Oct-07 (METAS, No. 217-00736) | Oct-08 |
| Probe ER3DV6 | SN: 2336 | 31-Dec-07 (SPEAG, No. ER3-2336_Dec07) | Dec-08 |
| Probe H3DV6 | SN: 6065 | 31-Dec-07 (SPEAG, No. H3-6065_-Dec07) | Dec-08 |
| DAE4 | SN: 781 | 2-Oct-07 (SPEAG, No. DAE4-781_Oct07) | Oct-08 |

| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
|---------------------------|-------------|---|------------------------|
| Power meter EPM-4419B | GB42420191 | 11-May-05 (SPEAG, in house check Oct -07) | In house check: Nov-08 |
| Power sensor HP 8482A | US37295597 | 11-May-05 (SPEAG, in house check Oct -07) | In house check: Nov-08 |
| Power sensor HP 8482H | 3318A09450 | 08-Jan-02 (SPEAG, in house check Oct -07) | In house check: Nov-08 |
| Network Analyzer HP 8753E | US37390585 | 18-Oct-01 (SPEAG, in house check Oct-07) | In house check: Nov-09 |
| RF generator E4433B | MY 41310391 | 22-Nov-04 (SPEAG, in house check Oct-07) | In house check: Nov-09 |

| | | | |
|----------------|----------------------------|--|------------------------------|
| Calibrated by: | Name Mike Meill | Function Laboratory Technician | Signature <i>M. Meill</i> |
| Approved by: | Name Fin Bomholt | Technical Director | <i>F. Bomholt</i> |

Issued: March 13, 2008

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

References

- [1] ANSI-C63.19-2006
American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.

Methods Applied and Interpretation of Parameters:

- *Coordinate System:* y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with standard [1], the measurement planes (probe sensor center) are selected to be at a distance of 10 mm above the top edge of the dipole arms.
- *Measurement Conditions:* Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- *Antenna Positioning:* The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY4 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- *Feed Point Impedance and Return Loss:* These parameters are measured using a HP 8753E Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminated by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- *E-field distribution:* E field is measured in the x-y-plane with an isotropic ER3D-field probe with 100 mW forward power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 10 mm (in z) above the top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, 10mm above the dipole surface.
- *H-field distribution:* H-field is measured with an isotropic H-field probe with 100mW forward power to the antenna feed point, in the x-y-plane. The scan area and sensor distance is equivalent to the E-field scan. The maximum of the field is available at the center (subgrid 5) above the feed point. The H-field value stated as calibration value represents the maximum of the interpolated H-field, 10mm above the dipole surface at the feed point.

1 Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|---|------------------------|----------------------|
| DASY Version | DASY4 | V4.7 B61 |
| DASY PP Version | SEMCAD | V1.8 B176 |
| Phantom | HAC Test Arch | SD HAC P01 BA, #1070 |
| Distance Dipole Top - Probe Center | 10 mm | |
| Scan resolution | dx, dy = 5 mm | area = 20 x 180 mm |
| Frequency | 835 MHz ± 1 MHz | |
| Forward power at dipole connector | 20.0 dBm = 100mW | |
| Input power drift | < 0.05 dB | |

2 Maximum Field values

| H-field 10 mm above dipole surface | condition | interpolated maximum |
|---|----------------------|-----------------------------|
| Maximum measured | 100 mW forward power | 0.445 A/m |

Uncertainty for H-field measurement: 8.2% (k=2)

| E-field 10 mm above dipole surface | condition | Interpolated maximum |
|---|----------------------|-----------------------------|
| Maximum measured above high end- | 100 mW forward power | 160.4 V/m |
| Maximum measured above low end | 100 mW forward power | 157.6 V/m |
| Averaged maximum above arm | 100 mW forward power | 159.0 V/m |

Uncertainty for E-field measurement: 12.8% (k=2)

3 Appendix

3.1 Antenna Parameters

| Frequency | Return Loss | Impedance |
|------------------|--------------------|----------------------------|
| 800 MHz | 16.7 dB | (42.7 – j11.6) Ohm |
| 835 MHz | 23.9 dB | (47.0 + j5.4) Ohm |
| 900 MHz | 18.6 dB | (58.8 – j9.4) Ohm |
| 950 MHz | 19.2 dB | (51.4 + j11.1) Ohm |
| 960 MHz | 14.0 dB | (60.4 + j19.7) Ohm |

3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.


The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.

Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

3.3 Measurement Sheets

3.3.1 Return Loss and Smith Chart

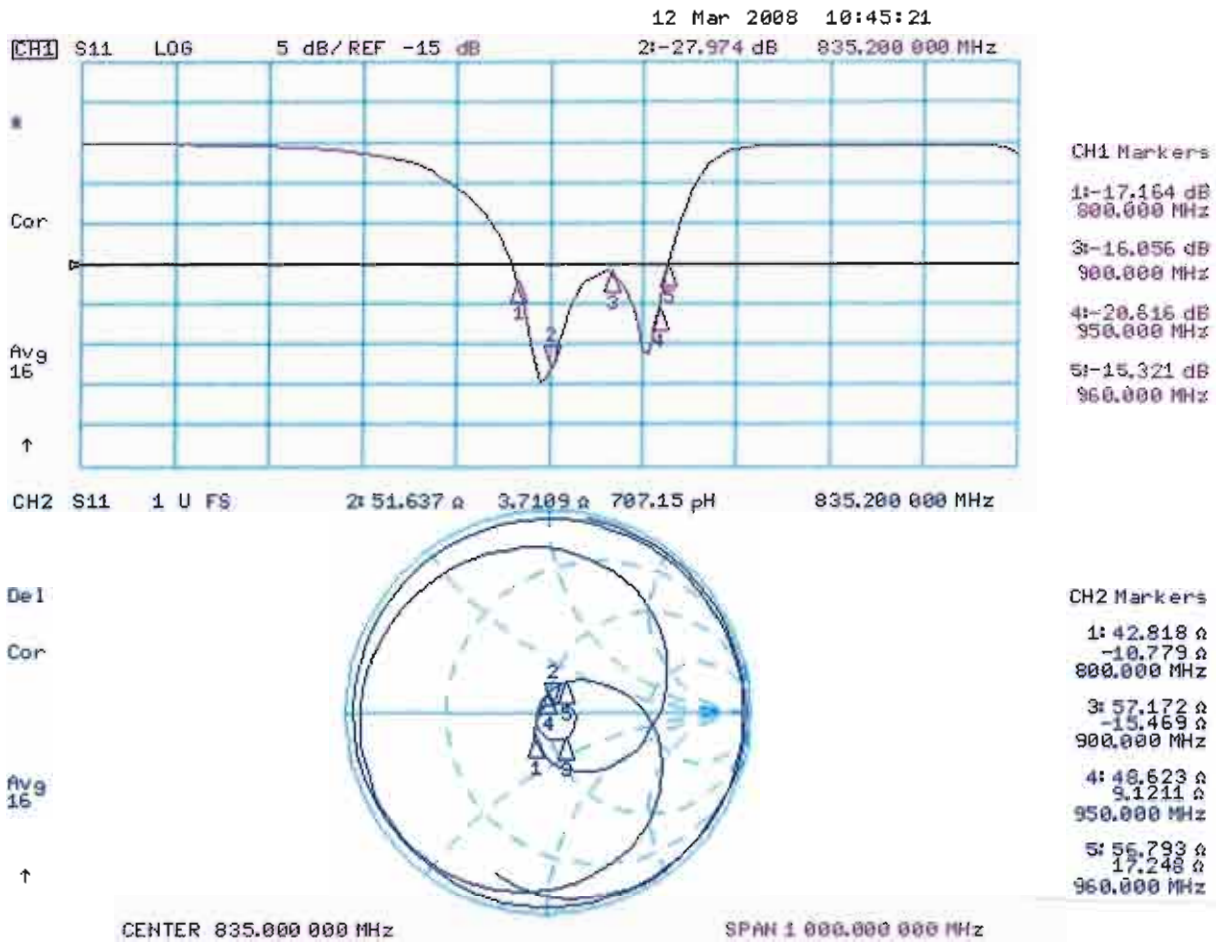

3.3.2 DASY4 H-field result

Date/Time: 11.03.2008 11:59:27

Test Laboratory: SPEAG Lab 2

DUT: HAC-Dipole 835 MHz; Type: D835V3; Serial: 1076

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: H Dipole Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: H3DV6 - SN6065; Calibrated: 31.12.2007
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 02.10.2007
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1070
- Measurement SW: DASY4, V4.7 Build 61; Postprocessing SW: SEMCAD, V1.8 Build 176

H Scan - Sensor Center 10mm above CD835 Dipole/Hearing Aid Compatibility Test (41x361x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.443 A/m

Probe Modulation Factor = 1.00


Device Reference Point: 0.000, 0.000, 354.7 mm

Reference Value = 0.471 A/m; Power Drift = 0.002 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

| | | |
|----------|----------|----------|
| Grid 1 | Grid 2 | Grid 3 |
| 0.371 M4 | 0.391 M4 | 0.370 M4 |
| Grid 4 | Grid 5 | Grid 6 |
| 0.419 M4 | 0.443 M4 | 0.420 M4 |
| Grid 7 | Grid 8 | Grid 9 |
| 0.367 M4 | 0.391 M4 | 0.370 M4 |

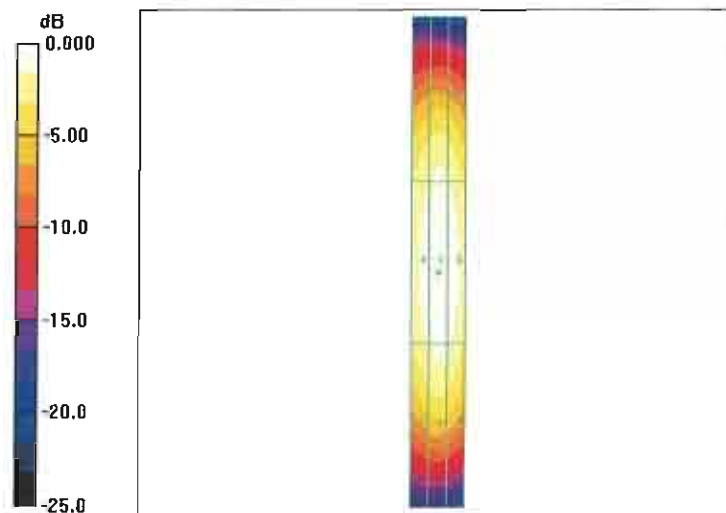

0 dB = 0.443A/m

3.3.3 DASY4 E-Field result

Date/Time: 10.03.2008 13:12:08

Test Laboratory: SPEAG Lab 2

DUT: HAC-Dipole 835 MHz; Type: D835V3; Serial: 1076

Communication System: CW; Frequency: 835; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: E Dipole Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ER3DV6 - SN2336; ConvF(1, 1, 1); Calibrated: 31.12.2007
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 02.10.2007
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1070
- Measurement SW: DASY4, V4.7 Build 61; Postprocessing SW: SEMCAD, V1.8 Build 176

E Scan - Sensor Center 10mm above CD835 Dipole/Hearing Aid Compatibility Test (41x361x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 157.2 V/m

Probe Modulation Factor = 1.00


Device Reference Point: 0.000, 0.000, 354.7 mm

Reference Value = 101.7 V/m; Power Drift = 0.009 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

| | | |
|----------|----------|----------|
| Grid 1 | Grid 2 | Grid 3 |
| 152.8 M4 | 157.2 M4 | 152.8 M4 |
| Grid 4 | Grid 5 | Grid 6 |
| 83.9 M4 | 85.8 M4 | 82.5 M4 |
| Grid 7 | Grid 8 | Grid 9 |
| 149.0 M4 | 153.7 M4 | 149.6 M4 |

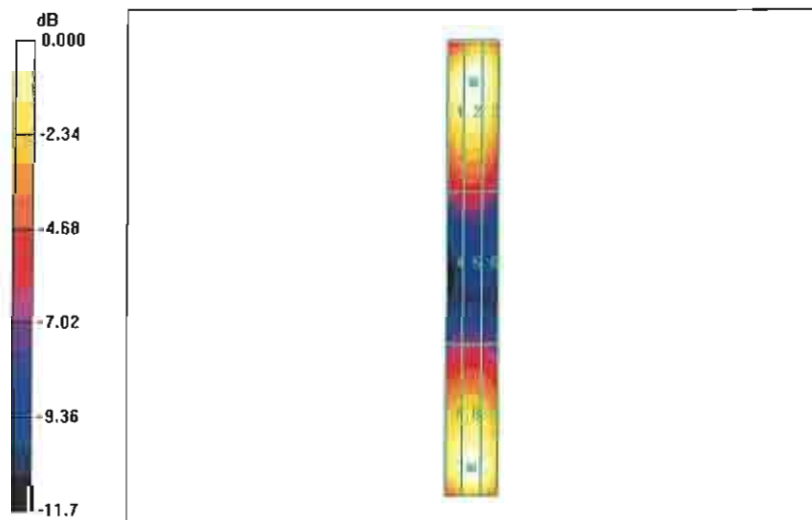

0 dB = 157.2 V/m

4. Additional Measurements

4.1 Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|---|------------------------|----------------------|
| DASY Version | DASY4 | V4.7 B53 |
| DASY PP Version | SEMCAD | V1.8 B172 |
| Phantom | HAC Test Arch | SD HAC P01 BA, #1002 |
| Distance Dipole Top - Probe Center | 10 mm | |
| Scan resolution | dx, dy = 5 mm | area = 20 x 180 mm |
| Frequency | 813 MHz ± 1 MHz | |
| Forward power at dipole connector | 20.0 dBm = 100mW | |
| Input power drift | < 0.05 dB | |

4.1.1 Maximum Field values

| H-field 10 mm above dipole surface | condition | interpolated maximum |
|---|----------------------|-----------------------------|
| Maximum measured | 100 mW forward power | 0.448 A/m |

Uncertainty for H-field measurement: 8.2% (k=2)

| E-field 10 mm above dipole surface | condition | Interpolated maximum |
|---|----------------------|-----------------------------|
| Maximum measured above high end | 100 mW forward power | 172.5 V/m |
| Maximum measured above low end | 100 mW forward power | 163.8V/m |
| Averaged maximum above arm | 100 mW forward power | 168.2 V/m |

Uncertainty for E-field measurement: 12.8% (k=2)

4.1.2 DASY4 H-field result

Date/Time: 11.03.2008 11:59:27

Test Laboratory: SPEAG Lab 2

DUT: HAC-Dipole 835 MHz; Type: D835V3; Serial: 1076

Communication System: CW; Frequency: 813 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: H Dipole Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: H3DV6 - SN6065; Calibrated: 31.12.2007
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 02.10.2007
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1070
- Measurement SW: DASY4, V4.7 Build 61; Postprocessing SW: SEMCAD, V1.8 Build 176

H Scan - Sensor Center 10mm above CD835 Dipole @ 813MHz/Hearing Aid Compatibility Test (41x361x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.452 A/m


Probe Modulation Factor = 1.00

Reference Value = 0.481 A/m; Power Drift = -0.003 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

| | | |
|--------------------|--------------------|--------------------|
| Grid 1 0.374 M4 | Grid 2 0.395 M4 | Grid 3 0.374 M4 |
| Grid 4 0.427 M4 | Grid 5 0.452 M4 | Grid 6 0.429 M4 |
| Grid 7 0.371 M4 | Grid 8 0.395 M4 | Grid 9 0.373 M4 |

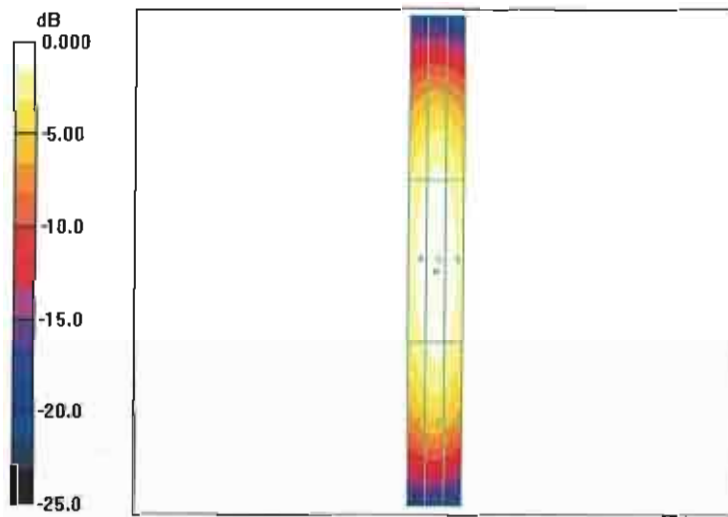

0 dB = 0.452 A/m

4.1.3 DASYS4 E-field result

Date/Time: 10.03.2008 13:12:08

Test Laboratory: SPEAG Lab 2

DUT: HAC-Dipole 835 MHz; Type: D835V3; Serial: 1076

Communication System: CW; Frequency: 813; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: E Dipole Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASYS4 Configuration:

- Probe: ER3DV6 - SN2336; ConvF(1, 1, 1); Calibrated: 31.12.2007
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 02.10.2007
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1070
- Measurement SW: DASYS4, V4.7 Build 61; Postprocessing SW: SEMCAD, V1.8 Build 176

E Scan - Sensor Center 10mm above CD835 Dipole @ 813MHz/Hearing Aid Compatibility Test (41x361x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 161.6 V/m


Probe Modulation Factor = 1.00

Reference Value = 104.9 V/m; Power Drift = 0.006 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

| | | |
|--------------------|--------------------|--------------------|
| Grid 1 157.3 M4 | Grid 2 161.6 M4 | Grid 3 157.1 M4 |
| Grid 4 86.3 M4 | Grid 5 88.2 M4 | Grid 6 85.2 M4 |
| Grid 7 151.8 M4 | Grid 8 156.5 M4 | Grid 9 152.3 M4 |

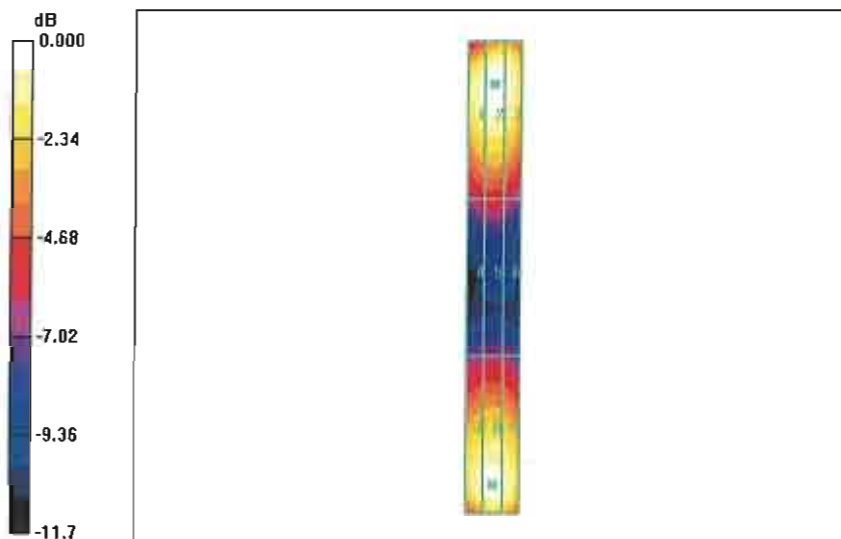

0 dB = 161.6 V/m

4.2 Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|---|------------------------|----------------------|
| DASY Version | DASY4 | V4.7 B53 |
| DASY PP Version | SEMCAD | V1.8 B172 |
| Phantom | HAC Test Arch | SD HAC P01 BA, #1002 |
| Distance Dipole Top - Probe Center | 10 mm | |
| Scan resolution | dx, dy = 5 mm | area = 20 x 180 mm |
| Frequency | 898 MHz ± 1 MHz | |
| Forward power at dipole connector | 20.0 dBm = 100mW | |
| Input power drift | < 0.05 dB | |

4.2.1 Maximum Field values

| H-field 10 mm above dipole surface | condition | Interpolated maximum |
|---|----------------------|-----------------------------|
| Maximum measured | 100 mW forward power | 0.416 A/m |

Uncertainty for H-field measurement: 8.2% (k=2)

| E-field 10 mm above dipole surface | condition | Interpolated maximum |
|---|----------------------|-----------------------------|
| Maximum measured above high end | 100 mW forward power | 158.8 V/m |
| Maximum measured above low end | 100 mW forward power | 143.9 V/m |
| Averaged maximum above arm | 100 mW forward power | 151.4 V/m |

Uncertainty for E-field measurement: 12.8% (k=2)

4.2.2 DASY4 H-field result

Date/Time: 11.03.2008 11:59:27

Test Laboratory: SPEAG Lab 2

DUT: HAC-Dipole 835 MHz; Type: D835V3; Serial: 1076

Communication System: CW; Frequency: 898 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: H Dipole Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: H3DV6 - SN6065; Calibrated: 31.12.2007
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 02.10.2007
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1070
- Measurement SW: DASY4, V4.7 Build 61; Postprocessing SW: SEMCAD, V1.8 Build 176

H Scan - Sensor Center 10mm above CD835 Dipole @ 898MHz/Hearing Aid Compatibility Test (41x361x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.425 A/m

Probe Modulation Factor = 1.00


Device Reference Point: 0.000, 0.000, 354.7 mm

Reference Value = 0.445 A/m; Power Drift = -0.036 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

| | | |
|--------------------|--------------------|--------------------|
| Grid 1 0.373 M4 | Grid 2 0.394 M4 | Grid 3 0.372 M4 |
| Grid 4 0.402 M4 | Grid 5 0.425 M4 | Grid 6 0.403 M4 |
| Grid 7 0.372 M4 | Grid 8 0.396 M4 | Grid 9 0.375 M4 |

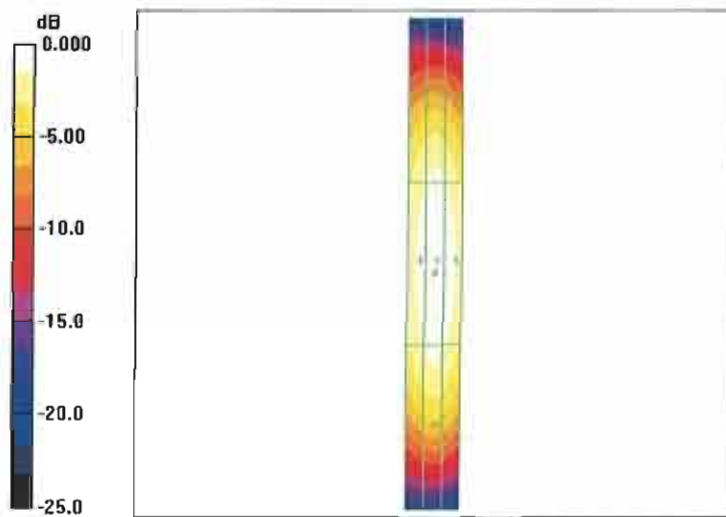

0 dB = 0.425 A/m

4.2.3 DASY4 E-field result

Date/Time: 10.03.2008 13:12:08

Test Laboratory: SPEAG Lab 2

DUT: HAC-Dipole 835 MHz; Type: D835V3; Serial: 1076

Communication System: CW; Frequency: 898; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: E Dipole Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ER3DV6 - SN2336; ConvF(1, 1, 1); Calibrated: 31.12.2007
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 02.10.2007
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1070
- Measurement SW: DASY4, V4.7 Build 61; Postprocessing SW: SEMCAD, V1.8 Build 176

E Scan - Sensor Center 10mm above CD835 Dipole @ 898MHz/Hearing Aid Compatibility Test (41x361x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 154.8 V/m

Probe Modulation Factor = 1.00



Device Reference Point: 0.000, 0.000, 354.7 mm

Reference Value = 93.0 V/m; Power Drift = -0.013 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

| | | |
|---------------------------|---------------------------|---------------------------|
| Grid 1 150.5 M4 | Grid 2 154.8 M4 | Grid 3 150.5 M4 |
| Grid 4 74.3 M4 | Grid 5 76.0 M4 | Grid 6 73.2 M4 |
| Grid 7 148.9 M4 | Grid 8 153.5 M4 | Grid 9 149.5 M4 |

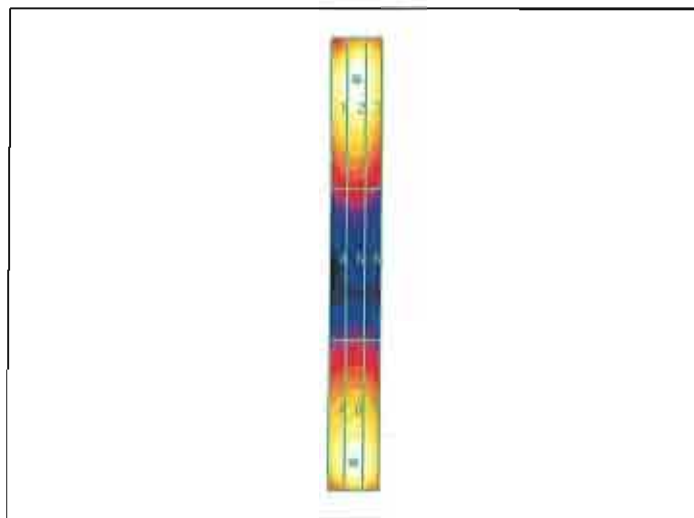

0 dB = 154.8 V/m



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Motorola MDb**

Certificate No: **CD1880V3-1059_Jul08**

CALIBRATION CERTIFICATE

Object **CD1880V3 - SN: 1059**

Calibration procedure(s) **QA CAL-20.v4
Calibration procedure for dipoles in air**

Calibration date: **July 16, 2008**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|-----------------------|------------|--------------------------------|-----------------------|
| Power meter EPM-442A | GB37480704 | 04-Oct-07 (No. 217-00736) | Oct-08 |
| Power sensor HP 8481A | US37292783 | 04-Oct-07 (No. 217-00736) | Oct-08 |
| Probe ER3DV6 | SN: 2336 | 31-Dec-07 (No. ER3-2336_Dec07) | Dec-08 |
| Probe H3DV6 | SN: 6065 | 31-Dec-07 (No. H3-6065_-Dec07) | Dec-08 |
| DAE4 | SN: 781 | 2-Oct-07 (No. DAE4-781_Oct07) | Oct-08 |

| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
|---------------------------|------------|-----------------------------------|------------------------|
| Power meter EPM-4419B | GB42420191 | 11-May-05 (in house check Oct-07) | In house check: Oct-08 |
| Power sensor HP 8482A | US37295597 | 11-May-05 (in house check Oct-07) | In house check: Oct-08 |
| Power sensor HP 8482H | 3318A09450 | 08-Jan-02 (in house check Oct-07) | In house check: Oct-08 |
| Network Analyzer HP 8753E | US37390585 | 18-Oct-01 (in house check Oct-07) | In house check: Oct-09 |

Calibrated by: **Claudio Leubler** **Laboratory Technician**

Approved by: **Fin Bornholt** **Technical Director**

Signature

Signature

Issued: July 23, 2008

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

References

- [1] ANSI-C63.19-2006
American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.

Methods Applied and Interpretation of Parameters:

- *Coordinate System:* y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with standard [1], the measurement planes (probe sensor center) are selected to be at a distance of 10 mm above the top edge of the dipole arms.
- *Measurement Conditions:* Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- *Antenna Positioning:* The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY4 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- *Feed Point Impedance and Return Loss:* These parameters are measured using a HP 8753E Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminated by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- *E-field distribution:* E field is measured in the x-y-plane with an isotropic ER3D-field probe with 100 mW forward power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 10 mm (in z) above the top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, 10mm above the dipole surface.
- *H-field distribution:* H-field is measured with an isotropic H-field probe with 100mW forward power to the antenna feed point, in the x-y-plane. The scan area and sensor distance is equivalent to the E-field scan. The maximum of the field is available at the center (subgrid 5) above the feed point. The H-field value stated as calibration value represents the maximum of the interpolated H-field, 10mm above the dipole surface at the feed point.

1. Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|---|-------------------------|----------------------|
| DASY Version | DASY4 | V4.7 B71 |
| DASY PP Version | SEMCAD | V1.8 B184 |
| Phantom | HAC Test Arch | SD HAC P01 BA, #1070 |
| Distance Dipole Top - Probe Center | 10 mm | |
| Scan resolution | dx, dy = 5 mm | area = 20 x 90 mm |
| Frequency | 1880 MHz ± 1 MHz | |
| Forward power at dipole connector | 20.0 dBm = 100mW | |
| Input power drift | < 0.05 dB | |

2. Maximum Field values

| H-field 10 mm above dipole surface | condition | Interpolated maximum |
|---|----------------------|-----------------------------|
| Maximum measured | 100 mW forward power | 0.471 A/m |

Uncertainty for H-field measurement: 8.2% (k=2)

| E-field 10 mm above dipole surface | condition | Interpolated maximum |
|---|----------------------|-----------------------------|
| Maximum measured above high end | 100 mW forward power | 142.6 V/m |
| Maximum measured above low end | 100 mW forward power | 140.8 V/m |
| Averaged maximum above arm | 100 mW forward power | 141.7 V/m |

Uncertainty for E-field measurement: 12.8% (k=2)

3. Appendix

3.1 Antenna Parameters

| Frequency | Return Loss | Impedance |
|------------------|--------------------|----------------------------|
| 1710 MHz | 20.1 dB | (49.8 + j9.8) Ohm |
| 1880 MHz | 22.2 dB | (51.4 + j7.8) Ohm |
| 1900 MHz | 22.8 dB | (53.7 + j6.6) Ohm |
| 1950 MHz | 33.1 dB | (52.1 – j0.7) Ohm |
| 2000 MHz | 19.3 dB | (40.5 + j2.4) Ohm |

3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.


The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.

Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

3.3 Measurement Sheets

3.3.1 Return Loss and Smith Chart

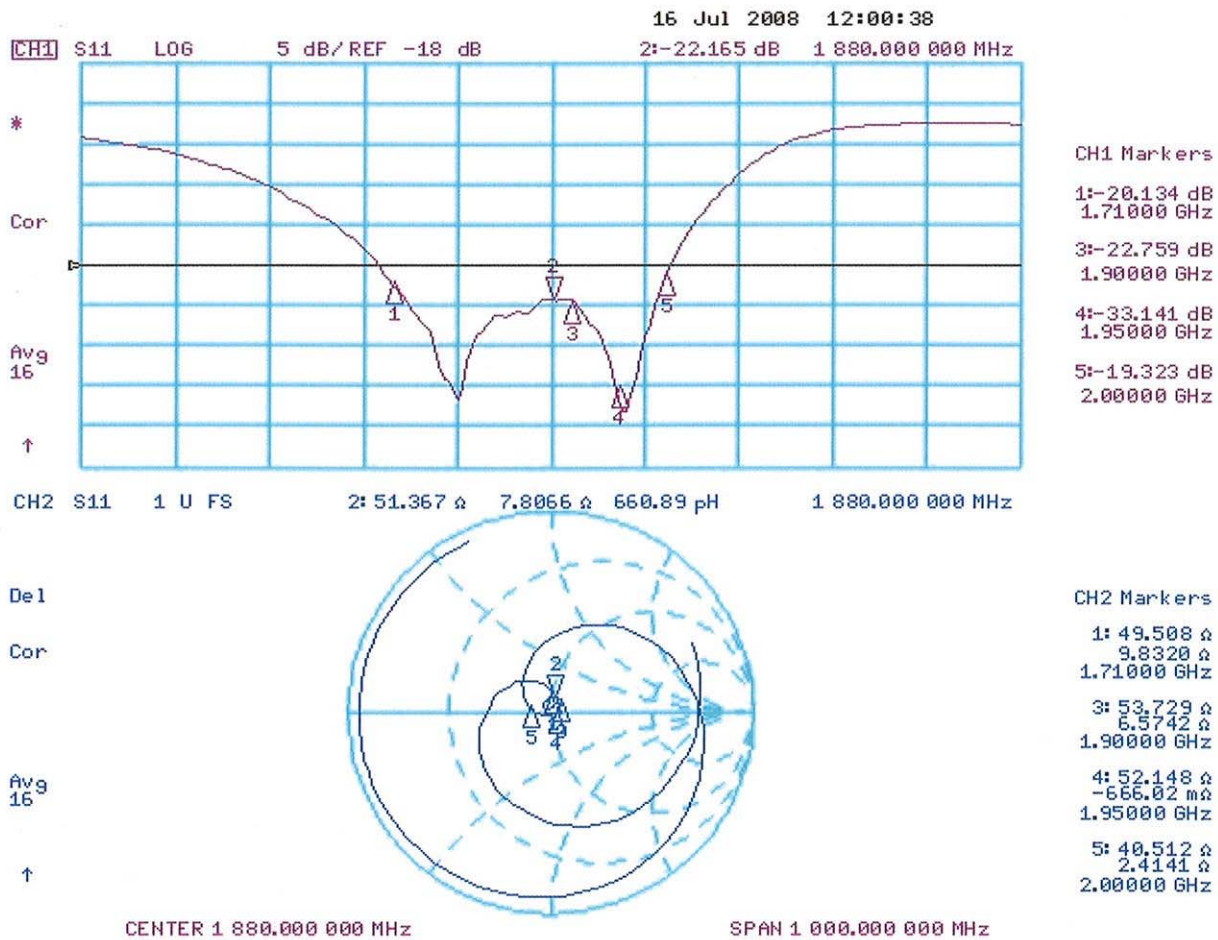

DASY4 H-Field Result

Date/Time: 15.07.2008 15:44:14

Test Laboratory: SPEAG Lab 2

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: 1059
 Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Phantom section: RF Section
 Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:


- Probe: H3DV6 - SN6065; Calibrated: 31.12.2007
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 02.10.2007
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

H Scan - measurement distance from the probe sensor center to CD1880 Dipole = 10mm/Hearing Aid Compatibility Test (41x181x1):

Measurement grid: dx=5mm, dy=5mm
 Maximum value of peak Total field = 0.471 A/m
 Probe Modulation Factor = 1.00
 Device Reference Point: 0.000, 0.000, -6.30 mm
 Reference Value = 0.499 A/m; Power Drift = 0.011 dB
Hearing Aid Near-Field Category: M2 (AWF 0 dB)

Peak H-field in A/m

| | | |
|------------------------------|------------------------------|------------------------------|
| Grid 1 0.411 M2 | Grid 2 0.428 M2 | Grid 3 0.406 M2 |
| Grid 4 0.453 M2 | Grid 5 0.471 M2 | Grid 6 0.445 M2 |
| Grid 7 0.417 M2 | Grid 8 0.435 M2 | Grid 9 0.406 M2 |

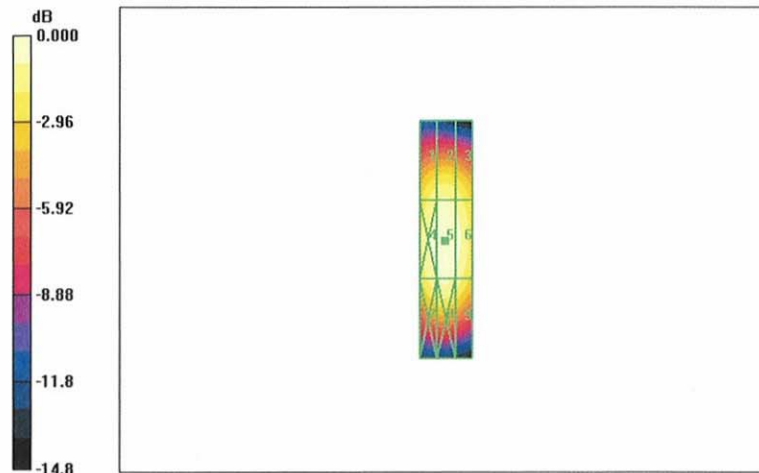

0 dB = 0.471 A/m

3.3.2 DASY4 E-Field Result

Date/Time: 16.07.2008 17:26:14

Test Laboratory: SPEAG Lab 2

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: 1059

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ER3DV6 - SN2336; ConvF(1, 1, 1); Calibrated: 31.12.2007
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 02.10.2007
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

E Scan - measurement distance from the probe sensor center to CD1880 Dipole = 10mm/Hearing Aid Compatibility Test (41x181x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 142.6 V/m

Probe Modulation Factor = 1.00



Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 156.3 V/m; Power Drift = -0.006 dB

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

Peak E-field in V/m

| | | |
|------------------------------|------------------------------|------------------------------|
| Grid 1 136.1 M2 | Grid 2 140.8 M2 | Grid 3 137.5 M2 |
| Grid 4 86.7 M3 | Grid 5 88.8 M3 | Grid 6 85.2 M3 |
| Grid 7 136.5 M2 | Grid 8 142.6 M2 | Grid 9 139.7 M2 |

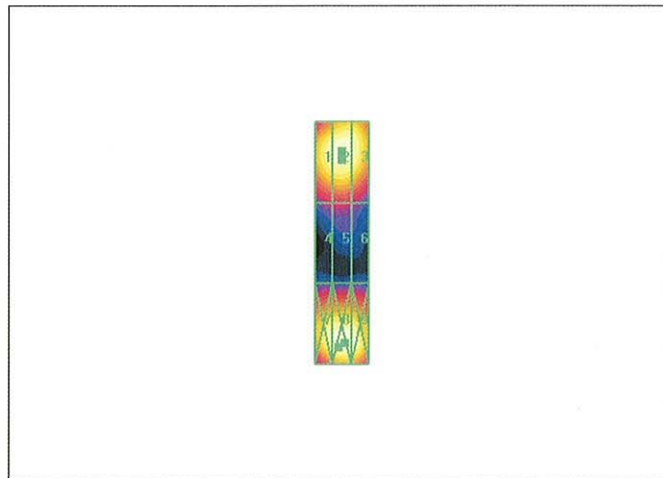

0 dB = 142.6V/m

4 Additional Measurements

4.1 Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|---|-------------------------|----------------------|
| DASY Version | DASY4 | V4.7 B71 |
| DASY PP Version | SEMCAD | V1.8 B184 |
| Phantom | HAC Test Arch | SD HAC P01 BA, #1070 |
| Distance Dipole Top - Probe Center | 10 mm | |
| Scan resolution | dx, dy = 5 mm | area = 20 x 90 mm |
| Frequency | 1730 MHz ± 1 MHz | |
| Forward power at dipole connector | 20.0 dBm = 100mW | |
| Input power drift | < 0.05 dB | |

4.2 Maximum Field values

| H-field 10 mm above dipole surface | condition | Interpolated maximum |
|---|----------------------|-----------------------------|
| Maximum measured | 100 mW forward power | 0.492 A/m |

Uncertainty for H-field measurement: 8.2% (k=2)

| E-field 10 mm above dipole surface | condition | Interpolated maximum |
|---|----------------------|-----------------------------|
| Maximum measured above high end | 100 mW forward power | 154.4 V/m |
| Maximum measured above low end | 100 mW forward power | 148.2 V/m |
| Averaged maximum above arm | 100 mW forward power | 151.3 V/m |

Uncertainty for E-field measurement: 12.8% (k=2)

4.3.1 DASY4 H-Field Result

Date/Time: 15.07.2008 15:44:14

Test Laboratory: SPEAG Lab 2

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: 1059

Communication System: CW; Frequency: 1730 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: H3DV6 - SN6065; Calibrated: 31.12.2007
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 02.10.2007
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

H Scan - measurement distance from the probe sensor center to CD1880 Dipole = 10mm @ 1730 MHz/Hearing Aid Compatibility Test (41x181x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.492 A/m

Probe Modulation Factor = 1.00


Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.523 A/m; Power Drift = 0.012 dB

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

Peak H-field in A/m

| | | |
|------------------------------|------------------------------|------------------------------|
| Grid 1 0.413 M2 | Grid 2 0.428 M2 | Grid 3 0.403 M2 |
| Grid 4 0.475 M2 | Grid 5 0.492 M2 | Grid 6 0.459 M2 |
| Grid 7 0.422 M2 | Grid 8 0.436 M2 | Grid 9 0.400 M2 |

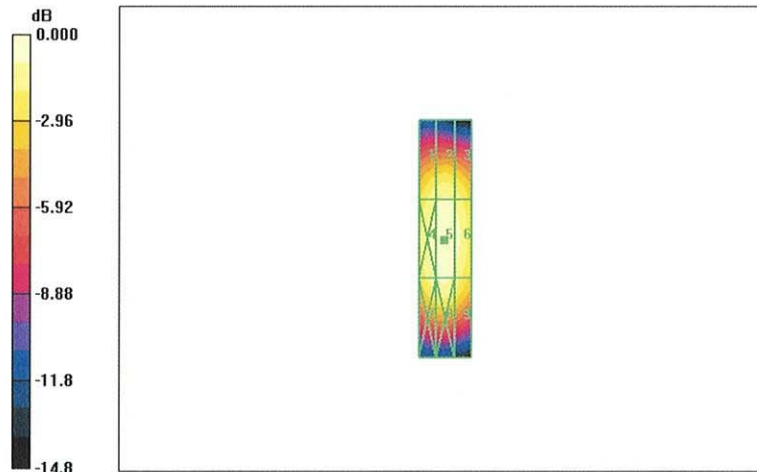

0 dB = 0.471 A/m

4.3.2 DASY4 E-Field Result

Date/Time: 16.07.2008 17:26:14

Test Laboratory: SPEAG Lab 2

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: 1059

Communication System: CW; Frequency: 1730 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ER3DV6 - SN2336; ConvF(1, 1, 1); Calibrated: 31.12.2007
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 02.10.2007
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

E Scan - measurement distance from the probe sensor center to CD1880 Dipole = 10mm @ 1730 MHz/Hearing Aid Compatibility Test (41x181x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 148.2 V/m

Probe Modulation Factor = 1.00



Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 176.1 V/m; Power Drift = -0.016 dB

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

Peak E-field in V/m

| | | |
|------------------------------|------------------------------|------------------------------|
| Grid 1 144.1 M2 | Grid 2 148.2 M2 | Grid 3 143.0 M2 |
| Grid 4 106.5 M3 | Grid 5 108.4 M3 | Grid 6 102.5 M3 |
| Grid 7 151.3 M2 | Grid 8 154.4 M2 | Grid 9 142.8 M2 |

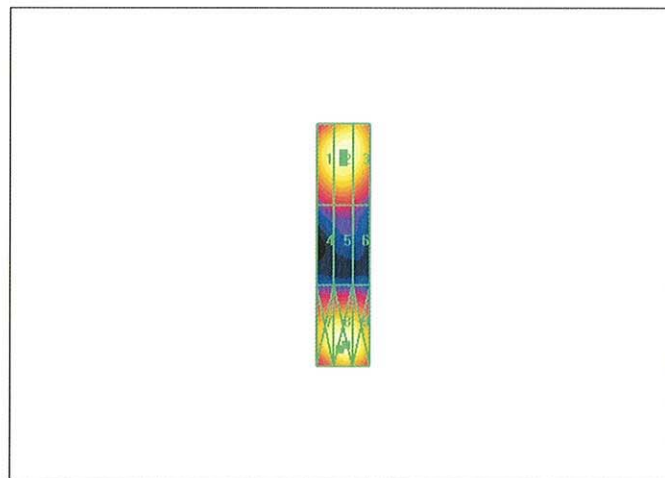

0 dB = 142.6V/m