

## Parts

Package include	
Emitter	1
Receiver(Headphone)	1
Instruction Manual	1
Audio cable	1
Audio Transform cable	1

## Installation

### Installing the receiver:

Insert two AAA batteries into the battery compartment according to the + and - polarity, tune the power On/Off of the receiver, then the receiver indicator will brighten.

### Installing the emitter:

Insert two AAA batteries into the battery compartment according to the + and - polarity (3.0V DC). Insert audio plug of the emitter into AUDIO-OUT socket of audio source (such as TV set, audio device, PC, DVD player, CD player, MP3 player, etc.). Please see Fig.1, Fig.2, Fig.3, Fig.4 (Note: locate the emitter at a high position in order to achieve best reception effect)

## Operation

### Wireless headphone

(1) Please see Fig.1, Insert the emitter audio cable into the AUDIO-OUT socket of the electronic device or headphone socket, and move the function switch of the emitter to the "ON" position, then the emitter indicator shine.  
(2) Built in the battery on the emitter and the receiver, draw the function switch

to the "WIRELESS" position, the receiver indicator brighten. Put the volume control to a suitable position, then adjust the tiny modulation on the emitter till getting a best effect (largest sound and clearest).

### Wireless net audio chat

(1) Connect the emitter audio cable to the adaptor cable (optional) (see Fig.2), and insert the other end of the adaptor cable into the audio out socket of the PC, then insert one end of the audio cable (optional) into the microphone socket (MIC) on the emitter, and insert the other end into the microphone in socket of the PC.  
(2) Turn on the power switch of the emitter, then the indicator brighten, put the out-built MIC forward yourself and keep away with the distance of 0.5M (see Fig.3).  
(3) open your chat tool and tune the power On/Off button, then the indicator of the headphone brighten. Adjust the volume to the suitable position, then headphone can receive the sound via the SKYPE/MSN/QQ from your friends in the other end.

### Listen to the radio


The receiver can be used separately as an FM radio. First draw the function switch to the "FM" position, and then press the "RESET" once, then press the "SCAN" key in turn to search a higher range and lock one radio channel; when the highest range is reached, press "RESET" key, and the frequency returns to the lowest range. Press "SCAN" key again, and the receiver will search the radio channels from the low range again.

### Wired Headphone (without batteries)

Insert one end of the audio cable (optional) into the audio socket of the receiver (see Fig.4), and insert the other end into the headphone socket of the electronic devices, such as MP3 player, VCD player, DVD player, etc., and then the unit can be used as a wired headphone.

### Wireless monitoring

(1) Turn on the emitter by tuning power switch. Then the emitter indicator brighten up.  
(2) Turn on the receiver by tuning Volume control button. Then the receiver indicator brighten up.  
(3) Place the emitter with the wards.  
Press RESET button, then press SCAN button to SCAN sound from wards automatically.

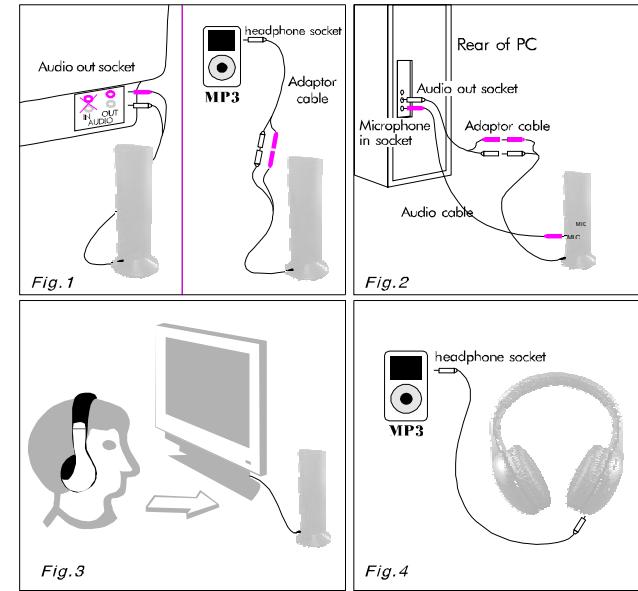

# FM Hi-Fi Wireless Headphone User's Manual

## Technical Specifications

### Emitter

Emission frequency: 88.1MHz  
Modulation mode: FM  
Emission distance: 30M (with no interference)  
Power supply: 2xAAA batteries .

### Receiver(headphone)

Frequency range: 88.1MHz for wireless headphone and 87-108MHz for FM radio.  
Reception Mode: FM  
Distortion: < 2%  
Power Supply: 2xAAA batteries

## Notes

- To achieve best reception spread out emitter audio cable of the emitter or locate the emitter at a higher position. (the emitter audio cable can also be used as antenna).
- If the sound is distorted or too strong, adjust the volume of the signal source (TV set, VCD, player, DVD player, PC, MP3, walkman etc.) To a lower level, and reception performance may be improved.
- Replace the batteries if you are having the following problems  
1) The emitter indicator becomes dim.  
2) The receiver reception is poor.  
3) The volume becomes weak and the sound is distorted.


## Appearance and Function Illustrations

### A Receiver

- 1.Battery compartment cover
- 2.Volume control and power button (ON/OFF)
- 3.Scan key(SCAN)
- 4.Reset key(RESET)
- 5.Power indicator
- 6.Audio socket

### B Emitter

7. Power indicator (Front)
- 8.Power and function switch
- 9.Microphone socket (MIC)
- 10.Vacancy
- 11.Microphone (MIC)
- 12.Audio cable of emitter
- 13.Battery compartment cover (bottom)

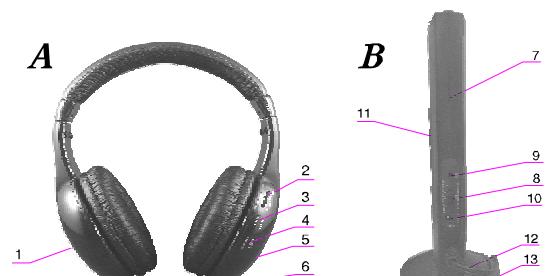

**FCC ID:INC-66121**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.