

DFS Test Report

Applicant : D-Link Corporation

Product Name : AX3000 Wi-Fi 6 Router

Trade Name : D-Link

Model Number : X530, X530/x, X530/xx, X530/xxx (x can be 0-9, A-Z)

Applicable Standard : FCC 47 CFR PART 15 SUBPART E
ANSI C63.10:2013

Received Date : Nov. 19, 2024

Test Period : Dec. 05, 2024 ~ Dec. 19, 2024

Issued Date : Jan. 08, 2025

Issued by

Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Bade test site :

Test Firm Registration Number: 226252

Test Firm Designation Number: TW0010

Wugu test site :

Test Firm Registration Number: 191812

Test Firm Designation Number: TW0034

Note:

1. The test results are valid only for samples provided by customers and under the test conditions described in this report.
2. This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
3. The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

Revision History

Rev.	Issued Date	Description	Revised By
00	Jan. 08, 2025	Initial Issue	Snow Wang

Verification of Compliance

Applicant : D-Link Corporation

Product Name : AX3000 Wi-Fi 6 Router

Trade Name : D-Link

Model Number : X530, X530/x, X530/xx, X530/xxx (x can be 0-9, A-Z)

FCC ID : KA2X530A1

Applicable Standard : FCC 47 CFR PART 15 SUBPART E
ANSI C63.10:2013

Test Result : Complied

Performing Lab. : Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330



Eurofins E&E Wireless Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Eurofins E&E Wireless Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : _____

TABLE OF CONTENTS

1	General Information	5
1.1.	Summary of Test Result	5
1.2.	Testing Location	6
1.3.	Test Site Environment.....	6
2	EUT Description.....	7
3	Test Methodology	9
3.1.	Mode of Operation	9
3.2.	EUT Test Step	9
3.3.	Test Instruments	9
4	Dynamic Frequency Selection	10
4.1.	Limits	10
4.2.	Test and Measurement System	14
5	Test Results	17
5.1.	Radar Waveforms and Traffic	17
5.2.	Channel Loading	33
5.3.	Channel Availability Check Time.....	37
5.4.	Channel Move Time and Channel Closing Transmission Time.....	40
5.5.	Non-Occupancy Period	43
5.6.	U-NII Detection Bandwidth	44
5.7.	Statistical Performance check	47

Appendix A. Test Setup Photographs

1 General Information

1.1. Summary of Test Result

Standard	Item	Result	Remark
15.407(h)(2)	Channel Availability Check Time	PASS	---
15.407(h)(2)	Channel Move Time	PASS	---
15.407(h)(2)	Channel Closing Transmission Time	PASS	---
15.407(h)(2)	Non-Occupancy Period	PASS	---
15.407(h)(2)	U-NII Detection Bandwidth	PASS	---
15.407(h)(2)	Statistical Performance check	PASS	---

Decision Rule

- ☒ Uncertainty is not included.
- ☐ Uncertainty is included.

Standard	Description
CFR47, Part 15, Subpart E	Unlicensed National Information Infrastructure Devices
Canada RSS-247 Issue 3	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB789033: D02	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
KDB 662911 D01 v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)

1.2. Testing Location

Lab Name: Eurofins E&E Wireless Taiwan Co., Ltd.

Site Address: ☐ No. 140-1, Changan Street, Bade District, Taoyuan City, Taiwan (R.O.C.)

Site Address: ☒ No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan (R.O.C.)

1.3. Test Site Environment

Items	Required (IEC 60068-1)	Interval(*)
Temperature (°C)	15-35	20-30
Humidity (%RH)	25-75	45-75

(*)The measurement ambient temperature is within this range.

2 EUT Description

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity

Applicant	D-Link Corporation 14420 Myford Road Suite 100 Irvine California United States 92606			
Product Name	AX3000 Wi-Fi 6 Router			
Trade Name	D-Link			
Model Number	X530, X530/x, X530/xx, X530/xxx (x can be 0-9, A-Z)			
Difference description of model number	Different model number is for marketing purpose. No physical difference.			
FCC ID	KA2X530A1			
Operate Frequency	Frequency Band		Frequency Range (MHz)	
	802.11a	U-NII Band 2-A	5260 – 5320	
		U-NII Band 2-C	5500 – 5700	
	802.11n HT20 / 802.11ac VHT20 / 802.11ax HE20	U-NII Band 2-A	5260 – 5320	
		U-NII Band 2-C	5500 – 5700	
	802.11n HT40 / 802.11ac VHT40 / 802.11ax HE40	U-NII Band 2-A	5270 – 5310	
		U-NII Band 2-C	5510 – 5670	
	802.11ac VHT80 / 802.11ax HE80	U-NII Band 2-A	5290	
		U-NII Band 2-C	5530 – 5610	
	802.11ac VHT160 / 802.11ax HE160	U-NII Band 2-A	5250	
U-NII Band 2-C		5570		
Modulation Type	OFDM/OFDMA			
Antenna information	Antenna	Model	Type	Max. Gain (dBi)
	ANT-1 (ANT-0)	RFA-05-JP767-P1	PCB antenna	3.2
	ANT-2 (ANT-1)	RFA-05-JP767-P2	PCB antenna	3.21
	ANT-3 (ANT-2)	RFA-05-JP767-P3	PCB antenna	3.21
Antenna Delivery	802.11a : 3TX (CDD) 802.11n / ac / ax : 3TX (MIMO/Beamforming on)			
Operate Temp. Range	0 ~ +40 °C			
EUT Power Rating	DC 12 V			

Items	Description	
Communication Mode	☒ IP Based (Load Based)	☐ Frame Based
TPC Function	☒ With TPC	☐ Without TPC
Weather Band (5600 ~ 5650 MHz)	☒ With 5600 ~ 5650 MHz	☐ Without 5600 ~ 5650 MHz
Beamforming Function	☒ With Beamforming	☐ Without Beamforming
Equipment Type	☐ Outdoor access point (point-to-point)	
	☐ Outdoor access point (point-to-multipoint)	
	☒ Indoor access point	
	☐ Fixed point-to-point access points	
	☐ Client devices	
Operating mode	☒ Master	
	☐ Client with radar detection	
	☒ Client without radar detection	
	☐ Ad-Hoc	
	☐ Bridge	
	☐ MESH	

Note : DFS controls (hardware or software) related to radar detection are NOT accessible to the user.
Manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms is not available to the end user.

3 Test Methodology

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

The tests documented in this report were performed in accordance with FCC KDB request:

- FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
- FCC KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02

3.1. Mode of Operation

Decision of Test Eurofins has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
802.11ax HE20
802.11ax HE40
802.11ax HE80
802.11ax HE160

3.2. EUT Test Step

1.	Setup the EUT shown on 3.2.
2.	Turn on the power of all equipment.
3.	Turn on Wi-Fi function link to Access Point.
4.	The EUT is operated in the normal mode to the purposes of measurement.

3.3. Test Instruments

For Conducted

Test Period: Dec. 5 , 2024 ~ Dec. 19 , 2024

Testing Engineer: An Wu

Test Site		RF02-WG				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☒	Spectrum Analyzer (10 Hz~26.5 GHz)	Keysight	N9010B	MY63460164	Mar. 8, 2024	1 year
☒	Signal Generator	R&S	SMM100A	101740	Jan. 26, 2024	1 year

Note: N.C.R. = No Calibration Request.

4 Dynamic Frequency Selection

4.1. Limits

§15.407 (h) and FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02 Compliance measurement procedures for unlicensed-national information infrastructure devcies operating in the 5250-5350 MHZ and 5470-5725 MHZ bands incorporating dynamic frequency selection.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel			
Requirement	Operational Mode		
	Master	Client (without Radar Detection)	Client (with Radar Detection)
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation		
Requirement	Operational Mode	
	Master Device or Client With Radar Detection	Client without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client With Radar Detection	Client without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
Note : Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in all 20 MHz channel blocks and a null frequencies between the bonded 20 MHz channel blocks		

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	U-NII Band 2-Aalue (See Notes 1,2 and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and Power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to FCC KDB Publication 662911 D01.	

Table 4: DFS Response Requirement U-NII Band 2-Aalues

Parameter	U-NII Band 2-Aalue
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100 % of the U-NII 99 % transmission power bandwidth. See Note 3.
Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

Table 5: Short Pulse Radar Test Waveforms					
Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A	$\text{Roundup} \left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60 %	30
2	1-5	150-230	23-29	60 %	30
3	6-10	200-500	16-18	60 %	30
4	11-20	200-500	12-16	60 %	30
Aggregate (Radar Types 1-4)				80 %	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

Table 5a: Pulse Repetition Intervals U-NII Band 2-Aalues for Test A

Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

Table 6 – Long Pulse Radar Test Signal

Radar Waveform	Bursts	Pulses per Burst	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Minimum Percentage of Successful Detection	Minimum Trials
5	8-20	1-3	50-100	5-20	1000-2000	80 %	30


Table 7 – Frequency Hopping Radar Test Signal

Radar Waveform	Pulse Width (μsec)	PRI (μsec)	Burst Length (ms)	Pulses per Hop	Hopping Rate (kHz)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	300	9	0.333	70 %	30

4.2. Test and Measurement System

4.2.1. Setup for Master with injection at the Master

Example Radiated Setup where UUT is a Master and Radar Test Waveforms are injected into the Master

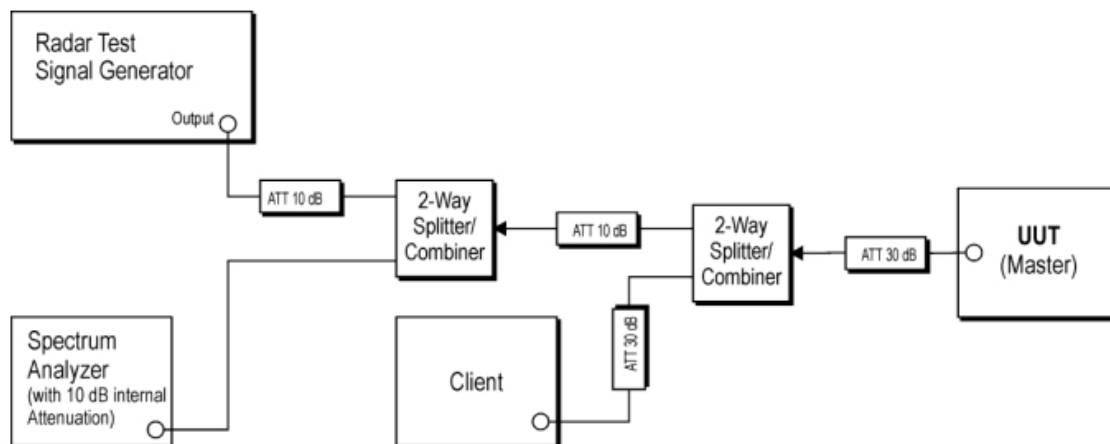


Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	ID
1.	AX3000 Wi-Fi 6 Router	D-Link	X530	FCC : KA2X530A1

4.2.2. Setup for Client with injection at the Master

Example Radiated Setup where UUT is a Client and Radar Test Waveforms are injected into the Master

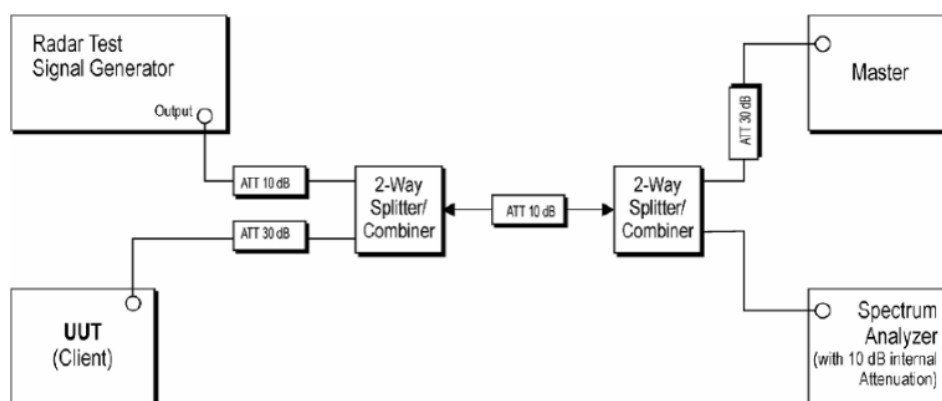

Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	ID
1.	AX3000 Wi-Fi 6 Router	D-Link	X530	FCC : KA2X530A1

4.2.3. System Calibration

The short pulse types 0,1,2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time. The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the May 2014 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02. The frequency of the signal generator is incremented in 1 MHz steps from FL to FH for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold.

4.2.4. System Calibration

The Interference Radar Detection Threshold Level is (-63 dBm). The above equipment setup was used to calibrate the radiated Radar Waveform. A vector signal generator was utilized to establish the test signal level for each radar type. During this process there were replace 50 ohm terminal form Master and Client device and no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) at the frequency of the Radar Waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (U-NII Band 2-ABW) were set to at least 3 MHz.


The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was (-63 dBm). Capture the spectrum analyzer plots on short pulse radar types, long pulse radar type and hopping radar waveform.

4.2.5. Adjustment of Displayed Traffic Level

A link is established between the Master and Slave and the distance between the units is adjusted as needed to provide a suitable received level at the Master and Slave devices. Software to ping the client is permitted to simulate data transfer but must have random ping intervals. The monitoring antenna is adjusted so that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold.


5 Test Results

5.1. Radar Waveforms and Traffic

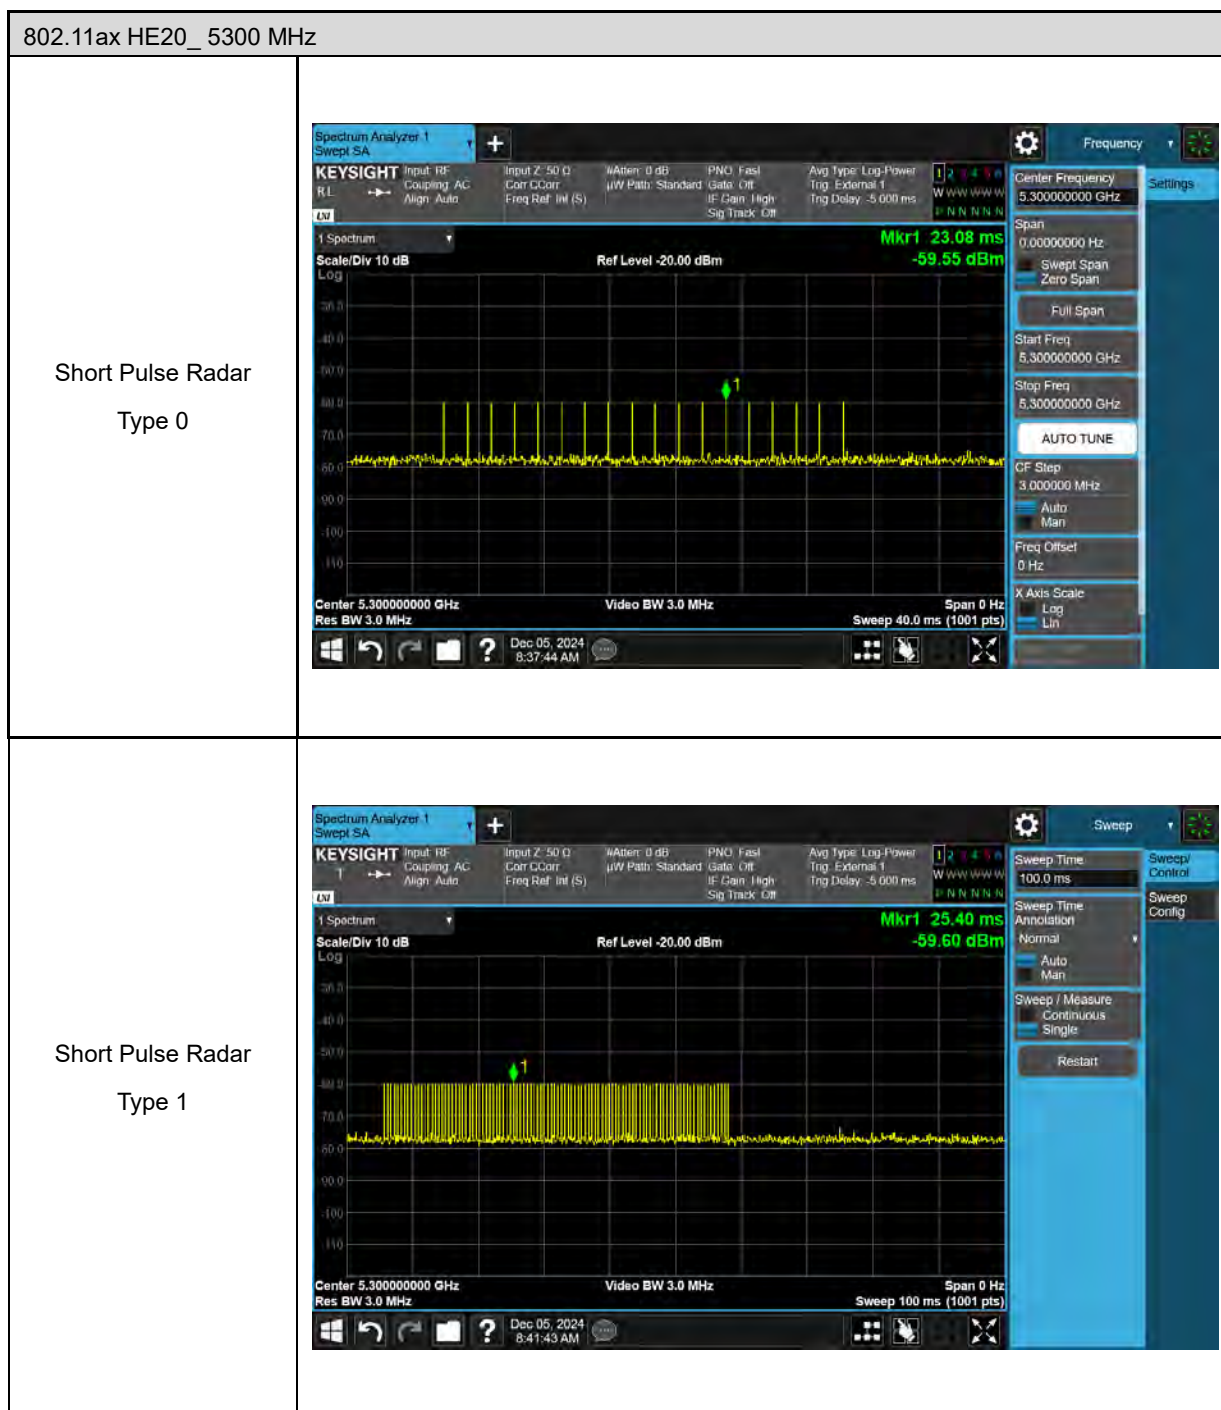


802.11ax HE20_ 5300 MHz

Short Pulse Radar
Type 2

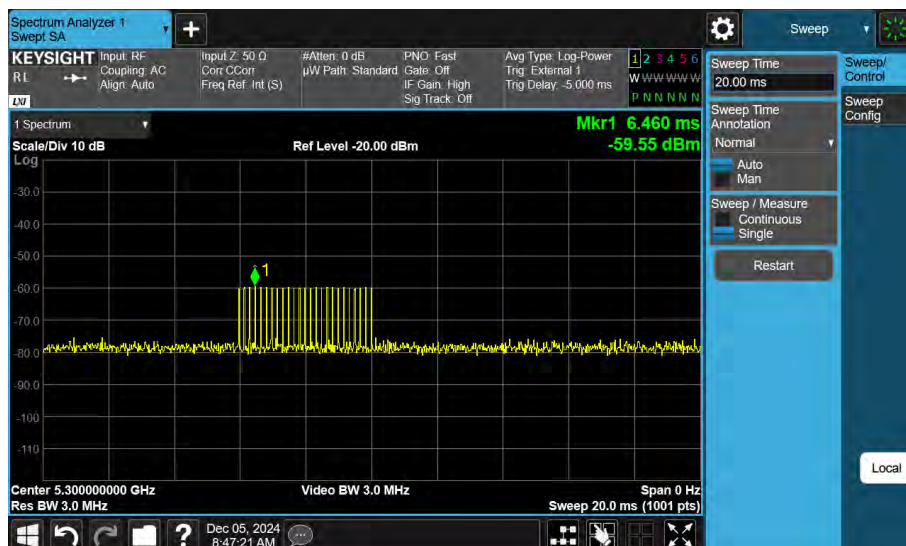


Short Pulse Radar
Type 3

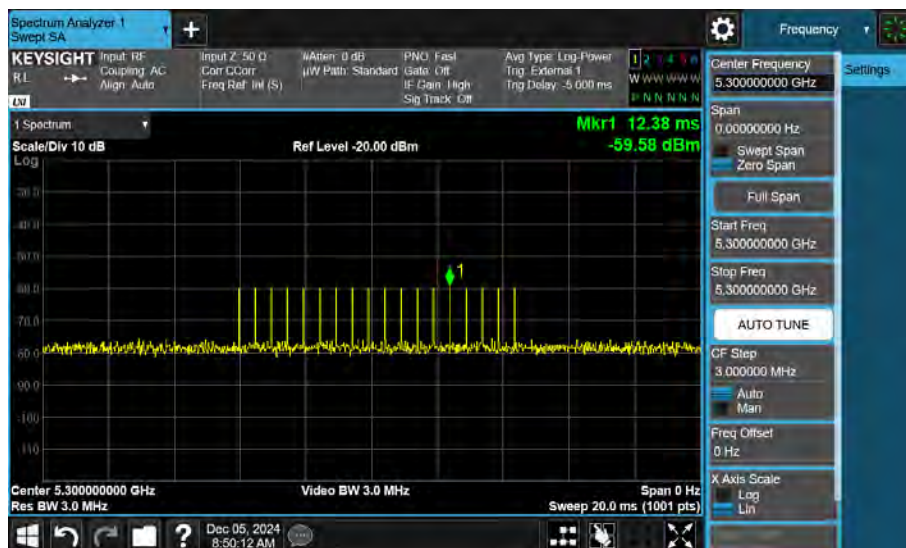


802.11ax HE20_ 5300 MHz

Short Pulse Radar
Type 4

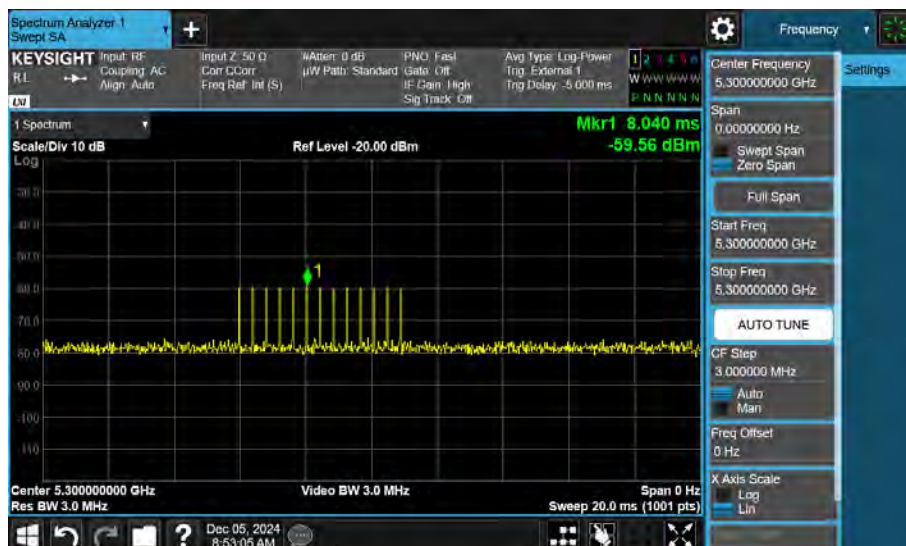


Long Pulse Radar
Type 5

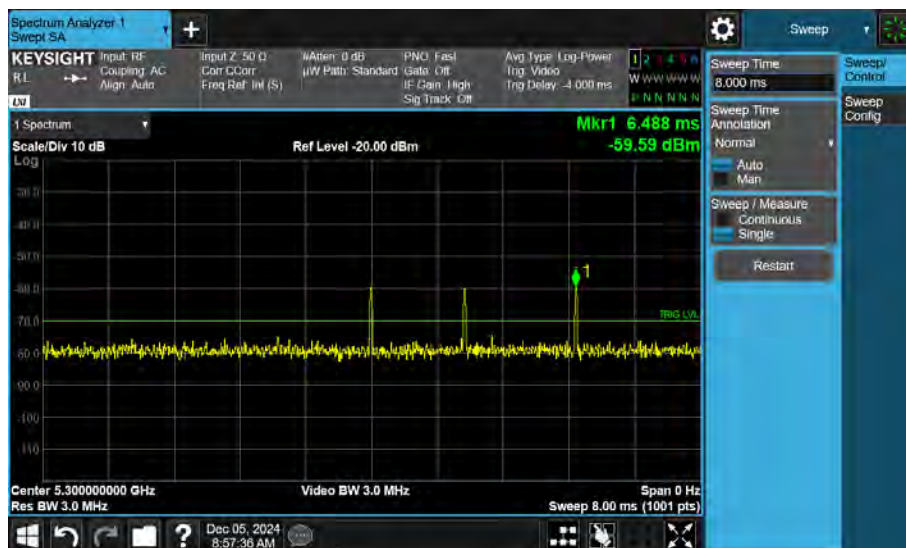


802.11ax HE20_ 5300 MHz

Frequency Hopping
Radar
Type 6

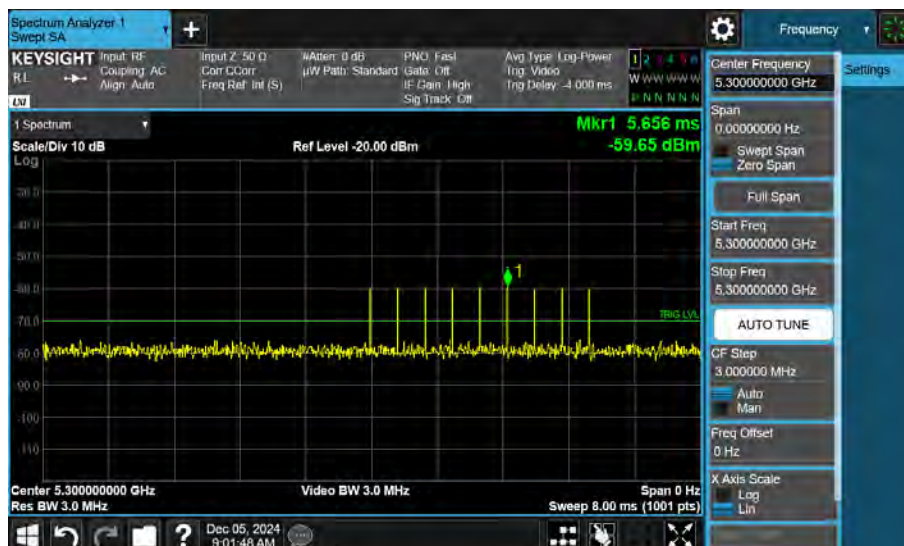


802.11ax HE40_ 5310 MHz

Short Pulse Radar
Type 0

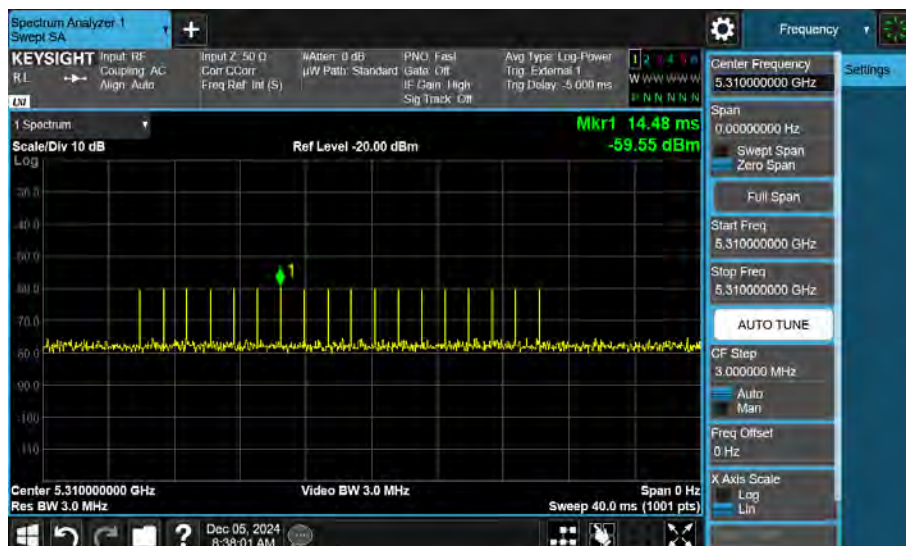


Short Pulse Radar
Type 1

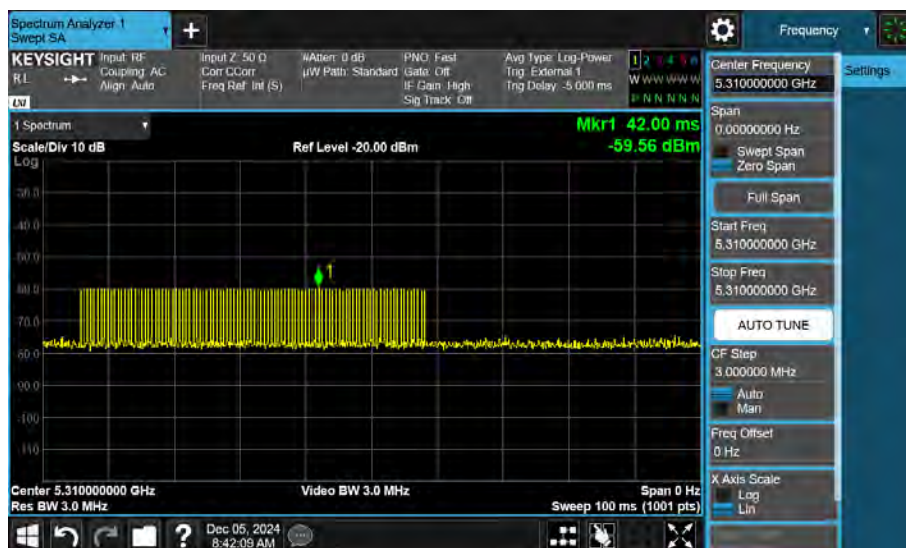


802.11ax HE40_ 5310 MHz

Short Pulse Radar
Type 2

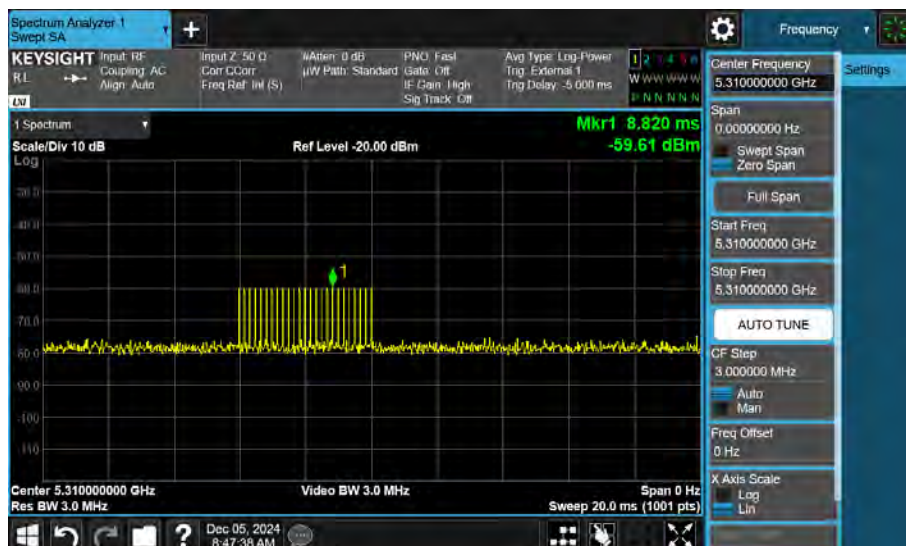


Short Pulse Radar
Type 3

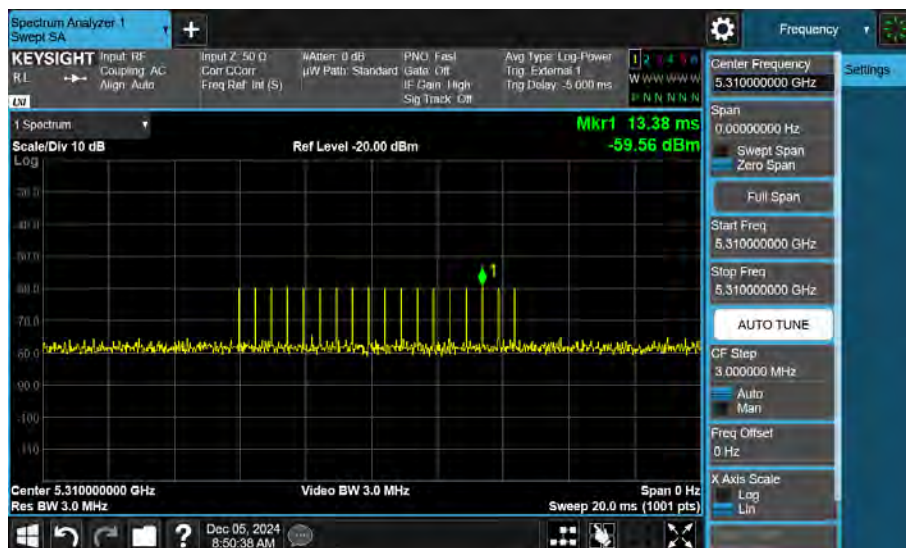


802.11ax HE40_ 5310 MHz

Short Pulse Radar
Type 4

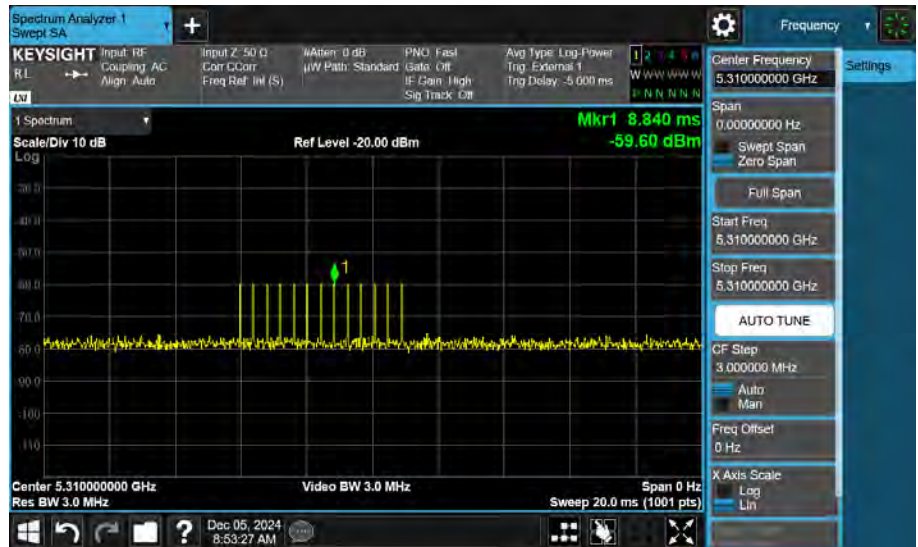


Long Pulse Radar
Type 5

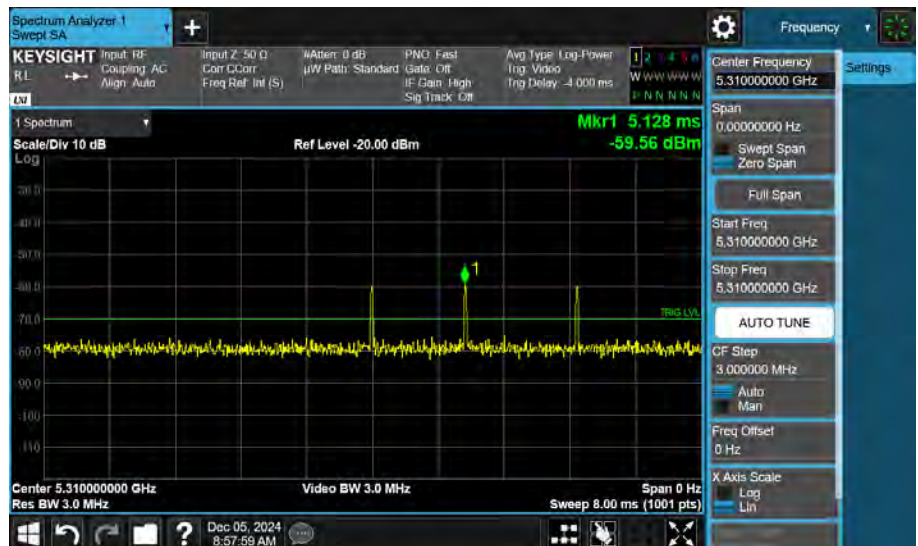


802.11ax HE40_ 5310 MHz

Frequency Hopping
Radar
Type 6

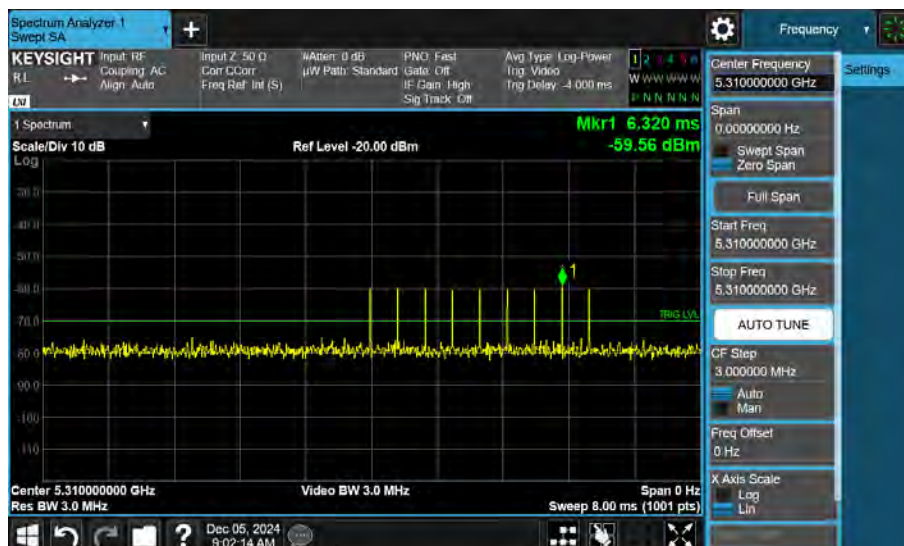


802.11ax HE80_ 5290 MHz

Short Pulse Radar
Type 0

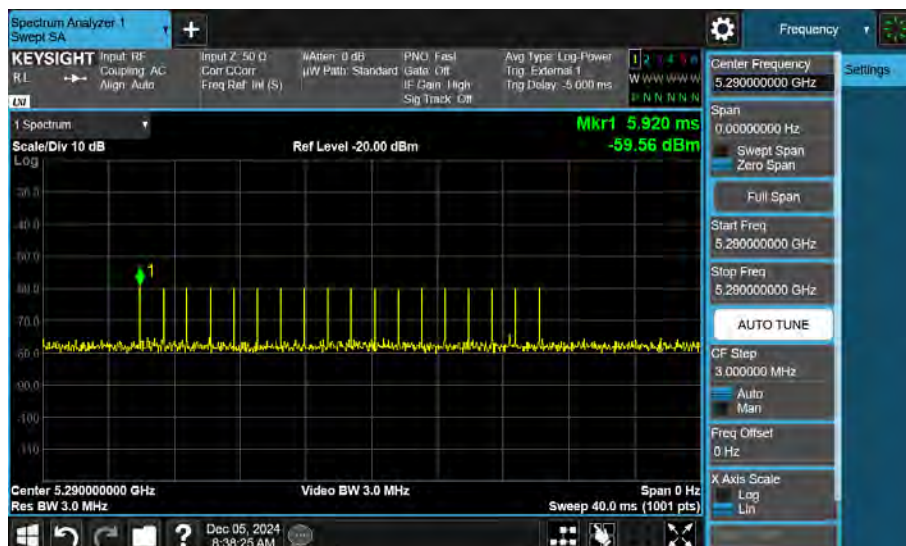


Short Pulse Radar
Type 1

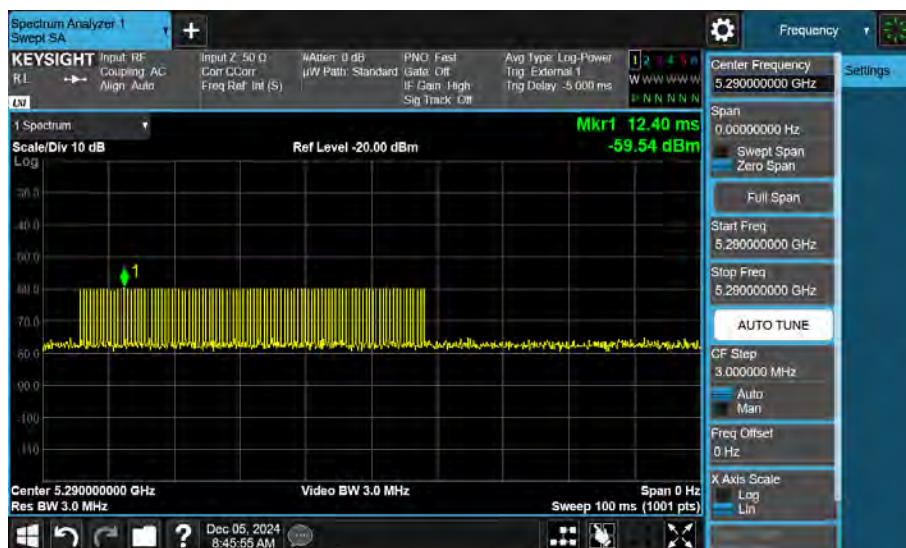


802.11ax HE80_ 5290 MHz

Short Pulse Radar
Type 2

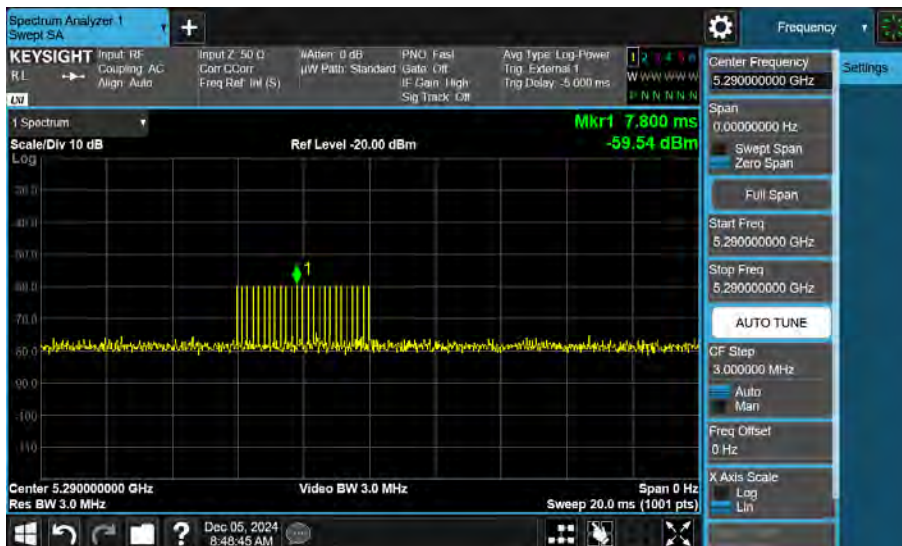


Short Pulse Radar
Type 3

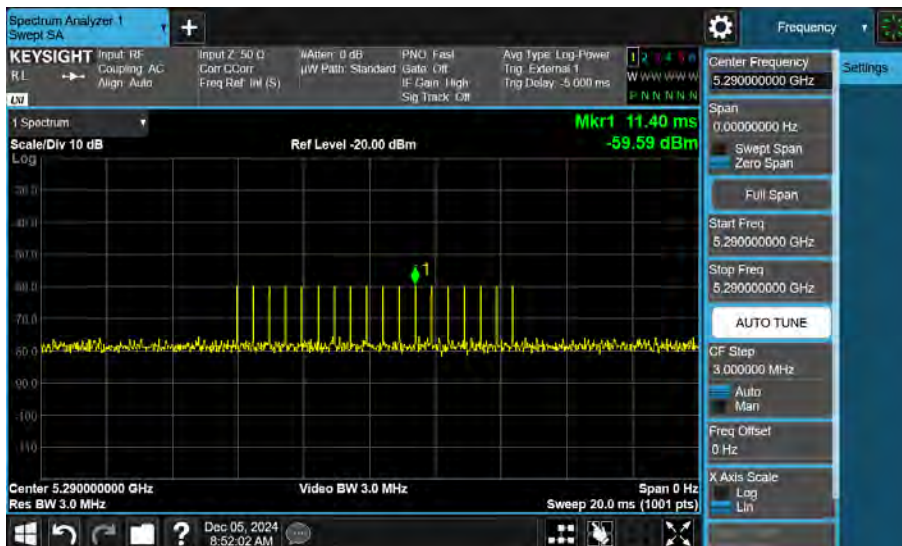


802.11ax HE80_ 5290 MHz

Short Pulse Radar
Type 4

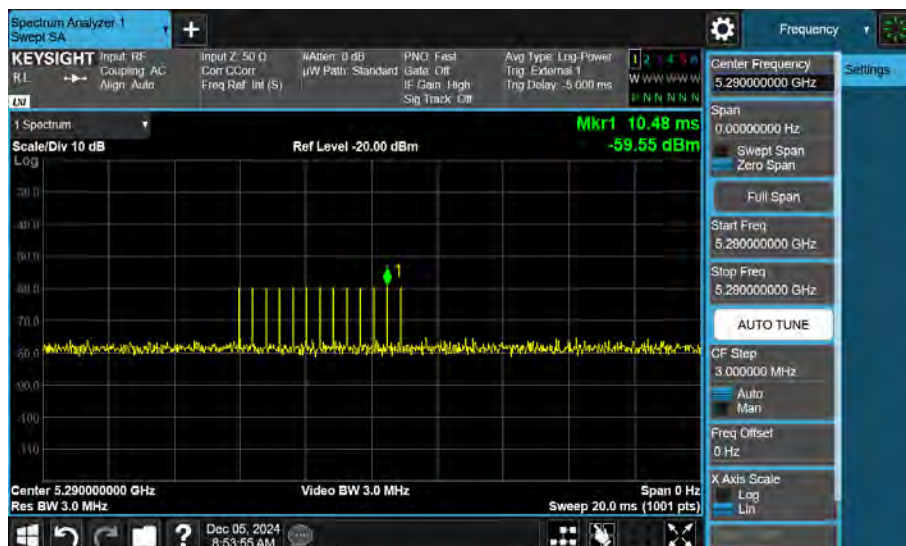


Long Pulse Radar
Type 5

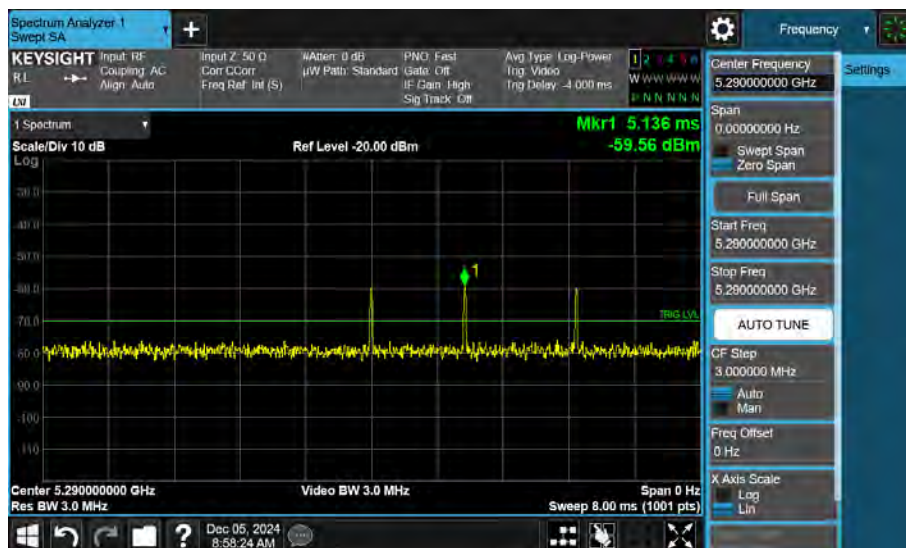


802.11ax HE80_ 5290 MHz

Frequency Hopping
Radar
Type 6

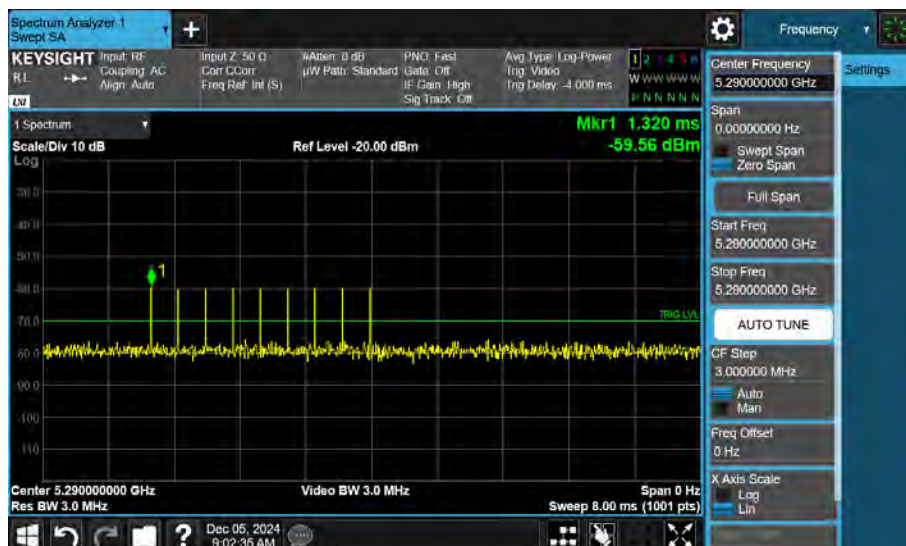


802.11ax HE160_ 5250 MHz

Short Pulse Radar
Type 0

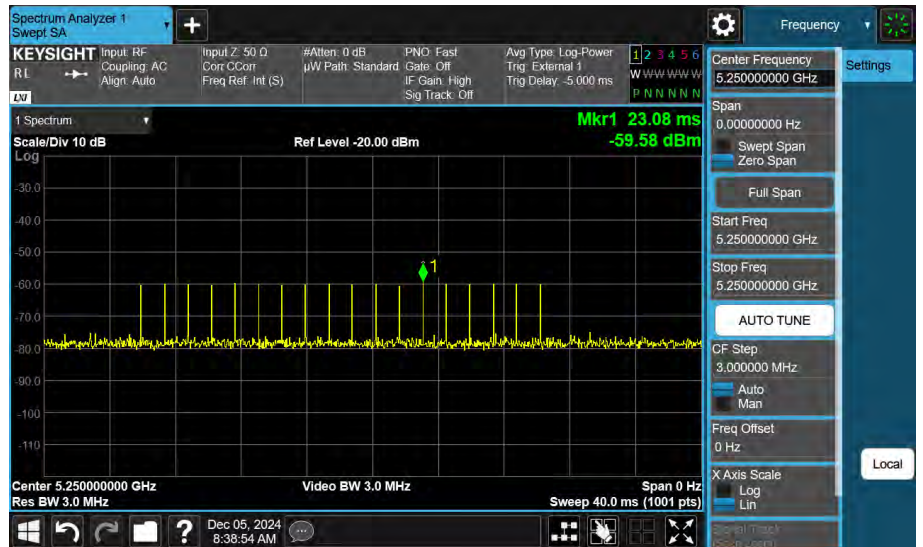


Short Pulse Radar
Type 1

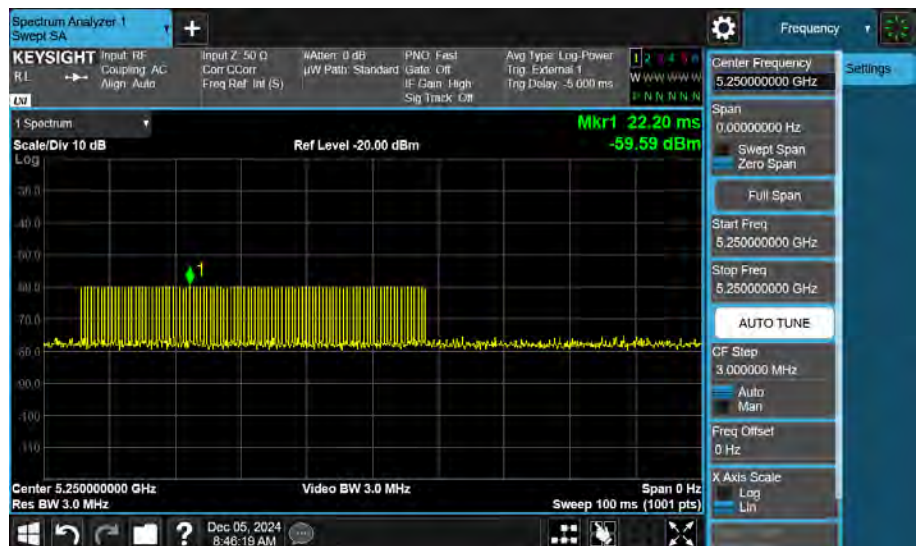


802.11ax HE160_ 5250 MHz

Short Pulse Radar
Type 2

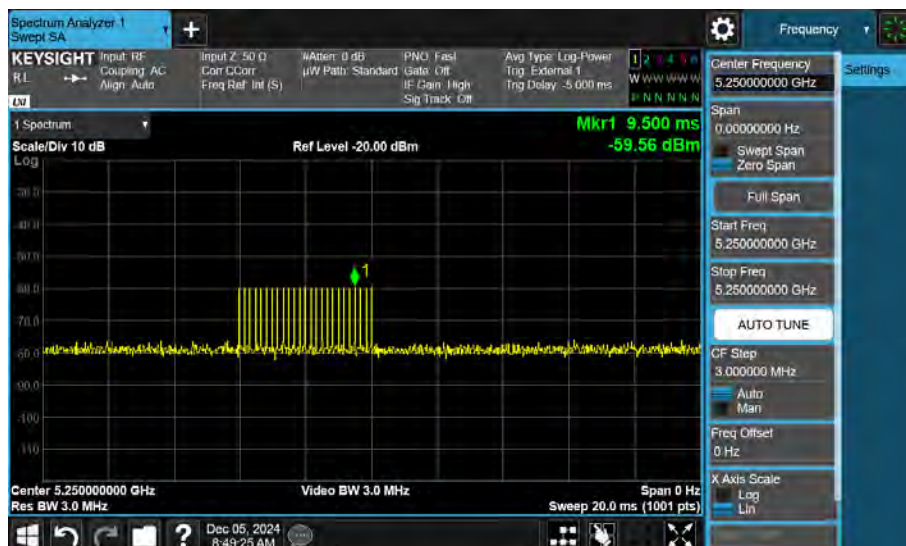


Short Pulse Radar
Type 3

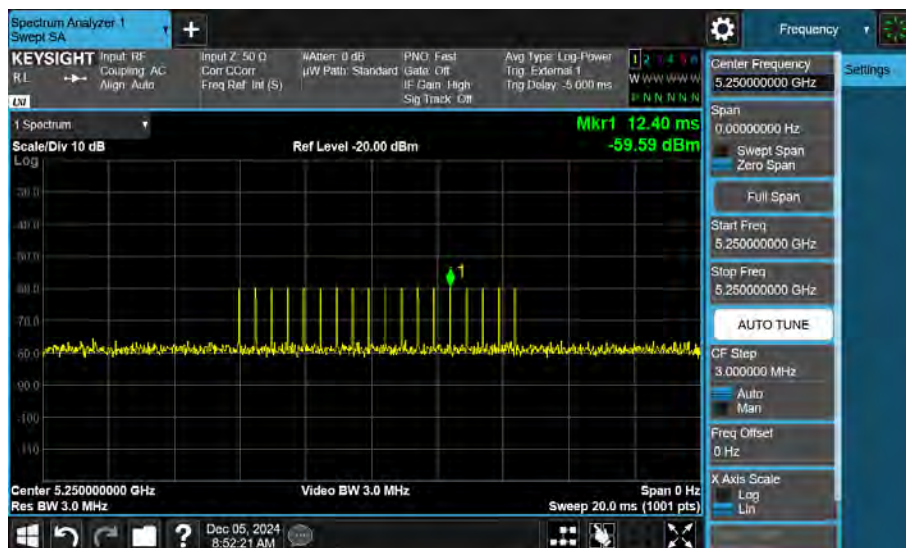


802.11ax HE160_ 5250 MHz

Short Pulse Radar
Type 4

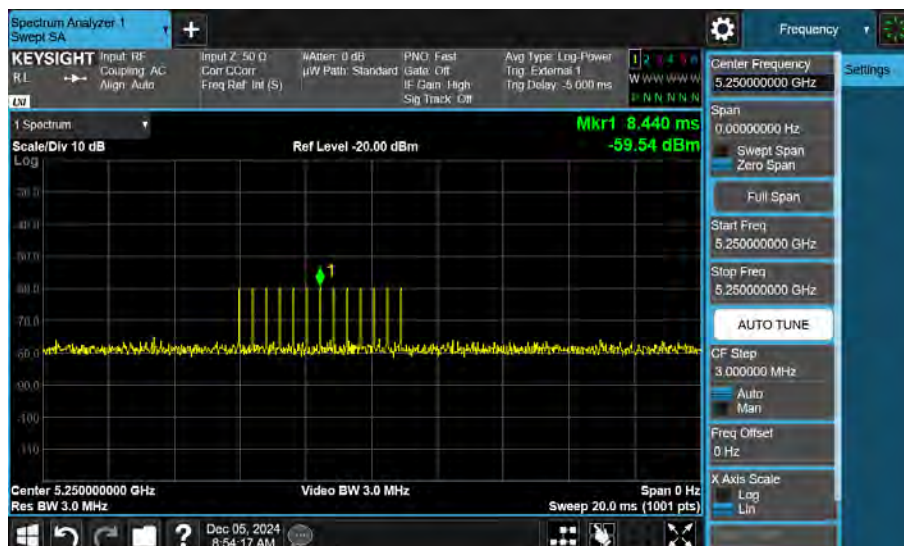


Long Pulse Radar
Type 5

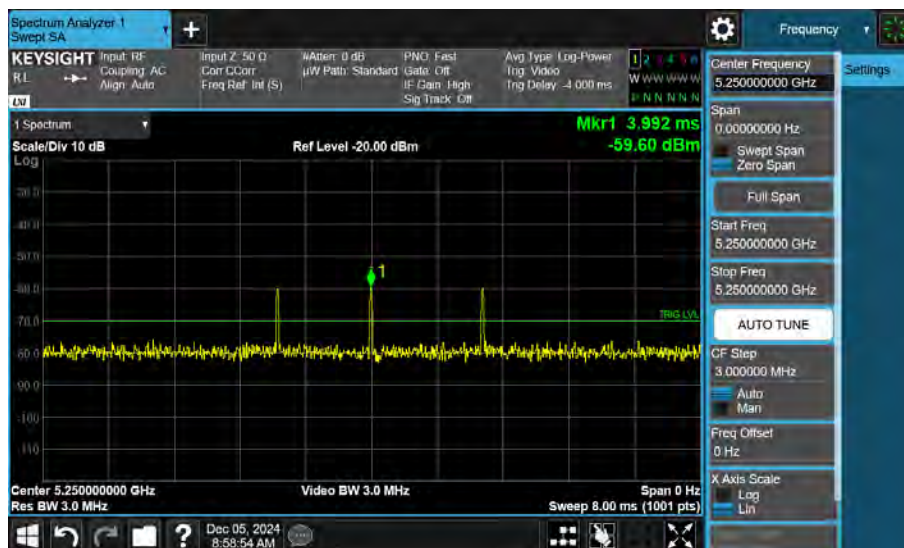


802.11ax HE160_ 5250 MHz

Frequency Hopping
Radar
Type 6

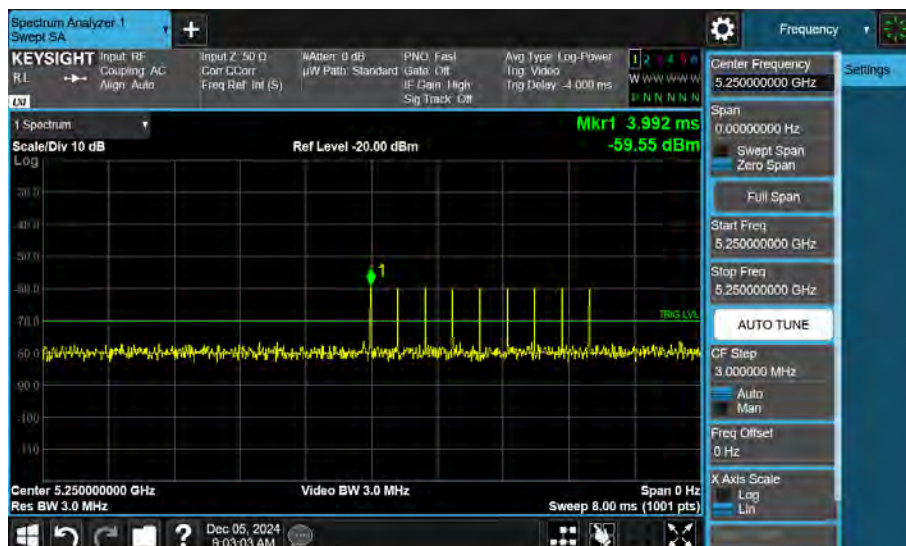

802.11ax HE160_ 5250 MHz

Traffic

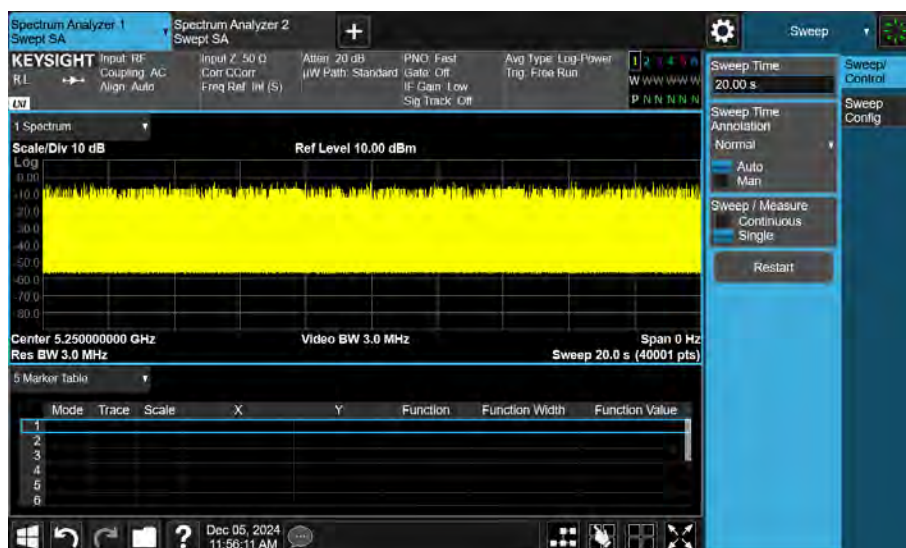

5.2. Channel Loading

■ Duty cycle $\geq 17\%$

802.11ax HE20



DFS and Adaptivity

Device

Trigger Level(dBm): MK1 Time(s): MK2 Time(s): Delta Time(s):

-60 0 100.00ms 100.00ms

On Time Point: Total Point: Sum of On Time(s):

6744 39474 17.08ms


Sweep Time(s): Sweep Point: Duty Cycle(%):

101.33ms 40001 17.08%

RUN

eurofins

802.11ax HE40

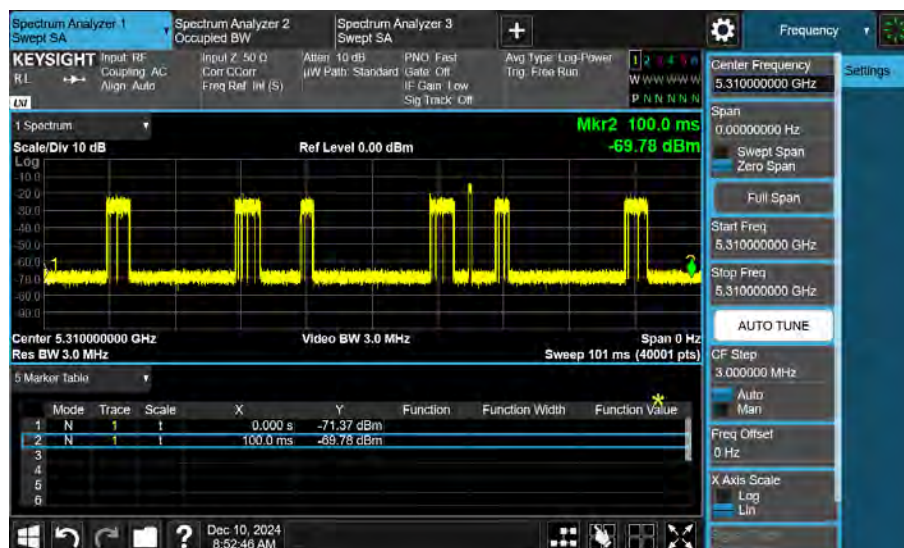

DFS and Adaptivity


Device

Trigger Level(dBm):	MK1 Time(s):	MK2 Time(s):	Delta Time(s):
-60	0	100.00ms	100.00ms
On Time Point:		Total Point:	Sum of On Time(s):
7109		39474	18.01ms
Sweep Time(s):	Sweep Point:	Duty Cycle(%):	
101.33ms	40001	18.01%	

eurofins

RUN

802.11ax HE80

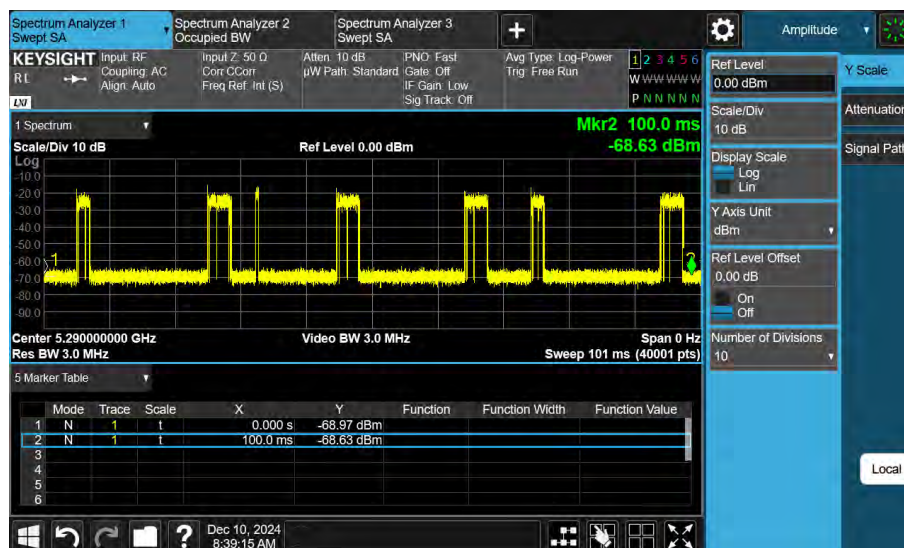

DFS and Adaptivity

Device

Trigger Level(dBm):
MK1 Time(s):
MK2 Time(s):
Delta Time(s):

-60
0
100.00ms
100.00ms

On Time Point:
Total Point:
Sum of On Time(s):

6878
39474
17.42ms

Sweep Time(s):
Sweep Point:
Duty Cycle(%):

101.33ms
40001
17.42%

eurofins

RUN

802.11ax HE160



DFS and Adaptivity

Device

Trigger Level(dBm):
MK1 Time(s):
MK2 Time(s):
Delta Time(s):

-50
0
100.00ms
100.00ms

On Time Point:
Total Point:
Sum of On Time(s):

7509
39474
19.02ms

Sweep Time(s):
Sweep Point:
Duty Cycle(%):

101.33ms
40001
19.02%

eurofins

RUN

5.3. Channel Availability Check Time

5.3.1. Procedure to Determine Initial Power-Up Cycle Time

A link was established on channel then the EUT was rebooted. The time from the cessation of traffic to the re-initialization of traffic was measured as the time required for the EUT to complete the total power-up cycle. The time to complete the initial power-up period is 60 seconds less than this total power-up time.

5.3.2. Procedure for Timing Of Radar Burst

With a link established on channel, the EUT was rebooted. A radar signal was triggered within 0 to 6 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.

The Non-Occupancy list was cleared. With a link established on channel, the EUT was rebooted. A radar signal was triggered within 54 to 60 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.

5.3.3. Qualitative Results

Timing of Radar Burst	Display on Control Computer	Spectrum Analyzer Display
No Radar Triggered	EUT marks Channel as active	Transmissions begin on channel after completion of the initial power-up cycle and the CAC
Within 0 to 6 second window	EUT indicates radar detected	No transmissions on channel
Within 54 to 60 second window	EUT indicates radar detected	No transmissions on channel

802.11ax HE160_ 5250 MHz

Initial Channel
Availability Check




Initial Channel
Availability Check
Begin



802.11ax HE160_ 5250 MHz

Initial Channel
Availability Check
End

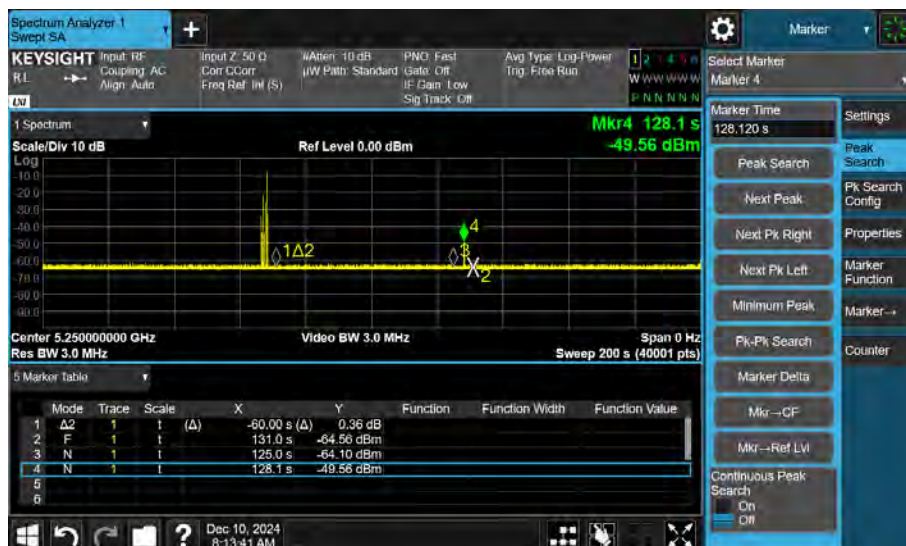

5.4. Channel Move Time and Channel Closing Transmission Time

5.4.1. Reporting Notes

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse.
This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time = (Number of analyzer bins showing transmission) * (dwell time per bin)

The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.


Results

Frequency (MHz)	Radar Type	Channel Move Time (msec)		Limit (sec)
		Master	Client	
5250	Type 0	1393	1448	10

Frequency (MHz)	Radar Type	Aggregate Channel Closing Transmission Time (msec)		Limit (msec)
		Master	Client	
5250	Type 0	12.5	28.5	60

Master

802.11ax HE160_ 5250 MHz

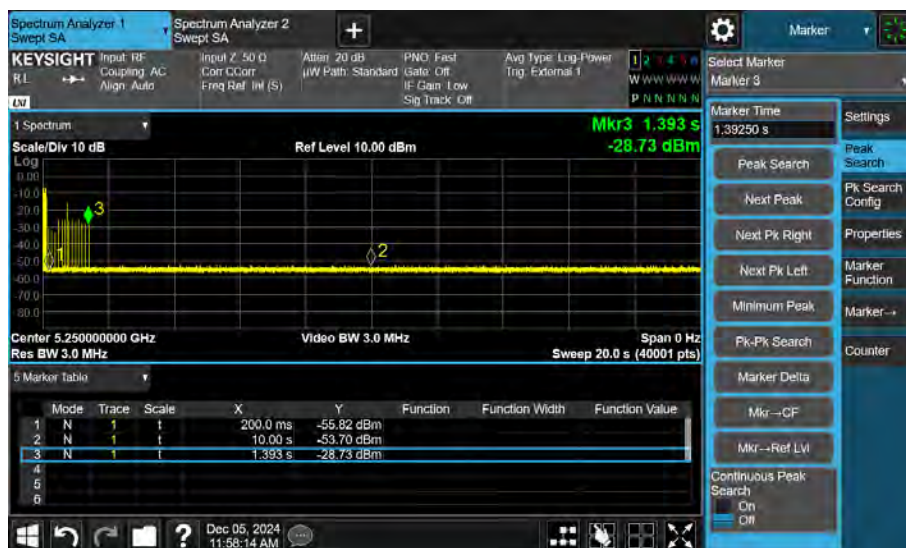

Channel Move and
Closing Time

DFS and Adaptivity

Device

Trigger Level(dBm):

MK1 Time(s):

MK2 Time(s):

Delta Time(s):

-50

200.00ms

10000.00ms

9800.00ms

On Time Point:

Total Point:

Sum of On Time(s):

25

19600

12.50ms

Sweep Time(s):

Sweep Point:

Duty Cycle(%):

20000.00ms

40001


0.13%

euofins

RUN

Client

802.11ax HE160_ 5250 MHz

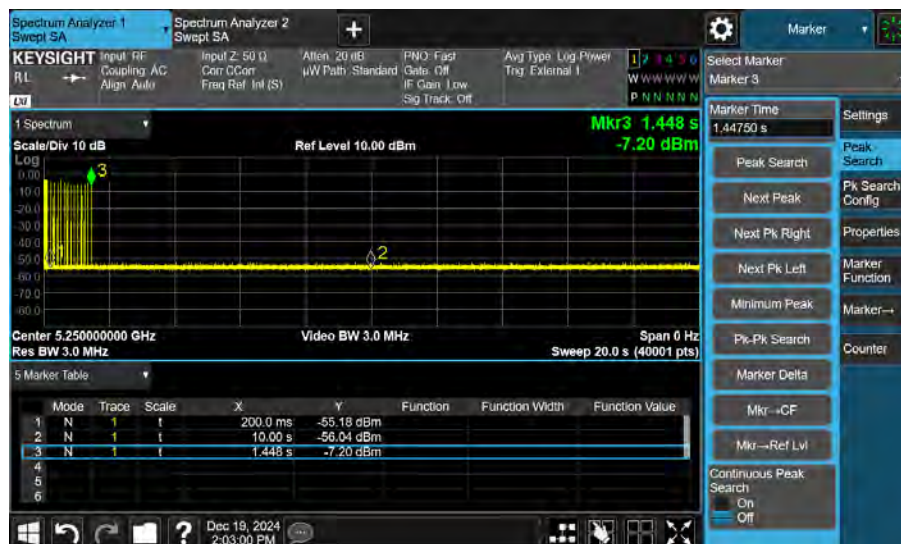

Channel Move and
Closing Time

DFS and Adaptivity

Device

Trigger Level(dBm):

MK1 Time(s):

MK2 Time(s):

Delta Time(s):

-50

200.00ms

10000.00ms

9800.00ms

On Time Point:

Total Point:

Sum of On Time(s):

57

19600

28.50ms

Sweep Time(s):

Sweep Point:

Duty Cycle(%):

20000.00ms

40001

0.29%


euofins

RUN

5.5. Non-Occupancy Period

802.11ax HE160_ 5250 MHz

Master

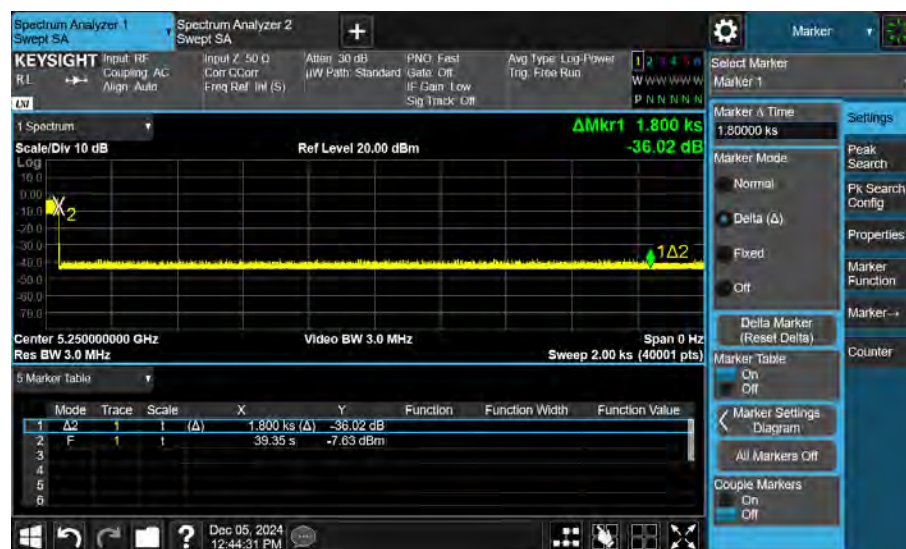

Client



Note: Non-Occupancy Period time is 30 minute during which a Channel will not be utilized after a Radar Waveform is detected on that Channel.

5.6. U-NII Detection Bandwidth

■ Test Results

Test Mode						
802.11ax HE20						
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5300	5290	5310	20	18.884	105.91	≥ 100

Test Mode						
802.11ax HE40						
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5310	5290	5330	40	37.8	105.82	≥ 100

Test Mode						
802.11ax HE80						
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5290	5250	5330	80	77.44	103.31	≥ 100


Test Mode						
802.11ax HE160						
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5250	5250	5330	80	77.653	103.02	≥ 100

Test Graphs


802.11ax HE20_ 5300 MHz



802.11ax HE40_ 5310 MHz

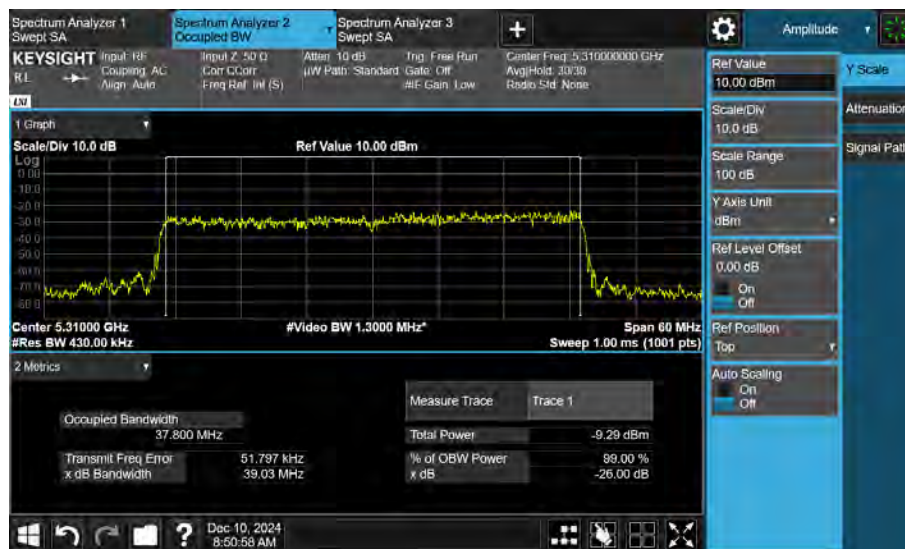

802.11ax HE80_ 5290 MHz

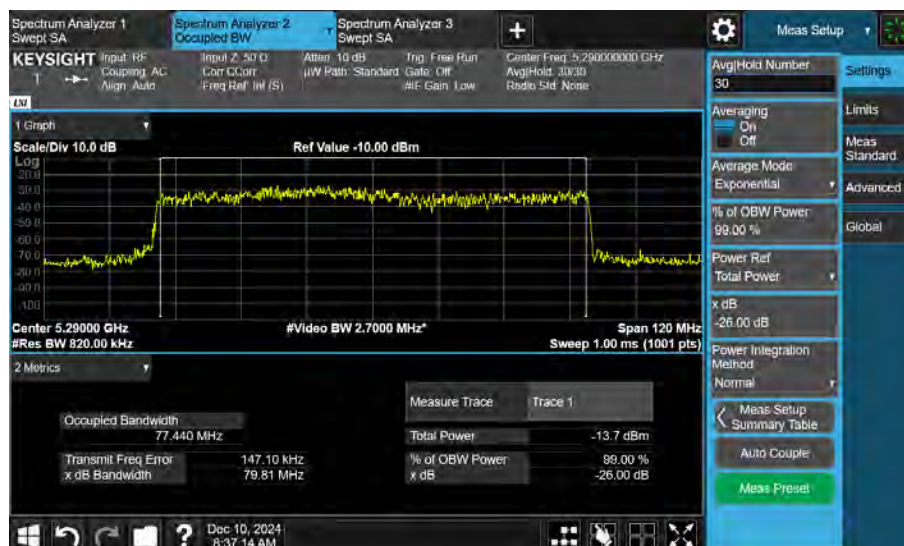

802.11ax HE160_ 5250 MHz



5.7. Statistical Performance check

■ Test Results

Test Mode		802.11ax HE20					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5300	Type1	Table 5a	1	28	2	93.33%	≥ 60%
	Type2	Random	Random	27	3	90.00%	≥ 60%
	Type3	Random	Random	27	3	90.00%	≥ 60%
	Type4	Random	Random	28	2	93.33%	≥ 60%
	Type1~4					91.67%	≥ 80%
	Type5	Random	Random	26	4	86.67%	≥ 80%
	Type6	Hopping	1	30	0	100.00%	≥ 70%

Test Mode		802.11ax HE40					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5310	Type1	Table 5a	1	28	2	93.33%	≥ 60%
	Type2	Random	Random	27	3	90.00%	≥ 60%
	Type3	Random	Random	26	4	86.67%	≥ 60%
	Type4	Random	Random	29	1	96.67%	≥ 60%
	Type1~4					91.67%	≥ 80%
	Type5	Random	Random	27	3	90.00%	≥ 80%
	Type6	Hopping	1	30	0	100.00%	≥ 70%

Test Mode		802.11ax HE80					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5290	Type1	Table 5a	1	27	3	90.00%	≥ 60%
	Type2	Random	Random	27	3	90.00%	≥ 60%
	Type3	Random	Random	28	2	93.33%	≥ 60%
	Type4	Random	Random	26	4	86.67%	≥ 60%
	Type1~4					90.00%	≥ 80%
	Type5	Random	Random	26	4	86.67%	≥ 80%
	Type6	Hopping	1	30	0	100.00%	≥ 70%

Test Mode		802.11ax HE160					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5250	Type1	Table 5a	1	26	4	86.67%	≥ 60%
	Type2	Random	Random	28	2	93.33%	≥ 60%
	Type3	Random	Random	27	3	90.00%	≥ 60%
	Type4	Random	Random	28	2	93.33%	≥ 60%
	Type1~4					90.83%	≥ 80%
	Type5	Random	Random	28	2	93.33%	≥ 80%
	Type6	Hopping	1	30	0	100.00%	≥ 70%

Test Mode		802.11ax HE20				
Frequency		5300 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	1	538	99	1859	1
2	5300	1	578	92	1730	1
3	5300	1	618	86	1618	1
4	5300	1	618	86	1618	1
5	5300	1	598	89	1672	1
6	5300	1	598	89	1672	1
7	5300	1	758	70	1319	1
8	5300	1	518	102	1931	1
9	5300	1	738	72	1355	1
10	5300	1	678	78	1475	1
11	5300	1	818	65	1222	1
12	5300	1	658	81	1520	1
13	5300	1	598	89	1672	1
14	5300	1	858	62	1166	1
15	5300	1	698	76	1433	1
16	5300	1	2019	27	495	1
17	5300	1	2409	22	415	1
18	5300	1	2917	19	343	1
19	5300	1	1602	33	624	1
20	5300	1	879	61	1138	0
21	5300	1	2737	20	365	1
22	5300	1	2788	19	359	1
23	5300	1	1035	51	966	1
24	5300	1	2958	18	338	1
25	5300	1	2768	20	361	1
26	5300	1	1394	38	717	1
27	5300	1	1760	30	568	1
28	5300	1	656	81	1524	1
29	5300	1	609	87	1642	0
30	5300	1	1692	32	591	1
Detection Percentage (%)						93.33

Test Mode		802.11ax HE20				
Frequency		5300 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	3.60	158.10	27	6325	1
2	5300	4.40	196.30	27	5094	1
3	5300	1.10	215.30	26	4645	1
4	5300	1.30	179.30	28	5577	0
5	5300	1.70	225.00	24	4444	0
6	5300	4.60	170.30	25	5872	1
7	5300	1.20	176.70	29	5659	1
8	5300	2.70	229.90	28	4350	1
9	5300	3.10	179.10	29	5583	1
10	5300	3.70	197.90	25	5053	1
11	5300	2.00	224.20	28	4460	1
12	5300	3.30	221.90	29	4507	1
13	5300	2.10	189.20	26	5285	1
14	5300	4.70	224.50	24	4454	1
15	5300	1.20	201.60	25	4960	1
16	5300	3.00	157.50	23	6349	1
17	5300	1.50	168.60	23	5931	1
18	5300	2.20	152.40	27	6562	1
19	5300	3.60	205.10	28	4876	1
20	5300	2.50	227.70	23	4392	1
21	5300	1.50	190.40	23	5252	1
22	5300	3.60	188.20	26	5313	1
23	5300	3.70	223.00	28	4484	1
24	5300	2.10	162.90	27	6139	1
25	5300	4.80	197.00	29	5076	1
26	5300	3.60	199.70	29	5008	1
27	5300	1.70	173.20	23	5774	1
28	5300	4.60	178.60	26	5599	1
29	5300	2.60	202.30	25	4943	1
30	5300	4.40	177.70	23	5627	0
Detection Percentage (%)						90.00

Test Mode		802.11ax HE20				
Frequency		5300 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	6.20	331.20	17	3019.32	1
2	5300	8.60	261.60	17	3822.63	0
3	5300	6.50	290.10	16	3447.09	1
4	5300	8.50	435.70	18	2295.16	1
5	5300	8.20	397.50	16	2515.72	1
6	5300	9.90	429.00	17	2331.00	1
7	5300	6.70	375.50	17	2663.12	0
8	5300	10.00	244.10	16	4096.68	1
9	5300	6.40	338.40	18	2955.08	1
10	5300	7.10	300.60	17	3326.68	1
11	5300	8.30	296.60	18	3371.54	1
12	5300	7.90	217.90	16	4589.26	1
13	5300	7.50	355.00	18	2816.90	1
14	5300	9.50	336.10	18	2975.30	1
15	5300	7.50	398.10	18	2511.93	1
16	5300	8.10	409.90	18	2439.62	1
17	5300	8.30	355.30	18	2814.52	1
18	5300	8.10	373.00	17	2680.97	1
19	5300	8.80	217.50	18	4597.70	1
20	5300	7.50	276.90	17	3611.41	1
21	5300	9.40	326.90	16	3059.04	1
22	5300	9.10	238.50	18	4192.87	1
23	5300	9.50	303.60	18	3293.81	1
24	5300	7.30	443.70	18	2253.78	1
25	5300	10.00	217.50	16	4597.70	1
26	5300	6.90	373.00	17	2680.97	0
27	5300	9.40	366.30	17	2730.00	1
28	5300	6.40	207.80	17	4812.32	1
29	5300	9.80	492.10	16	2032.11	1
30	5300	7.60	479.50	18	2085.51	1
Detection Percentage (%)						90.00

Test Mode		802.11ax HE20				
Frequency		5300 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	12.10	296.20	12	3376	0
2	5300	14.40	216.30	15	4623	1
3	5300	12.50	202.60	16	4936	1
4	5300	11.40	387.60	15	2580	1
5	5300	14.70	360.20	13	2776	1
6	5300	14.60	366.40	16	2729	1
7	5300	11.20	413.90	13	2416	1
8	5300	19.40	456.20	15	2192	1
9	5300	12.00	312.70	14	3198	1
10	5300	15.50	454.90	16	2198	1
11	5300	15.00	415.90	13	2404	1
12	5300	19.20	293.00	15	3413	1
13	5300	19.20	219.10	13	4564	1
14	5300	12.90	356.60	15	2804	1
15	5300	18.50	309.70	14	3229	1
16	5300	17.20	426.80	14	2343	1
17	5300	16.70	486.90	13	2054	1
18	5300	13.60	392.00	16	2551	1
19	5300	15.00	265.00	13	3774	1
20	5300	15.30	356.20	14	2807	1
21	5300	11.90	254.90	14	3923	1
22	5300	12.20	303.50	15	3295	1
23	5300	12.70	275.00	16	3636	1
24	5300	19.50	280.90	12	3560	1
25	5300	17.20	370.90	14	2696	1
26	5300	19.30	440.10	15	2272	1
27	5300	15.80	458.00	16	2183	1
28	5300	11.70	359.80	12	2779	1
29	5300	17.90	218.20	12	4583	0
30	5300	11.30	469.90	13	2128	1
Detection Percentage (%)						93.33

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5296.5	1	72.2	15	1416.6	3	1
	5296.5	2	88.1	15	1762.3	1	
	5297.5	3	55.4	17	1679.3	3	
	5296.5	4	82.6	14	1361.7	1	
	5296.5	5	98.9	16	1970.9	3	
	5294.5	6	67.2	11	1237.7	1	
	5296.5	7	64.6	15	1221.0	3	
	5293.5	8	56.5	7	1613.8	2	
	5297.5	9	75.4	18	1710.8	3	
	5292.5	10	90.5	5	1546.5	2	
	5297.5	11	72.0	17	1077.2	2	
2	5294.5	1	52.4	9	1472.7	2	0
	5295.5	2	73.9	13	1384.1	3	
	5292.5	3	98.8	6	1925.7	2	
	5295.5	4	69.8	12	1251.0	1	
	5295.5	5	98.1	12	1118.9	1	
	5294.5	6	82.8	11	1015.1	1	
	5296.5	7	65.8	14	1650.0	3	
	5296.5	8	51.9	15	1112.4	2	
	5293.5	9	71.9	8	1651.5	2	
	5295.5	10	67.0	12	1701.6	2	
	5294.5	11	79.0	11	1979.2	3	
	5293.5	12	80.2	7	1601.3	3	
3	5294.5	1	64.5	11	1961.1	2	1
	5296.5	2	70.9	14	1744.9	2	
	5293.5	3	59.9	8	1843.2	1	
	5296.5	4	51.0	15	1291.6	2	
	5296.5	5	56.4	14	1840.3	3	
	5293.5	6	86.9	8	1857.5	3	
	5296.5	7	82.7	16	1600.2	3	
	5294.5	8	96.9	10	1325.7	1	
	5292.5	9	69.7	6	1669.7	2	
	5294.5	10	67.1	11	1875.9	2	
	5296.5	11	79.2	14	1779.0	2	
	5294.5	12	72.6	9	1199.9	1	
	5293.5	13	54.5	7	1071.0	2	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5297.5	1	64.5	17	1276.0	1	0
	5292.5	2	61.0	6	1181.4	3	
	5294.5	3	81.9	9	1991.2	1	
	5292.5	4	70.6	6	1073.7	3	
	5297.5	5	72.5	17	1780.4	3	
	5293.5	6	88.3	8	1000.0	3	
	5294.5	7	85.5	9	1521.5	2	
	5294.5	8	85.4	11	1899.8	1	
	5294.5	9	72.5	9	1817.9	3	
5	5294.5	1	84.0	10	1878.5	3	1
	5298.5	2	70.9	20	1342.2	1	
	5294.5	3	85.0	9	1974.3	1	
	5293.5	4	68.3	8	1418.7	2	
	5297.5	5	78.2	17	1144.0	1	
	5293.5	6	94.8	7	1554.3	3	
	5298.5	7	87.4	19	1902.8	2	
	5294.5	8	78.0	10	1466.0	3	
	5293.5	9	86.3	7	1588.2	2	
	5295.5	10	80.6	12	1299.4	3	
	5294.5	11	52.0	9	1929.9	1	
	5292.5	12	57.4	6	1808.0	2	
	5296.5	13	52.5	15	1296.1	1	
	5294.5	14	85.6	10	1909.3	1	
	5298.5	15	58.6	19	1647.0	3	
6	5295.5	1	53.9	13	1427.5	3	1
	5297.5	2	79.3	18	1924.5	1	
	5293.5	3	72.5	7	1481.2	3	
	5294.5	4	74.7	9	1011.5	1	
	5295.5	5	62.4	12	1656.9	3	
	5296.5	6	52.7	15	1669.6	2	
	5296.5	7	93.2	15	1085.5	2	
	5297.5	8	97.3	17	1851.6	2	
	5296.5	9	88.3	14	1273.5	1	
	5295.5	10	58.8	13	1869.1	3	
	5297.5	11	69.4	18	1590.0	3	
	5298.5	12	61.3	19	1529.1	2	
	5294.5	13	85.1	11	1907.3	3	
	5294.5	14	98.5	11	1673.3	3	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5292.5	1	63.9	6	1944.3	2	1
	5292.5	2	66.4	6	1204.1	2	
	5296.5	3	63.2	16	1330.5	1	
	5292.5	4	85.9	5	1220.2	2	
	5296.5	5	90.7	15	1072.2	2	
	5293.5	6	60.5	8	1934.3	2	
	5294.5	7	50.3	9	1514.0	1	
	5292.5	8	79.0	6	1670.3	2	
	5296.5	9	78.3	15	1476.0	3	
	5296.5	10	52.2	14	1629.5	2	
	5296.5	11	95.8	16	1219.4	2	
	5292.5	12	53.0	6	1159.4	1	
	5294.5	13	79.4	10	1424.1	1	
	5298.5	14	90.6	19	1800.9	3	
	5293.5	15	63.9	8	1629.5	3	
	5294.5	16	74.0	10	1376.1	1	
	5296.5	17	89.2	15	1908.9	1	
8	5292.5	1	83.1	6	1405.1	2	1
	5294.5	2	55.3	11	1776.0	3	
	5295.5	3	53.2	13	1266.0	2	
	5297.5	4	57.0	18	1428.0	2	
	5298.5	5	63.8	19	1376.7	2	
	5294.5	6	98.2	10	1844.1	3	
	5297.5	7	70.2	18	1878.5	1	
	5295.5	8	60.9	12	1148.9	3	
	5294.5	9	97.2	10	1065.1	1	
	5293.5	10	89.4	8	1695.8	2	
	5297.5	11	63.2	18	1329.0	3	
	5294.5	12	94.7	11	1657.9	3	
	5293.5	13	63.5	8	1354.1	2	
	5294.5	14	55.6	11	1934.0	1	
	5295.5	15	75.0	13	1833.4	2	
	5297.5	16	77.0	17	1767.3	2	
	5292.5	17	72.8	6	1629.5	2	
	5293.5	18	94.1	7	1240.4	3	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5295.5	1	74.8	12	1255.7	3	1
	5297.5	2	77.2	18	1125.4	3	
	5294.5	3	92.1	10	1505.9	1	
	5296.5	4	79.0	16	1291.8	1	
	5292.5	5	57.3	6	1807.5	2	
	5295.5	6	64.2	12	1535.3	2	
	5296.5	7	96.2	16	1921.6	2	
	5298.5	8	96.4	19	1313.7	2	
	5296.5	9	75.4	14	1257.6	2	
	5292.5	10	93.7	5	1472.1	1	
	5295.5	11	90.7	13	1702.2	3	
	5298.5	12	93.9	20	1367.9	2	
	5294.5	13	80.2	9	1678.7	1	
	5298.5	14	70.3	19	1256.0	1	
	5294.5	15	69.4	10	1601.9	1	
	5294.5	16	51.1	10	1852.5	3	
	5295.5	17	56.8	13	1205.1	2	
	5297.5	18	90.1	17	1388.1	3	
	5297.5	19	83.1	18	1661.6	1	
10	5297.5	1	76.3	17	1713.9	3	1
	5296.5	2	73.2	14	1168.9	2	
	5294.5	3	89.4	11	1625.9	2	
	5297.5	4	68.4	17	1944.3	2	
	5296.5	5	66.2	15	1914.1	1	
	5296.5	6	75.7	15	1833.6	1	
	5294.5	7	91.3	9	1687.7	2	
	5295.5	8	73.5	12	1431.3	2	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5300	1	73.0	17	1771.8	1	1
	5300	2	76.7	15	1467.5	1	
	5300	3	64.9	13	1974.6	3	
	5300	4	84.9	10	1798.2	2	
	5300	5	61.3	5	1878.6	1	
	5300	6	59.9	13	1813.2	1	
	5300	7	53.6	7	1066.6	2	
	5300	8	62.7	12	1732.6	2	
	5300	9	92.9	13	1947.4	2	
	5300	10	52.7	20	1236.7	1	
	5300	11	75.7	9	1032.6	1	
	5300	12	78.0	9	1664.4	2	
	5300	13	95.5	11	1734.8	3	
	5300	14	51.9	14	1097.0	3	
	5300	15	64.3	11	1023.4	3	
	5300	16	56.3	17	1165.1	1	
12	5300	1	99.1	13	1458.1	3	1
	5300	2	68.1	11	1612.7	2	
	5300	3	54.0	14	1007.2	1	
	5300	4	78.8	11	1222.0	2	
	5300	5	69.0	18	1966.8	3	
	5300	6	69.8	20	1879.6	1	
	5300	7	91.1	7	1329.2	1	
	5300	8	54.4	6	1101.5	3	
	5300	9	91.1	18	1752.5	1	
	5300	10	66.9	11	1559.9	2	
	5300	11	52.7	11	1802.6	1	
	5300	12	75.1	14	1192.8	1	
	5300	13	84.9	10	1416.0	1	
	5300	14	88.3	15	1749.7	2	
	5300	15	77.9	10	1306.3	3	
	5300	16	75.0	16	1684.7	2	
	5300	17	79.6	16	1078.4	2	
	5300	18	79.6	6	1104.1	2	
	5300	19	86.6	6	1261.1	2	
	5300	20	70.2	5	1723.0	1	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5300	1	94.0	11	1925.6	2	1
	5300	2	57.5	6	1012.4	1	
	5300	3	56.1	16	1686.5	2	
	5300	4	59.8	12	1351.6	3	
	5300	5	89.5	8	1524.1	1	
	5300	6	96.1	12	1508.2	1	
	5300	7	75.2	6	1033.6	2	
	5300	8	86.7	7	1823.0	1	
	5300	9	74.7	9	1184.7	3	
	5300	10	53.3	9	1195.3	2	
14	5300	1	50.3	6	1461.3	2	1
	5300	2	80.7	16	1073.7	2	
	5300	3	99.0	10	1923.3	2	
	5300	4	74.7	12	1262.4	2	
	5300	5	95.9	16	1414.4	1	
	5300	6	74.7	19	1869.2	3	
	5300	7	78.0	12	1781.0	1	
	5300	8	65.1	17	1317.7	1	
	5300	9	70.5	14	1280.3	1	
	5300	10	65.8	6	1580.3	3	
	5300	11	91.8	14	1737.0	3	
	5300	12	55.3	12	1935.5	3	
	5300	13	86.2	15	1060.4	2	
	5300	14	99.4	9	1990.0	1	
	5300	15	98.6	11	1589.8	3	
	5300	16	59.8	12	1707.4	2	
	5300	17	73.0	20	1235.1	1	
	5300	18	60.6	15	1666.8	2	
	5300	19	83.4	17	1123.9	3	
	5300	20	90.4	9	1302.3	3	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5300	1	53.9	6	1568.5	1	1
	5300	2	54.3	15	1141.9	2	
	5300	3	97.7	20	1574.9	1	
	5300	4	65.1	18	1949.1	3	
	5300	5	81.9	14	1471.2	1	
	5300	6	72.3	6	1912.0	1	
	5300	7	78.5	9	1808.3	3	
	5300	8	65.6	17	1891.4	1	
	5300	9	54.6	6	1968.9	1	
	5300	10	88.1	15	1957.3	1	
	5300	11	89.7	19	1482.7	3	
	5300	12	87.0	20	1636.3	1	
	5300	13	61.3	15	1362.6	2	
	5300	14	63.9	7	1494.0	2	
	5300	15	89.3	14	1832.9	1	
	5300	16	54.9	17	1685.8	3	
	5300	17	67.7	9	1750.9	2	
	5300	18	72.1	20	1962.1	3	
	5300	19	63.4	14	1096.3	3	
16	5300	1	94.3	11	1569.6	3	1
	5300	2	64.8	19	1113.2	2	
	5300	3	63.9	15	1523.4	2	
	5300	4	88.5	10	1811.4	1	
	5300	5	72.2	7	1935.4	1	
	5300	6	62.4	10	1046.5	1	
	5300	7	58.4	10	1325.4	2	
	5300	8	68.8	6	1899.5	1	
	5300	9	79.2	15	1435.0	1	
	5300	10	95.2	9	1610.1	2	
	5300	11	75.3	18	1638.7	2	
	5300	12	85.2	19	1469.6	2	
	5300	13	52.1	14	1537.4	1	
	5300	14	50.8	10	1125.1	1	
	5300	15	84.5	20	1617.1	1	
	5300	16	60.4	11	1959.6	2	
	5300	17	53.2	18	1728.1	1	
	5300	18	74.1	13	1067.3	3	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5300	1	92.9	16	1510.1	1	1
	5300	2	66.3	9	1332.3	3	
	5300	3	58.7	13	1008.5	1	
	5300	4	66.9	15	1355.0	2	
	5300	5	90.9	7	1318.5	1	
	5300	6	53.6	11	1716.7	3	
	5300	7	70.7	19	1818.1	3	
	5300	8	58.4	17	1621.0	1	
	5300	9	94.8	16	1484.2	3	
	5300	10	95.2	15	1967.8	2	
	5300	11	91.7	15	1003.8	1	
	5300	12	99.5	16	1767.4	2	
	5300	13	59.0	8	1742.4	1	
	5300	14	72.2	12	1547.2	1	
	5300	15	99.1	12	1547.6	2	
	5300	16	66.5	16	1481.8	2	
	5300	17	60.1	8	1468.1	3	
18	5300	1	71.9	16	1427.2	2	1
	5300	2	89.8	11	1664.8	3	
	5300	3	78.8	15	1025.0	2	
	5300	4	52.9	19	1803.2	3	
	5300	5	79.6	14	1574.8	3	
	5300	6	68.8	19	1514.8	3	
	5300	7	54.1	5	1134.2	2	
	5300	8	57.7	15	1002.6	2	
	5300	9	91.8	13	1989.0	3	
	5300	10	51.3	15	1252.1	1	
	5300	11	62.8	11	1946.6	3	
	5300	12	81.8	9	1159.5	3	
	5300	13	75.3	5	1359.6	2	
	5300	14	95.0	8	1013.4	1	
	5300	15	70.7	8	1306.6	2	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5300	1	75.6	19	1908.1	2	1
	5300	2	61.0	5	1633.2	1	
	5300	3	80.0	8	1010.4	3	
	5300	4	55.8	18	1571.9	1	
	5300	5	99.2	18	1445.9	3	
	5300	6	98.1	15	1286.5	2	
	5300	7	80.8	7	1196.0	3	
	5300	8	83.8	7	1371.6	1	
	5300	9	77.0	20	1205.4	3	
	5300	10	85.9	6	1370.7	3	
	5300	11	84.3	12	1506.8	3	
	5300	12	59.8	19	1015.5	2	
	5300	13	71.5	7	1987.2	2	
	5300	14	73.1	19	1435.3	3	
20	5300	1	54.2	17	1240.8	2	1
	5300	2	56.7	8	1408.9	3	
	5300	3	63.4	10	1200.9	3	
	5300	4	59.0	6	1411.1	1	
	5300	5	83.0	10	1488.0	2	
	5300	6	73.4	5	1863.9	3	
	5300	7	95.1	9	1411.9	2	
	5300	8	74.2	9	1855.2	2	
	5300	9	53.8	20	1080.4	2	
	5300	10	67.1	10	1950.9	2	
21	5302.5	1	59.9	18	1434.4	1	1
	5305.5	2	74.2	9	1751.7	2	
	5303.5	3	83.0	14	1407.5	1	
	5306.5	4	58.2	8	1340.6	3	
	5303.5	5	98.6	16	1281.0	3	
	5302.5	6	55.4	17	1402.6	2	
	5305.5	7	88.2	11	1899.7	2	
	5306.5	8	85.6	8	1197.4	2	
	5302.5	9	52.9	18	1735.8	1	
	5302.5	10	91.2	17	1458.9	3	
	5303.5	11	53.9	14	1882.7	2	
	5306.5	12	74.2	8	1321.9	3	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5301.5	1	52.5	19	1212.0	3	1
	5303.5	2	50.3	16	1202.1	3	
	5307.5	3	96.5	6	1139.6	3	
	5306.5	4	96.1	8	1742.8	2	
	5302.5	5	60.4	18	1553.2	1	
	5306.5	6	73.0	8	1337.9	2	
	5306.5	7	84.8	8	1037.0	3	
	5302.5	8	60.3	17	1031.6	3	
	5303.5	9	68.7	15	1350.4	1	
23	5303.5	1	68.2	15	1906.5	2	1
	5303.5	2	76.3	16	1313.7	1	
	5304.5	3	59.8	12	1531.4	3	
	5302.5	4	59.2	18	1296.0	3	
	5303.5	5	87.6	16	1922.2	3	
	5303.5	6	96.3	16	1607.4	2	
	5304.5	7	70.8	13	1190.0	1	
	5303.5	8	77.8	16	1430.8	2	
	5302.5	9	55.1	18	1262.1	2	
	5307.5	10	84.8	6	1999.2	3	
	5303.5	11	53.7	15	1686.3	1	
	5304.5	12	81.4	13	1261.5	2	
	5303.5	13	77.4	15	1539.3	1	
	5303.5	14	53.2	15	1177.8	2	
	5303.5	15	59.5	16	1971.3	3	
24	5305.5	1	55.2	10	1600.6	1	0
	5302.5	2	94.4	17	1917.2	2	
	5306.5	3	73.8	8	1003.0	1	
	5302.5	4	77.0	18	1527.3	3	
	5302.5	5	73.2	18	1485.2	2	
	5302.5	6	92.9	17	1140.4	1	
	5305.5	7	88.4	10	1062.5	1	
	5305.5	8	58.1	11	1519.0	3	
	5307.5	9	97.1	6	1663.2	2	
	5304.5	10	66.9	12	1790.0	3	
	5305.5	11	95.0	11	1635.6	1	
	5304.5	12	83.5	12	1578.7	3	
	5305.5	13	59.4	11	1214.3	2	
	5305.5	14	65.4	11	1619.7	2	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5306.5	1	98.2	8	1420.0	3	1
	5304.5	2	51.9	12	1028.3	2	
	5305.5	3	98.7	10	1442.5	3	
	5307.5	4	57.5	6	1357.2	1	
	5303.5	5	93.0	15	1112.9	2	
	5306.5	6	66.3	7	1327.1	3	
	5303.5	7	92.8	15	1870.6	2	
	5307.5	8	53.9	6	1563.4	1	
	5304.5	9	59.2	13	1326.0	1	
	5305.5	10	75.8	10	1016.9	3	
	5305.5	11	89.5	9	1865.9	3	
	5303.5	12	78.4	14	1280.0	3	
	5301.5	13	77.7	19	1713.5	1	
	5304.5	14	73.6	12	1533.4	3	
	5303.5	15	83.5	15	1981.5	2	
	5302.5	16	61.4	18	1944.1	2	
	5305.5	17	56.6	10	1833.4	1	
	5306.5	18	88.4	8	1448.0	2	
26	5303.5	1	51.3	14	1541.3	1	1
	5306.5	2	69.3	8	1649.2	2	
	5305.5	3	55.9	11	1740.2	2	
	5307.5	4	74.8	6	1743.2	3	
	5301.5	5	55.6	19	1282.5	3	
	5307.5	6	74.4	5	1516.6	3	
	5302.5	7	51.7	17	1249.8	3	
	5302.5	8	76.2	17	1274.5	1	
	5305.5	9	51.5	10	1996.6	2	
	5305.5	10	94.0	11	1660.8	2	
	5304.5	11	84.0	13	1678.8	2	
	5305.5	12	66.2	11	1028.0	1	
	5301.5	13	69.8	20	1069.3	1	
	5302.5	14	94.8	17	1803.8	2	
	5303.5	15	85.1	14	1304.8	2	
	5307.5	16	94.1	6	1009.8	2	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5303.5	1	54.9	16	1371.6	2	1
	5305.5	2	69.4	9	1503.1	1	
	5305.5	3	61.0	9	1778.6	2	
	5305.5	4	92.9	11	1508.9	1	
	5305.5	5	89.4	11	1464.6	2	
	5305.5	6	72.4	10	1963.7	1	
	5302.5	7	80.8	17	1801.4	2	
	5302.5	8	94.9	18	1296.4	3	
	5304.5	9	57.3	12	1323.6	2	
	5304.5	10	50.6	13	1523.7	2	
	5305.5	11	60.8	9	1475.4	1	
	5303.5	12	77.6	14	1106.6	3	
	5306.5	13	98.9	8	1118.0	2	
	5307.5	14	75.3	6	1114.0	2	
	5304.5	15	78.9	13	1169.5	3	
	5303.5	16	58.7	16	1621.4	1	
	5302.5	17	51.6	17	1241.7	2	
	5306.5	18	71.1	8	1337.0	2	
	5305.5	19	67.2	9	1367.8	1	
	5303.5	20	70.7	15	1613.8	3	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5303.5	1	70.4	15	1175.0	3	1
	5307.5	2	64.0	6	1465.3	3	
	5303.5	3	81.6	15	1671.2	1	
	5302.5	4	91.8	18	1400.7	3	
	5307.5	5	58.8	5	1903.8	1	
	5301.5	6	71.6	19	1979.9	3	
	5301.5	7	62.9	20	1860.4	1	
	5306.5	8	80.5	8	1013.5	1	
	5305.5	9	91.3	9	1313.7	3	
	5305.5	10	83.2	10	1198.1	3	
	5301.5	11	53.1	19	1392.8	3	
	5305.5	12	77.7	11	1098.7	2	
	5303.5	13	97.7	16	1304.2	2	
	5303.5	14	51.7	15	1666.4	1	
	5303.5	15	69.9	14	1312.2	1	
	5305.5	16	55.0	10	1491.7	2	
	5305.5	17	50.5	10	1468.4	2	
	5302.5	18	99.2	18	1452.1	1	
	5303.5	19	85.9	14	1189.8	2	
	5307.5	20	97.0	6	1295.2	3	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5305.5	1	51.3	10	1948.3	2	0
	5302.5	2	90.7	17	1308.5	3	
	5304.5	3	70.1	13	1429.5	2	
	5304.5	4	63.5	12	1674.0	2	
	5302.5	5	83.4	17	1232.7	3	
	5307.5	6	65.0	5	1631.6	1	
	5302.5	7	79.1	17	1468.6	2	
	5306.5	8	85.2	7	1271.2	2	
	5304.5	9	66.8	13	1005.3	3	
	5305.5	10	87.9	9	1754.5	3	
	5305.5	11	55.5	9	1475.6	1	
	5303.5	12	92.4	15	1845.2	2	
	5305.5	13	90.7	11	1916.9	3	
	5306.5	14	67.2	7	1437.2	1	
	5304.5	15	61.6	13	1181.6	1	
	5306.5	16	55.1	7	1748.2	3	
	5303.5	17	92.4	14	1863.9	2	
30	5304.5	1	78.9	12	1323.1	1	1
	5305.5	2	60.6	9	1114.3	2	
	5304.5	3	85.2	12	1080.1	3	
	5306.5	4	53.5	7	1590.5	1	
	5305.5	5	73.4	9	1414.5	1	
	5305.5	6	75.4	10	1110.0	2	
	5303.5	7	56.8	16	1072.4	1	
	5303.5	8	97.6	15	1807.2	3	
	5306.5	9	53.1	8	1806.3	2	
	5306.5	10	76.1	8	1278.5	2	
	5305.5	11	67.3	9	1005.3	3	
	5304.5	12	93.3	12	1813.2	1	
	5306.5	13	62.8	7	1931.0	1	
	5303.5	14	90.2	16	1603.1	3	
Detection Percentage (%)							86.67

Test Mode		802.11ax HE20				
Frequency		5300 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						100.00

Test Mode		802.11ax HE40				
Frequency		5310 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	1	818	65	1222	1
2	5310	1	798	67	1253	1
3	5310	1	938	57	1066	1
4	5310	1	558	95	1792	1
5	5310	1	858	62	1166	1
6	5310	1	818	65	1222	1
7	5310	1	778	68	1285	1
8	5310	1	3066	18	326	1
9	5310	1	558	95	1792	1
10	5310	1	598	89	1672	1
11	5310	1	798	67	1253	0
12	5310	1	798	67	1253	1
13	5310	1	3066	18	326	0
14	5310	1	638	83	1567	1
15	5310	1	878	61	1139	1
16	5310	1	2029	27	493	1
17	5310	1	1375	39	727	1
18	5310	1	727	73	1376	1
19	5310	1	2343	23	427	1
20	5310	1	1630	33	613	1
21	5310	1	2378	23	421	1
22	5310	1	1795	30	557	1
23	5310	1	1765	30	567	1
24	5310	1	1863	29	537	1
25	5310	1	1604	33	623	1
26	5310	1	1107	48	903	1
27	5310	1	692	77	1445	1
28	5310	1	2375	23	421	1
29	5310	1	1533	35	652	1
30	5310	1	1110	48	901	1
Detection Percentage (%)						93.33

Test Mode		802.11ax HE40				
Frequency		5310 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	1.00	152.80	25	6545	1
2	5310	4.30	154.40	29	6477	1
3	5310	2.20	204.10	29	4900	1
4	5310	3.70	163.60	29	6112	1
5	5310	4.90	224.90	25	4446	1
6	5310	2.40	176.90	28	5653	1
7	5310	1.20	160.00	25	6250	1
8	5310	2.80	159.90	28	6254	1
9	5310	3.00	188.50	29	5305	1
10	5310	2.10	188.00	25	5319	1
11	5310	2.90	223.90	27	4466	1
12	5310	2.30	197.20	28	5071	1
13	5310	3.90	210.50	23	4751	1
14	5310	4.70	156.60	25	6386	1
15	5310	3.80	204.80	27	4883	1
16	5310	4.00	152.00	27	6579	1
17	5310	2.60	204.20	28	4897	1
18	5310	4.60	177.50	29	5634	1
19	5310	2.70	182.20	29	5488	1
20	5310	2.80	175.80	23	5688	0
21	5310	1.30	171.20	23	5841	1
22	5310	1.90	182.40	23	5482	1
23	5310	4.60	214.70	26	4658	1
24	5310	4.00	214.20	24	4669	1
25	5310	2.50	154.50	27	6472	1
26	5310	4.90	214.00	25	4673	0
27	5310	1.40	153.00	28	6536	1
28	5310	3.00	211.40	29	4730	0
29	5310	1.00	172.50	24	5797	1
30	5310	1.40	178.30	23	5609	1
Detection Percentage (%)						90.00

Test Mode		802.11ax HE40				
Frequency		5310 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	8.90	354.30	17	2822.47	0
2	5310	9.00	397.80	18	2513.83	1
3	5310	9.80	252.80	17	3955.70	1
4	5310	6.30	349.10	16	2864.51	0
5	5310	6.60	378.80	16	2639.92	1
6	5310	9.90	347.20	18	2880.18	1
7	5310	7.50	216.10	18	4627.49	1
8	5310	7.00	407.30	17	2455.19	1
9	5310	7.70	475.30	18	2103.93	1
10	5310	6.80	472.90	17	2114.61	1
11	5310	6.10	283.20	17	3531.07	1
12	5310	6.70	388.00	18	2577.32	1
13	5310	9.10	454.00	16	2202.64	1
14	5310	9.10	373.50	18	2677.38	1
15	5310	6.10	439.10	18	2277.39	1
16	5310	9.80	219.70	17	4551.66	1
17	5310	7.00	415.30	17	2407.90	1
18	5310	6.90	344.00	17	2906.98	1
19	5310	9.80	227.30	16	4399.47	1
20	5310	8.90	311.50	17	3210.27	1
21	5310	7.40	418.30	17	2390.63	1
22	5310	6.10	368.00	18	2717.39	1
23	5310	9.10	207.50	16	4819.28	1
24	5310	6.50	207.50	18	4819.28	1
25	5310	9.40	298.20	17	3353.45	0
26	5310	6.30	323.00	17	3095.98	1
27	5310	10.00	315.10	16	3173.60	1
28	5310	9.10	308.50	18	3241.49	1
29	5310	7.00	229.60	18	4355.40	1
30	5310	7.10	402.30	17	2485.71	0
Detection Percentage (%)						86.67

Test Mode		802.11ax HE40				
Frequency		5310 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	17.00	252.80	16	3956	1
2	5310	13.60	458.00	14	2183	1
3	5310	11.70	464.10	14	2155	1
4	5310	19.10	436.90	16	2289	1
5	5310	13.50	402.90	16	2482	1
6	5310	15.80	433.70	15	2306	1
7	5310	14.20	272.50	14	3670	1
8	5310	18.20	291.20	12	3434	1
9	5310	19.20	214.70	15	4658	1
10	5310	11.30	239.70	16	4172	1
11	5310	16.70	222.80	14	4488	1
12	5310	12.50	395.80	13	2527	1
13	5310	14.50	277.40	14	3605	1
14	5310	18.10	486.30	16	2056	1
15	5310	14.80	299.30	13	3341	1
16	5310	18.40	297.60	14	3360	1
17	5310	19.00	333.50	13	2999	1
18	5310	16.20	455.40	14	2196	1
19	5310	14.20	439.30	16	2276	1
20	5310	12.10	429.20	15	2330	1
21	5310	11.60	343.90	12	2908	1
22	5310	12.50	220.50	12	4535	1
23	5310	17.70	248.80	15	4019	1
24	5310	15.20	257.10	15	3890	1
25	5310	17.80	363.40	14	2752	1
26	5310	19.90	362.90	13	2756	1
27	5310	16.00	306.30	13	3265	0
28	5310	18.00	235.30	15	4250	1
29	5310	12.50	381.90	15	2618	1
30	5310	12.70	485.30	16	2061	1
Detection Percentage (%)						96.67

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5295	1	96.0	11	1071.5	1	1
	5295	2	59.2	10	1601.9	1	
	5297	3	92.7	15	1438.2	1	
	5297	4	63.5	14	1005.8	2	
	5296	5	95.9	13	1525.4	2	
	5299	6	53.1	19	1855.7	2	
	5296	7	86.9	12	1779.1	1	
	5298	8	66.1	17	1004.1	3	
	5295	9	54.2	9	1350.4	2	
	5296	10	63.6	12	1693.9	3	
	5293	11	72.5	6	1129.6	2	
2	5295	1	50.8	10	1286.9	3	1
	5297	2	73.1	14	1230.3	3	
	5294	3	91.9	8	1181.4	1	
	5297	4	73.6	14	1954.6	2	
	5297	5	67.0	15	1297.7	2	
	5297	6	51.7	15	1156.7	1	
	5296	7	62.7	13	1510.7	3	
	5295	8	96.8	10	1463.5	1	
	5298	9	79.6	18	1800.2	3	
	5294	10	90.0	7	1673.9	3	
	5297	11	62.8	16	1317.3	3	
	5296	12	89.0	13	1604.3	1	
3	5294	1	70.8	8	1755.5	2	1
	5295	2	92.0	10	1078.3	1	
	5295	3	73.6	9	1365.0	2	
	5298	4	71.8	17	1692.9	1	
	5297	5	86.2	14	1639.0	2	
	5298	6	55.9	17	1172.7	3	
	5297	7	61.5	14	1916.4	2	
	5294	8	72.7	8	1424.2	3	
	5293	9	54.7	6	1372.0	3	
	5299	10	59.8	20	1072.6	3	
	5295	11	79.5	10	1556.8	2	
	5296	12	74.9	12	1193.3	1	
	5293	13	76.3	6	1814.5	2	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5296	1	51.2	13	1331.1	1	1
	5296	2	92.3	13	1092.1	2	
	5296	3	67.9	12	1045.8	2	
	5296	4	74.4	13	1325.7	2	
	5296	5	77.6	12	1751.9	2	
	5293	6	52.1	6	1350.5	3	
	5294	7	59.1	8	1109.4	1	
	5299	8	60.7	19	1734.5	2	
	5297	9	61.7	15	1269.1	3	
5	5297	1	63.1	14	1334.2	3	1
	5297	2	80.4	14	1559.0	2	
	5296	3	94.4	12	1217.5	1	
	5296	4	51.6	12	1079.4	1	
	5296	5	64.6	12	1470.1	1	
	5297	6	66.9	14	1632.2	1	
	5296	7	97.1	12	1636.3	3	
	5297	8	79.8	16	1221.4	2	
	5294	9	89.3	7	1561.4	2	
	5294	10	81.5	7	1463.6	2	
	5298	11	99.3	17	1846.0	3	
	5296	12	78.7	12	1488.7	2	
	5297	13	95.7	14	1818.1	3	
	5295	14	74.9	9	1941.3	3	
	5296	15	93.2	13	1046.1	1	
6	5294	1	59.3	8	1682.5	3	1
	5298	2	72.4	17	1109.1	2	
	5299	3	88.5	19	1096.7	3	
	5297	4	91.3	15	1073.9	1	
	5295	5	63.4	9	1143.0	3	
	5299	6	74.9	19	1445.2	3	
	5299	7	67.6	19	1529.7	3	
	5295	8	56.1	11	1951.1	3	
	5294	9	58.5	8	1922.3	1	
	5293	10	95.4	6	1225.7	2	
	5296	11	75.0	12	1891.3	1	
	5299	12	69.9	20	1484.5	2	
	5294	13	58.9	7	1265.2	3	
	5295	14	69.3	11	1642.2	1	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5294	1	67.8	7	1033.2	1	1
	5299	2	55.0	20	1041.2	3	
	5293	3	73.5	5	1730.7	1	
	5299	4	71.0	19	1308.4	3	
	5294	5	67.1	7	1722.9	2	
	5296	6	57.7	13	1495.2	3	
	5294	7	52.1	7	1126.8	3	
	5297	8	69.6	16	1316.7	3	
	5294	9	97.4	8	1469.4	2	
	5294	10	71.2	8	1453.9	1	
	5295	11	55.6	9	1634.0	2	
	5294	12	53.6	7	1636.4	2	
	5298	13	100.0	18	1022.7	3	
	5293	14	53.9	6	1540.5	2	
	5295	15	90.4	11	1293.4	3	
	5298	16	75.1	17	1022.7	1	
	5297	17	65.9	16	1745.7	2	
8	5297	1	99.6	16	1835.9	1	1
	5298	2	91.2	17	1809.1	3	
	5295	3	70.5	9	1577.6	1	
	5294	4	77.2	7	1556.6	3	
	5297	5	82.7	14	1976.9	1	
	5298	6	88.4	18	1916.6	3	
	5293	7	91.4	6	1769.1	3	
	5297	8	62.8	15	1199.4	3	
	5297	9	80.8	16	1798.7	3	
	5299	10	51.1	20	1371.5	2	
	5297	11	53.2	14	1999.7	2	
	5293	12	88.3	6	1437.0	2	
	5294	13	84.4	8	1234.6	3	
	5295	14	58.2	9	1101.3	3	
	5294	15	99.0	8	1243.7	2	
	5294	16	92.8	7	1628.7	1	
	5295	17	75.6	10	1761.7	1	
	5297	18	88.4	14	1745.5	2	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5298	1	65.0	17	1138.1	3	1
	5295	2	74.7	11	1529.1	3	
	5293	3	63.0	6	1915.3	2	
	5296	4	52.3	13	1155.9	3	
	5293	5	97.0	6	1193.1	3	
	5299	6	94.3	20	1505.2	1	
	5299	7	99.3	19	1427.6	1	
	5293	8	89.0	5	1408.1	2	
	5297	9	83.9	15	1475.0	3	
	5297	10	64.4	14	1128.7	2	
	5298	11	68.4	18	1843.3	3	
	5295	12	93.1	11	1422.5	3	
	5295	13	90.0	10	1268.0	3	
	5295	14	61.3	9	1220.1	1	
	5298	15	86.0	18	1953.5	2	
	5293	16	71.7	6	1753.4	1	
	5298	17	68.4	18	1193.7	3	
	5294	18	96.0	8	1547.1	3	
	5295	19	54.6	9	1724.7	2	
10	5298	1	82.0	17	1925.5	2	1
	5297	2	87.3	14	1861.6	1	
	5295	3	68.9	9	1709.9	3	
	5294	4	54.0	8	1850.1	3	
	5297	5	88.3	14	1915.0	3	
	5297	6	74.8	15	1843.2	3	
	5297	7	90.4	15	1290.6	2	
	5294	8	95.3	8	1042.0	2	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5310	1	81.4	10	1349.6	2	1
	5310	2	60.2	6	1624.6	1	
	5310	3	61.1	15	1424.7	1	
	5310	4	98.7	20	1416.2	1	
	5310	5	85.3	13	1365.7	1	
	5310	6	89.9	9	1257.2	2	
	5310	7	92.6	17	1133.5	3	
	5310	8	63.9	10	1849.5	3	
	5310	9	90.1	15	1083.5	1	
	5310	10	89.3	11	1268.9	2	
	5310	11	75.1	11	1040.7	2	
	5310	12	69.5	9	1002.0	1	
	5310	13	71.7	19	1827.6	3	
	5310	14	50.3	9	1015.4	3	
	5310	15	84.3	16	1132.8	3	
	5310	16	71.4	19	1677.3	3	
12	5310	1	70.4	12	1296.9	1	0
	5310	2	79.2	9	1203.5	3	
	5310	3	87.7	13	1593.7	2	
	5310	4	93.1	11	1495.0	2	
	5310	5	91.0	19	1412.7	1	
	5310	6	72.4	9	1912.0	2	
	5310	7	68.7	12	1839.0	2	
	5310	8	70.3	15	1693.6	3	
	5310	9	76.6	6	1726.6	1	
	5310	10	83.8	13	1958.4	1	
	5310	11	85.4	12	1327.3	1	
	5310	12	63.9	6	1811.0	3	
	5310	13	64.7	16	1973.6	2	
	5310	14	63.8	15	1072.0	2	
	5310	15	77.0	9	1830.4	1	
	5310	16	74.4	14	1039.8	3	
	5310	17	67.5	8	1508.4	1	
	5310	18	93.0	18	1975.9	2	
	5310	19	66.2	16	1774.9	2	
	5310	20	70.4	8	1085.0	1	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5310	1	68.5	10	1885.2	1	1
	5310	2	69.3	15	1330.6	3	
	5310	3	62.6	8	1525.5	3	
	5310	4	93.3	7	1050.5	3	
	5310	5	64.9	14	1519.1	1	
	5310	6	93.7	9	1861.7	2	
	5310	7	58.5	7	1965.2	2	
	5310	8	79.3	11	1103.7	3	
	5310	9	57.9	13	1571.4	2	
	5310	10	70.9	18	1571.8	3	
14	5310	1	93.1	6	1872.7	1	1
	5310	2	76.3	15	1716.0	3	
	5310	3	72.3	10	1993.8	1	
	5310	4	52.2	19	1521.2	2	
	5310	5	82.9	6	1512.9	1	
	5310	6	53.2	18	1050.3	3	
	5310	7	72.8	10	1454.4	3	
	5310	8	90.5	10	1632.7	3	
	5310	9	61.3	17	1134.3	3	
	5310	10	59.3	16	1256.4	2	
	5310	11	99.4	15	1976.8	3	
	5310	12	78.2	16	1174.6	3	
	5310	13	72.5	15	1349.3	3	
	5310	14	65.9	16	1305.0	1	
	5310	15	67.2	11	1548.7	3	
	5310	16	65.1	12	1859.0	2	
	5310	17	97.7	19	1698.5	1	
	5310	18	57.7	9	1415.8	1	
	5310	19	65.8	19	1873.9	1	
	5310	20	71.0	17	1117.0	3	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5310	1	71.8	18	1444.2	3	1
	5310	2	90.1	12	1648.4	2	
	5310	3	94.6	7	1676.2	3	
	5310	4	91.0	12	1184.1	2	
	5310	5	58.5	11	1483.3	2	
	5310	6	78.1	8	1953.8	2	
	5310	7	66.5	5	1874.4	3	
	5310	8	97.3	14	1768.2	3	
	5310	9	58.2	17	1768.3	3	
	5310	10	65.9	17	1918.6	2	
	5310	11	93.4	16	1744.0	2	
	5310	12	81.7	9	1440.1	1	
	5310	13	69.0	6	1002.9	2	
	5310	14	92.1	11	1131.3	1	
	5310	15	78.1	6	1127.7	1	
	5310	16	62.0	16	1414.4	3	
	5310	17	96.9	10	1813.5	1	
	5310	18	52.5	9	1974.6	2	
	5310	19	88.8	11	1719.3	1	
16	5310	1	62.1	14	1016.4	2	1
	5310	2	91.1	13	1019.1	1	
	5310	3	76.9	11	1927.3	2	
	5310	4	78.5	11	1343.6	1	
	5310	5	82.4	14	1976.0	2	
	5310	6	58.6	18	1474.8	1	
	5310	7	88.3	12	1892.6	2	
	5310	8	78.7	19	1392.7	3	
	5310	9	97.0	17	1220.9	1	
	5310	10	58.9	17	1783.6	1	
	5310	11	67.5	16	1994.1	1	
	5310	12	71.3	20	1765.9	1	
	5310	13	50.4	7	1041.6	1	
	5310	14	95.8	15	1256.0	3	
	5310	15	67.6	9	1693.8	1	
	5310	16	66.2	16	1678.9	3	
	5310	17	56.1	7	1226.0	2	
	5310	18	85.7	12	1338.0	1	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5310	1	61.0	7	1828.7	3	1
	5310	2	76.0	7	1277.2	3	
	5310	3	57.6	18	1605.1	2	
	5310	4	63.3	18	1679.3	1	
	5310	5	69.4	13	1784.4	3	
	5310	6	89.7	20	1742.8	3	
	5310	7	53.2	6	1467.3	1	
	5310	8	79.4	10	1380.1	1	
	5310	9	64.7	13	1582.4	1	
	5310	10	53.1	18	1668.0	3	
	5310	11	61.4	13	1081.3	1	
	5310	12	89.5	7	1462.8	3	
	5310	13	50.5	9	1595.6	2	
	5310	14	81.4	5	1248.3	1	
	5310	15	57.6	16	1743.5	2	
	5310	16	95.5	8	1739.1	1	
	5310	17	86.7	7	1102.6	3	
18	5310	1	76.5	19	1136.5	2	0
	5310	2	83.5	13	1834.2	3	
	5310	3	51.8	8	1147.5	2	
	5310	4	57.8	8	1747.2	1	
	5310	5	54.5	8	1209.7	3	
	5310	6	90.3	15	1163.9	3	
	5310	7	85.7	18	1582.0	1	
	5310	8	53.1	7	1145.7	3	
	5310	9	57.4	7	1407.6	1	
	5310	10	58.3	18	1235.8	2	
	5310	11	52.7	18	1176.3	2	
	5310	12	98.2	5	1181.6	3	
	5310	13	51.8	12	1204.7	1	
	5310	14	68.9	14	1714.6	1	
	5310	15	99.6	17	1340.8	1	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5310	1	99.7	13	1694.9	2	1
	5310	2	57.1	8	1565.9	3	
	5310	3	60.4	15	1087.7	2	
	5310	4	78.2	12	1867.0	2	
	5310	5	76.1	19	1994.4	2	
	5310	6	55.1	14	1877.7	2	
	5310	7	91.4	7	1643.8	1	
	5310	8	79.0	15	1741.9	3	
	5310	9	55.2	20	1279.3	1	
	5310	10	85.0	10	1121.2	1	
	5310	11	82.4	14	1903.6	1	
	5310	12	81.1	7	1558.6	3	
	5310	13	65.6	11	1254.4	1	
	5310	14	71.9	11	1391.4	3	
20	5310	1	69.8	9	1656.1	2	1
	5310	2	98.6	15	1771.2	1	
	5310	3	53.2	10	1829.2	3	
	5310	4	72.7	20	1910.0	3	
	5310	5	51.8	7	1994.3	2	
	5310	6	61.2	19	1881.7	2	
	5310	7	77.1	15	1144.1	1	
	5310	8	93.3	15	1081.3	2	
	5310	9	65.5	14	1177.8	3	
	5310	10	96.2	18	1135.2	2	
21	5325	1	77.9	9	1060.9	1	1
	5323	2	53.0	14	1554.0	1	
	5321	3	61.5	19	1472.8	1	
	5321	4	99.8	19	1489.2	2	
	5323	5	51.1	14	1866.2	1	
	5325	6	55.5	9	1012.1	1	
	5327	7	59.4	6	1825.4	2	
	5322	8	54.7	17	1561.5	1	
	5322	9	56.7	17	1182.1	3	
	5325	10	97.2	9	1255.9	1	
	5327	11	58.1	6	1730.2	3	
	5321	12	92.9	19	1406.9	1	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5326	1	99.3	8	1762.4	2	0
	5322	2	57.8	17	1533.0	3	
	5324	3	56.4	13	1664.2	1	
	5326	4	79.3	8	1710.3	3	
	5322	5	94.8	17	1309.4	2	
	5325	6	93.4	10	1593.6	2	
	5323	7	57.8	14	1370.5	1	
	5326	8	91.0	7	1054.0	3	
	5321	9	51.5	20	1032.2	2	
23	5326	1	58.8	7	1150.4	2	1
	5321	2	93.8	19	1880.8	1	
	5324	3	89.9	12	1899.1	3	
	5326	4	89.5	7	1696.3	3	
	5326	5	54.5	7	1704.1	2	
	5322	6	95.9	17	1533.2	2	
	5326	7	56.1	8	1250.9	1	
	5324	8	83.8	13	1306.4	2	
	5327	9	99.3	6	1280.5	3	
	5324	10	98.9	12	1513.6	2	
	5322	11	62.6	18	1213.1	2	
	5323	12	56.0	14	1148.1	1	
	5323	13	52.7	15	1094.2	2	
	5322	14	94.4	17	1721.5	2	
	5321	15	73.5	19	1064.8	3	
24	5324	1	61.1	12	1612.0	2	1
	5323	2	71.1	16	1550.5	2	
	5324	3	81.2	13	1148.4	3	
	5323	4	96.6	15	1786.9	3	
	5325	5	55.2	9	1545.9	2	
	5325	6	51.4	11	1177.6	1	
	5321	7	95.8	19	1560.4	2	
	5325	8	55.3	9	1259.3	1	
	5324	9	90.1	13	1591.3	1	
	5321	10	82.5	19	1961.9	3	
	5323	11	61.5	16	1536.2	1	
	5325	12	73.9	10	1464.5	2	
	5325	13	93.3	10	1973.7	1	
	5324	14	87.8	13	1011.1	3	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5325	1	50.9	10	1356.4	2	1
	5325	2	85.1	9	1625.6	3	
	5325	3	99.1	10	1698.7	2	
	5323	4	70.4	15	1467.0	3	
	5323	5	60.8	15	1711.6	1	
	5323	6	99.3	16	1855.6	1	
	5321	7	64.7	19	1379.0	1	
	5323	8	86.3	14	1324.8	3	
	5322	9	99.1	18	1593.1	3	
	5325	10	69.7	10	1434.4	3	
	5323	11	70.1	14	1214.2	2	
	5325	12	90.1	9	1182.3	2	
	5323	13	90.0	14	1398.3	1	
	5324	14	59.9	13	1669.8	2	
	5326	15	69.1	7	1628.3	1	
	5323	16	58.1	15	1524.6	1	
	5322	17	92.5	18	1577.0	2	
	5324	18	98.6	12	1323.1	3	
26	5326	1	51.0	8	1084.3	1	1
	5321	2	99.1	19	1025.4	1	
	5325	3	51.7	9	1154.1	1	
	5321	4	68.9	19	1727.7	3	
	5322	5	50.4	18	1939.8	3	
	5325	6	88.8	10	1083.6	2	
	5323	7	55.8	16	1222.7	2	
	5324	8	55.6	12	1568.2	3	
	5323	9	84.0	16	1389.4	2	
	5323	10	73.1	16	1015.1	3	
	5323	11	88.3	14	1438.3	1	
	5323	12	90.4	14	1188.5	3	
	5322	13	57.9	18	1463.6	3	
	5325	14	73.7	11	1741.7	3	
	5324	15	86.2	13	1981.4	1	
	5323	16	50.5	14	1454.7	3	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5324	1	55.9	12	1841.8	1	1
	5327	2	99.5	5	1859.2	2	
	5325	3	67.2	11	1979.7	3	
	5323	4	83.2	15	1843.4	3	
	5326	5	96.7	8	1155.1	3	
	5325	6	57.7	11	1534.7	2	
	5325	7	72.5	11	1169.8	2	
	5324	8	87.9	12	1927.7	1	
	5327	9	81.0	6	1560.7	1	
	5323	10	94.3	15	1516.1	3	
	5322	11	66.9	18	1020.6	1	
	5323	12	80.6	16	1140.6	1	
	5322	13	69.9	17	1926.6	3	
	5326	14	93.1	8	1321.0	1	
	5322	15	51.3	18	1822.1	2	
	5325	16	76.3	10	1288.3	1	
	5321	17	51.6	19	1347.8	2	
	5325	18	78.3	9	1298.9	1	
	5325	19	81.4	11	1938.9	3	
	5323	20	57.1	16	1527.5	2	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5322	1	70.3	18	1624.6	3	1
	5323	2	64.8	16	1116.1	2	
	5322	3	85.5	18	1900.7	2	
	5322	4	91.3	18	1319.9	3	
	5322	5	81.0	18	1839.2	2	
	5327	6	72.9	6	1388.1	1	
	5323	7	76.6	15	1626.8	2	
	5325	8	52.3	10	1912.2	2	
	5322	9	50.5	18	1600.2	1	
	5327	10	93.3	5	1927.5	2	
	5326	11	66.4	8	1551.1	3	
	5324	12	64.8	12	1938.6	2	
	5321	13	97.0	19	1609.4	1	
	5321	14	74.4	19	1847.3	3	
	5325	15	93.5	10	1688.5	2	
	5324	16	99.0	12	1212.1	1	
	5327	17	76.1	5	1150.6	1	
	5324	18	72.2	13	1454.4	1	
	5326	19	75.7	8	1702.1	1	
	5324	20	59.0	13	1274.1	1	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5323	1	59.2	16	1442.9	2	1
	5325	2	96.0	11	1713.7	3	
	5326	3	83.7	7	1896.9	2	
	5324	4	60.9	12	1310.4	1	
	5325	5	90.2	9	1959.5	1	
	5321	6	99.9	20	1293.6	1	
	5326	7	58.4	8	1137.3	3	
	5327	8	62.9	6	1064.0	3	
	5322	9	95.9	18	1653.9	1	
	5325	10	85.8	10	1906.3	1	
	5321	11	57.1	19	1784.2	3	
	5325	12	94.8	9	1809.9	2	
	5327	13	60.9	6	1637.9	2	
	5325	14	94.4	9	1245.3	1	
	5322	15	69.3	17	1700.3	2	
	5325	16	80.0	10	1282.1	2	
	5323	17	68.4	16	1923.7	1	
30	5321	1	55.9	19	1397.4	3	1
	5323	2	53.3	15	1917.4	3	
	5326	3	97.8	7	1200.8	2	
	5323	4	74.3	14	1630.9	2	
	5322	5	81.9	18	1661.4	3	
	5323	6	83.5	14	1384.9	1	
	5325	7	84.8	10	1916.3	2	
	5323	8	91.6	15	1929.0	1	
	5326	9	85.9	7	1798.0	3	
	5326	10	56.7	8	1142.8	3	
	5327	11	65.9	6	1762.8	3	
	5322	12	87.2	17	1839.2	3	
	5322	13	66.7	18	1206.3	1	
	5323	14	94.2	16	1355.6	1	
Detection Percentage (%)							90.00

Test Mode		802.11ax HE40				
Frequency		5310 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	5290	1	798	67	1253	1
2	5290	1	818	65	1222	1
3	5290	1	718	74	1393	1
4	5290	1	838	63	1193	1
5	5290	1	618	86	1618	1
6	5290	1	538	99	1859	1
7	5290	1	898	59	1114	1
8	5290	1	558	95	1792	1
9	5290	1	818	65	1222	1
10	5290	1	878	61	1139	1
11	5290	1	878	61	1139	1
12	5290	1	758	70	1319	1
13	5290	1	778	68	1285	1
14	5290	1	578	92	1730	1
15	5290	1	798	67	1253	0
16	5290	1	827	64	1209	1
17	5290	1	1674	32	597	1
18	5290	1	1106	48	904	1
19	5290	1	1524	35	656	1
20	5290	1	673	79	1486	1
21	5290	1	1649	33	606	1
22	5290	1	1449	37	690	1
23	5290	1	1710	31	585	1
24	5290	1	1822	29	549	1
25	5290	1	2293	24	436	1
26	5290	1	2134	25	469	1
27	5290	1	610	87	1639	1
28	5290	1	947	56	1056	0
29	5290	1	971	55	1030	0
30	5290	1	1417	38	706	1
Detection Percentage (%)						90.00

Test Mode		802.11ax HE80				
Frequency		5290 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	1	798	67	1253	1
2	5290	1	818	65	1222	1
3	5290	1	718	74	1393	1
4	5290	1	838	63	1193	1
5	5290	1	618	86	1618	1
6	5290	1	538	99	1859	1
7	5290	1	898	59	1114	1
8	5290	1	558	95	1792	1
9	5290	1	818	65	1222	1
10	5290	1	878	61	1139	1
11	5290	1	878	61	1139	1
12	5290	1	758	70	1319	1
13	5290	1	778	68	1285	1
14	5290	1	578	92	1730	1
15	5290	1	798	67	1253	0
16	5290	1	827	64	1209	1
17	5290	1	1674	32	597	1
18	5290	1	1106	48	904	1
19	5290	1	1524	35	656	1
20	5290	1	673	79	1486	1
21	5290	1	1649	33	606	1
22	5290	1	1449	37	690	1
23	5290	1	1710	31	585	1
24	5290	1	1822	29	549	1
25	5290	1	2293	24	436	1
26	5290	1	2134	25	469	1
27	5290	1	610	87	1639	1
28	5290	1	947	56	1056	0
29	5290	1	971	55	1030	0
30	5290	1	1417	38	706	1
Detection Percentage (%)						90.00

Test Mode		802.11ax HE80				
Frequency		5290 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	1.80	190.00	24	5263	1
2	5290	2.20	196.20	27	5097	1
3	5290	5.00	222.90	23	4486	1
4	5290	4.10	173.40	27	5767	1
5	5290	3.20	181.10	29	5522	1
6	5290	3.80	153.80	27	6502	1
7	5290	1.70	211.70	26	4724	1
8	5290	4.70	158.40	23	6313	1
9	5290	4.60	205.90	24	4857	1
10	5290	3.70	222.60	28	4492	1
11	5290	4.20	200.10	28	4998	1
12	5290	4.10	185.10	23	5402	1
13	5290	1.00	225.70	27	4431	1
14	5290	4.40	162.20	28	6165	1
15	5290	4.10	185.90	25	5379	0
16	5290	3.40	214.90	24	4653	0
17	5290	2.00	184.70	27	5414	1
18	5290	3.70	177.50	29	5634	1
19	5290	4.20	182.20	27	5488	1
20	5290	4.40	222.00	26	4505	1
21	5290	4.10	175.30	23	5705	1
22	5290	3.40	227.90	24	4388	1
23	5290	3.10	175.80	25	5688	1
24	5290	2.70	208.30	29	4801	1
25	5290	3.90	200.80	25	4980	1
26	5290	1.50	216.10	24	4627	1
27	5290	3.80	181.10	23	5522	1
28	5290	3.50	213.50	28	4684	0
29	5290	2.10	161.70	26	6184	1
30	5290	3.60	217.40	24	4600	1
Detection Percentage (%)						90.00

Test Mode		802.11ax HE80				
Frequency		5290 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	7.30	486.70	16	2054.65	0
2	5290	6.60	384.30	18	2602.13	1
3	5290	6.50	280.30	16	3567.61	1
4	5290	7.70	350.50	18	2853.07	1
5	5290	6.70	374.90	16	2667.38	1
6	5290	6.30	391.20	18	2556.24	1
7	5290	9.60	298.90	18	3345.60	1
8	5290	10.00	456.30	18	2191.54	1
9	5290	7.20	306.10	16	3266.91	1
10	5290	6.90	453.40	18	2205.56	1
11	5290	6.90	236.40	16	4230.12	1
12	5290	6.50	317.80	16	3146.63	1
13	5290	7.50	257.40	17	3885.00	1
14	5290	7.00	289.30	18	3456.62	1
15	5290	8.00	427.10	18	2341.37	1
16	5290	7.80	478.10	16	2091.61	1
17	5290	6.10	481.40	18	2077.27	1
18	5290	8.50	294.00	16	3401.36	0
19	5290	6.60	457.90	18	2183.88	1
20	5290	6.70	332.50	17	3007.52	1
21	5290	6.10	261.70	17	3821.17	1
22	5290	7.10	359.60	16	2780.87	1
23	5290	7.00	217.00	16	4608.29	1
24	5290	6.70	250.50	17	3992.02	1
25	5290	8.50	280.90	18	3559.99	1
26	5290	8.80	498.00	18	2008.03	1
27	5290	8.20	441.40	18	2265.52	1
28	5290	8.60	494.40	16	2022.65	1
29	5290	7.80	267.60	17	3736.92	1
30	5290	7.10	244.30	17	4093.33	1
Detection Percentage (%)						93.33

Test Mode		802.11ax HE80				
Frequency		5290 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	19.80	385.40	12	2595	1
2	5290	19.90	493.50	14	2026	1
3	5290	16.90	270.70	12	3694	1
4	5290	18.50	411.10	14	2432	1
5	5290	19.90	497.30	12	2011	1
6	5290	11.80	405.90	15	2464	1
7	5290	11.10	352.60	15	2836	1
8	5290	16.40	351.70	14	2843	1
9	5290	19.90	275.70	15	3627	1
10	5290	17.10	306.00	15	3268	1
11	5290	20.00	226.50	13	4415	1
12	5290	11.40	274.00	12	3650	1
13	5290	18.90	486.00	15	2058	0
14	5290	20.00	279.10	15	3583	0
15	5290	13.50	221.40	12	4517	1
16	5290	15.90	202.20	13	4946	0
17	5290	19.40	488.10	14	2049	1
18	5290	19.90	312.20	13	3203	1
19	5290	18.50	302.20	13	3309	1
20	5290	16.40	380.10	14	2631	1
21	5290	16.80	265.60	14	3765	1
22	5290	15.50	281.00	15	3559	1
23	5290	11.10	392.30	14	2549	1
24	5290	16.00	479.40	15	2086	0
25	5290	13.50	292.90	13	3414	1
26	5290	11.60	314.60	16	3179	1
27	5290	15.30	467.70	13	2138	1
28	5290	15.70	439.80	14	2274	1
29	5290	15.50	423.30	15	2362	1
30	5290	18.30	342.30	12	2921	1
Detection Percentage (%)						86.67

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5253	1	54.8	6	1835.1	3	1
	5254	2	78.3	8	1988.6	1	
	5255	3	63.7	11	1105.9	1	
	5257	4	63.1	16	1879.1	3	
	5258	5	96.9	17	1013.9	1	
	5257	6	91.2	14	1007.5	1	
	5259	7	85.6	20	1138.4	2	
	5254	8	73.2	8	1478.1	3	
	5257	9	69.3	14	1957.3	3	
	5254	10	65.0	7	1885.3	1	
	5258	11	63.4	18	1684.7	2	
2	5258	1	91.5	18	1720.9	2	1
	5253	2	75.5	6	1052.6	3	
	5257	3	86.9	16	1013.8	2	
	5254	4	87.8	7	1165.3	2	
	5258	5	69.1	18	1318.6	3	
	5254	6	51.1	7	1963.6	3	
	5257	7	89.7	14	1024.0	3	
	5259	8	97.6	20	1464.9	3	
	5253	9	63.3	6	1847.7	1	
	5256	10	79.5	12	1701.7	3	
	5256	11	92.0	13	1559.3	2	
	5259	12	77.4	19	1161.9	1	
3	5258	1	50.6	18	1245.1	3	1
	5254	2	77.2	8	1125.8	1	
	5256	3	89.5	13	1385.3	3	
	5258	4	100.0	18	1864.7	1	
	5257	5	83.2	14	1892.6	2	
	5257	6	79.7	16	1683.6	2	
	5256	7	79.4	12	1285.2	3	
	5258	8	50.1	18	1180.1	1	
	5258	9	59.1	17	1420.5	3	
	5256	10	60.7	13	1650.7	1	
	5255	11	51.3	9	1404.8	3	
	5257	12	96.8	15	1887.8	3	
	5254	13	94.7	7	1311.8	3	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5255	1	60.3	10	1429.5	3	1
	5259	2	70.5	19	1694.4	3	
	5255	3	52.8	10	1809.2	2	
	5253	4	96.8	5	1710.8	1	
	5254	5	67.2	7	1367.1	1	
	5258	6	54.5	17	1198.8	2	
	5256	7	67.8	12	1315.1	1	
	5257	8	79.1	14	1125.5	2	
	5253	9	78.8	5	1779.3	2	
5	5259	1	74.1	20	1169.4	2	1
	5255	2	52.0	9	1452.3	1	
	5258	3	53.7	18	1112.1	2	
	5253	4	88.3	6	1389.4	1	
	5257	5	69.8	14	1559.5	1	
	5256	6	84.7	12	1245.2	1	
	5258	7	95.3	17	1742.5	1	
	5258	8	95.8	17	1829.9	2	
	5258	9	66.7	18	1941.5	1	
	5253	10	98.0	6	1889.3	2	
	5255	11	97.7	11	1393.0	1	
	5258	12	66.4	17	1128.7	3	
	5258	13	55.8	17	1441.2	2	
	5254	14	64.0	7	1975.3	1	
	5254	15	91.0	8	1589.7	3	
6	5255	1	82.0	10	1447.5	2	1
	5256	2	89.4	13	1799.6	3	
	5254	3	77.4	7	1569.7	2	
	5257	4	69.6	16	1644.1	3	
	5256	5	51.8	13	1422.5	3	
	5257	6	69.5	16	1667.4	2	
	5258	7	62.1	17	1260.3	2	
	5258	8	67.8	18	1251.3	3	
	5257	9	87.4	16	1426.0	2	
	5257	10	87.0	16	1524.8	3	
	5256	11	94.6	13	1224.6	1	
	5253	12	72.7	6	1678.5	3	
	5256	13	97.6	12	1693.1	3	
	5259	14	65.7	19	1070.4	3	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5257	1	90.6	14	1391.1	2	0
	5257	2	84.5	14	1221.5	1	
	5258	3	52.9	18	1063.1	3	
	5254	4	62.2	7	1505.1	1	
	5258	5	56.7	18	1464.6	2	
	5254	6	73.4	7	1093.8	3	
	5255	7	64.9	9	1983.2	3	
	5255	8	54.1	9	1926.9	3	
	5255	9	51.0	10	1287.9	3	
	5257	10	79.7	14	1454.8	1	
	5258	11	72.2	17	1437.9	1	
	5258	12	74.6	18	1209.7	2	
	5258	13	70.7	18	1968.7	2	
	5254	14	80.4	7	1731.8	1	
	5257	15	76.7	14	1089.6	1	
	5255	16	93.6	11	1666.1	2	
	5259	17	75.2	19	1941.8	2	
8	5254	1	81.1	7	1325.1	1	0
	5254	2	88.1	8	1898.9	3	
	5257	3	67.2	15	1121.5	2	
	5257	4	96.5	16	1254.3	1	
	5256	5	93.4	12	1627.4	2	
	5257	6	53.6	15	1459.0	1	
	5257	7	58.4	15	1963.6	3	
	5254	8	90.7	8	1008.4	3	
	5255	9	63.8	10	1726.6	3	
	5256	10	91.2	12	1577.2	2	
	5255	11	91.8	11	1382.7	2	
	5257	12	96.3	14	1565.3	2	
	5257	13	74.8	16	1941.4	1	
	5257	14	53.1	15	1395.2	3	
	5254	15	93.1	8	1178.4	1	
	5259	16	55.7	19	1995.0	3	
	5258	17	66.3	18	1693.8	2	
	5254	18	76.6	8	1357.9	1	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5259	1	77.3	20	1161.4	2	1
	5257	2	85.9	14	1595.4	2	
	5257	3	54.8	14	1135.2	3	
	5259	4	66.9	19	1838.7	1	
	5257	5	79.0	14	1511.2	2	
	5254	6	50.5	8	1223.5	3	
	5255	7	55.4	11	1550.8	3	
	5253	8	64.0	5	1505.8	1	
	5255	9	85.9	9	1943.3	1	
	5259	10	84.2	20	1615.3	3	
	5259	11	84.8	19	1179.6	2	
	5258	12	61.4	18	1593.6	3	
	5255	13	84.8	10	1423.8	3	
	5257	14	91.9	16	1100.7	3	
	5255	15	70.2	10	1225.1	3	
	5253	16	55.5	6	1379.5	1	
	5254	17	88.3	7	1449.1	3	
	5255	18	86.9	9	1103.6	2	
	5256	19	51.3	12	1026.5	2	
10	5255	1	96.5	9	1999.3	3	1
	5257	2	92.8	15	1775.1	1	
	5254	3	50.4	8	1371.8	1	
	5254	4	70.4	8	1598.5	3	
	5257	5	58.3	15	1874.1	1	
	5255	6	52.9	10	1562.3	1	
	5257	7	87.6	14	1191.9	3	
	5257	8	96.4	14	1162.4	1	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5290	1	82.3	13	1502.9	3	1
	5290	2	65.9	9	1548.3	2	
	5290	3	93.4	10	1961.1	1	
	5290	4	55.6	17	1314.2	1	
	5290	5	63.9	19	1981.2	2	
	5290	6	54.6	12	1899.4	3	
	5290	7	97.4	6	1191.1	1	
	5290	8	96.0	11	1403.5	2	
	5290	9	50.1	10	1479.5	1	
	5290	10	66.6	14	1118.2	2	
	5290	11	92.3	10	1172.1	1	
	5290	12	89.4	19	1232.5	2	
	5290	13	79.0	11	1889.5	1	
	5290	14	84.2	17	1187.4	3	
	5290	15	71.1	20	1226.9	3	
	5290	16	97.3	18	1201.4	3	
12	5290	1	56.3	6	1941.2	3	1
	5290	2	96.5	9	1160.9	2	
	5290	3	80.8	9	1836.6	2	
	5290	4	79.4	17	1099.3	3	
	5290	5	64.4	14	1683.9	1	
	5290	6	56.8	8	1158.1	1	
	5290	7	78.5	15	1005.4	2	
	5290	8	62.0	6	1107.0	2	
	5290	9	82.8	12	1600.2	2	
	5290	10	85.3	15	1126.8	1	
	5290	11	66.6	16	1298.7	1	
	5290	12	81.2	20	1126.6	2	
	5290	13	76.6	7	1126.7	3	
	5290	14	65.6	14	1428.4	2	
	5290	15	89.2	15	1584.3	2	
	5290	16	91.5	5	1444.8	2	
	5290	17	56.3	8	1617.9	3	
	5290	18	96.9	14	1574.6	2	
	5290	19	92.0	12	1887.1	2	
	5290	20	61.8	16	1989.0	2	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5290	1	53.3	17	1792.7	3	1
	5290	2	54.5	17	1967.7	2	
	5290	3	64.7	12	1118.6	3	
	5290	4	85.7	16	1468.0	2	
	5290	5	59.6	19	1841.3	1	
	5290	6	66.5	10	1429.8	1	
	5290	7	77.6	9	1103.7	1	
	5290	8	89.3	10	1277.1	1	
	5290	9	68.1	17	1865.1	1	
	5290	10	62.1	16	1885.1	2	
14	5290	1	81.0	13	1009.7	1	1
	5290	2	67.4	11	1797.5	2	
	5290	3	85.1	15	1124.5	2	
	5290	4	83.3	8	1922.8	2	
	5290	5	61.6	11	1548.3	3	
	5290	6	86.6	6	1534.9	3	
	5290	7	63.6	6	1583.4	1	
	5290	8	76.6	6	1845.4	1	
	5290	9	76.4	16	1236.9	2	
	5290	10	54.6	17	1895.4	3	
	5290	11	71.3	16	1648.0	3	
	5290	12	93.1	10	1533.5	1	
	5290	13	91.2	9	1888.5	1	
	5290	14	73.9	19	1475.3	1	
	5290	15	63.0	8	1383.5	3	
	5290	16	83.1	8	1918.6	2	
	5290	17	76.2	7	1719.4	3	
	5290	18	72.0	5	1176.7	3	
	5290	19	95.0	5	1450.1	3	
	5290	20	93.1	18	1446.0	3	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5290	1	81.7	18	1091.8	2	1
	5290	2	99.5	6	1016.7	3	
	5290	3	79.2	8	1074.5	2	
	5290	4	66.3	7	1108.1	3	
	5290	5	54.7	5	1882.3	1	
	5290	6	94.9	16	1405.8	1	
	5290	7	87.8	9	1462.5	1	
	5290	8	63.7	14	1035.4	3	
	5290	9	88.8	19	1141.4	3	
	5290	10	74.5	10	1303.9	2	
	5290	11	56.0	17	1422.1	2	
	5290	12	50.2	7	1092.1	1	
	5290	13	64.0	14	1156.3	3	
	5290	14	89.7	11	1351.8	1	
	5290	15	97.3	7	1989.3	1	
	5290	16	61.7	7	1183.8	2	
	5290	17	88.6	19	1911.7	1	
	5290	18	58.6	16	1938.1	3	
	5290	19	68.3	7	1209.0	2	
16	5290	1	50.8	6	1573.2	3	0
	5290	2	96.2	18	1116.3	3	
	5290	3	71.5	20	1289.2	3	
	5290	4	87.9	7	1960.5	2	
	5290	5	68.6	19	1471.2	1	
	5290	6	60.3	7	1087.6	2	
	5290	7	61.5	17	1869.8	2	
	5290	8	95.1	6	1038.5	2	
	5290	9	60.1	7	1025.6	1	
	5290	10	90.1	14	1200.1	3	
	5290	11	99.4	18	1614.4	1	
	5290	12	90.9	9	1523.3	3	
	5290	13	62.2	11	1872.3	2	
	5290	14	58.6	13	1026.4	3	
	5290	15	81.3	12	1349.2	2	
	5290	16	61.7	10	1481.0	3	
	5290	17	95.2	10	1649.9	2	
	5290	18	75.8	16	1539.6	1	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5290	1	50.7	9	1781.2	1	1
	5290	2	63.8	10	1879.1	3	
	5290	3	53.5	12	1050.4	2	
	5290	4	58.8	20	1635.2	3	
	5290	5	83.3	20	1030.5	1	
	5290	6	57.3	7	1755.6	3	
	5290	7	61.8	12	1728.0	2	
	5290	8	59.0	8	1438.2	1	
	5290	9	80.9	9	1309.1	2	
	5290	10	82.8	17	1072.4	2	
	5290	11	56.9	19	1076.6	1	
	5290	12	70.5	17	1454.8	2	
	5290	13	71.0	6	1930.6	3	
	5290	14	89.2	10	1566.8	2	
	5290	15	80.1	8	1463.0	3	
	5290	16	84.3	8	1763.1	2	
	5290	17	59.6	12	1516.0	1	
18	5290	1	65.7	18	1019.5	2	1
	5290	2	54.9	16	1068.5	1	
	5290	3	57.5	6	1455.8	3	
	5290	4	65.5	15	1100.8	3	
	5290	5	57.9	11	1842.8	3	
	5290	6	87.9	11	1015.4	2	
	5290	7	74.7	6	1019.1	1	
	5290	8	82.4	11	1633.9	1	
	5290	9	86.6	18	1026.9	2	
	5290	10	72.4	15	1871.0	1	
	5290	11	91.1	16	1965.5	3	
	5290	12	67.3	16	1550.8	3	
	5290	13	72.7	7	1241.7	3	
	5290	14	53.4	9	1363.7	3	
	5290	15	78.9	8	1431.3	2	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5290	1	84.3	14	1145.4	3	1
	5290	2	95.4	10	1988.6	2	
	5290	3	79.8	10	1803.3	3	
	5290	4	72.2	11	1201.7	1	
	5290	5	80.0	14	1267.6	3	
	5290	6	72.4	18	1253.7	2	
	5290	7	79.2	5	1261.2	3	
	5290	8	80.8	20	1877.8	1	
	5290	9	56.5	12	1836.4	2	
	5290	10	53.0	15	1359.1	1	
	5290	11	72.8	9	1167.3	2	
	5290	12	68.5	8	1484.8	3	
	5290	13	52.2	13	1754.9	1	
	5290	14	78.0	6	1315.4	3	
20	5290	1	60.0	9	1943.6	3	1
	5290	2	52.8	11	1955.6	2	
	5290	3	57.4	12	1171.7	2	
	5290	4	68.5	12	1604.0	3	
	5290	5	98.9	17	1503.9	1	
	5290	6	58.8	9	1683.3	1	
	5290	7	76.8	14	1868.2	3	
	5290	8	55.2	19	1876.2	2	
	5290	9	72.8	6	1612.7	2	
	5290	10	93.4	15	1153.2	3	
21	5326	1	53.5	7	1636.7	3	1
	5326	2	54.9	7	1954.3	3	
	5326	3	52.8	7	1073.9	2	
	5325	4	81.8	9	1086.0	1	
	5323	5	93.2	16	1735.2	2	
	5321	6	79.0	20	1153.8	2	
	5324	7	85.4	12	1028.7	1	
	5323	8	56.7	16	1249.0	2	
	5323	9	90.5	14	1916.1	1	
	5322	10	80.2	18	1666.5	1	
	5325	11	57.8	11	1154.8	3	
	5323	12	80.7	15	1222.0	1	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5327	1	52.4	6	1241.5	1	1
	5323	2	65.2	15	1619.2	3	
	5323	3	84.6	14	1035.2	3	
	5325	4	92.1	10	1874.7	1	
	5326	5	73.3	8	1330.6	3	
	5324	6	71.7	13	1859.5	1	
	5322	7	98.5	18	1806.1	1	
	5324	8	96.4	12	1569.5	1	
	5327	9	98.7	6	1710.8	3	
23	5325	1	82.4	9	1706.2	2	1
	5321	2	89.2	20	1609.3	3	
	5323	3	82.1	16	1723.3	1	
	5322	4	70.6	17	1010.2	1	
	5327	5	92.6	5	1614.4	2	
	5325	6	99.5	9	1865.5	2	
	5327	7	67.2	5	1216.6	2	
	5325	8	71.7	10	1618.2	1	
	5327	9	75.1	6	1972.7	3	
	5325	10	90.8	9	1588.8	1	
	5324	11	50.2	12	1907.2	2	
	5326	12	57.1	8	1454.3	2	
	5323	13	98.4	15	1430.7	3	
	5327	14	96.0	6	1307.1	3	
	5322	15	95.8	18	1138.9	1	
24	5323	1	74.0	14	1939.9	3	1
	5325	2	90.7	10	1934.5	2	
	5322	3	84.5	17	1731.8	1	
	5322	4	79.1	17	1552.6	1	
	5326	5	71.9	8	1984.2	3	
	5326	6	84.8	7	1699.4	3	
	5325	7	95.7	11	1952.6	2	
	5324	8	58.4	12	1135.2	2	
	5321	9	54.8	19	1021.7	3	
	5324	10	88.8	13	1786.0	2	
	5325	11	69.1	9	1487.3	1	
	5324	12	62.6	13	1355.0	2	
	5325	13	79.0	10	1291.0	1	
	5321	14	73.1	19	1200.1	2	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5322	1	94.5	17	1094.7	3	1
	5324	2	92.9	12	1202.9	2	
	5325	3	77.8	11	1778.8	1	
	5327	4	76.8	6	1821.7	1	
	5323	5	94.5	15	1414.8	3	
	5326	6	90.1	8	1162.5	2	
	5322	7	72.0	17	1998.7	2	
	5326	8	90.8	8	1433.8	3	
	5325	9	86.2	11	1072.1	2	
	5323	10	80.2	16	1057.5	3	
	5326	11	59.0	8	1751.5	2	
	5323	12	97.7	14	1431.2	1	
	5325	13	88.2	11	1025.5	3	
	5324	14	60.8	12	1274.1	2	
	5326	15	90.7	7	1292.0	3	
	5326	16	69.3	7	1666.0	3	
	5325	17	79.2	9	1380.7	3	
	5325	18	61.9	10	1929.0	3	
26	5322	1	92.9	17	1504.5	1	1
	5327	2	71.6	6	1576.2	3	
	5326	3	88.1	7	1816.1	2	
	5322	4	97.3	17	1358.6	1	
	5327	5	58.4	6	1944.3	1	
	5326	6	93.3	7	1699.5	2	
	5326	7	52.4	8	1705.2	2	
	5322	8	92.9	17	1913.0	2	
	5326	9	61.8	7	1243.6	3	
	5321	10	62.3	19	1378.8	3	
	5321	11	83.9	20	1408.8	1	
	5326	12	72.8	7	1625.9	1	
	5324	13	69.8	12	1623.3	3	
	5327	14	96.4	6	1677.8	3	
	5324	15	84.2	12	1208.4	3	
	5323	16	86.8	15	1431.6	3	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5321	1	62.9	19	1009.5	3	0
	5327	2	51.0	6	1947.9	3	
	5327	3	83.3	5	1014.3	3	
	5321	4	82.7	20	1154.0	2	
	5325	5	93.6	9	1497.0	1	
	5325	6	50.6	10	1722.0	2	
	5322	7	80.7	18	1616.7	3	
	5326	8	56.8	7	1595.3	2	
	5322	9	73.9	18	1430.0	1	
	5323	10	70.9	16	1821.2	3	
	5324	11	66.3	12	1315.5	1	
	5326	12	87.8	8	1860.0	3	
	5325	13	61.8	11	1979.7	3	
	5321	14	96.1	19	1907.9	3	
	5325	15	50.2	11	1964.9	2	
	5323	16	51.4	16	1246.9	3	
	5327	17	94.1	6	1115.0	2	
	5322	18	59.7	17	1284.2	1	
	5325	19	96.4	11	1115.1	2	
	5323	20	61.5	16	1187.1	1	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5326	1	53.6	8	1329.4	2	1
	5321	2	84.4	19	1155.3	1	
	5324	3	67.8	13	1938.0	3	
	5322	4	55.4	18	1014.1	2	
	5321	5	69.0	19	1468.2	2	
	5325	6	96.8	10	1529.1	1	
	5326	7	93.2	7	1059.5	2	
	5323	8	78.1	15	1225.9	1	
	5324	9	82.8	13	1973.9	1	
	5322	10	75.8	17	1383.1	1	
	5326	11	79.0	7	1990.4	1	
	5325	12	85.9	9	1872.0	2	
	5325	13	72.8	10	1258.7	2	
	5325	14	68.9	11	1683.9	3	
	5327	15	83.0	5	1947.4	3	
	5325	16	70.1	10	1887.1	1	
	5326	17	58.8	8	1826.2	1	
	5323	18	98.0	16	1672.4	1	
	5325	19	54.6	9	1973.9	1	
	5321	20	50.2	20	1319.3	2	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5325	1	62.1	10	1255.2	3	1
	5322	2	80.2	18	1395.7	2	
	5325	3	85.9	11	1934.7	1	
	5326	4	59.1	8	1183.2	1	
	5322	5	72.7	18	1845.7	3	
	5325	6	89.7	10	1810.5	3	
	5321	7	96.3	20	1765.0	3	
	5325	8	91.6	9	1829.7	2	
	5323	9	71.9	14	1197.1	2	
	5322	10	60.7	18	1282.4	1	
	5324	11	51.4	12	1411.6	3	
	5326	12	62.6	8	1154.1	1	
	5325	13	66.4	10	1814.8	1	
	5324	14	77.6	12	1227.5	3	
	5321	15	75.9	20	1977.1	2	
	5325	16	78.6	9	1883.3	2	
	5322	17	89.6	17	1301.7	1	
30	5325	1	66.3	10	1003.4	3	1
	5322	2	78.1	18	1875.9	3	
	5327	3	53.4	5	1170.6	1	
	5323	4	97.2	16	1737.1	3	
	5325	5	51.7	9	1515.4	3	
	5326	6	93.3	8	1185.6	1	
	5323	7	52.6	16	1002.9	2	
	5325	8	55.8	10	1708.7	1	
	5327	9	77.8	6	1848.1	1	
	5321	10	71.6	19	1209.5	3	
	5322	11	52.3	18	1486.4	1	
	5323	12	72.5	16	1658.4	3	
	5324	13	96.0	12	1757.0	3	
	5322	14	75.8	18	1899.8	3	
Detection Percentage (%)							86.67

Test Mode		802.11ax HE80				
Frequency		5290 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						100.00

Test Mode		802.11ax HE160				
Frequency		5250 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5250	1	3066	18	326	1
2	5250	1	918	58	1089	0
3	5250	1	858	62	1166	1
4	5250	1	638	83	1567	1
5	5250	1	838	63	1193	1
6	5250	1	618	86	1618	1
7	5250	1	598	89	1672	1
8	5250	1	758	70	1319	1
9	5250	1	858	62	1166	1
10	5250	1	598	89	1672	1
11	5250	1	858	62	1166	1
12	5250	1	758	70	1319	1
13	5250	1	638	83	1567	1
14	5250	1	578	92	1730	1
15	5250	1	818	65	1222	1
16	5250	1	1198	45	835	0
17	5250	1	1261	42	793	1
18	5250	1	1642	33	609	1
19	5250	1	2831	19	353	1
20	5250	1	587	90	1704	0
21	5250	1	1955	27	512	0
22	5250	1	734	72	1362	1
23	5250	1	1881	29	532	1
24	5250	1	1135	47	881	1
25	5250	1	1682	32	595	1
26	5250	1	1100	48	909	1
27	5250	1	581	91	1721	1
28	5250	1	747	71	1339	1
29	5250	1	2378	23	421	1
30	5250	1	1023	52	978	1
Detection Percentage (%)						86.67

Test Mode		802.11ax HE160				
Frequency		5250 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5250	4.60	163.80	26	6105	1
2	5250	1.70	175.80	27	5688	1
3	5250	2.50	197.60	29	5061	1
4	5250	2.10	210.40	28	4753	1
5	5250	4.80	192.10	29	5206	1
6	5250	1.70	199.10	29	5023	1
7	5250	1.10	229.00	24	4367	1
8	5250	2.80	178.70	29	5596	1
9	5250	1.80	184.00	29	5435	1
10	5250	3.30	186.00	24	5376	1
11	5250	4.80	198.30	23	5043	1
12	5250	3.40	186.70	29	5356	0
13	5250	3.90	177.20	27	5643	1
14	5250	4.30	195.40	29	5118	1
15	5250	1.70	223.10	28	4482	1
16	5250	1.30	159.70	29	6262	1
17	5250	1.70	171.80	26	5821	1
18	5250	3.40	195.00	28	5128	1
19	5250	3.50	227.30	28	4399	1
20	5250	3.70	217.10	27	4606	1
21	5250	2.90	190.00	25	5263	1
22	5250	1.90	159.90	26	6254	1
23	5250	1.00	219.70	23	4552	1
24	5250	4.50	214.40	27	4664	0
25	5250	3.90	204.90	28	4880	1
26	5250	2.10	215.10	29	4649	1
27	5250	2.90	197.00	26	5076	1
28	5250	4.90	177.50	26	5634	1
29	5250	1.20	161.90	26	6177	1
30	5250	3.60	196.50	29	5089	1
Detection Percentage (%)						93.33

Test Mode		802.11ax HE160				
Frequency		5250 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5250	6.50	483.00	17	2070.39	1
2	5250	8.70	403.10	18	2480.77	0
3	5250	6.90	263.50	16	3795.07	1
4	5250	8.50	229.90	18	4349.72	1
5	5250	6.90	426.40	17	2345.22	1
6	5250	8.80	229.60	16	4355.40	1
7	5250	9.10	337.50	17	2962.96	1
8	5250	9.80	341.90	18	2924.83	0
9	5250	9.30	279.40	17	3579.10	0
10	5250	6.20	288.70	18	3463.80	1
11	5250	6.70	290.70	16	3439.97	1
12	5250	8.80	412.70	18	2423.07	1
13	5250	6.50	328.80	17	3041.36	1
14	5250	9.40	258.70	17	3865.48	1
15	5250	6.40	391.30	16	2555.58	1
16	5250	6.90	481.70	16	2075.98	1
17	5250	9.40	389.90	16	2564.76	1
18	5250	7.70	265.40	18	3767.90	1
19	5250	9.40	403.50	16	2478.31	1
20	5250	7.50	470.20	16	2126.75	1
21	5250	10.00	451.10	16	2216.80	1
22	5250	8.10	297.40	17	3362.47	1
23	5250	8.50	207.60	16	4816.96	1
24	5250	9.30	368.70	16	2712.23	1
25	5250	7.90	310.20	18	3223.73	1
26	5250	6.20	314.20	16	3182.69	1
27	5250	9.70	208.50	18	4796.16	1
28	5250	6.70	367.30	18	2722.57	1
29	5250	7.60	232.10	16	4308.49	1
30	5250	9.00	369.20	18	2708.56	1
Detection Percentage (%)						90.00

Test Mode		802.11ax HE160				
Frequency		5250 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5250	18.40	379.80	12	2633	1
2	5250	14.70	470.20	12	2127	1
3	5250	17.30	427.70	14	2338	1
4	5250	17.00	496.50	16	2014	1
5	5250	14.30	355.20	14	2815	1
6	5250	11.50	347.00	14	2882	1
7	5250	15.30	301.90	15	3312	1
8	5250	17.70	294.80	16	3392	1
9	5250	15.80	396.20	12	2524	1
10	5250	16.80	330.90	16	3022	1
11	5250	18.60	257.70	15	3880	1
12	5250	12.50	228.90	12	4369	1
13	5250	14.10	421.40	16	2373	1
14	5250	11.50	359.70	16	2780	1
15	5250	18.70	260.00	16	3846	1
16	5250	18.50	215.50	16	4640	1
17	5250	15.90	420.90	13	2376	1
18	5250	16.80	329.40	13	3036	1
19	5250	17.20	246.60	16	4055	1
20	5250	14.70	405.40	16	2467	1
21	5250	13.80	211.30	12	4733	1
22	5250	11.20	267.90	14	3733	1
23	5250	13.30	296.90	12	3368	1
24	5250	19.40	325.30	14	3074	1
25	5250	12.70	473.60	12	2111	0
26	5250	17.10	274.50	16	3643	0
27	5250	17.10	361.10	14	2769	1
28	5250	13.00	226.00	15	4425	1
29	5250	14.80	283.20	14	3531	1
30	5250	19.10	210.60	12	4748	1
Detection Percentage (%)						93.33

Test Mode		802.11ax HE160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5250	1	95.3	5	1393.3	3	0
	5250	2	94.4	16	1210.1	3	
	5250	3	94.5	10	1938.5	3	
	5250	4	73.3	16	1382.4	2	
	5250	5	98.2	11	1138.8	1	
	5250	6	57.7	17	1905.9	3	
	5250	7	70.8	15	1127.5	2	
	5250	8	72.2	18	1878.8	3	
	5250	9	59.8	6	1255.9	1	
	5250	10	64.7	8	1442.3	1	
	5250	11	73.9	18	1350.7	2	
	5250	12	90.2	17	1354.4	2	
	5250	13	60.5	17	1823.1	1	
	5250	14	98.9	12	1247.2	2	
	5250	15	65.4	10	1050.4	3	
	5250	16	80.5	7	1577.6	2	
12	5250	1	62.2	5	1455.6	2	1
	5250	2	79.8	14	1079.0	2	
	5250	3	95.6	17	1498.6	2	
	5250	4	74.5	16	1328.0	3	
	5250	5	54.9	16	1998.9	1	
	5250	6	91.8	8	1674.7	1	
	5250	7	81.6	13	1794.2	2	
	5250	8	98.1	16	1590.8	3	
	5250	9	53.5	7	1403.1	3	
	5250	10	73.8	19	1628.6	1	
	5250	11	91.9	12	1320.6	2	
	5250	12	59.5	8	1745.8	1	
	5250	13	75.8	8	1415.8	2	
	5250	14	91.9	6	1318.9	2	
	5250	15	79.8	8	1725.2	3	
	5250	16	98.6	19	1197.0	2	
	5250	17	87.6	14	1063.9	3	
	5250	18	66.2	8	1512.6	3	
	5250	19	54.1	20	1837.5	2	
	5250	20	99.9	14	1326.2	1	

Test Mode		802.11ax HE160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5250	1	50.0	16	1748.9	2	1
	5250	2	94.8	15	1828.1	1	
	5250	3	75.2	17	1003.7	1	
	5250	4	79.2	16	1916.3	1	
	5250	5	87.8	13	1721.9	1	
	5250	6	75.6	16	1901.3	1	
	5250	7	66.3	6	1450.0	2	
	5250	8	63.5	11	1916.7	1	
	5250	9	64.5	5	1186.5	1	
	5250	10	98.7	8	1130.4	3	
14	5250	1	51.9	12	1500.3	1	1
	5250	2	72.3	14	1157.0	1	
	5250	3	88.4	15	1855.1	3	
	5250	4	52.3	7	1893.5	1	
	5250	5	92.3	7	1194.0	2	
	5250	6	65.6	15	1428.4	2	
	5250	7	69.0	14	1530.2	2	
	5250	8	78.3	5	1757.0	3	
	5250	9	83.5	18	1740.5	1	
	5250	10	59.5	15	1161.1	2	
	5250	11	77.5	8	1983.7	1	
	5250	12	54.9	7	1419.4	1	
	5250	13	96.6	9	1657.0	3	
	5250	14	95.1	15	1964.1	2	
	5250	15	96.2	12	1085.9	3	
	5250	16	77.2	15	1313.7	3	
	5250	17	97.2	18	1112.6	3	
	5250	18	88.3	10	1755.5	1	
	5250	19	60.7	14	1194.5	1	
	5250	20	65.0	5	1295.4	2	

Test Mode		802.11ax HE160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5250	1	68.5	8	1859.7	2	1
	5250	2	98.2	20	1438.6	2	
	5250	3	85.0	13	1900.9	1	
	5250	4	73.4	10	1884.5	1	
	5250	5	73.7	8	1517.8	1	
	5250	6	90.8	12	1408.0	3	
	5250	7	75.5	14	1122.2	1	
	5250	8	54.8	10	1682.7	2	
	5250	9	66.0	16	1665.9	2	
	5250	10	87.8	15	1764.9	1	
	5250	11	71.0	18	1400.0	2	
	5250	12	59.6	12	1325.1	2	
	5250	13	87.0	15	1526.3	1	
	5250	14	89.3	19	1384.5	3	
	5250	15	82.2	13	1212.3	2	
	5250	16	95.1	13	1970.9	2	
	5250	17	71.3	16	1487.4	1	
	5250	18	83.2	10	1376.8	2	
	5250	19	56.5	16	1924.6	3	
16	5250	1	58.6	7	1364.1	2	1
	5250	2	91.2	10	1193.2	3	
	5250	3	98.6	11	1914.8	1	
	5250	4	94.1	15	1802.5	2	
	5250	5	91.6	11	1037.5	3	
	5250	6	59.5	6	1262.4	2	
	5250	7	57.4	16	1388.6	1	
	5250	8	65.4	17	1238.0	1	
	5250	9	76.3	20	1689.3	2	
	5250	10	78.7	19	1009.9	3	
	5250	11	78.6	19	1334.6	1	
	5250	12	74.7	19	1649.8	2	
	5250	13	93.5	9	1416.8	2	
	5250	14	75.8	8	1641.3	1	
	5250	15	66.7	14	1208.8	3	
	5250	16	80.9	18	1136.4	2	
	5250	17	71.2	17	1117.5	3	
	5250	18	74.4	5	1046.0	1	

Test Mode		802.11ax HE160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5250	1	77.3	9	1533.9	3	1
	5250	2	68.4	17	1208.3	2	
	5250	3	81.8	10	1573.5	3	
	5250	4	59.0	19	1288.5	2	
	5250	5	51.1	15	1725.6	1	
	5250	6	99.1	5	1627.2	2	
	5250	7	83.1	14	1925.7	2	
	5250	8	68.6	16	1372.7	2	
	5250	9	90.6	12	1402.2	1	
	5250	10	63.5	17	1177.3	1	
	5250	11	67.7	13	1202.6	1	
	5250	12	70.6	7	1151.7	2	
	5250	13	95.2	15	1222.8	3	
	5250	14	52.5	14	1142.3	3	
	5250	15	98.4	15	1054.6	3	
	5250	16	91.1	18	1916.5	3	
	5250	17	92.8	19	1333.7	1	
18	5250	1	79.9	13	1556.9	3	1
	5250	2	73.9	17	1566.8	3	
	5250	3	92.2	19	1448.1	3	
	5250	4	80.4	14	1093.3	2	
	5250	5	94.8	20	1044.6	2	
	5250	6	53.3	18	1851.6	3	
	5250	7	79.7	9	1479.7	1	
	5250	8	79.7	6	1712.4	1	
	5250	9	61.9	15	1867.7	2	
	5250	10	96.4	15	1727.6	1	
	5250	11	72.0	13	1785.4	3	
	5250	12	88.6	16	1417.9	3	
	5250	13	68.6	12	1736.9	2	
	5250	14	91.9	8	1221.4	1	
	5250	15	98.1	17	1438.6	1	

Test Mode		802.11ax HE160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5250	1	68.8	14	1091.9	1	1
	5250	2	81.3	16	1559.4	2	
	5250	3	94.5	12	1513.4	1	
	5250	4	52.2	7	1588.6	1	
	5250	5	55.6	14	1944.6	3	
	5250	6	64.0	16	1455.7	1	
	5250	7	88.7	13	1392.5	3	
	5250	8	91.9	9	1517.1	3	
	5250	9	83.9	9	1090.2	2	
	5250	10	94.0	7	1430.8	2	
	5250	11	70.1	18	1264.8	2	
	5250	12	84.7	11	1050.1	3	
	5250	13	59.5	10	1734.5	2	
	5250	14	77.3	12	1290.7	1	
20	5250	1	98.0	12	1995.1	1	1
	5250	2	96.5	9	1736.1	1	
	5250	3	78.4	9	1656.1	2	
	5250	4	50.4	6	1769.0	3	
	5250	5	87.9	15	1646.8	3	
	5250	6	56.7	19	1027.0	1	
	5250	7	62.9	16	1275.8	3	
	5250	8	88.1	11	1354.0	1	
	5250	9	64.6	14	1180.4	2	
	5250	10	84.5	13	1554.5	1	
21	5286	1	81.1	8	1409.7	1	0
	5286	2	76.3	7	1231.6	2	
	5285	3	87.8	11	1152.3	3	
	5281	4	51.4	20	1573.6	2	
	5283	5	79.9	14	1764.8	1	
	5283	6	53.5	14	1074.0	1	
	5282	7	95.3	17	1280.3	1	
	5284	8	80.7	12	1325.9	1	
	5285	9	87.5	10	1698.0	1	
	5286	10	96.5	7	1642.1	2	
	5285	11	52.7	10	1731.7	3	
	5287	12	73.6	6	1815.5	3	

Test Mode		802.11ax HE160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5282	1	71.7	18	1442.9	3	1
	5284	2	72.5	13	1455.5	1	
	5285	3	64.4	9	1739.3	3	
	5281	4	72.4	20	1620.9	3	
	5282	5	62.9	18	1495.6	1	
	5283	6	74.0	15	1395.0	3	
	5284	7	63.0	13	1568.3	2	
	5284	8	50.9	13	1043.8	1	
	5284	9	63.3	13	1693.3	1	
23	5282	1	74.3	17	1794.5	3	1
	5282	2	53.3	18	1033.0	3	
	5287	3	50.1	5	1348.5	2	
	5286	4	70.1	8	1526.8	3	
	5285	5	80.3	11	1897.7	3	
	5281	6	69.0	20	1626.0	2	
	5282	7	69.7	18	1965.3	1	
	5283	8	62.0	14	1374.6	1	
	5285	9	73.7	9	1078.2	1	
	5284	10	54.9	13	1870.1	3	
	5286	11	60.6	7	1306.5	1	
	5286	12	58.9	7	1564.4	1	
	5281	13	87.6	20	1124.1	3	
	5283	14	96.0	15	1530.1	2	
	5282	15	78.6	18	1424.2	2	
24	5285	1	63.5	10	1162.7	2	1
	5285	2	66.5	10	1125.2	3	
	5285	3	83.6	11	1165.3	3	
	5287	4	62.3	5	1042.8	2	
	5286	5	54.8	8	1402.9	2	
	5282	6	67.5	18	1264.0	2	
	5283	7	95.1	15	1657.4	1	
	5285	8	68.4	9	1046.6	3	
	5283	9	82.6	14	1593.9	2	
	5284	10	82.2	12	1697.5	1	
	5287	11	79.8	6	1172.3	3	
	5285	12	76.1	11	1889.4	1	
	5287	13	54.8	6	1653.1	1	
	5287	14	97.4	6	1549.0	2	

Test Mode		802.11ax HE160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5284	1	97.3	12	1993.2	1	1
	5283	2	64.0	14	1212.7	1	
	5286	3	72.8	7	1737.9	1	
	5287	4	86.1	6	1566.0	3	
	5282	5	52.9	17	1943.2	1	
	5285	6	63.2	10	1995.9	2	
	5286	7	96.8	8	1571.3	2	
	5282	8	86.2	17	1135.5	1	
	5285	9	77.3	10	1204.3	2	
	5283	10	82.0	14	1896.9	2	
	5281	11	76.9	19	1483.6	2	
	5284	12	68.0	12	1049.4	1	
	5285	13	57.7	10	1596.8	3	
	5285	14	75.2	10	1777.6	1	
	5283	15	61.5	14	1109.2	3	
	5287	16	64.0	6	1508.2	1	
	5285	17	77.8	11	1722.3	2	
	5284	18	63.0	12	1165.6	2	
26	5285	1	57.3	9	1473.3	2	1
	5285	2	94.4	11	1817.7	1	
	5285	3	60.0	9	1276.7	3	
	5285	4	73.8	11	1374.5	1	
	5285	5	65.2	11	1433.7	3	
	5286	6	52.8	7	1756.5	3	
	5281	7	80.1	20	1521.6	3	
	5282	8	87.0	17	1268.3	2	
	5284	9	62.4	13	1214.0	2	
	5285	10	90.8	11	1199.6	2	
	5287	11	61.8	6	1307.3	1	
	5281	12	74.7	20	1826.6	2	
	5286	13	53.1	8	1104.2	2	
	5285	14	69.2	10	1987.4	3	
	5287	15	99.0	6	1602.8	1	
	5287	16	76.7	6	1306.7	2	

Test Mode		802.11ax HE160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5283	1	92.3	14	1906.4	3	1
	5286	2	89.2	7	1146.8	2	
	5285	3	99.6	9	1490.4	1	
	5282	4	87.1	17	1906.6	1	
	5282	5	78.8	17	1209.0	3	
	5284	6	96.5	13	1427.1	1	
	5285	7	75.7	9	1375.3	3	
	5282	8	69.2	17	1657.8	3	
	5287	9	51.6	6	1284.3	2	
	5286	10	85.8	7	1450.4	1	
	5283	11	97.1	16	1724.2	1	
	5283	12	66.1	15	1145.9	3	
	5281	13	85.0	20	1937.4	2	
	5282	14	56.1	17	1631.0	3	
	5287	15	74.4	6	1828.3	1	
	5282	16	70.4	17	1637.1	3	
	5284	17	50.5	13	1692.4	3	
	5285	18	61.9	9	1447.2	3	
	5284	19	84.0	13	1617.9	2	
	5283	20	69.4	16	1912.5	3	

Test Mode		802.11ax HE160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5286	1	83.2	7	1200.7	3	1
	5287	2	85.9	6	1898.6	1	
	5281	3	81.5	20	1215.1	2	
	5286	4	51.4	7	1238.6	1	
	5282	5	86.6	18	1044.3	1	
	5286	6	96.9	8	1146.4	1	
	5283	7	90.0	15	1998.3	1	
	5285	8	83.4	9	1213.3	2	
	5286	9	58.7	8	1024.8	1	
	5285	10	77.9	11	1967.6	3	
	5285	11	64.4	10	1701.6	3	
	5286	12	55.8	8	1147.8	1	
	5287	13	80.8	5	1710.1	2	
	5287	14	99.1	5	1438.3	2	
	5284	15	61.4	12	1141.8	3	
	5282	16	75.0	18	1932.3	1	
	5287	17	69.1	6	1647.3	2	
	5282	18	58.0	18	1926.1	2	
	5283	19	82.2	15	1372.3	2	
	5285	20	79.1	9	1711.5	1	

Test Mode		802.11ax HE160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5286	1	52.4	8	1016.7	3	1
	5286	2	76.9	7	1143.0	2	
	5284	3	61.0	13	1843.0	2	
	5283	4	87.1	16	1048.7	2	
	5284	5	78.5	12	1400.6	3	
	5287	6	80.6	5	1362.0	3	
	5283	7	93.0	15	1491.4	2	
	5283	8	97.4	15	1962.4	1	
	5286	9	82.0	7	1426.8	2	
	5285	10	70.7	9	1412.2	1	
	5281	11	76.7	19	1139.7	2	
	5286	12	98.9	8	1119.5	3	
	5283	13	64.8	14	1110.9	2	
	5286	14	63.9	8	1024.3	2	
	5283	15	88.9	14	1986.3	2	
	5282	16	66.1	18	1657.5	2	
	5286	17	88.3	8	1205.7	3	
30	5286	1	98.2	8	1352.7	3	1
	5284	2	84.4	12	1389.6	3	
	5286	3	52.7	8	1654.3	3	
	5287	4	99.9	6	1584.5	3	
	5283	5	61.1	14	1145.3	1	
	5285	6	89.4	11	1578.9	1	
	5285	7	94.2	11	1457.0	1	
	5284	8	61.8	12	1926.6	1	
	5286	9	54.2	7	1862.2	3	
	5283	10	96.6	14	1743.2	1	
	5284	11	97.8	12	1303.5	3	
	5283	12	68.2	15	1212.0	3	
	5283	13	89.9	15	1437.0	1	
	5284	14	88.2	12	1544.1	3	
Detection Percentage (%)							93.33

Test Mode		802.11ax HE160				
Frequency		5250 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						100.00

---END---