

CFR 47 FCC Part 15.407

DFS TEST REPORT

Product : **NoteBook PC**

Trade Name : MTC; Getac

Model Number : 9213XY (X=0~9, Y=A~Z)

FCC ID : MAU9213H

Prepared for

MiTAC Technology Corp.

4F, No.1, R&D Road 2, Hsinchu Science-Based Industrial Park,
Hsinchu, Taiwan, R.O.C.

TEL. : +886 2 2501 8231

FAX. : +886 2 2509 5887

Prepared by

Interocean EMC Technology Corp.

244 No.5-2, Lin 1, Tin-Fu Tsun, Lin-Kou Hsiang,
Taipei County, Taiwan, R.O.C.

TEL.: +886 2 2600 6861

FAX.: +886 2 2600 6859

Remark :

The test report consists of 42 pages in total. It shall not be reproduced except in full,
without the written approval of IETC. This document may be altered or revised by
IETC only, and shall be noted in the revision section of the document.

The test results in the report only to the tested sample.

Report Issued: 2008/10/13

Project Engineer: Anya Lee
Anya Lee

Approved: Jerry Liu
Jerry Liu

Table of Contents

| | |
|--|-----------|
| 1 General Information | 3 |
| 1.1 Description of Equipment Under Test | 3 |
| 1.2 Test Equipment | 4 |
| 1.3 Test peripheral | 4 |
| 1.4 STATEMENT OF COMPLIANCE | 4 |
| 1.5 DEVIATIONS FROM THE STANDARD | 4 |
| 2 Dynamic Frequency Selection (DFS) test | 5 |
| 2.1 Operating environment | 5 |
| 2.2 UNII Device Description | 5 |
| 2.3 Operating mode | 5 |
| 2.4 Test Protocol and Requirement | 6 |
| 2.5 DFS Detection Thresholds and Limitations of each Parameter | 7 |
| 2.6 Radar Test Waveforms | 7 |
| 2.7 Radar Waveform Calibration | 11 |
| 2.8 Test setup | 16 |
| 2.9 DFS Test summary | 16 |
| 2.10 DFS test result | 16 |
| 3 Photographs of Test | 42 |
| 3.1 DFS Test Measurement | 42 |

1 General Information

1.1 Description of Equipment Under Test

Product : NoteBook PC

Model Number : 9213XY (X=0~9, Y=A~Z)

Applicant : **MiTAC Technology Corp.**
4F, No.1, R&D Road 2, Hsinchu Science-Based Industrial Park,
Hsinchu, Taiwan, R.O.C.

Manufacturer : **Getac Technology (Kunshan) Co., Ltd.**
Kunshan Export Processing Zone, 215300 Jiangsu, P.R.China

Power Supply : Manufacturer: Delta, M/N: SADP-65KB BBVF
Input: 100-240Vac, 50-60Hz, 1.5A
Power cord: Non-shielded Detachable, 1.8 m w/o core
Output: 19Vdc, 3.42A
Power cable: Non-shielded Un-detachable, 1.8m with core

Operating Frequency : 5180MHz ~ 5240MHz; 5260MHz ~ 5320MHz; 5500MHz ~ 5700MHz

Type of Modulation : OFDM

Antenna description : This device uses PIFA antenna.

| Antenna Gain | 5180MHz-5320MHz | 5500MHz-5700MHz |
|----------------|-----------------|-----------------|
| Chain A | 1.26 dBi | 0.32 dBi |
| Chain B | 1.08 dBi | 1.99 dBi |
| Chain C | 1.39 dBi | 1.23 dBi |
| Connector type | U.FL | U.FL |

Sample Receive date : Aug. 28, 2008

Date of Test : Aug. 28 ~ Sep. 23, 2008

Additional Description : 1) The EUT is **NoteBook PC**.
2) All model included in this report, the difference is for different market; the rest parts are identical.
3) The Model Number “**9213XY**” is representative selected in the test and included in this report.

Remark :

The imbeded wireless module (Intel Wi-Fi Link 5300 Minicard 533AN MMW) is designed for 802.11a/b/g/n applications with a PCI Express Minicard interface. It has three receive chains and three transmit chains (3x3 configuration).

1.2 Test Equipment

| Instrument | Manufacturer | Model | Next Cal. Date |
|--|-----------------|---------|----------------|
| Spectrum Analyzer | Rohde & Schwarz | FSEK 30 | 2008/12/27 |
| ESG Vector Signal Generator | Agilent | E4438C | 2009/05/06 |
| Signal Generator Studio for pulse Building | Agilent | N7620A | N/A |

Note: The above equipments are within the valid calibration period.

1.3 Test peripheral

| Instrument | Manufacturer | Model | FCC ID |
|------------|---------------|-------------------|-----------|
| Master AP | Cisco-Linksys | AIR-AP1242AG-A-K9 | LDK102056 |

1.4 STATEMENT OF COMPLIANCE

The tested sample complied with the DFS requirements of:

FCC Part 15.407(h)(2)

Maintenance of compliance is the responsibility of the manufacturer. Any modifications to the product should be assessed to determine their potential impact on the compliance status of the device with respect to the standards detailed in this test report.

1.5 DEVIATIONS FROM THE STANDARD

No deviations were made from the test methods and requirements covered by the scope of this report.

2 Dynamic Frequency Selection (DFS) test

2.1 Operating environment

Ambient temperature : 26°C

Relative humidity : 56%

2.2 UNII Device Description

2.2.1 The Master device operates in the following UNII bands:

- a. 5150-5250 MHz
- b. 5250-5350 MHz
- c. 5470-5725 MHz
- d. 5725-5825 MHz

2.2.2 Client (Slave) EUT:

Operating mode:

The EUT was defined as the client without radar detection function.

There are no “ad-hoc” or “peer-to-peer” mode for this device (please refer the declaration letter).

Associating peripheral:

The device was set up to associate with the master device (Model Name : AIR-AP1242AG-A-K9).

2.2.3 The maximum EIRP of this device is 16.47 dBm from UNII band. This device doesn't exceed 27dBm EIRP, so no transmit power control is implemented.

2.2.4 Below are the available 50 ohm antenna assemblies and their corresponding gains. 0dBi gain was used to set the -61dBm threshold level (-62dBm+1dB) during calibration of the conducted test setup.

2.3 Operating mode

Performance was measured at an active frequency of 5260 and 5500MHz

One laptop PC is connected to the AP via a wire Ethernet connection. A separate laptop PC is used as a host computer for the Station. The AP and the Station transmit output levels are set to normal operating condition.

System architectures were used under **IP based mode**.

2.4 Test Protocol and Requirement

2.4.1 For a Master Device, the DFS conformance requirement will be verified utilizing one short pulse radar type. Additionally, the Channel Move Time and Channel Closing Transmission Time requirements will be verified utilizing the long pulse radar type. The statistical performance check will be verified utilizing all radar type.

2.4.2 For a Client Device without DFS, the channel move time and channel closing transmission time requirements will be verified with one short pulse radar type.

For testing a Client Device with In-Service Monitoring, two configurations must be tested.

- The Client Device detects the radar waveform:
The channel move time and channel closing transmission time requirements will be verified utilizing short pulse radar type and the long pulse radar type. The statistical performance check will be verified utilizing all radar types.
- The Master Device detects the radar waveform:
The channel move time and channel closing transmission time requirements will be verified utilizing short pulse radar type.

2.4.3 A UNII network will employ a DFS function to:

- detect signals from radar systems and to avoid co-channel operation with these systems
- provide on aggregate a Uniform Spreading of the Operating Channels across the entire band. This applies to the 5250-5350 MHz and/ or 5470-5725 MHz bands.

2.4.4 Within the context of the operation of the DFS function, a UNII device will operate in either Master Mode or Client Mode. UNII devices operating in Client Mode can only operate in a network controlled by a UNII device operating in Master Mode.

The tables as below summarize the information contained.

Applicability of DFS Requirements Prior to Use of a Channel

| Requirement | Operational Mode | | |
|---------------------------------|------------------|--------------------------------|-----------------------------|
| | Master | Client Without Radar Detection | Client With Radar Detection |
| Non-Occupancy Period | Yes | Not required | Yes |
| DFS Detection Threshold | Yes | Not required | Yes |
| Channel Availability Check Time | Yes | Not required | Not required |
| Uniform Spreading | Yes | Not required | Not required |
| UNII Detection Bandwidth | Yes | Not required | Yes |

Applicability of DFS requirements during normal operation

| Requirement | Operational Mode | | |
|-----------------------------------|------------------|--------------------------------|-----------------------------|
| | Master | Client Without Radar Detection | Client With Radar Detection |
| DFS Detection Threshold | Yes | Not required | Yes |
| Channel Closing Transmission Time | Yes | Yes | Yes |
| Channel Move Time | Yes | Yes | Yes |
| UNII Detection Bandwidth | Yes | Not required | Yes |

2.5 DFS Detection Thresholds and Limitations of each Parameter

| Maximum Transmit Power | Value (See Notes 1 and 2) |
|------------------------|---------------------------|
| ≥ 200 mW | -64 dBm |
| ≤ 200 mW | -62 dBm |

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

| Parameter | Value |
|-----------------------------------|---|
| Non-occupancy Period | Minimum 30 minutes |
| Channel Availability Check Time | 60 seconds |
| Channel Move Time | 10 seconds (See Note 1) |
| Channel Closing Transmission Time | 200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period (See Note 1 and 2) |
| UNII Detection Bandwidth | Minimum 80% of the UNII 99% transmission power bandwidth. (See Note 3) |

Note 1: The instant that the Channel Move Time and the Channel Closing Transmission Time begins is as follows:

- For the Short Pulse Radar Test Signals this instant is the end of the Burst.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar Burst generated.
- For the Long Pulse Radar Test Signal this instant is the end of the 12 second period defining the Radar Waveform.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 1 is used and for each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

2.6 Radar Test Waveforms

2.6.1 This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Short Pulse Radar Test Waveforms

| Radar Type | Pulse Width (μsec) | PRI (μsec) | Number of Pulses | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|-----------------------------|--------------------|------------|------------------|--|--------------------------|
| 1 | 1 | 1428 | 18 | 60% | 30 |
| 2 | 1-5 | 150-230 | 23-29 | 60% | 30 |
| 3 | 6-10 | 200-500 | 16-18 | 60% | 30 |
| 4 | 11-20 | 200-500 | 12-16 | 60% | 30 |
| Aggregate (Radar Types 1-4) | | | | 80% | 120 |

2.6.2 A minimum of 30 unique waveforms is required for each of the Short Pulse Radar Type 2 through 4. For Short Pulse Radar Type 1, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for Short Pulse Radar Type 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms.

2.6.3 The aggregate is the average of the percentage of successful detections of Short Pulse Radar Type 1-4.

Long Pulse Radar Test Waveforms

| Radar Type | Pulse Width (μsec) | Chirp Width (MHz) | PRI (μsec) | Number of Pulses per Burst | Number of Bursts | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|------------|--------------------|-------------------|------------|----------------------------|------------------|--|--------------------------|
| 5 | 50-100 | 5-20 | 1000-2000 | 1-3 | 8-20 | 80% | 30 |

2.6.4 The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse radar test signal. If more than 30 waveforms are used for the Long Pulse radar test signal, then each additional waveform must also be unique and not repeated from the previous waveforms.

Each waveform is defined as follows:


1. The transmission period for the Long Pulse Radar test signal is 12 second.
2. There are a total of 8 to 20 Bursts in the 12 second period, with the number of Bursts being randomly chosen. This number is Burst Count.
3. Each Burst consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each Burst within the 12 second sequence may have a different number of pulses.
4. The pulse width is between 50 and 100 microsecond, with the pulse width being randomly chosen. Each pulse within a Burst will have the same pulse width. Pulses in different Bursts may have different pulse widths.
5. Each pulse has a linear FM chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a Burst will have the same chirp width. Pulses in different Bursts may have different chirp widths. The chirp is centered on the pulse. For example, with radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.

6. If more than one pulse is present in a Burst, the time between the pulses will be between 1000 and 2000 microsecond, with the time being randomly chosen. If three pulses are present in a Burst, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
7. The 12 second transmission period is divided into even intervals. The number of intervals is equal to Burst Count. Each interval is of length $(12,000,000 / \text{Burst Count})$ microseconds. Each interval contains one Burst. The start time for the Burst, relative to the beginning of the interval, is between 1 and $[(12,000,000 / \text{Burst Count}) - (\text{Total Burst Length}) + (\text{One Random PRI Interval})]$ microsecond, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each Burst is chosen independently.

A representative example of a Long Pulse radar test waveform:

1. The total test signal length is 12 second.
2. 8 Bursts are randomly generated for the Burst Count.
3. Burst 1 has 2 randomly generated pulses.
4. The pulse width (for both pulses) is randomly selected to be 75 microsecond.
5. The PRI is randomly selected to be at 1213 microsecond.
6. Bursts 2 through 8 are generated using steps 3 – 5.
7. Each Burst is contained in even intervals of 1,500,000 microseconds. The starting location for Pulse 1, Burst 1 is randomly generated (1 to 1,500,000 minus the total Burst 1 length + 1 random PRI interval) at the 325, 001 microsecond step. Bursts 2 through 8 randomly fall in successive 1,500,000 microsecond intervals (i.e. Burst 2 falls in the 1,500,001 – 3,000,000 microsecond range).

Graphical Representation of a Long Pulse radar Test Waveform

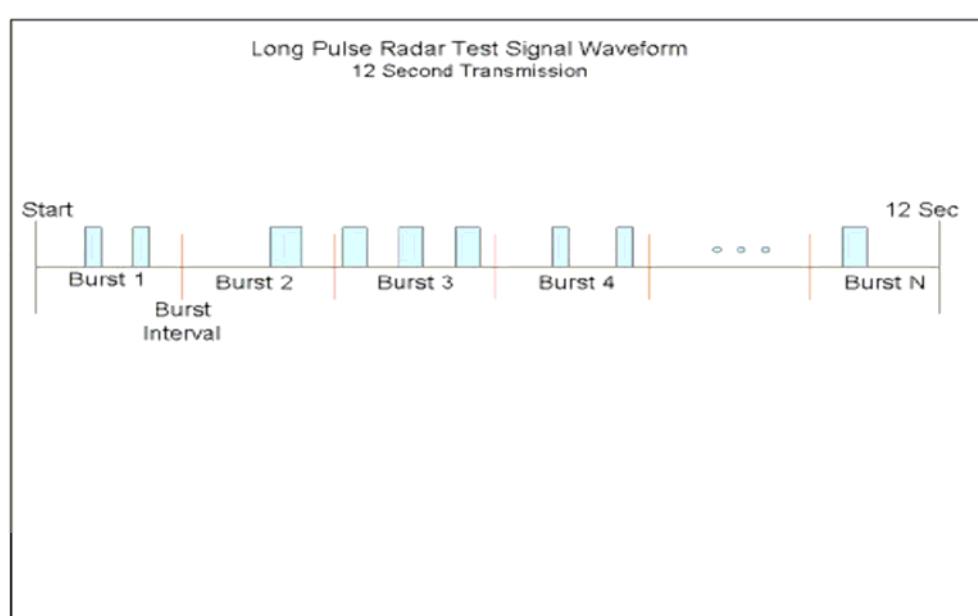

Frequency Hopping Radar Test Waveforms

| Radar Type | Pulse Width (μ sec) | PRI (μ sec) | Pulses per Hop | Hopping Rate (kHz) | Hopping Sequence Length (msec) | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|------------|--------------------------|------------------|----------------|--------------------|--------------------------------|--|--------------------------|
| 6 | 1 | 333 | 9 | 0.333 | 300 | 70% | 30 |

2.6.5 For the Frequency Hopping Radar Type, the same *Burst* parameters are used for each waveform.

2.6.6 The hopping sequence is different for each waveform and a 100-length segment is selected¹ from the hopping sequence defined by the following algorithm:
The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.


2.7 Radar Waveform Calibration

The following equipment setup was used to calibrate the conducted radar waveform. A spectrum analyzer is used to establish the test signal level for each radar type. During this process, there were no transmissions by either Master or Client device. The spectrum analyzer was switched to the zero span (time domain) mode at the frequency of the radar waveform generator. The peak detection was utilized. The spectrum analyzer RBW and VBW were set to at least 3MHz.

The signal generator amplitude and/ or step attenuators were set so that the power level measured at the spectrum analyzer was equal to the DFS detection threshold that is required for the tests.

The signal generator amplitude was set so that the power level measured at the spectrum analyzer was -61dBm.


Conducted calibrated setup diagram:

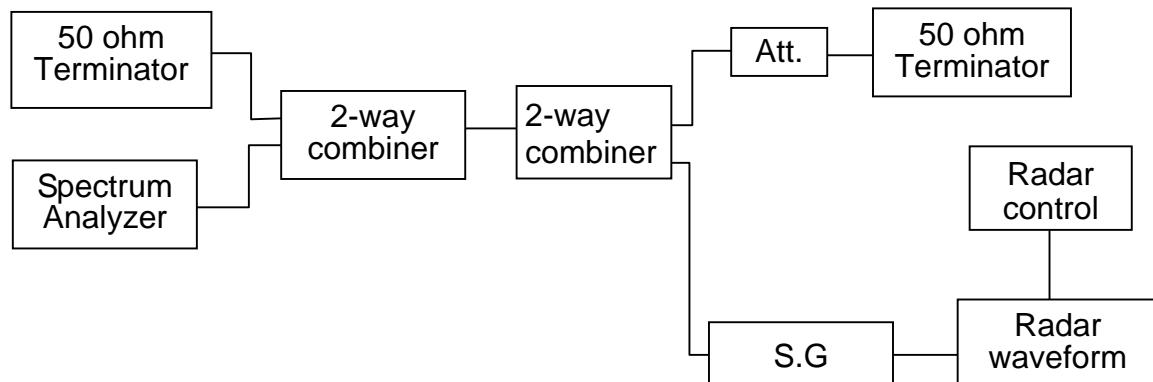


2.7.1 Radar Waveform Calibration Plots

The following are the calibration plots for radar waveform of testing required.


Radar type1:

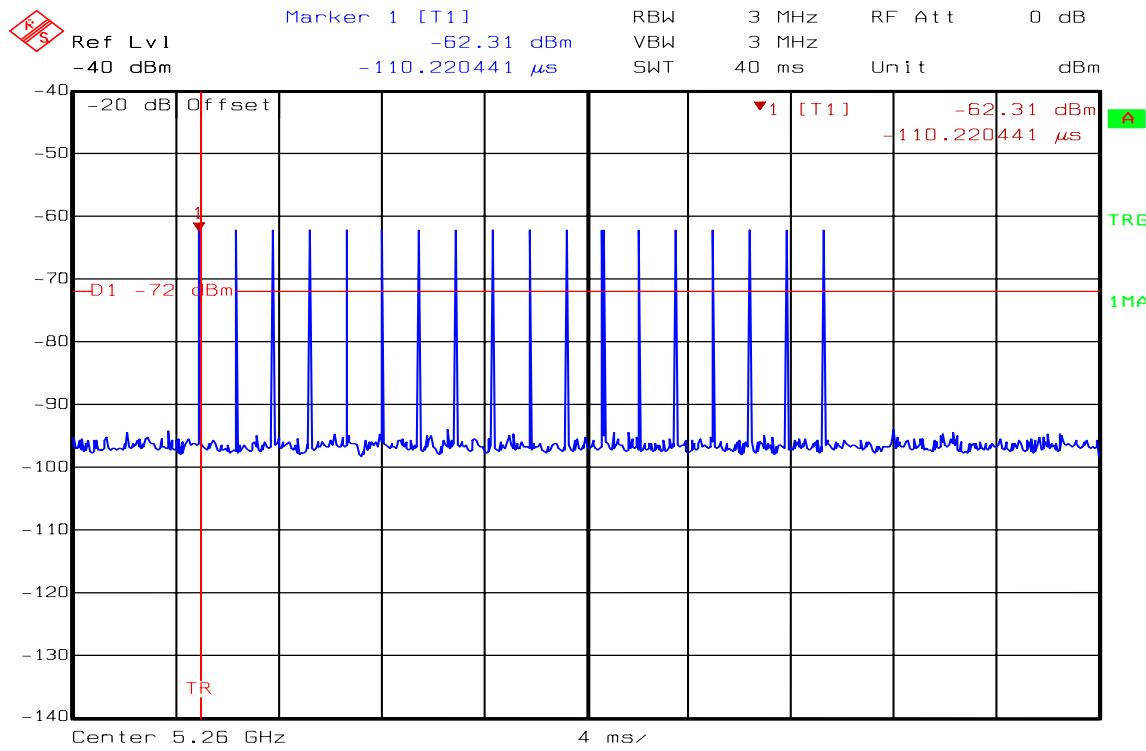


Radar type2:

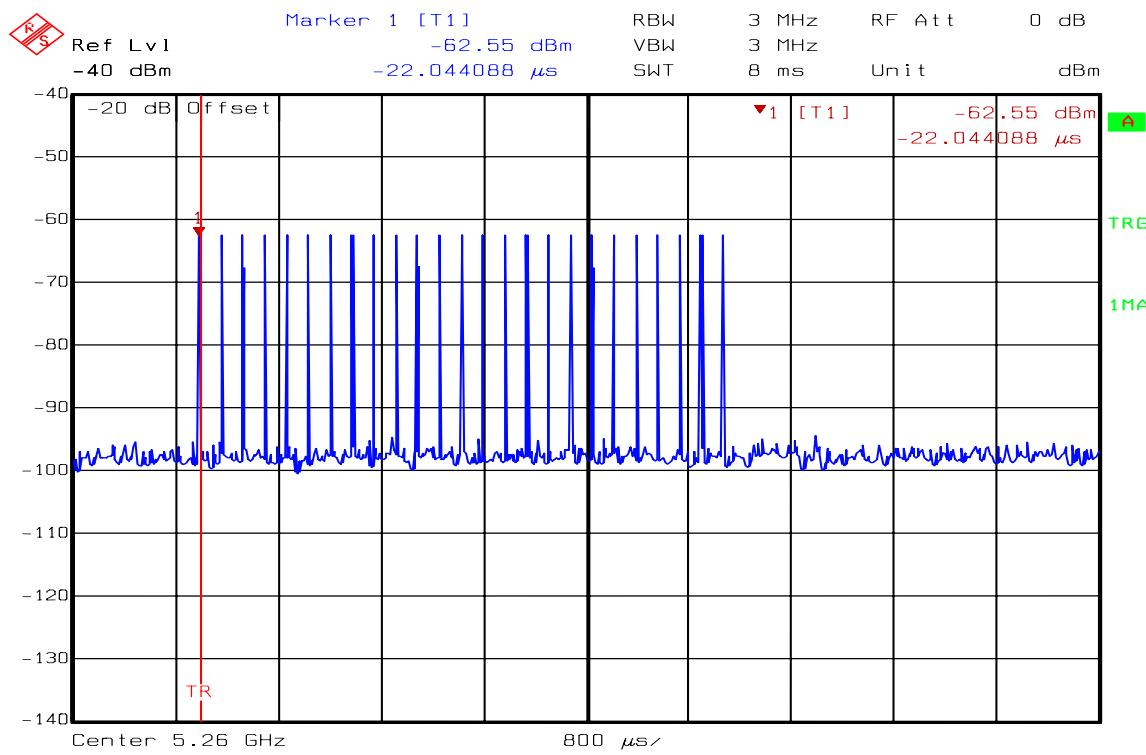


Radar type3:

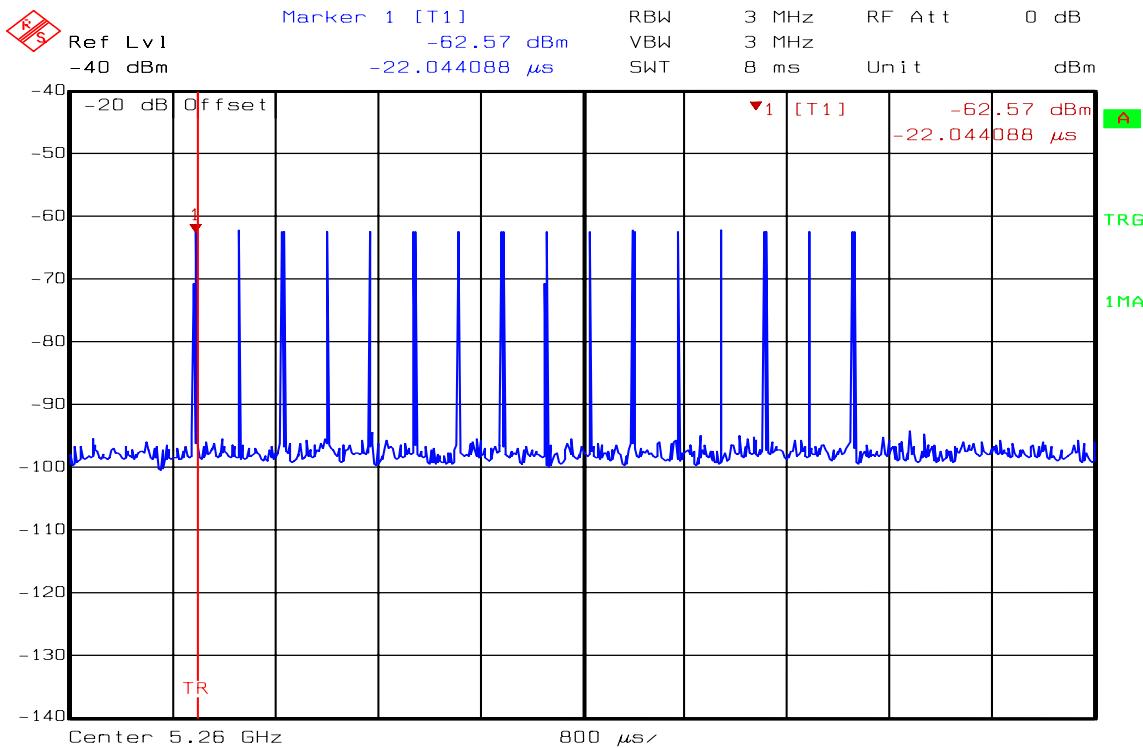


Radar type4:

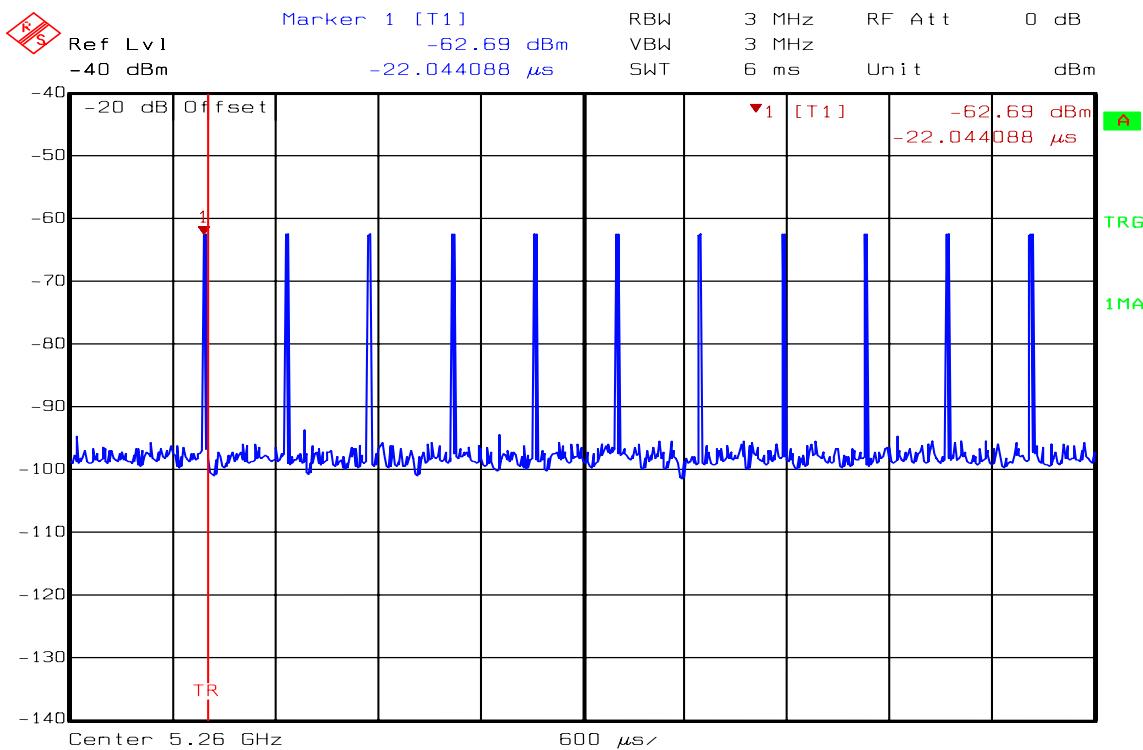


Radar type5:

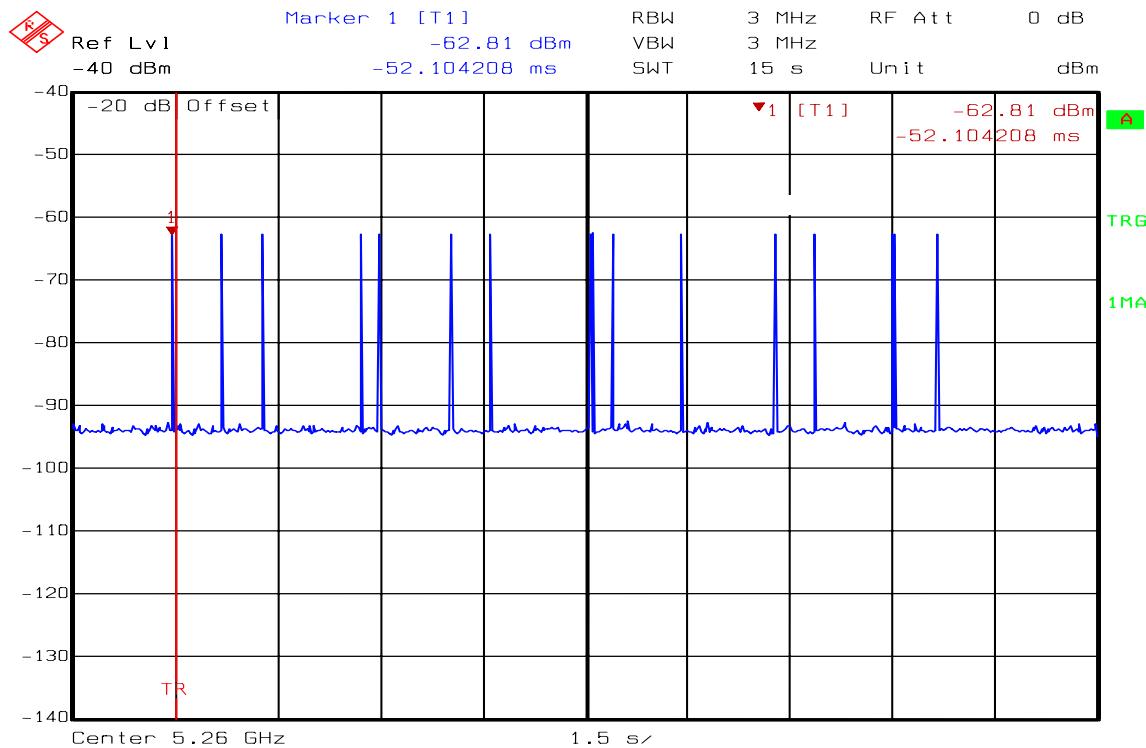


Radar type6:

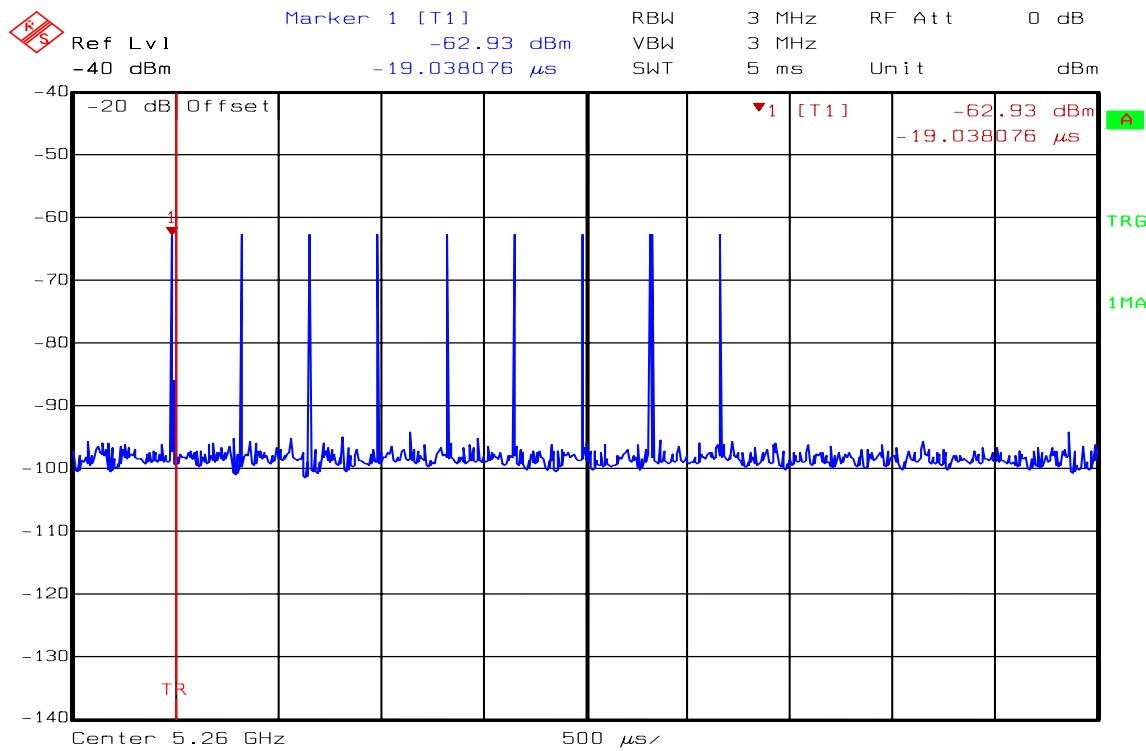

Radar type6:

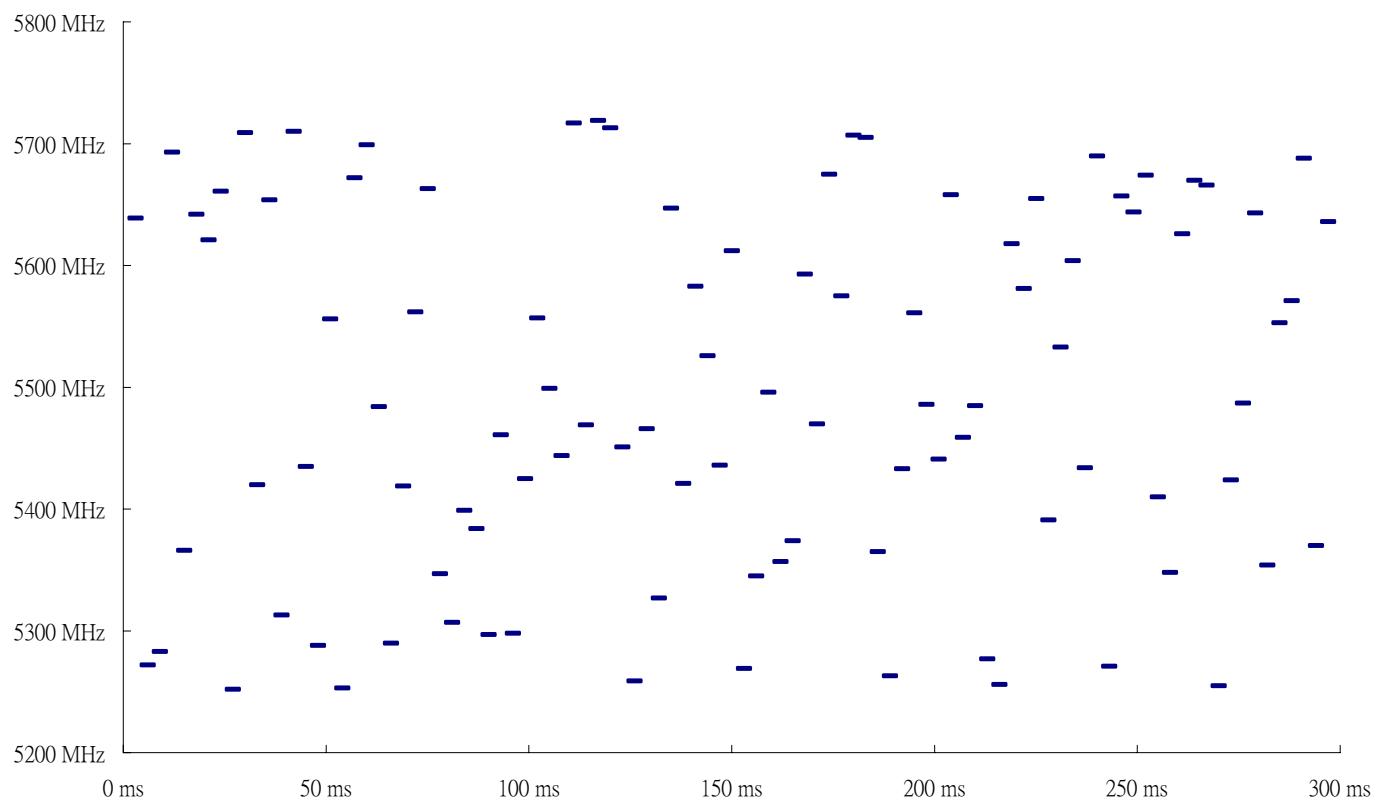

2.8 Test setup

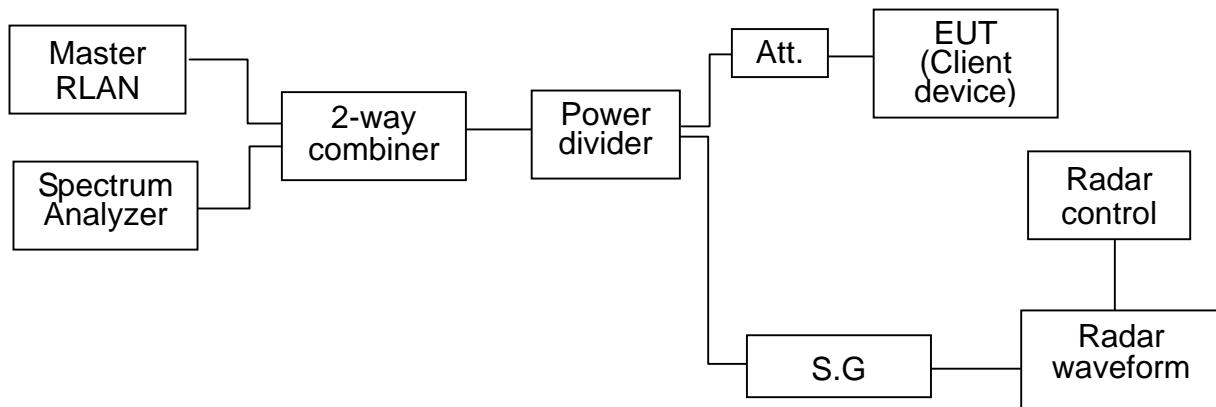

2.9 DFS Test summary

This EUT was defined as the Client without DFS detection.

| Clause | Parameter | Applicable | Pass/Fail |
|--------|-----------------------------------|--------------|-----------|
| 15.407 | DFS Detection Threshold | Not Required | N/A |
| 15.407 | Channel Availability Check Time | Not Required | N/A |
| 15.407 | Channel Move Time | Applicable | Pass |
| 15.407 | Channel Closing Transmission Time | Applicable | Pass |
| 15.407 | Non-Occupancy Period | Applicable | Pass |
| 15.407 | Uniform Spreading | Not Required | N/A |
| 15.407 | UNII Detection Bandwidth | Not Required | N/A |


2.10 DFS test result

2.10.1 Channel Move time


Client Mode (without DFS detection):

Test plots


Frequency 5260MHz (Radar type1)

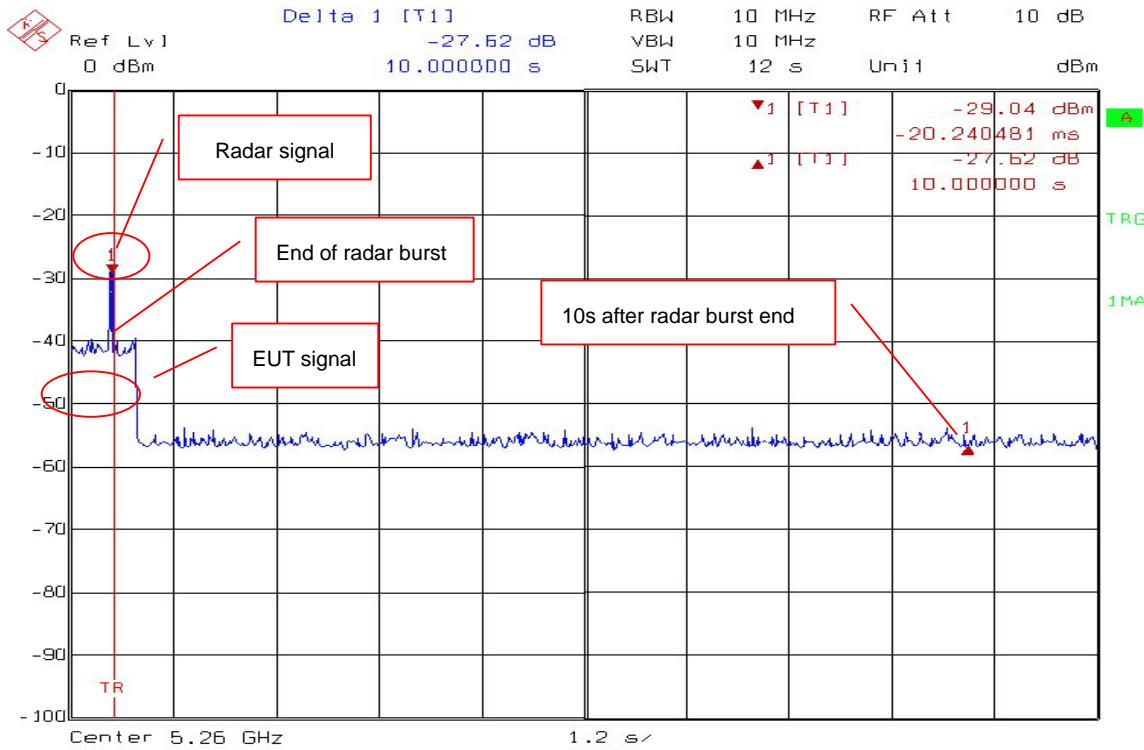


Frequency 5500MHz (Radar type1)

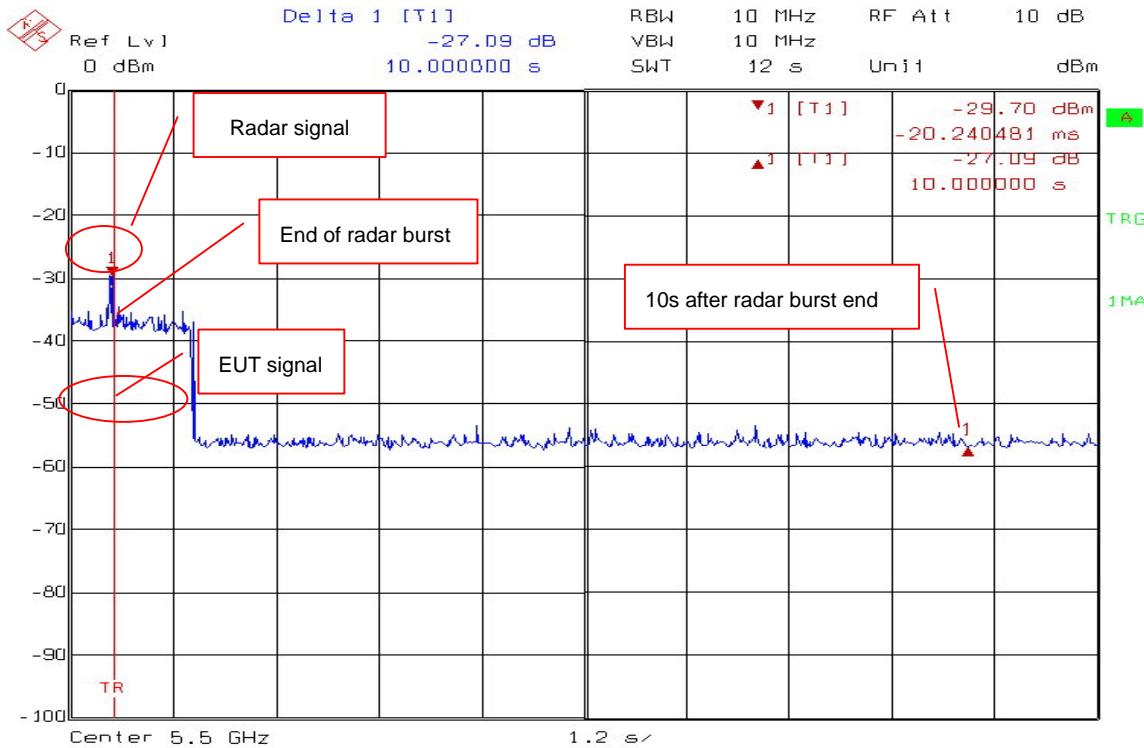


Frequency 5260MHz (Radar type2)

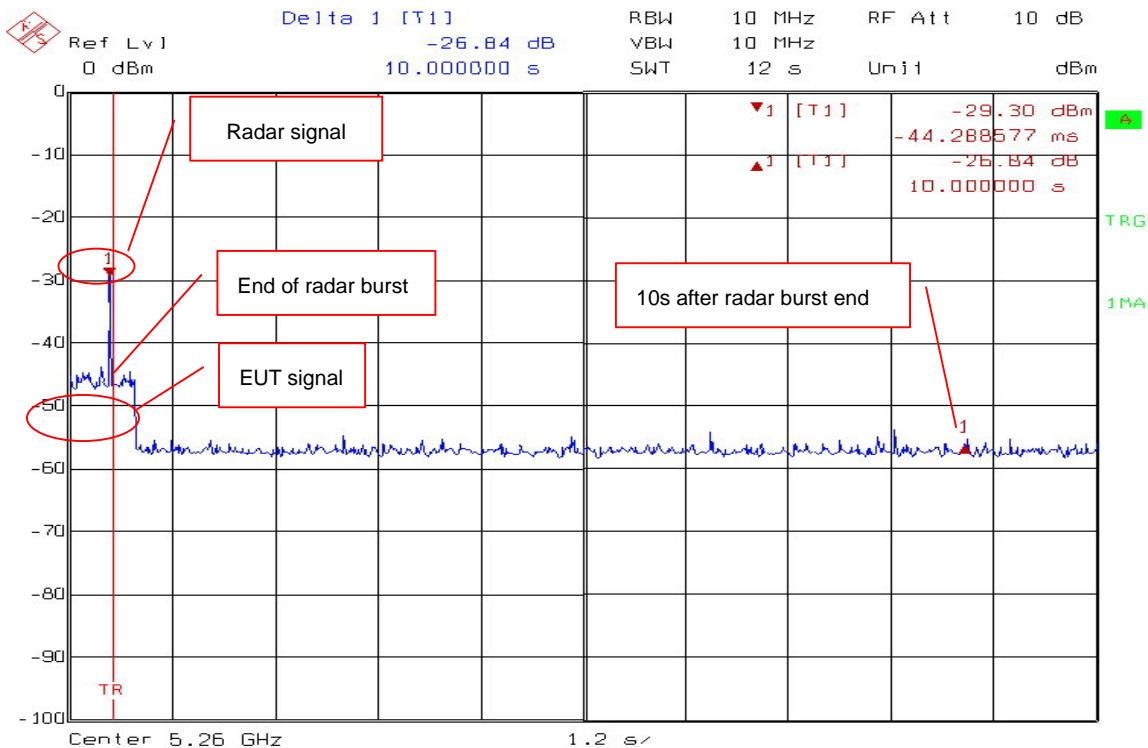


Frequency 5500MHz (Radar type2)

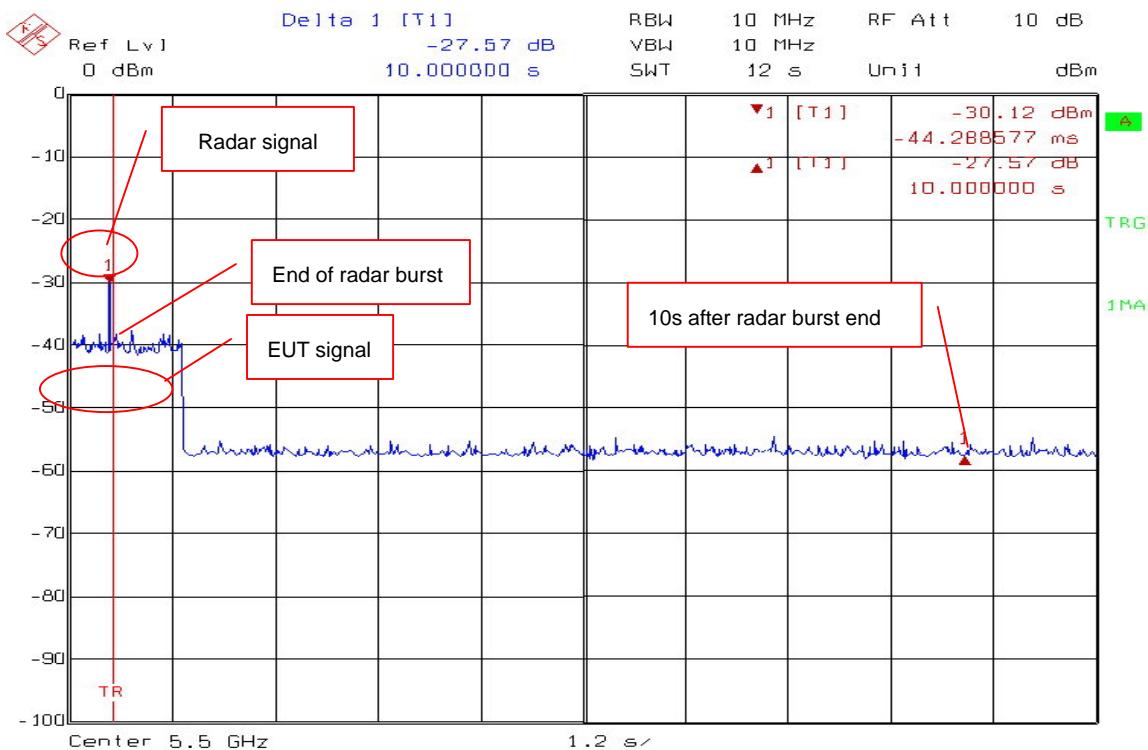


Frequency 5260MHz (Radar type3)

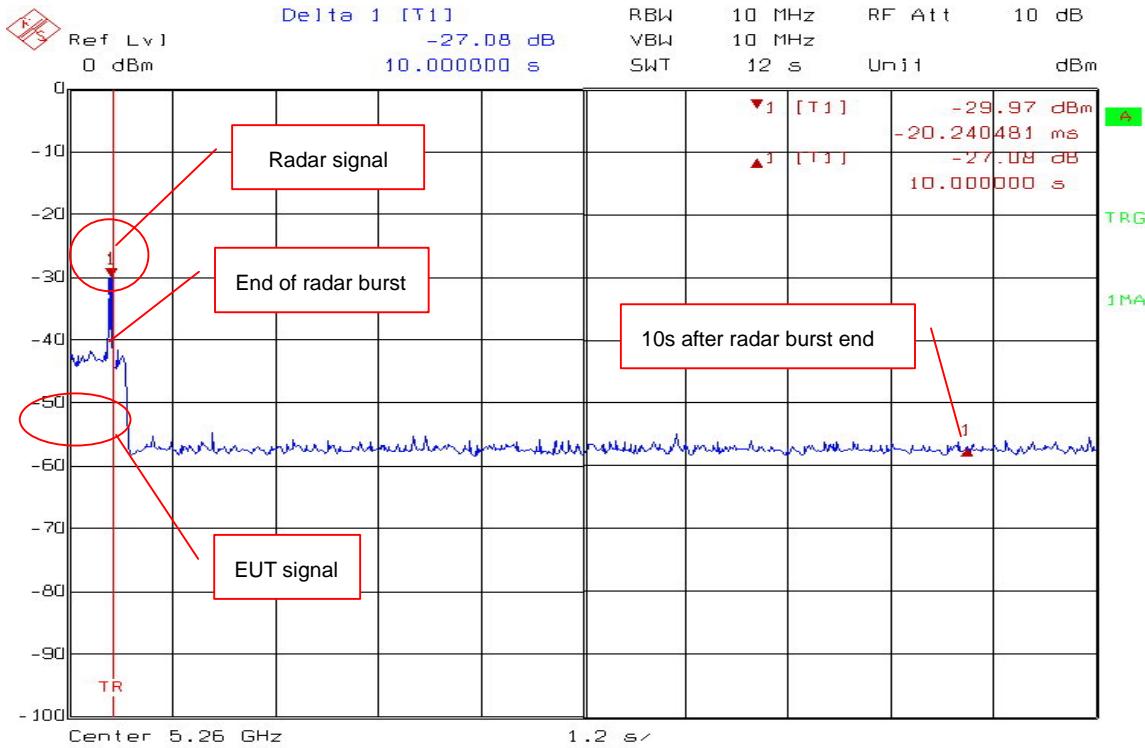


Frequency 5500MHz (Radar type3)

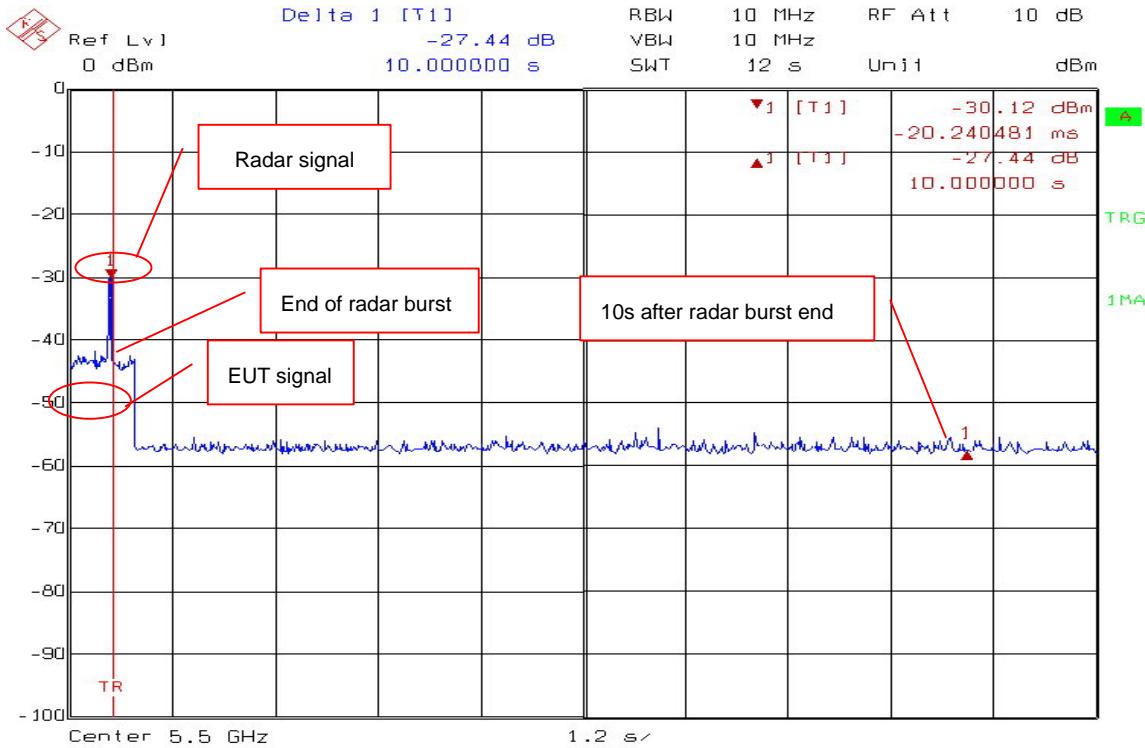


Frequency 5260MHz (Radar type4)

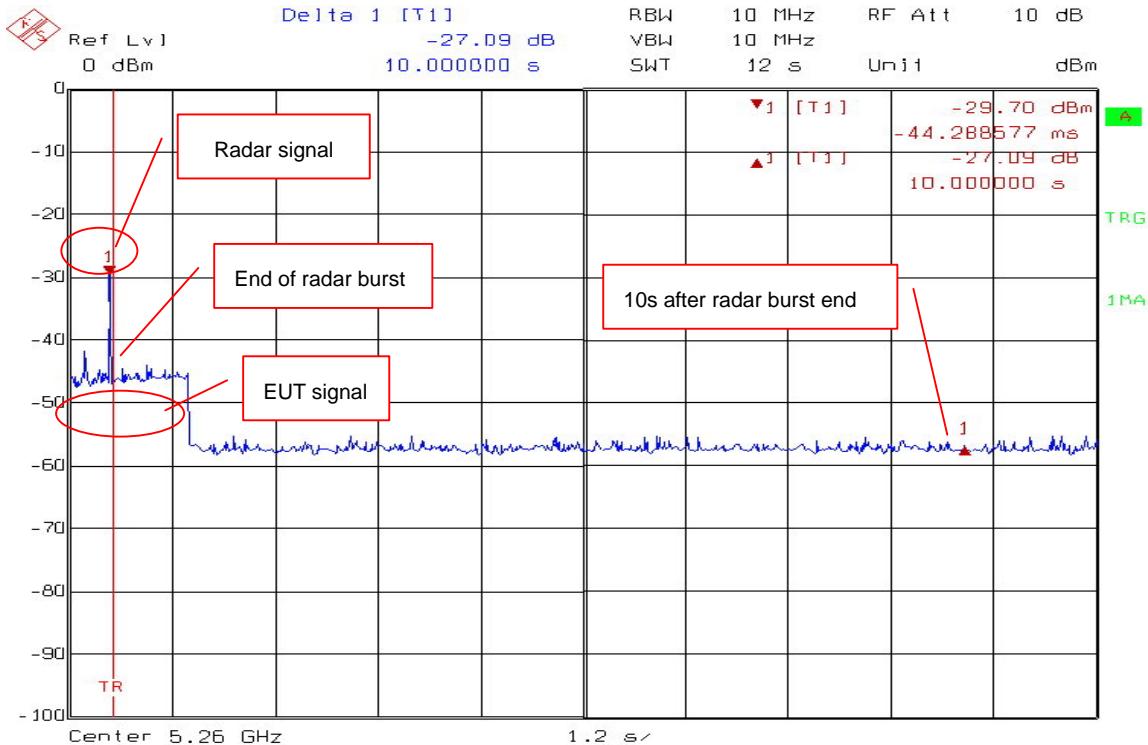


Frequency 5500MHz (Radar type4)

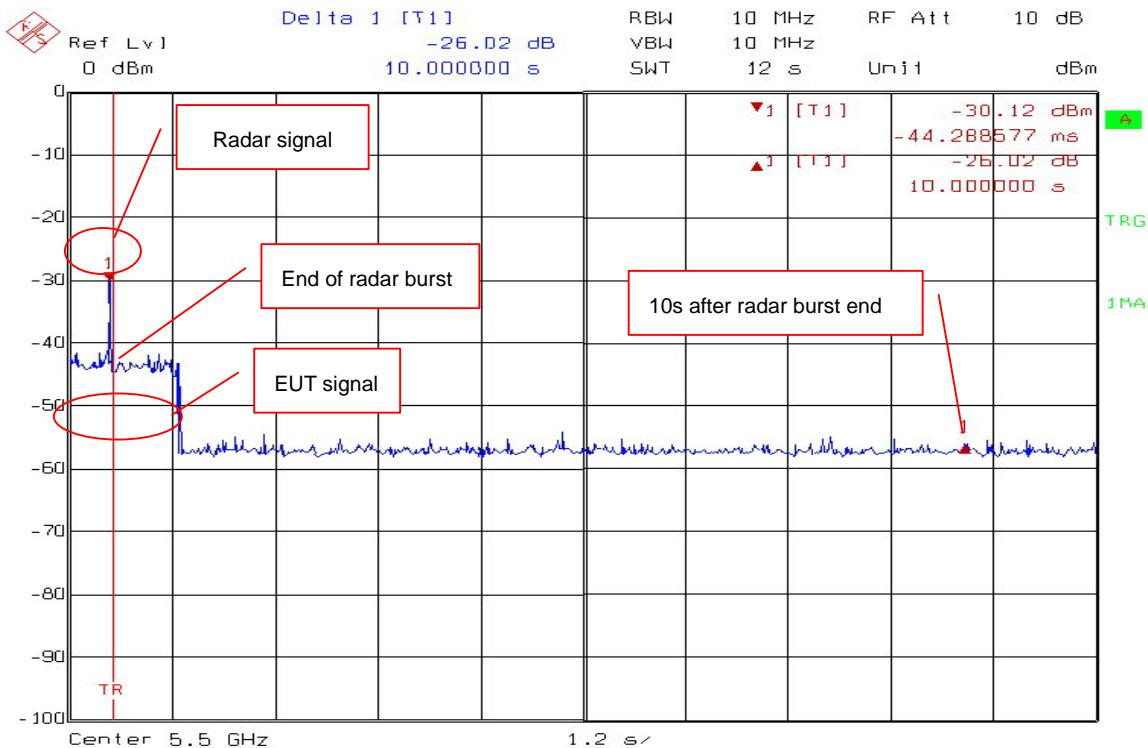


Frequency 5260MHz (Radar type5)

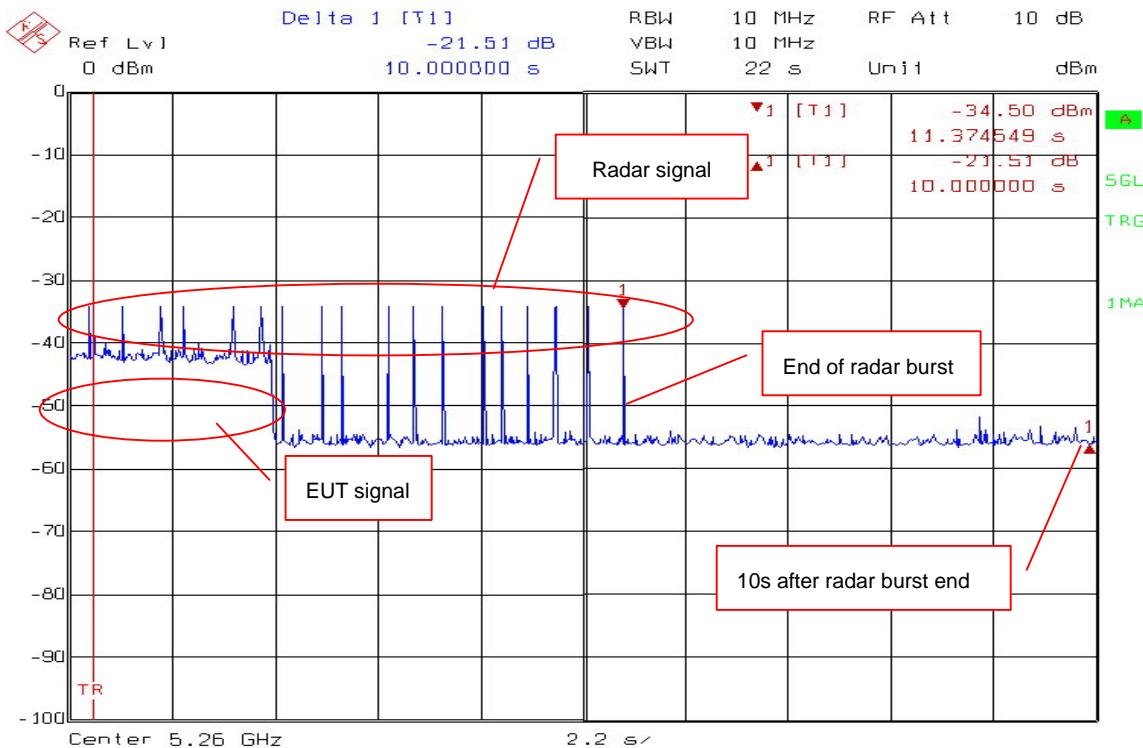


Frequency 5500MHz (Radar type5)

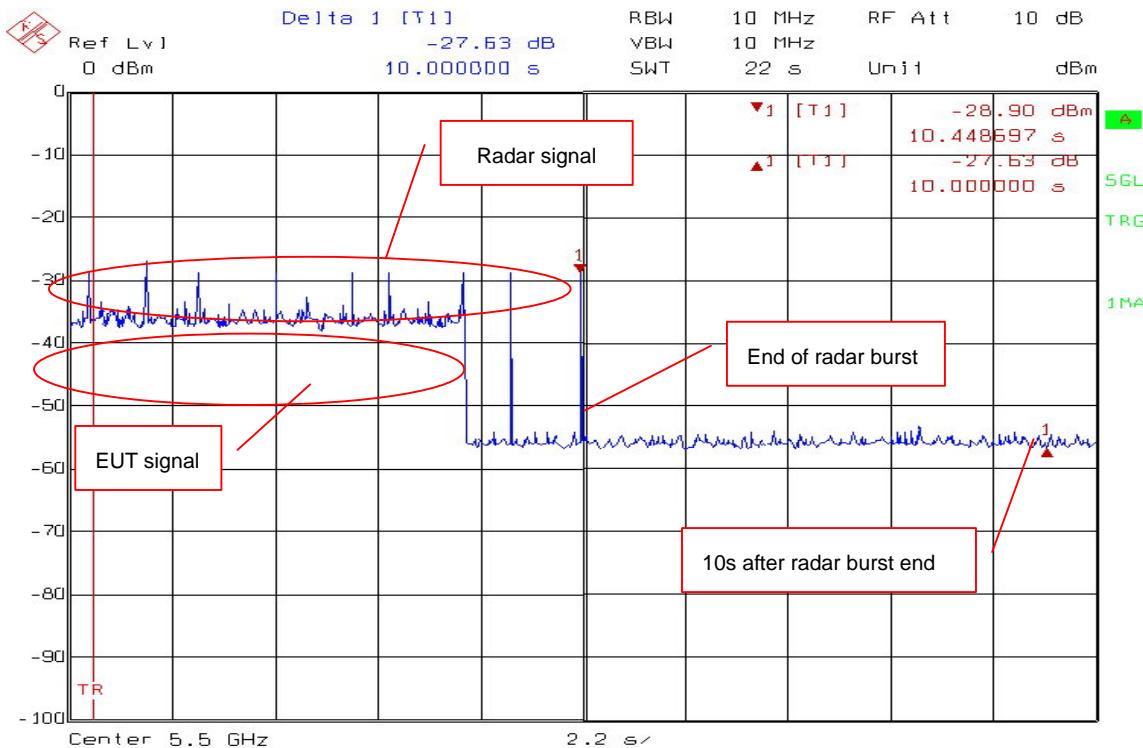

Frequency 5260MHz (Radar type6)

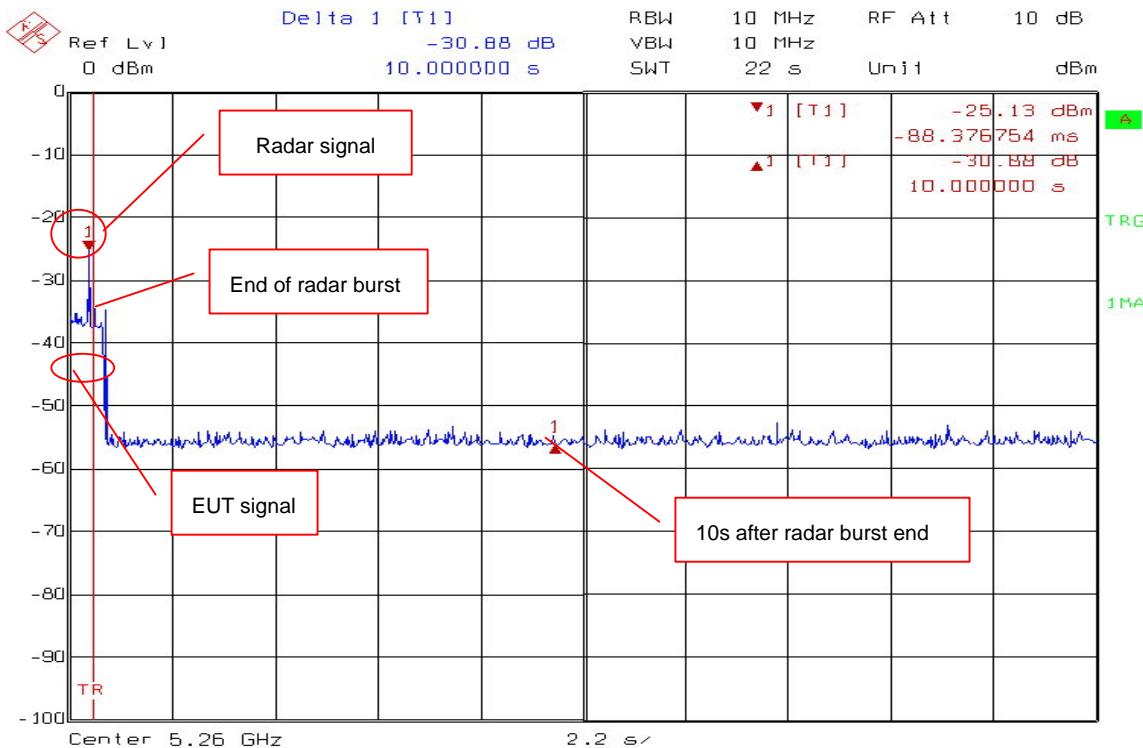

Frequency 5500MHz (Radar type6)

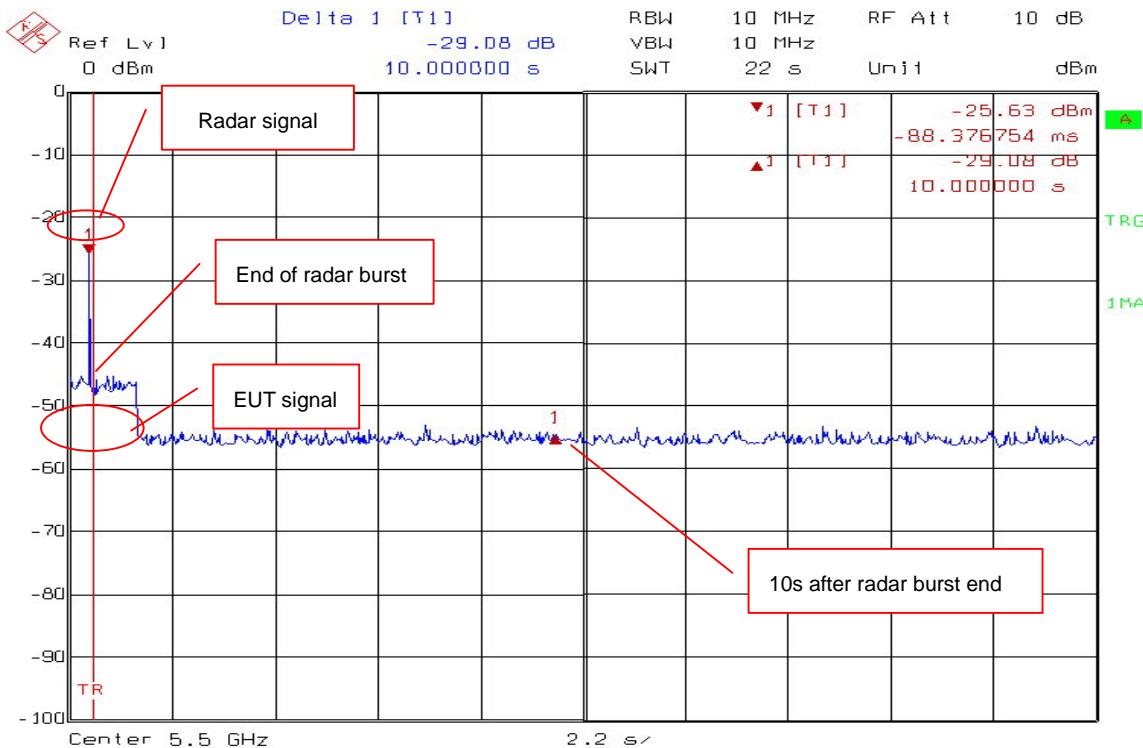

2.10.2 Channel Closing Transmission Time

(Radar type 1)

For EUT operating at 5260MHz

The Width of single AP packet is $232.657 \mu\text{s}$.

With Radar type 1 there is 1 AP packet during the channel move time, so an aggregate of intermittent control signals width is $14 \times 232.657 \mu\text{s} = 3.26\text{ms}$

For EUT operating at 5500MHz

The Width of single AP packet is $234.661 \mu\text{s}$.


With Radar type 1 there is 1 AP packet during the channel move time, so an aggregate of intermittent control signals width is $7 \times 234.661 \mu\text{s} = 1.64\text{ms}$

| Operating Frequency (MHz) | Radar Type | Channel Closing Transmission Time (ms) | Limit (ms) | Result |
|---------------------------|------------|--|------------|------------|
| 5260 | 1 | <10ms | 200 | Compliance |
| 5500 | 1 | <10ms | 200 | Compliance |


| Operating Frequency (MHz) | Radar Type | Aggregate of intermittent control signals width (ms) | Limit (ms) | Result |
|---------------------------|------------|--|------------|------------|
| 5260 | 1 | 3.26 | 60 | Compliance |
| 5500 | 1 | 1.64 | 60 | Compliance |

Note: please see the test plots as below pages.


Single AP packet width (5260MHz)

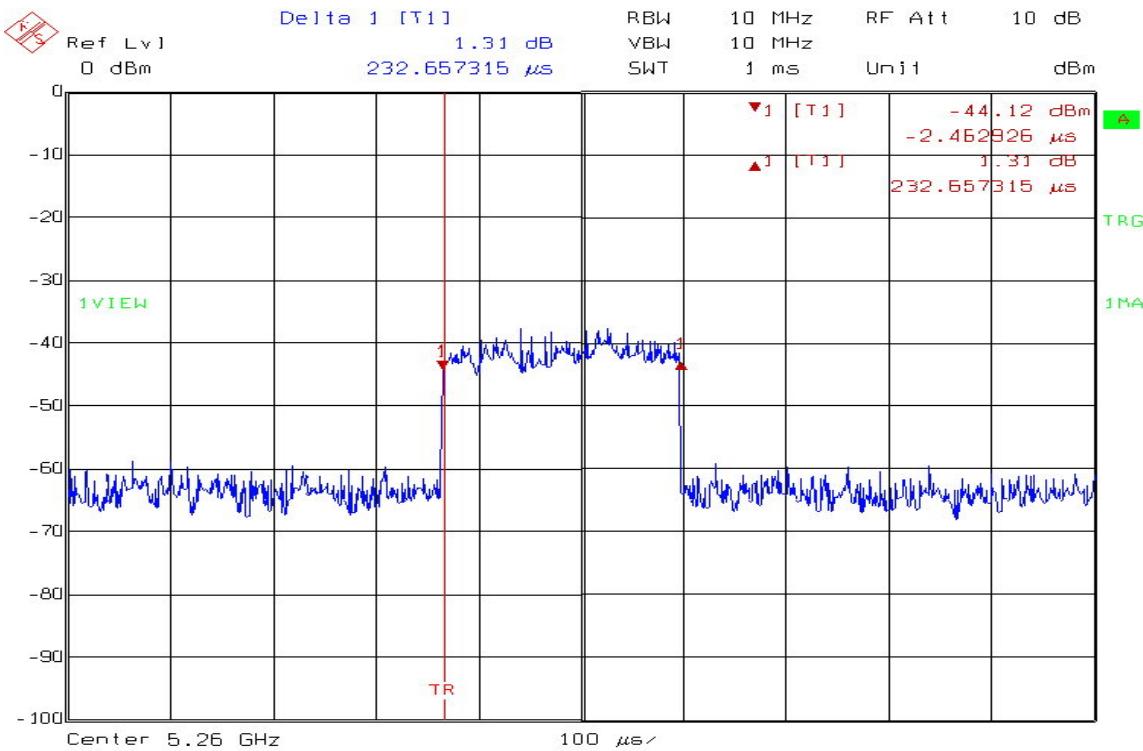


Closing transmission AP packet number (5300MHz)

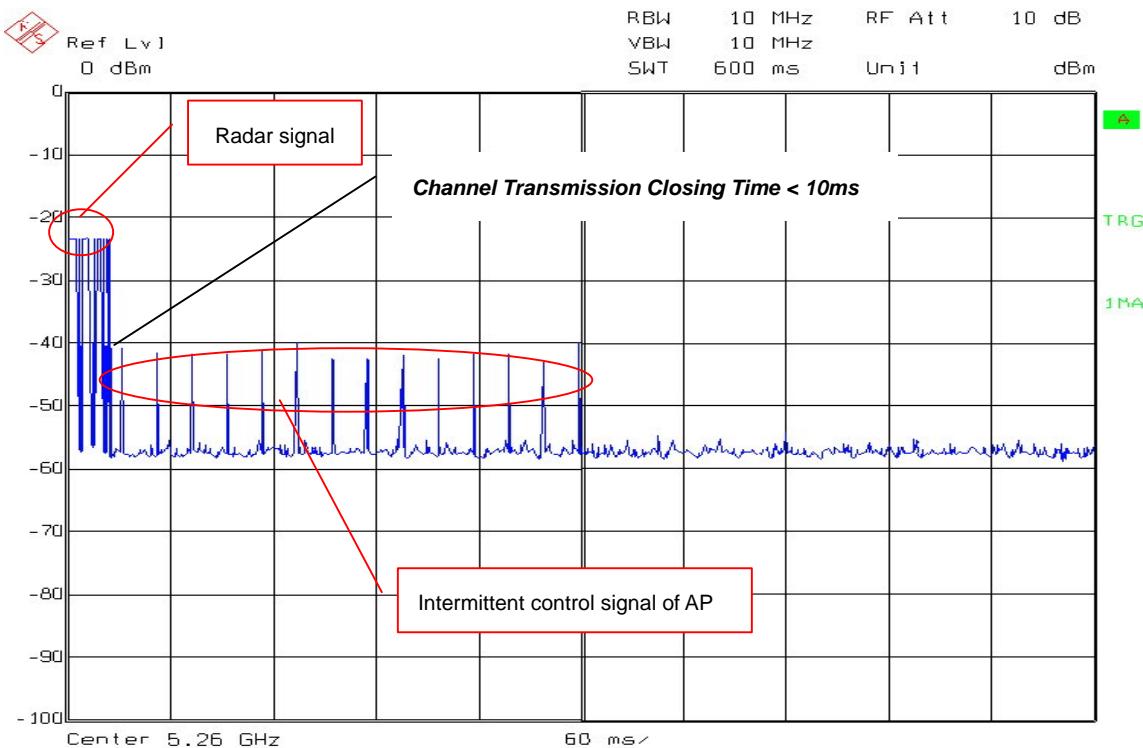

Single AP packet width (5500MHz)

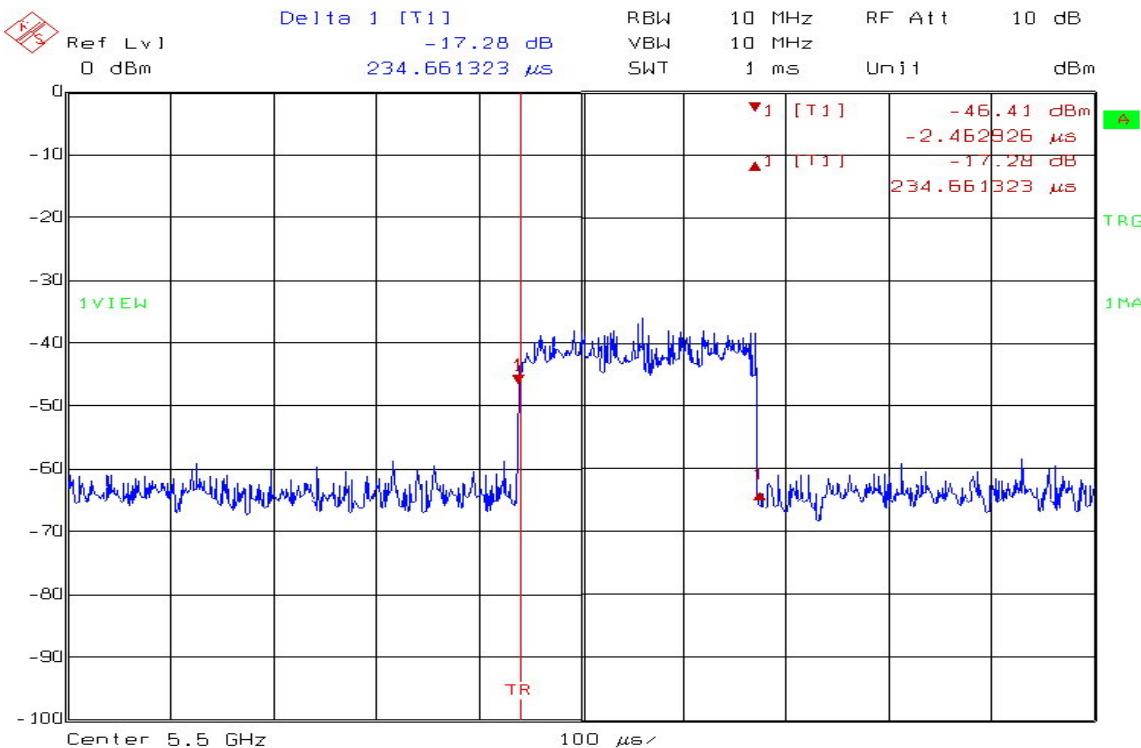

Closing transmission AP packet number (5500MHz)

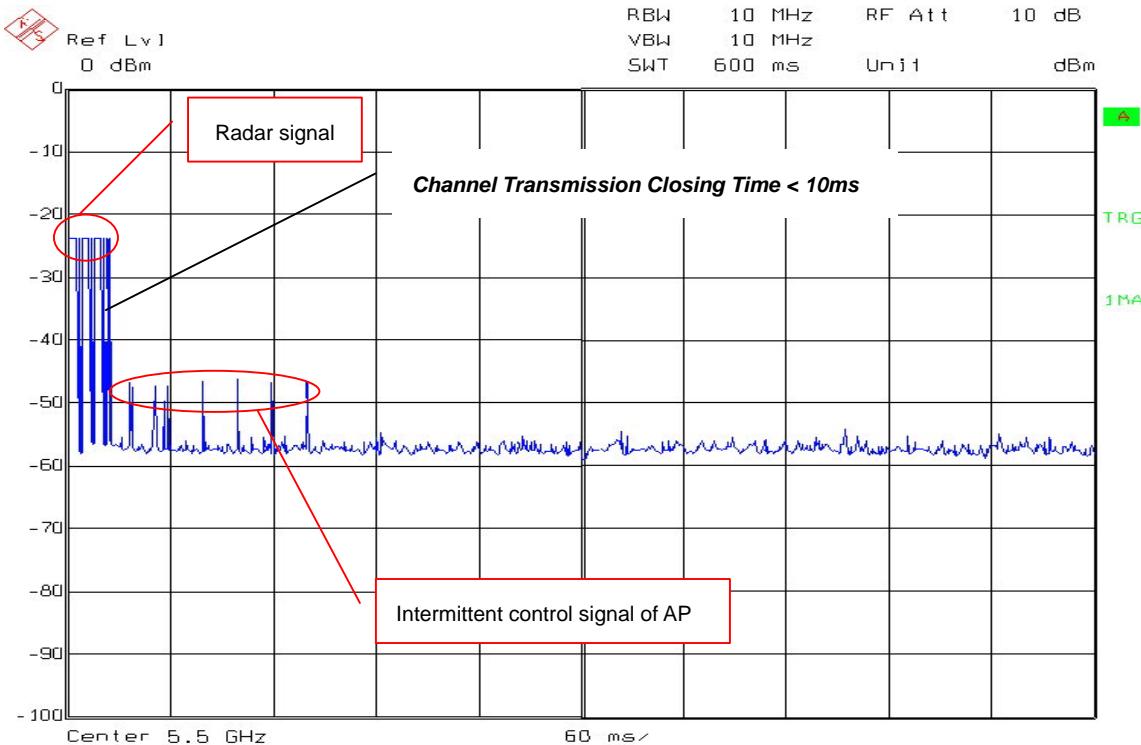

(Radar type 2)

For EUT operating at 5260MHz

The Width of single AP packet is $232.657 \mu\text{s}$.

With Radar type 1 there is 1 AP packet during the channel move time, so an aggregate of intermittent control signals width is $19*232.657\mu\text{s}= 4.42\text{ms}$

For EUT operating at 5500MHz

The Width of single AP packet is $234.661 \mu\text{s}$.


With Radar type 1 there is 1 AP packet during the channel move time, so an aggregate of intermittent control signals width is $15*234.661\mu\text{s}= 3.52\text{ms}$

| Operating Frequency (MHz) | Radar Type | Channel Closing Transmission Time (ms) | Limit (ms) | Result |
|---------------------------|------------|--|------------|------------|
| 5260 | 1 | <10ms | 200 | Compliance |
| 5500 | 1 | <10ms | 200 | Compliance |


| Operating Frequency (MHz) | Radar Type | Aggregate of intermittent control signals width (ms) | Limit (ms) | Result |
|---------------------------|------------|--|------------|------------|
| 5260 | 1 | 4.42 | 60 | Compliance |
| 5500 | 1 | 3.52 | 60 | Compliance |

Note: please see the test plots as below pages.


Single AP packet width (5260MHz)

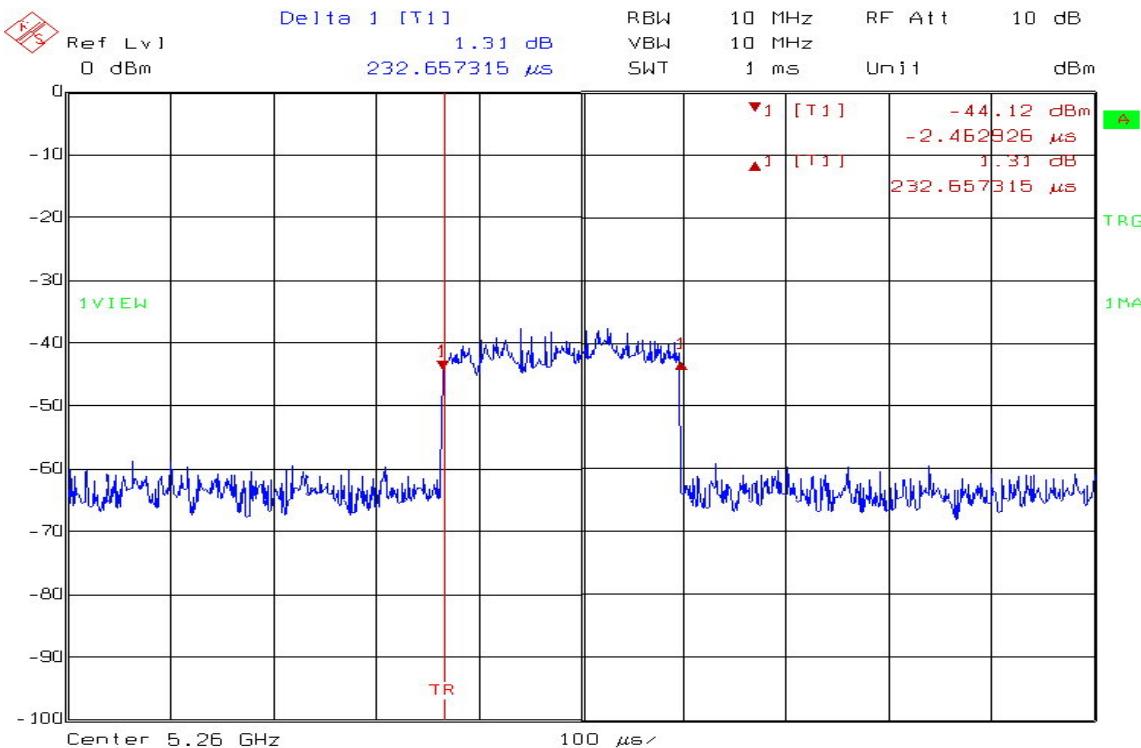


Closing transmission AP packet number (5260MHz)

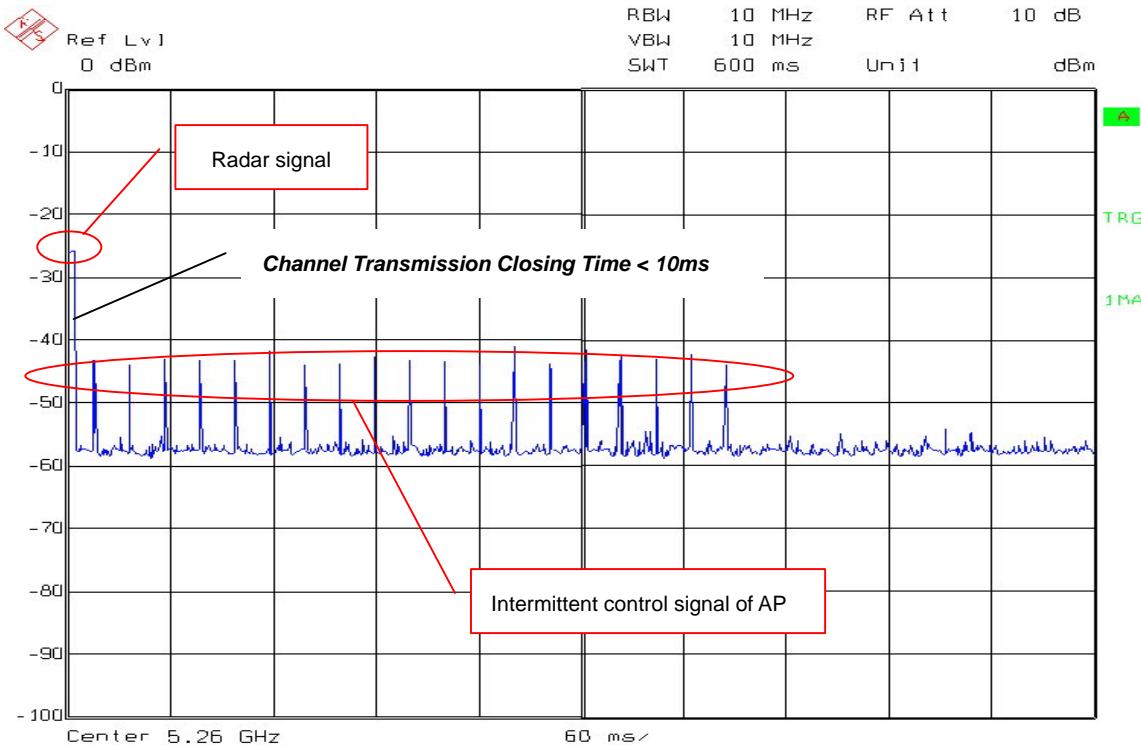

Single AP packet width (5500MHz)

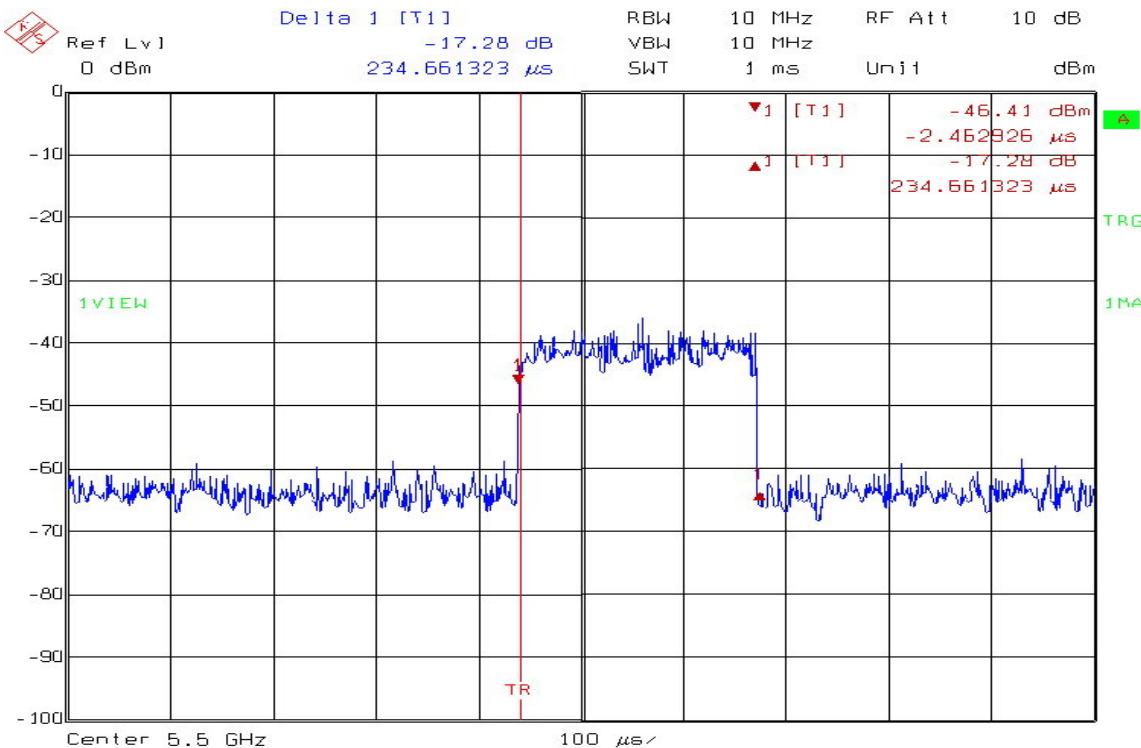

Closing transmission AP packet number (5500MHz)

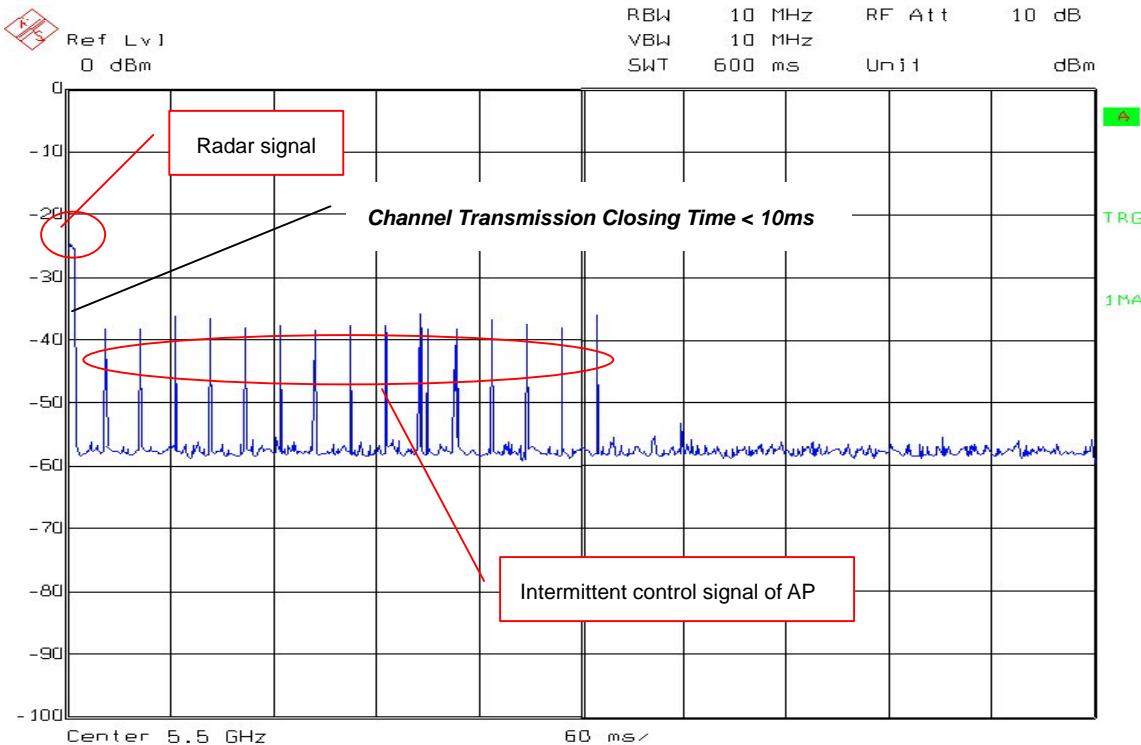

(Radar type 3)

For EUT operating at 5260MHz

The Width of single AP packet is 232.657 μ s.

With Radar type 3 there is 1 AP packet during the channel move time, so an aggregate of intermittent control signals width is $8 \times 232.657 \mu\text{s} = 1.86\text{ms}$

For EUT operating at 5500MHz

The Width of single AP packet is 234.661 μ s.


With Radar type 1 there is 1 AP packet during the channel move time, so an aggregate of intermittent control signals width is $16 \times 234.661 \mu\text{s} = 3.75\text{ms}$

| Operating Frequency (MHz) | Radar Type | Channel Closing Transmission Time (ms) | Limit (ms) | Result |
|---------------------------|------------|--|------------|------------|
| 5260 | 3 | <10ms | 200 | Compliance |
| 5500 | 3 | <10ms | 200 | Compliance |


| Operating Frequency (MHz) | Radar Type | Aggregate of intermittent control signals width (ms) | Limit (ms) | Result |
|---------------------------|------------|--|------------|------------|
| 5260 | 3 | 1.86 | 60 | Compliance |
| 5500 | 3 | 3.75 | 60 | Compliance |

Note: please see the test plots as below pages.


Single AP packet width (5260MHz)

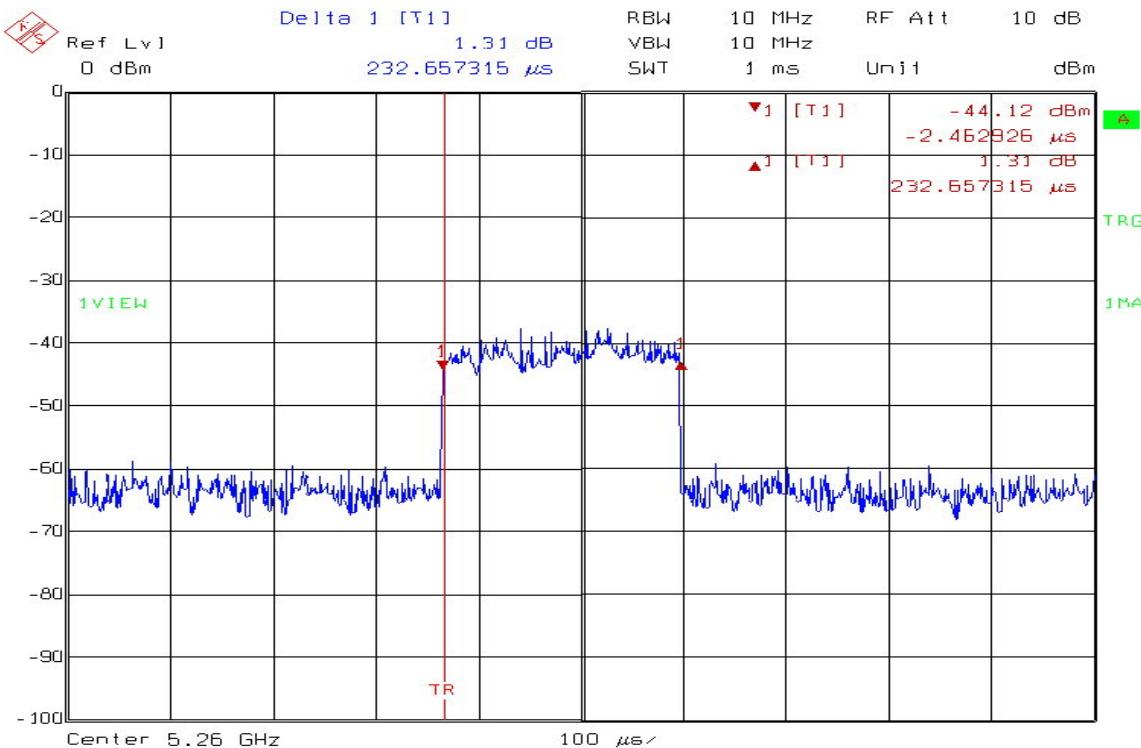


Closing transmission AP packet number (5260MHz)

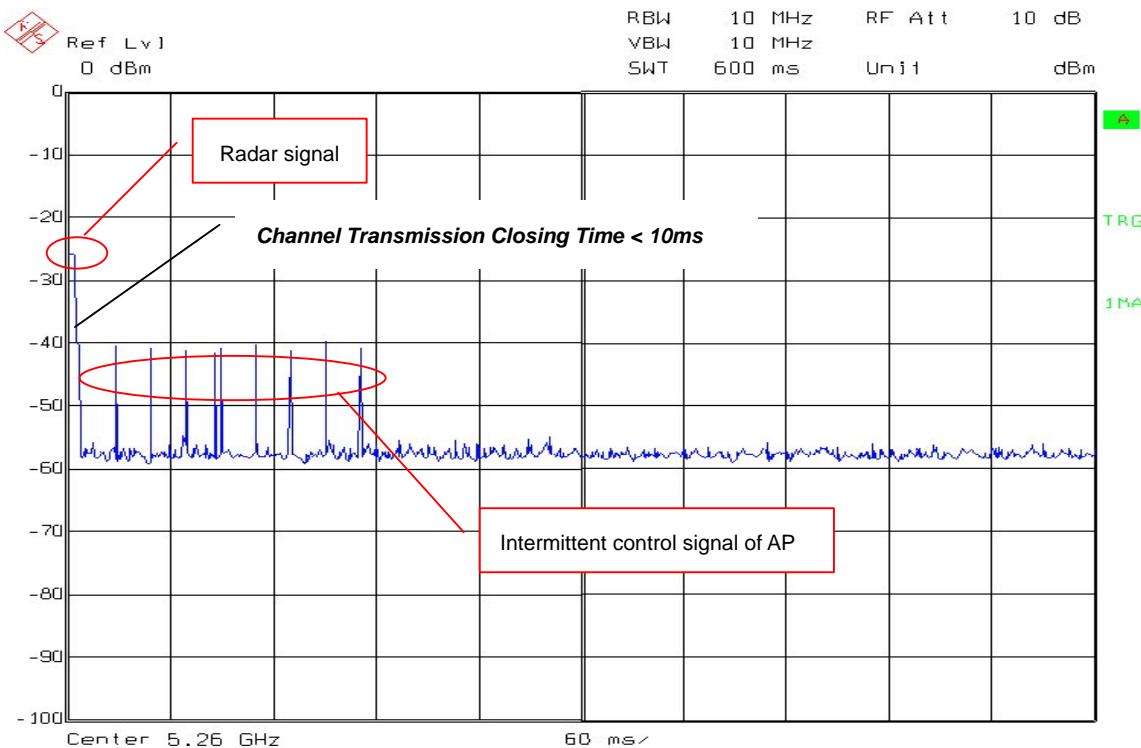

Single AP packet width (5500MHz)

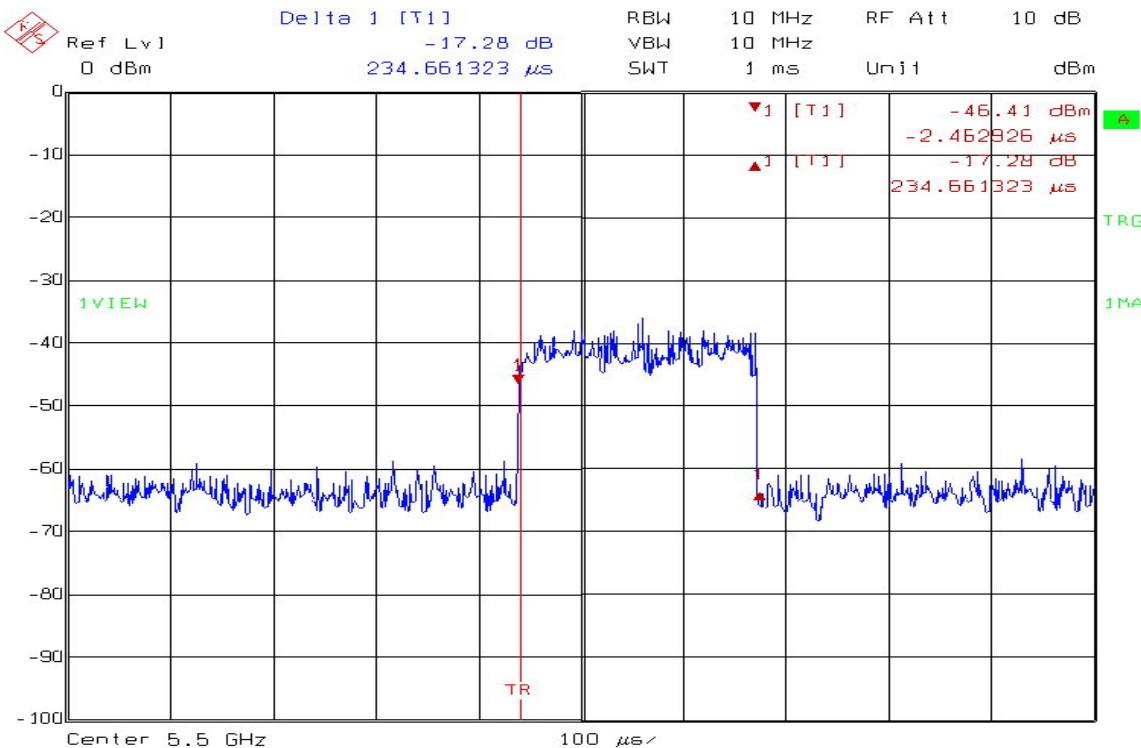

Closing transmission AP packet number (5500MHz)

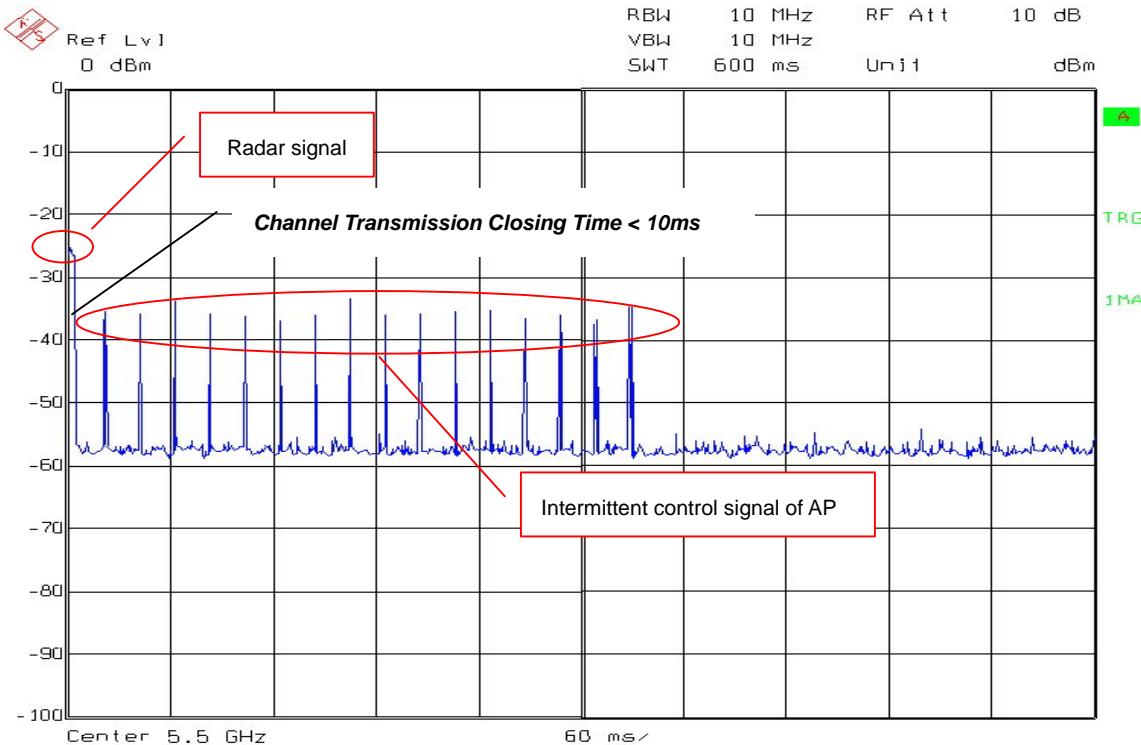

(Radar type 4)

For EUT operating at 5260MHz

The Width of single AP packet is $232.657 \mu\text{s}$.

With Radar type 4 there is 1 AP packet during the channel move time, so an aggregate of intermittent control signals width is $16 \times 232.657 \mu\text{s} = 3.72\text{ms}$

For EUT operating at 5500MHz

The Width of single AP packet is $234.661 \mu\text{s}$.


With Radar type 1 there is 1 AP packet during the channel move time, so an aggregate of intermittent control signals width is $13 \times 234.661 \mu\text{s} = 3.05\text{ms}$

| Operating Frequency (MHz) | Radar Type | Channel Closing Transmission Time (ms) | Limit (ms) | Result |
|---------------------------|------------|--|------------|------------|
| 5260 | 4 | <10ms | 200 | Compliance |
| 5500 | 4 | <10ms | 200 | Compliance |


| Operating Frequency (MHz) | Radar Type | Aggregate of intermittent control signals width (ms) | Limit (ms) | Result |
|---------------------------|------------|--|------------|------------|
| 5260 | 4 | 3.72 | 60 | Compliance |
| 5500 | 4 | 3.05 | 60 | Compliance |

Note: please see the test plots as below pages.


Single AP packet width (5260MHz)

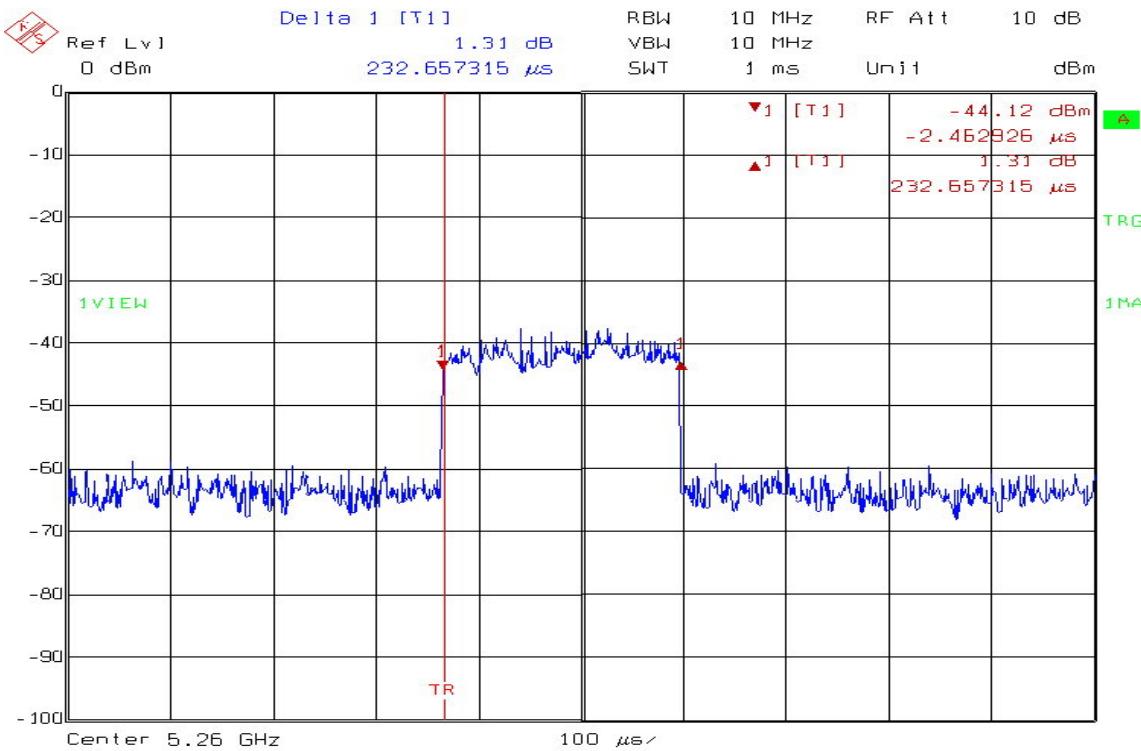


Closing transmission AP packet number (5260MHz)

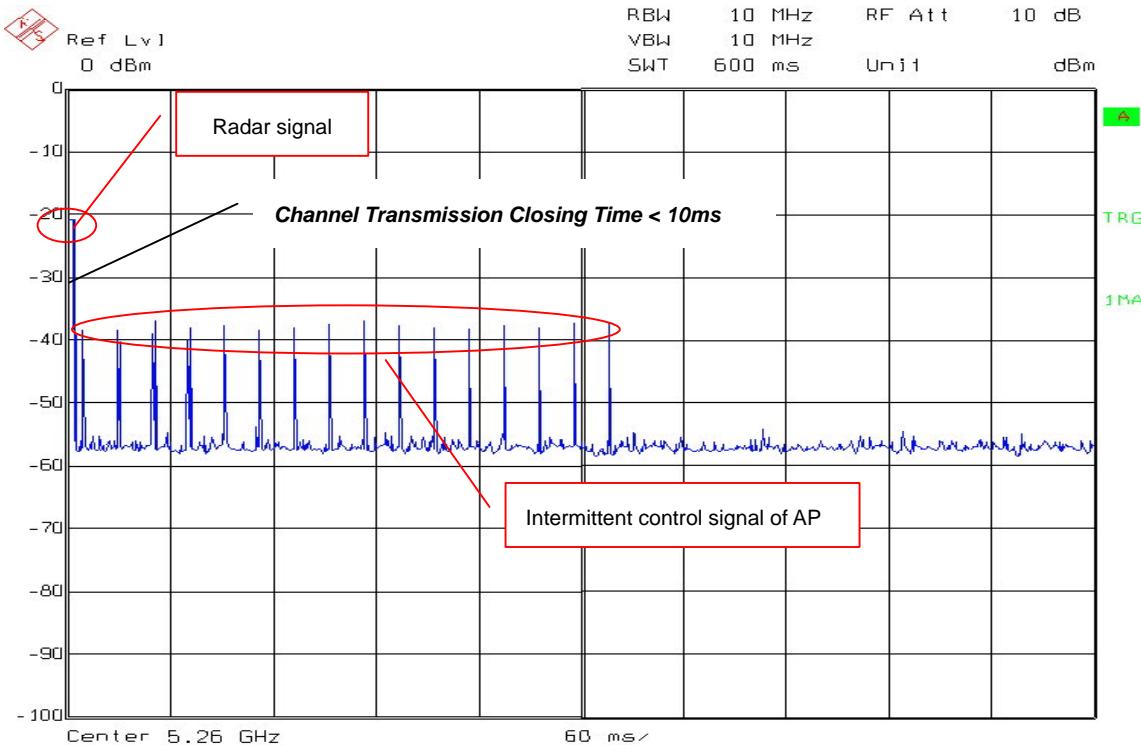

Single AP packet width (5500MHz)

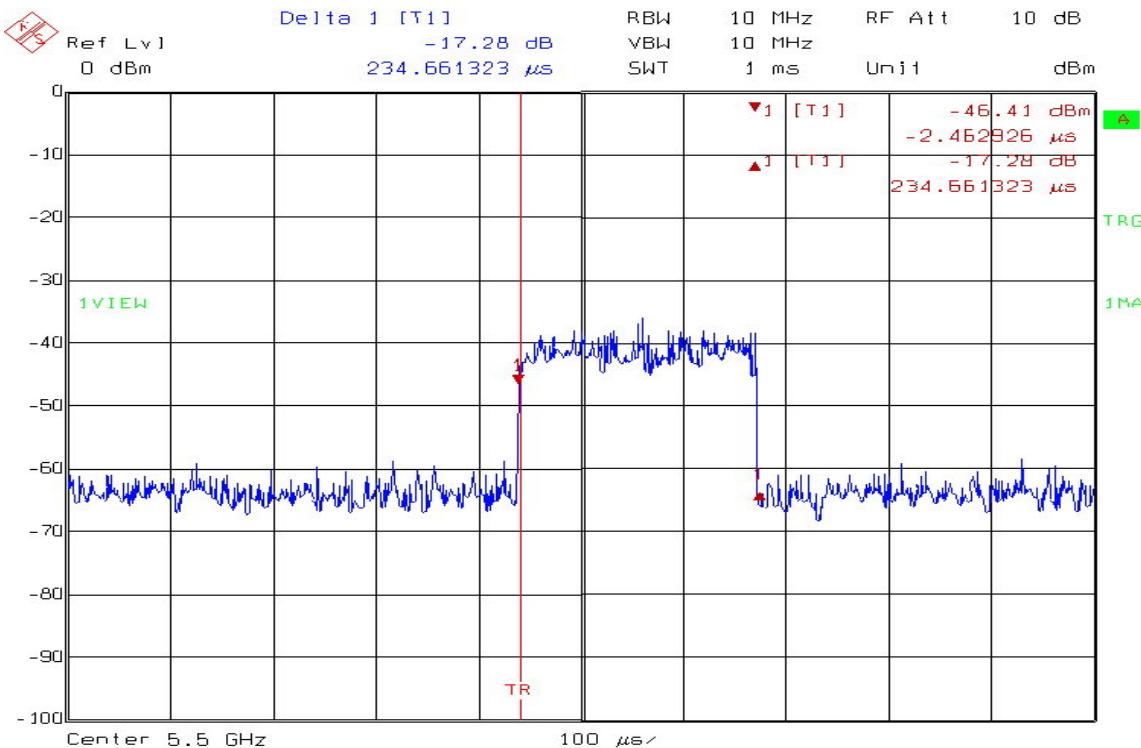

Closing transmission AP packet number (5500MHz)

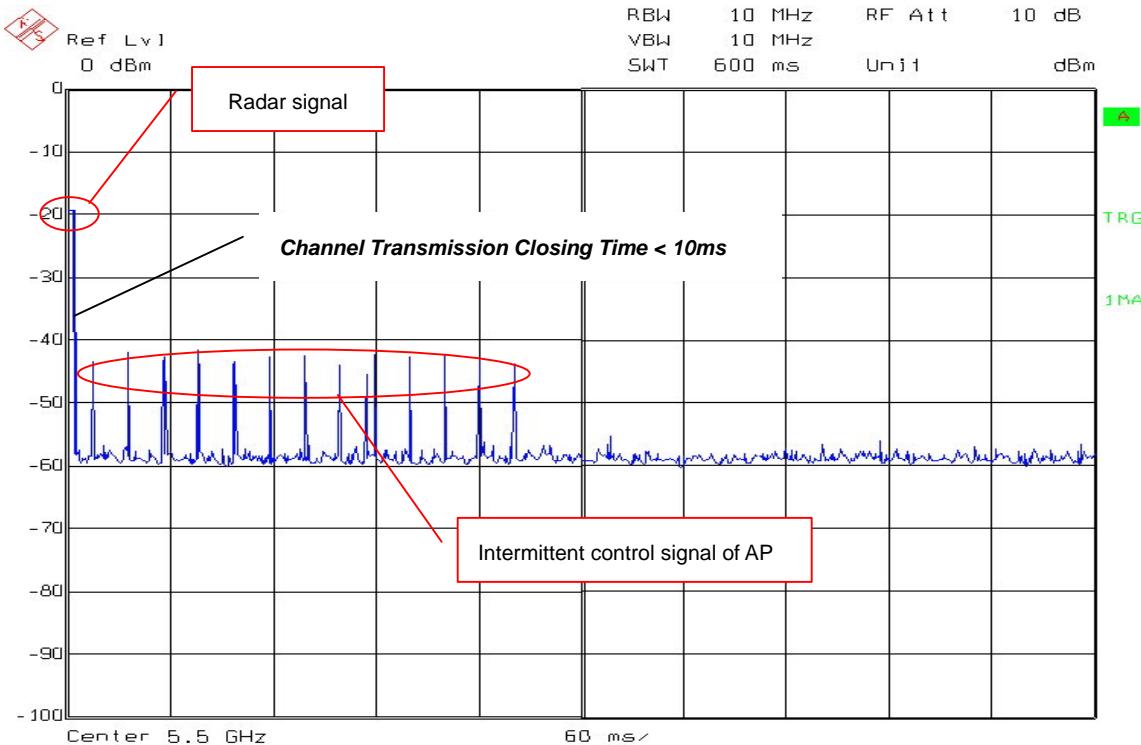

(Radar type 5)

For EUT operating at 5260MHz

The Width of single AP packet is $232.657 \mu\text{s}$.

With Radar type 5 there is 1 AP packet during the channel move time, so an aggregate of intermittent control signals width is $10 * 232.657 \mu\text{s} = 2.33\text{ms}$

For EUT operating at 5500MHz

The Width of single AP packet is $234.661 \mu\text{s}$.


With Radar type 5 there is 1 AP packet during the channel move time, so an aggregate of intermittent control signals width is $14 * 234.661 \mu\text{s} = 3.29\text{ms}$

| Operating Frequency (MHz) | Radar Type | Channel Closing Transmission Time (ms) | Limit (ms) | Result |
|---------------------------|------------|--|------------|------------|
| 5260 | 5 | <10ms | 200 | Compliance |
| 5500 | 5 | <10ms | 200 | Compliance |


| Operating Frequency (MHz) | Radar Type | Aggregate of intermittent control signals width (ms) | Limit (ms) | Result |
|---------------------------|------------|--|------------|------------|
| 5260 | 5 | 2.33 | 60 | Compliance |
| 5500 | 5 | 3.29 | 60 | Compliance |

Note: please see the test plots as below pages.


Single AP packet width (5260MHz)

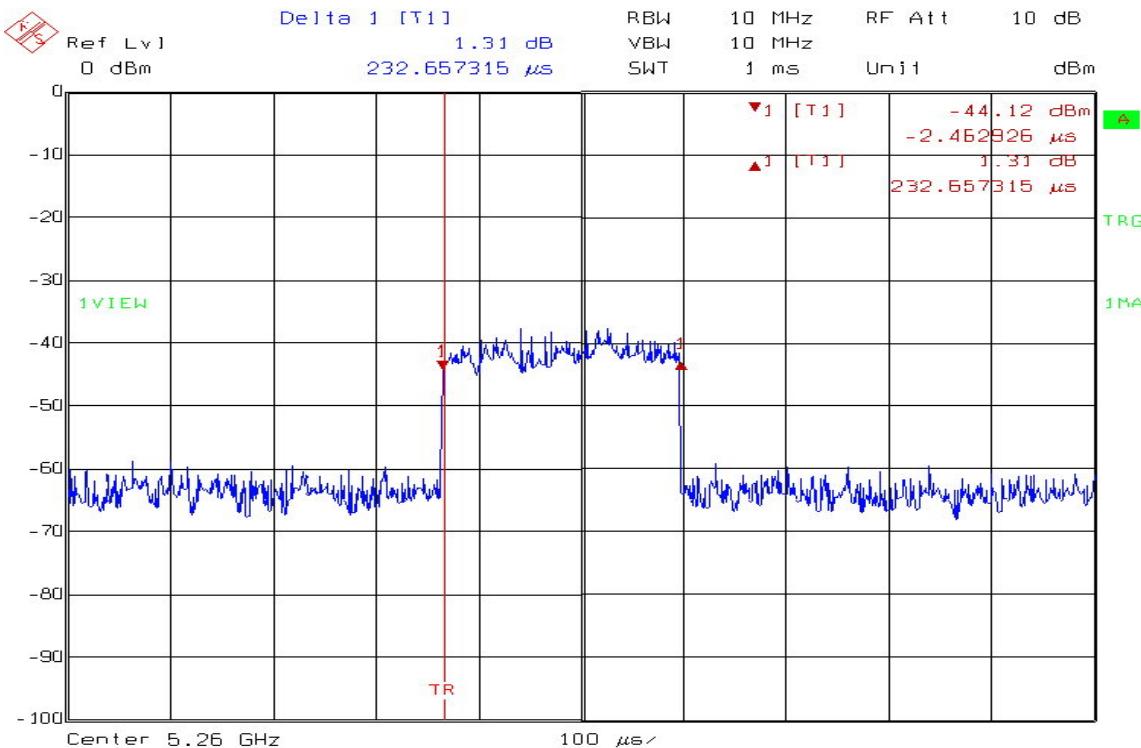


Closing transmission AP packet number (5260MHz)

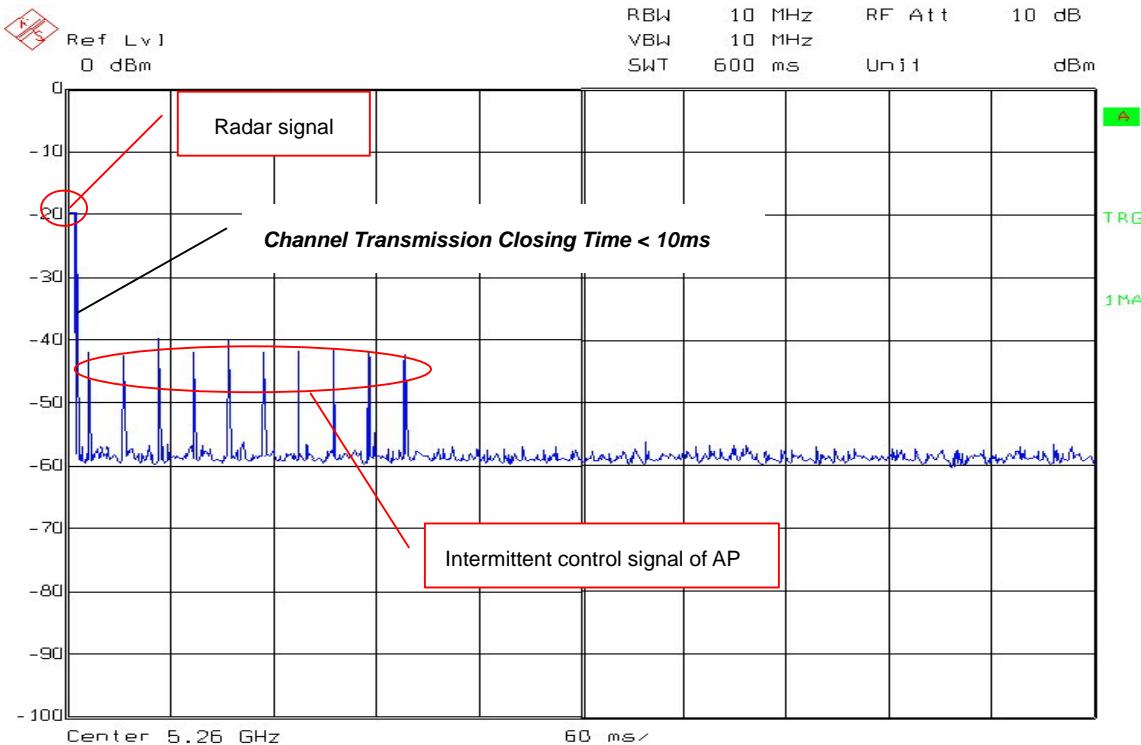

Single AP packet width (5500MHz)

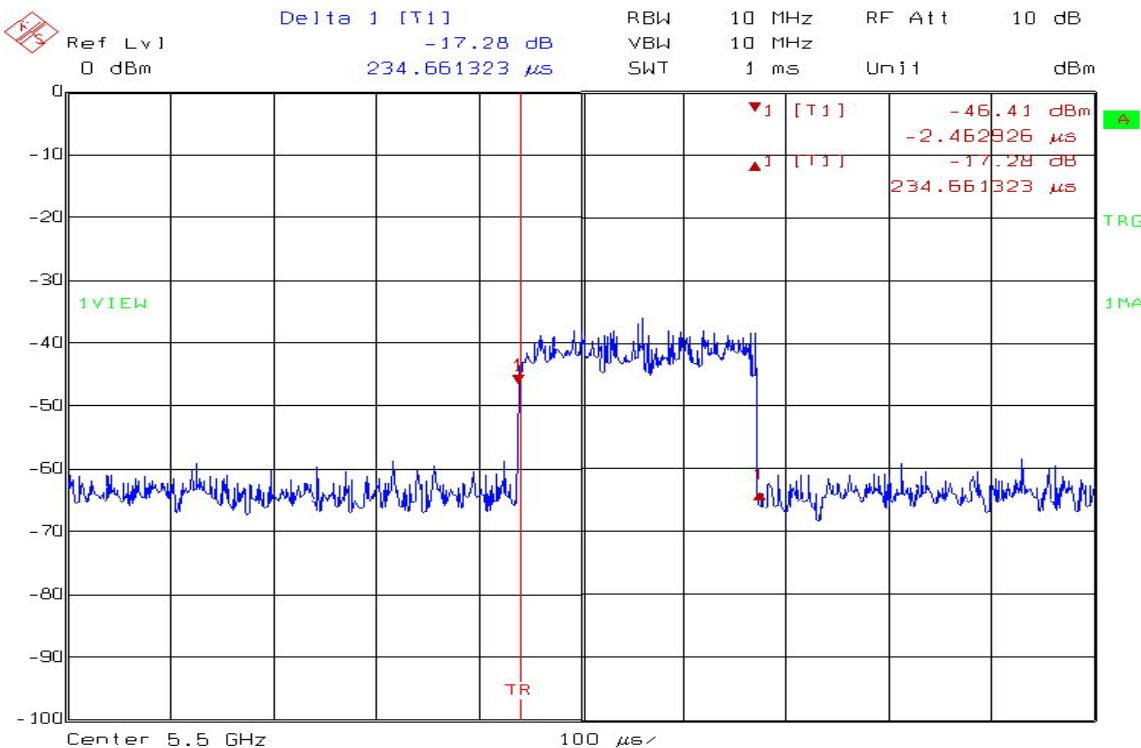

Closing transmission AP packet number (5500MHz)

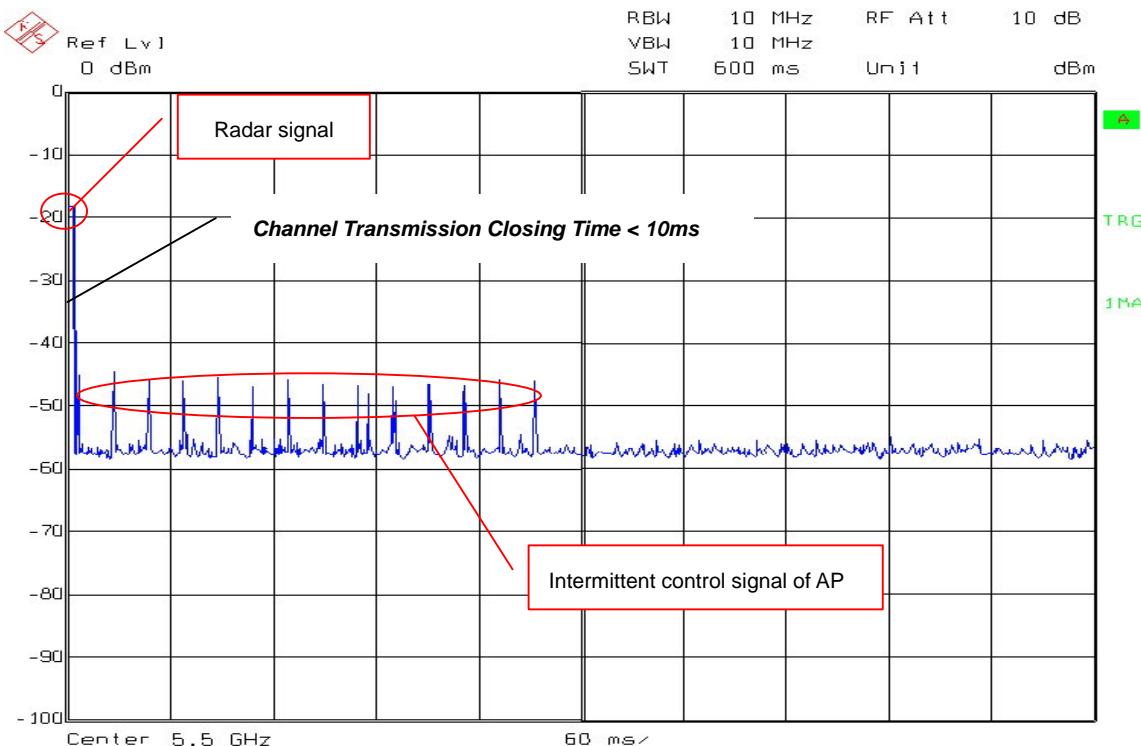

(Radar type 6)

For EUT operating at 5260MHz

The Width of single AP packet is $232.657 \mu\text{s}$.

With Radar type 6 there is 1 AP packet during the channel move time, so an aggregate of intermittent control signals width is $14 \times 232.657 \mu\text{s} = 3.26\text{ms}$

For EUT operating at 5500MHz

The Width of single AP packet is $234.661 \mu\text{s}$.


With Radar type 6 there is 1 AP packet during the channel move time, so an aggregate of intermittent control signals width is $12 \times 234.661 \mu\text{s} = 2.82\text{ms}$

| Operating Frequency (MHz) | Radar Type | Channel Closing Transmission Time (ms) | Limit (ms) | Result |
|---------------------------|------------|--|------------|------------|
| 5260 | 6 | <10ms | 200 | Compliance |
| 5500 | 6 | <10ms | 200 | Compliance |


| Operating Frequency (MHz) | Radar Type | Aggregate of intermittent control signals width (ms) | Limit (ms) | Result |
|---------------------------|------------|--|------------|------------|
| 5260 | 6 | 3.26 | 60 | Compliance |
| 5500 | 6 | 2.82 | 60 | Compliance |

Note: please see the test plots as below pages.


Single AP packet width (5260MHz)

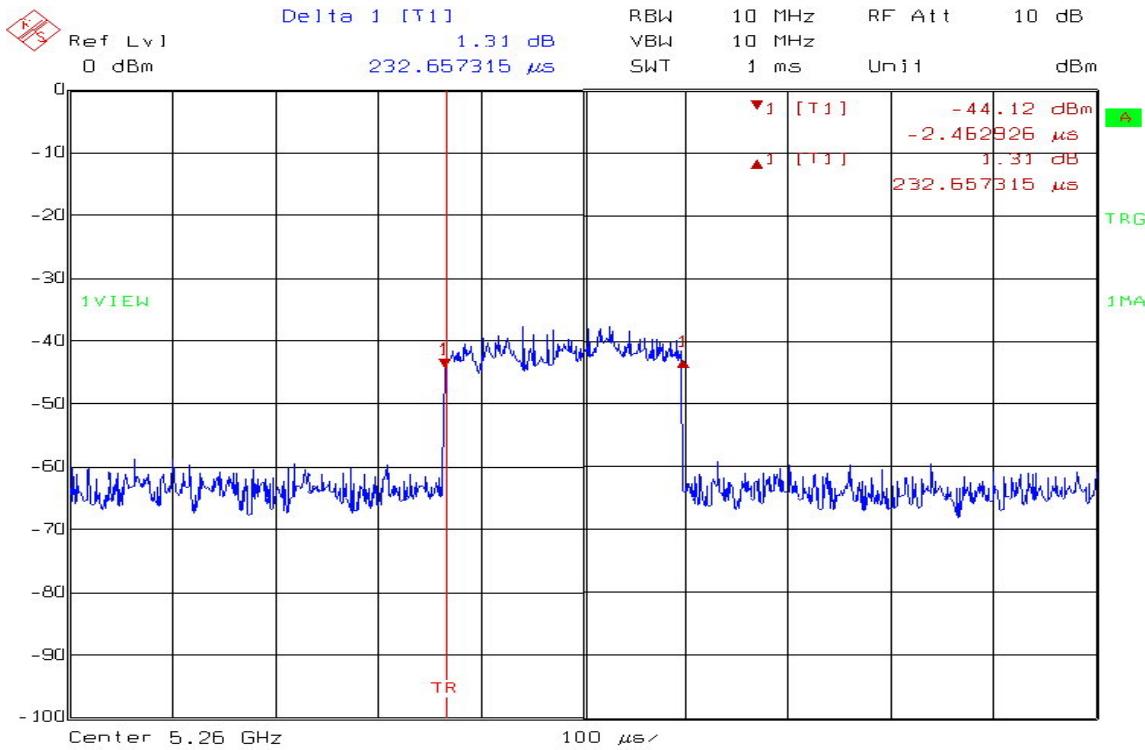


Closing transmission AP packet number (5260MHz)

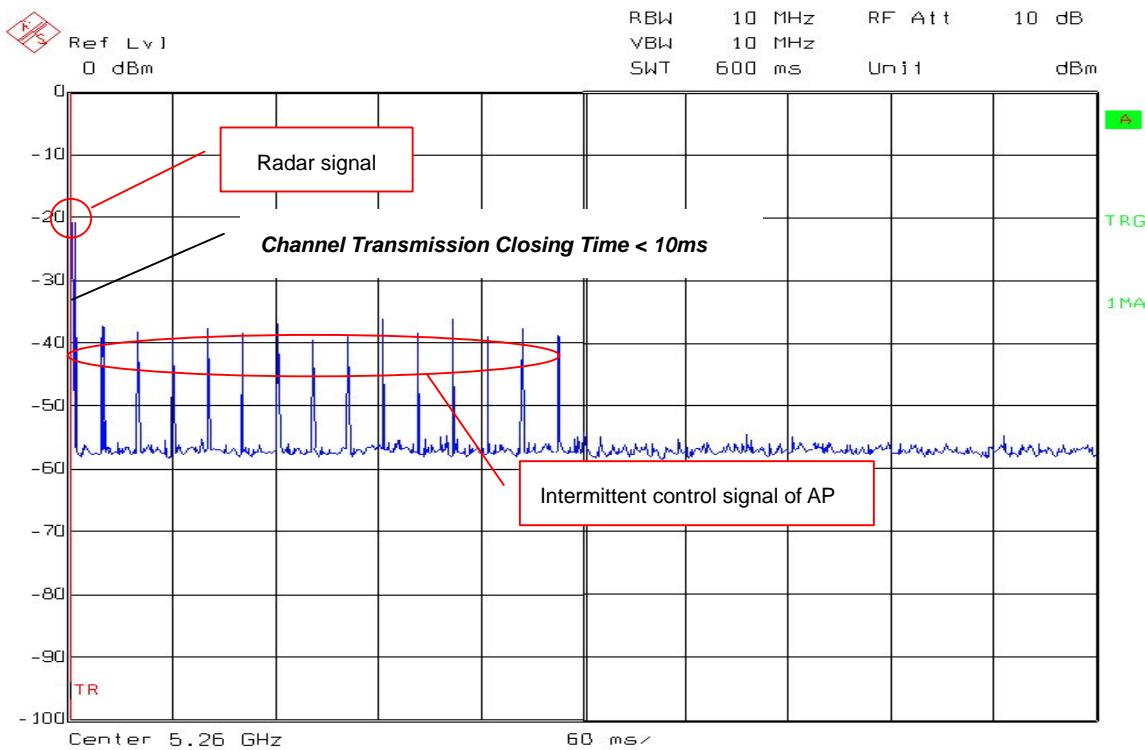

Single AP packet width (5500MHz)

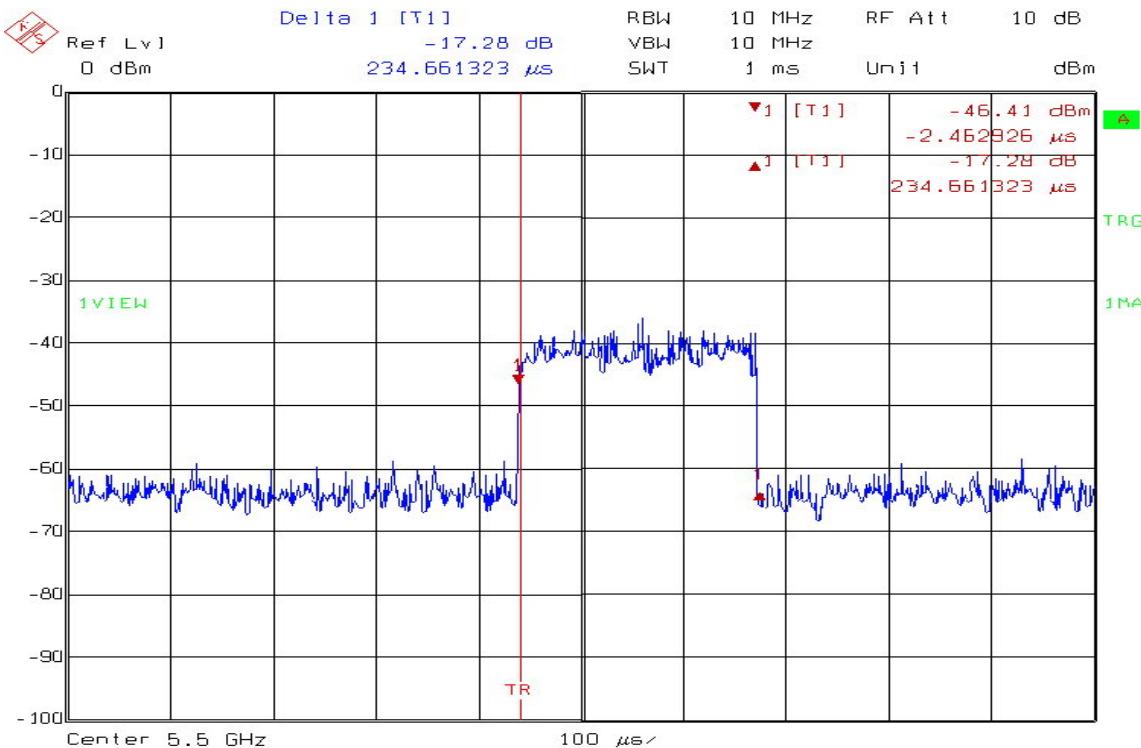

Closing transmission AP packet number (5500MHz)

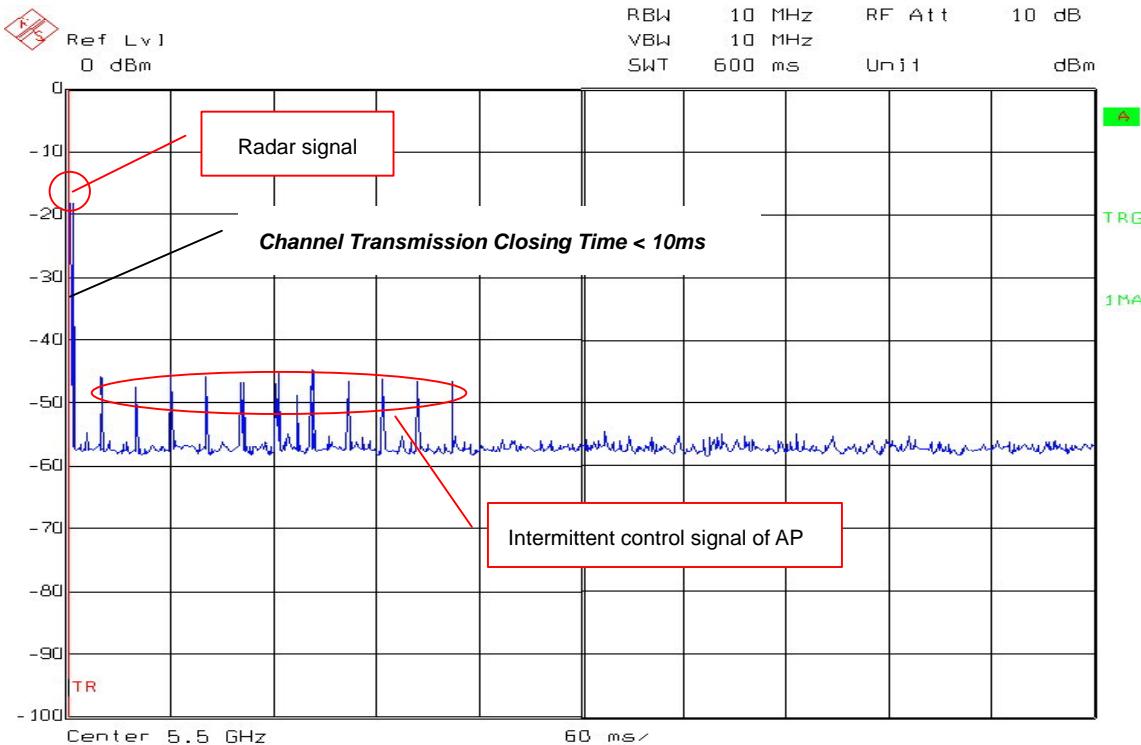


2.10.3 Non-Occupancy Period


No transmissions were observed on the previously active channel during 30 minutes observation time for the EUT.

Test plots

Frequency 5260MHz

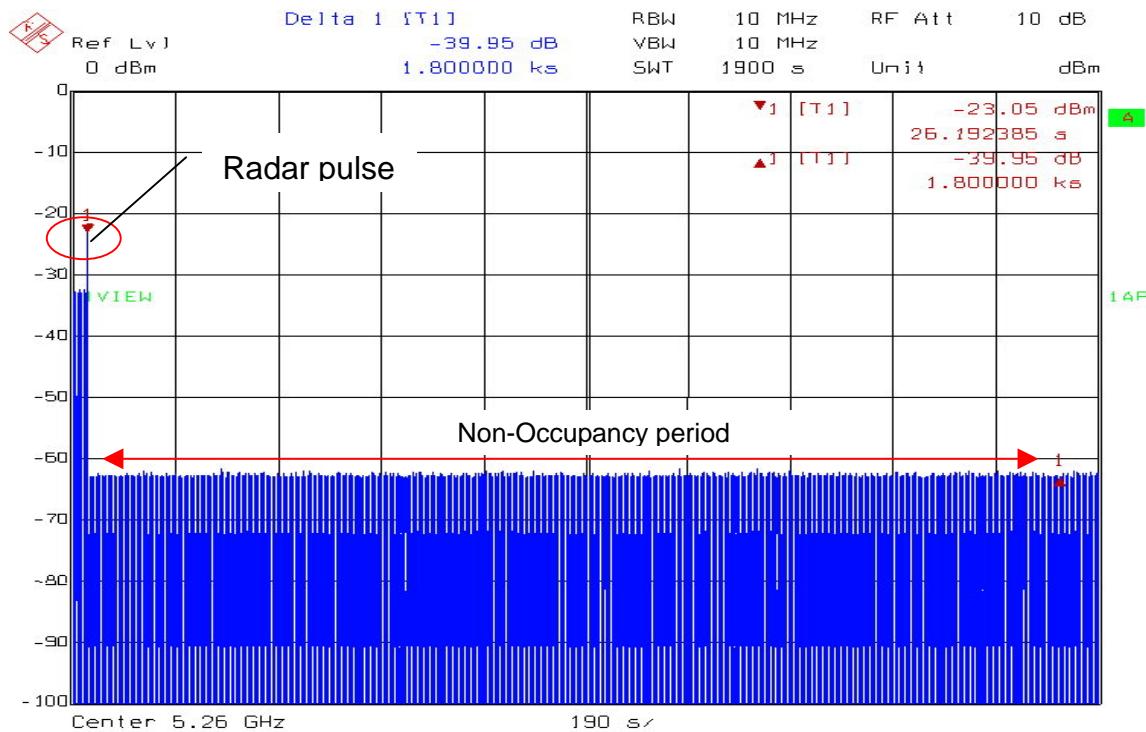

Frequency 5500MHz

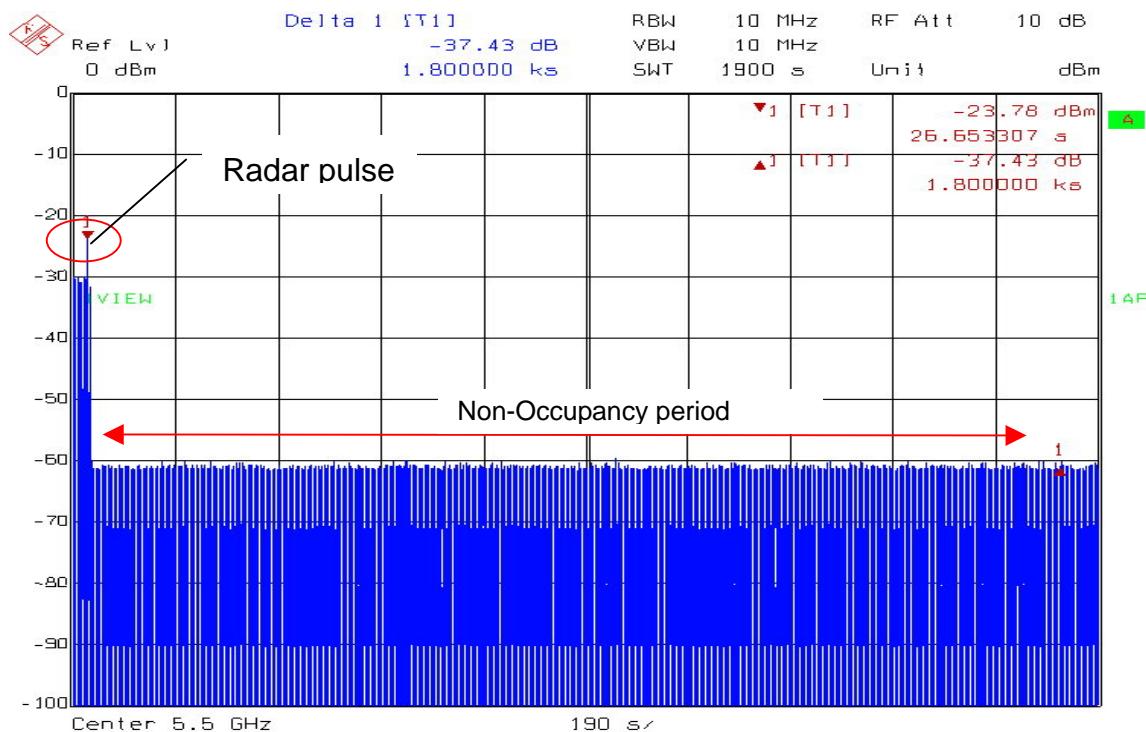

3 Photographs of Test

3.1 DFS Test Measurement

