



## 产 品 承 认 书

## PRODUCT SPECIFICATION FOR APPROVAL

客 户 名 称:

CUSTOMER

产 品 名 称:

PRODUCT NAME

物 料 编 码:

PART No.

产 品 规 格:

PRODUCT SPEC

日 期:

DATE

版 本 型 号:

VERSION

A11 coil

Magnetic plate: 43.5 \* 5.3 \* 0.8 double slot  
Coil: 0.08 \* 24 \* 2 \* 10Ts/outgoing 6mm inductance:  
6.3uH  $\pm$  10%  
Ordinary double-sided tape

2022.10.5

REV 1.0

版本 Revision	变更内容 Modified Content	责任人 Principle	日期 Date	备注 Note
REV 1.0	first release	X u e L e i	2022-08-29	

制定/PREPARED BY	审核/CHECKED BY	核准/APPROVED BY

客户认可签名及盖章 Authorized signature & company chop		
-----------------------------------------------------	--	--

Attached is the product specification sheet. If you have any questions, please give us feedback in a timely manner. Thank you!




# 产 品 规 格 SPECIFICATION

## 1、 Product size

<p>The technical drawing illustrates the dimensions of the magnetic disc assembly. The top view shows the outer diameter B, inner diameter C, and magnetic opening diameter G. The side view shows the total thickness D. The cross-sectional view shows the magnetic disc thickness, the adhesive layer, and the solder coating F. The line length E is also indicated.</p>	Magnetic disc diameter A	43.5±0.5mm
	Outer diameter of coil B	39±1mm
	Inner diameter of coil C	20.5±0.5mm
	Product thickness D	<1.8mm
	Line length E	25mm±3mm
	Solder length F	3±2mm
	Magnetic opening diameter G	5±0.3mm
	Magnetic thickness	0.8±0.1mm
	Magnetic disk shape	Circular double groove
	Adhesive thickness	Ordinary double-sided tape
	Shattered black film	NO



## 2、Schematic diagram

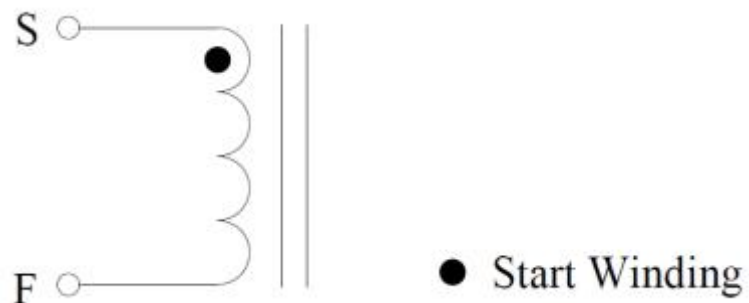

## 3、Winding parameters

端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
S	F	silk covered wire 0.08*24*2	10Ts	CCW

## 4、Electrical characteristics:

温度 TEMPERATURE:25±10℃, 湿度 RELATIVE HUMIDITY:65±20%

项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
IND.	S-F	6.3uH±10%	100KHz/1.0V	LCZ METER 1062B

## 5、Product image:

