

FCC Test Report

Client Name : EcoFlow Inc.

Client Address : Plant A202, Founder Technology Industrial
Park, Shiyan Sub-district, Bao'an District
Shenzhen, Guangdong 518000 China

Product Name : Robotic Lawnmower

Report Date : Dec. 29, 2022

Shenzhen Anbotech Compliance Laboratory Limited



Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel: (86) 0755-26066440 Fax: (86) 0755-26014772 Email: service@anbotech.com

Code: AB-RF-05-b



Hotline
400-003-0500
www.anbotech.com.cn



Contents

1. General Information	5
1.1. Client Information	5
1.2. Description of Device (EUT)	5
1.3. Auxiliary Equipment Used During Test	6
1.4. Description of Test Configuration	6
1.5. Description Of Test Setup	7
1.6. Test Equipment List	8
1.7. Measurement Uncertainty	9
1.8. Description of Test Facility	9
2. Summary of Test Results	10
3. Conducted Emission Test	11
3.1. Test Standard and Limit	11
3.2. Test Setup	11
3.3. Test Procedure	11
3.4. Test Data	11
4. Radiation Spurious Emission and Band Edge	14
4.1. Test Standard and Limit	14
4.2. Test Setup	14
4.3. Test Procedure	15
4.4. Test Data	16
5. Maximum Peak Output Power Test	22
5.1. Test Standard and Limit	22
5.2. Test Setup	22
5.3. Test Procedure	22
5.4. Test Data	22
6. 6DB Occupy Bandwidth Test	25
6.1. Test Standard and Limit	25
6.2. Test Setup	25
6.3. Test Procedure	25
6.4. Test Data	25
7. Power Spectral Density Test	28
7.1. Test Standard and Limit	28
7.2. Test Setup	28
7.3. Test Procedure	28
7.4. Test Data	28
8. 100kHz Bandwidth of Frequency Band Edge Requirement	31
8.1. Test Standard and Limit	31
8.2. Test Setup	31
8.3. Test Procedure	31



8.4. Test Data	31
9. Antenna Requirement	35
9.1. Test Standard and Requirement	35
9.2. Antenna Connected Construction	35
APPENDIX I -- TEST SETUP PHOTOGRAPH	36
APPENDIX II -- EXTERNAL PHOTOGRAPH	38
APPENDIX III -- INTERNAL PHOTOGRAPH	38



TEST REPORT

Applicant : EcoFlow Inc.
Manufacturer : EcoFlow Inc.
Product Name : Robotic Lawnmower
Model No. : EFH100
Trade Mark : 
Rating(s) : Input: 36V⁼⁼ (with DC 21.6V, 13800mAh Battery inside)

Test Standard(s) : FCC Part15 Subpart, Section 15.247

Test Method(s) : ANSI C63.10: 2020, KDB558074 D01 DTS Meas Guidance v05r02

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.


Date of receipt

Jun. 09, 2022

Date of Test

Jun. 09~Dec. 22, 2022

Prepared By



(TuTu Hong)

Approved & Authorized Signer



(Kingkong Jin)



1. General Information

1.1. Client Information

Applicant	:	EcoFlow Inc.
Address	:	Plant A202, Founder Technology Industrial Park, Shiyan Sub-district, Bao'an District Shenzhen, Guangdong 518000 China
Manufacturer	:	EcoFlow Inc.
Address	:	Plant A202, Founder Technology Industrial Park, Shiyan Sub-district, Bao'an District Shenzhen, Guangdong 518000 China

1.2. Description of Device (EUT)

Product Name	:	Robotic Lawnmower
Model No.	:	EFH100
Trade Mark	:	
Test Power Supply	:	Voltage of EUT: DC 21.6V Output to RF Module: DC 3.3V
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Adapter	:	N.A.

RF Specification

Support Technology	:	☒ LoRa
Operation Mode	:	☒ DSSS ☐ FHSS
Support Bandwidth	:	☐ 125KHz ☐ 250KHz ☒ 500KHz
Operation Frequency	:	902~928MHz
Number of Channel	:	15 Channels
Modulation Type	:	LoRa Chirp Spread Spectrum
Antenna Type	:	FPC antenna
Antenna Gain(Peak)	:	0.93 dBi

Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



1.3. Auxiliary Equipment Used During Test

Adapter:	:	Model: KT180A3600500US Input: 120V~60Hz 2.5A Output: 36V $\overline{=}$ 5.0A 180.0W
BL262TH9	:	Model: BL262TH9 Input: 36.0 $\overline{=}$

1.4. Description of Test Configuration

The system was configured for testing in testing mode, which was provided by manufacturer.


For LoRa mode, Detailed Frequency as below:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	903.0	9	923.4
2	904.6	10	924.0
3	906.2	11	924.6
4	907.8	12	925.2
5	909.4	13	925.8
6	911.0	14	926.4
7	912.6	15	927.0
8	914.2		

Note: EUT was tested with Channel 1, 8 and 15.



1.5. Description Of Test Setup

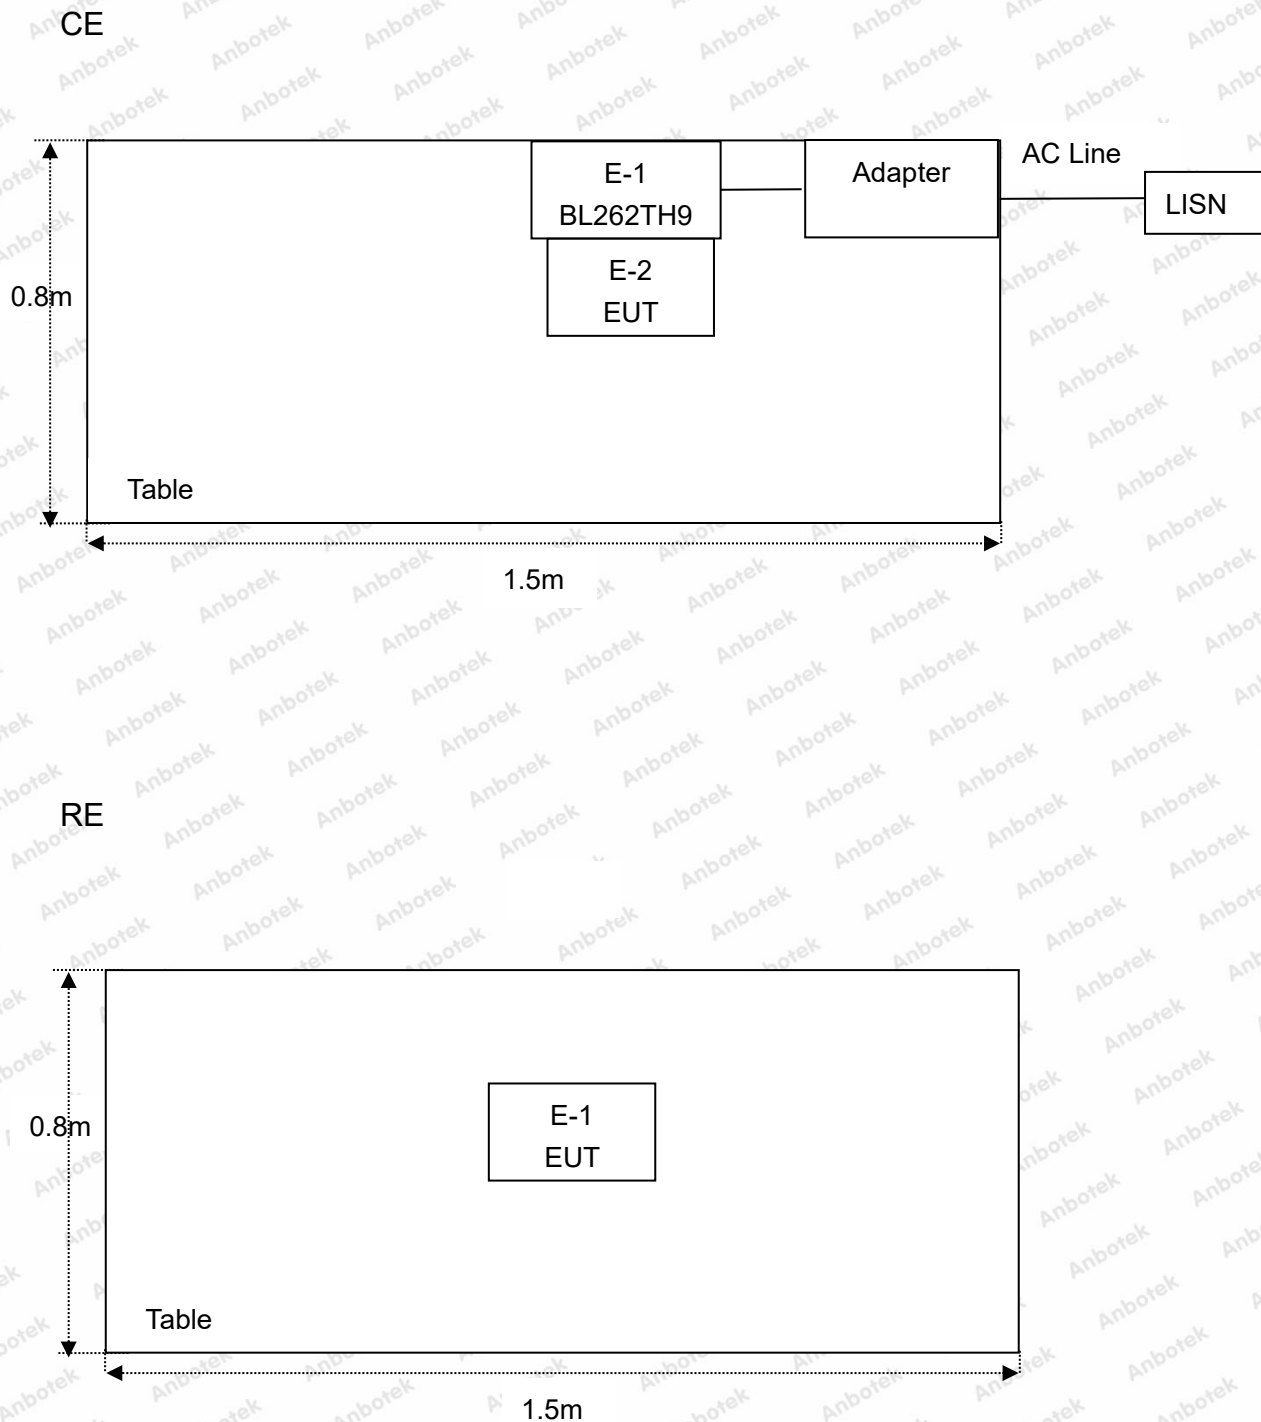

1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Oct. 23, 2022	1 Year
2.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	E215040DT001	Jul. 05, 2022	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 13, 2022	1 Year
4.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 23, 2022	1 Year
5.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 22, 2022	1 Year
6.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 13, 2022	1 Year
7.	EMI Preamplifier	SKET Electronic	LNPA-0118G -45	SKET-PA-002	Oct. 13, 2022	1 Year
8.	Double Ridged Horn Antenna	SCHWARZBECK	BBHA 9120D	02555	Oct. 16, 2022	3 Year
9.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Oct. 23, 2022	1 Year
10.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Oct. 23, 2022	1 Year
11.	Horn Antenna	A-INFO	LB-180400-K F	J211060628	Oct. 23, 2022	1 Year
12.	Pre-amplifier	SONOMA	310N	186860	Oct. 23, 2022	1 Year
13.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
14.	MXA Spectrum Analysis	KEYSIGHT	N9020A	MY53280032	Oct. 13, 2022	1 Year
15.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 13, 2022	1 Year
16.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 13, 2022	1 Year
17.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 22, 2022	1 Year
18.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Oct. 19, 2022	1 Year



1.7. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
	:	Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102



2. Summary of Test Results

Standard Section	Test Item	Result
15.203/15.247(c)	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.205/15.209	Spurious Emission	PASS
15.247(b)(3)	Conducted Peak Output Power	PASS
15.247(a)(2)	6dB Occupied Bandwidth	PASS
15.247(e)	Power Spectral Density	PASS
15.247(d)	Band Edge	PASS
Remark: "N/A" is an abbreviation for Not Applicable.		




3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBUV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50
Remark: (1) *Decreasing linearly with logarithm of the frequency. (2) The lower limit shall apply at the transition frequency.			

3.2. Test Setup

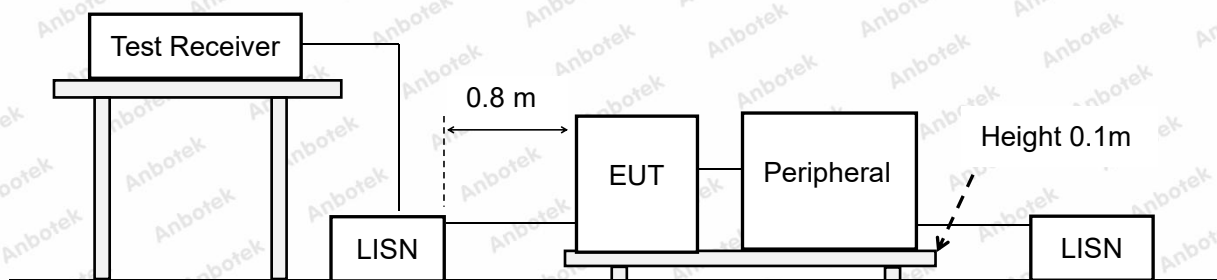

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data


During the test, pre-scan all the modes, only the worst case is recorded in the report.

Please to see the following pages.



Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: CH01
Test Specification: AC 120V, 60Hz from adapter of BL262TH9
Comment: Live Line
Tem.: 22.8°C Hum.: 50%

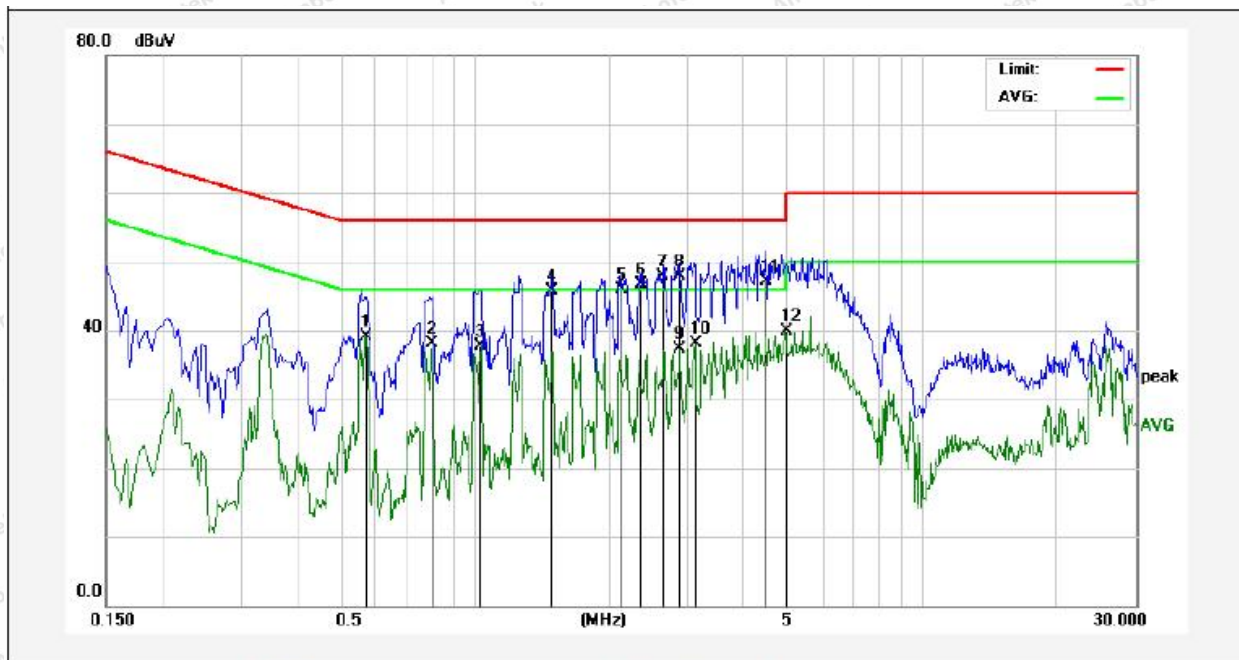

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.5740	29.28	9.85	39.13	46.00	-6.87	AVG	
2	0.8059	28.27	9.84	38.11	46.00	-7.89	AVG	
3	1.0339	27.94	9.85	37.79	46.00	-8.21	AVG	
4	1.4940	35.85	9.85	45.70	56.00	-10.30	QP	
5	2.1220	36.02	9.86	45.88	56.00	-10.12	QP	
6	2.3460	36.87	9.88	46.75	56.00	-9.25	QP	
7	2.6460	38.02	9.91	47.93	56.00	-8.07	QP	
8	2.8740	37.97	9.93	47.90	56.00	-8.10	QP	
9	2.8740	27.39	9.93	37.32	46.00	-8.68	AVG	
10	3.1099	28.15	9.93	38.08	46.00	-7.92	AVG	
11	4.4860	37.37	9.80	47.17	56.00	-8.83	QP	
12	4.9460	30.07	9.77	39.84	46.00	-6.16	AVG	



Test Site: 1# Shielded Room
Operating Condition: CH01
Test Specification: AC 120V, 60Hz from adapter of BL262TH9
Comment: Neutral Line
Tem.: 22.8°C Hum.: 50%

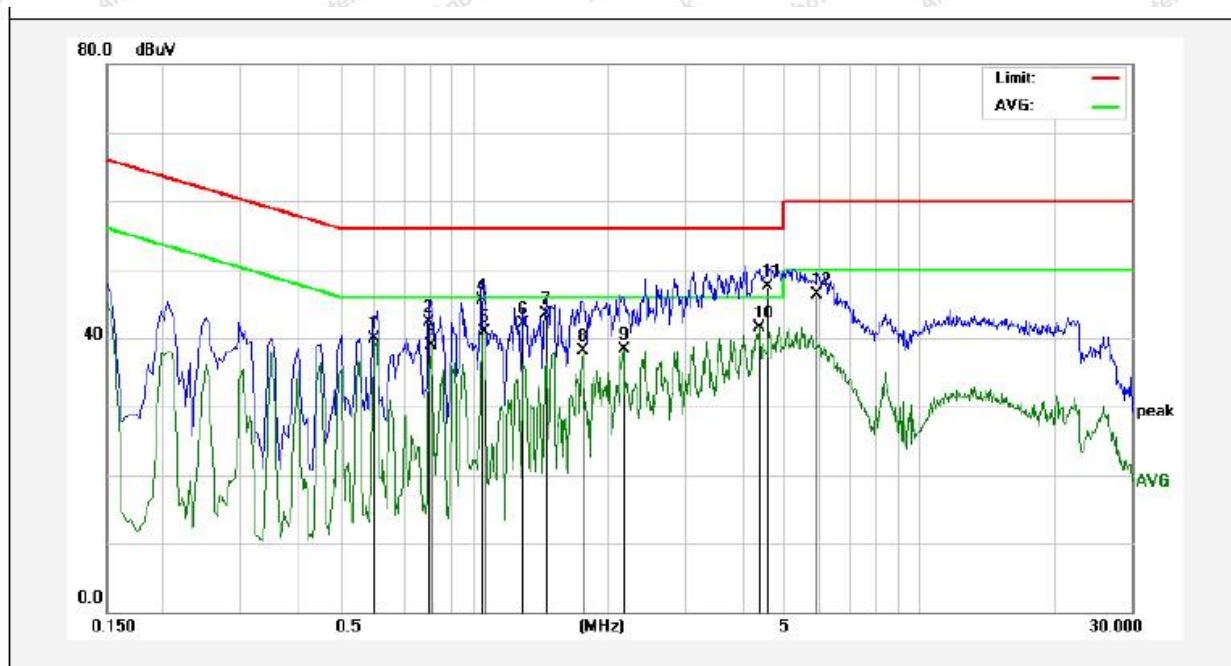

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.5980	29.98	9.85	39.83	46.00	-6.17	AVG	
2	0.7940	32.45	9.84	42.29	56.00	-13.71	QP	
3	0.8020	29.00	9.84	38.84	46.00	-7.16	AVG	
4	1.0460	35.71	9.85	45.56	56.00	-10.44	QP	
5	1.0580	31.01	9.85	40.86	46.00	-5.14	AVG	
6	1.2940	32.16	9.85	42.01	56.00	-13.99	QP	
7	1.4620	33.63	9.85	43.48	56.00	-12.52	QP	
8	1.7620	28.32	9.86	38.18	46.00	-7.82	AVG	
9	2.1700	28.47	9.86	38.33	46.00	-7.67	AVG	
10	4.3620	31.71	9.81	41.52	46.00	-4.48	AVG	
11	4.5900	37.75	9.80	47.55	56.00	-8.45	QP	
12	5.9020	36.49	9.78	46.27	60.00	-13.73	QP	



4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz~1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz~30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

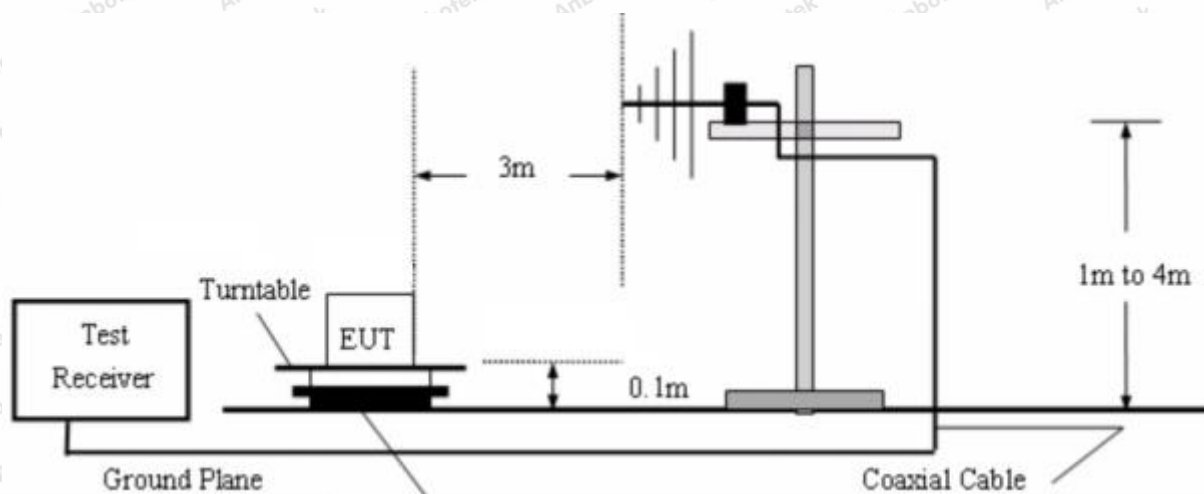


Figure 1. 30MHz to 1GHz



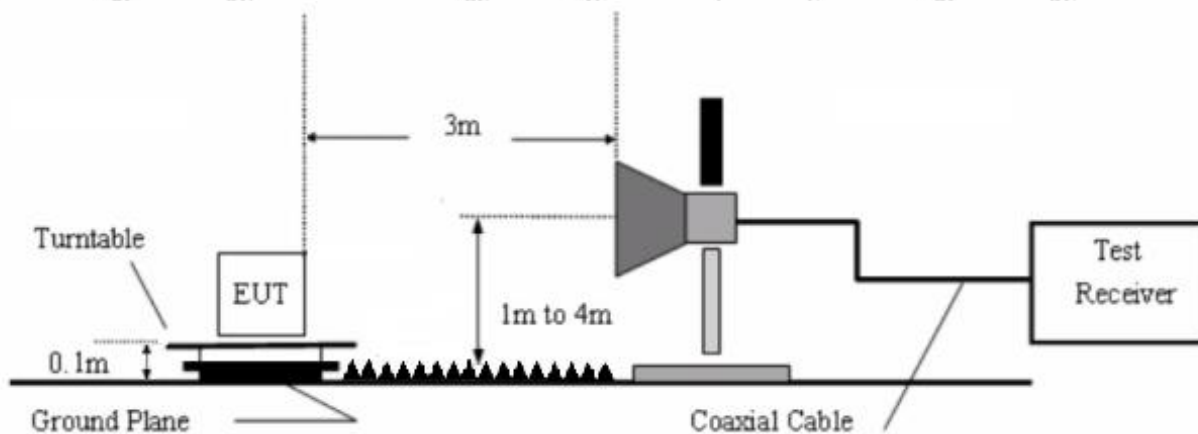


Figure 2. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.1m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 0.1m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on an antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector = Quasi-Peak, Trace mode = Max hold, Sweep = auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9kHz, VBW = 30kHz, Detector = Quasi-Peak, Trace mode = Max hold, Sweep = auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector = Quasi-Peak, Trace mode = Max hold, Sweep = auto couple.



For above 1GHz, Set the spectrum analyzer as:

RBW =1MHz, VBW =1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW =1MHz, VBW =10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data

PASS

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

During the test, pre-scan all the modes, only the worst case is recorded in the report.



Test Results (30~1000MHz)

Test Mode: CH01
Power Source: DC 21.6V
Polarization: Vertical
Temp.(°C)/Hum.(%RH): 24.3°C/49%RH

Fundamental of Lora




No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	53.1313	40.63	-16.93	23.70	40.00	-16.30	QP			
2	60.4919	40.88	-17.67	23.21	40.00	-16.79	QP			
3	66.7325	43.45	-19.54	23.91	40.00	-16.09	QP			
4	141.3298	46.60	-22.17	24.43	43.50	-19.07	QP			
5	151.0663	47.89	-22.05	25.84	43.50	-17.66	QP			
6	341.9786	38.89	-15.20	23.69	46.00	-22.31	QP			



Test Mode: CH01
Power Source: DC 21.6V
Polarization: Horizontal
Temp.(°C)/Hum.(%RH): 24.3°C/49%RH

Fundamental of Lora

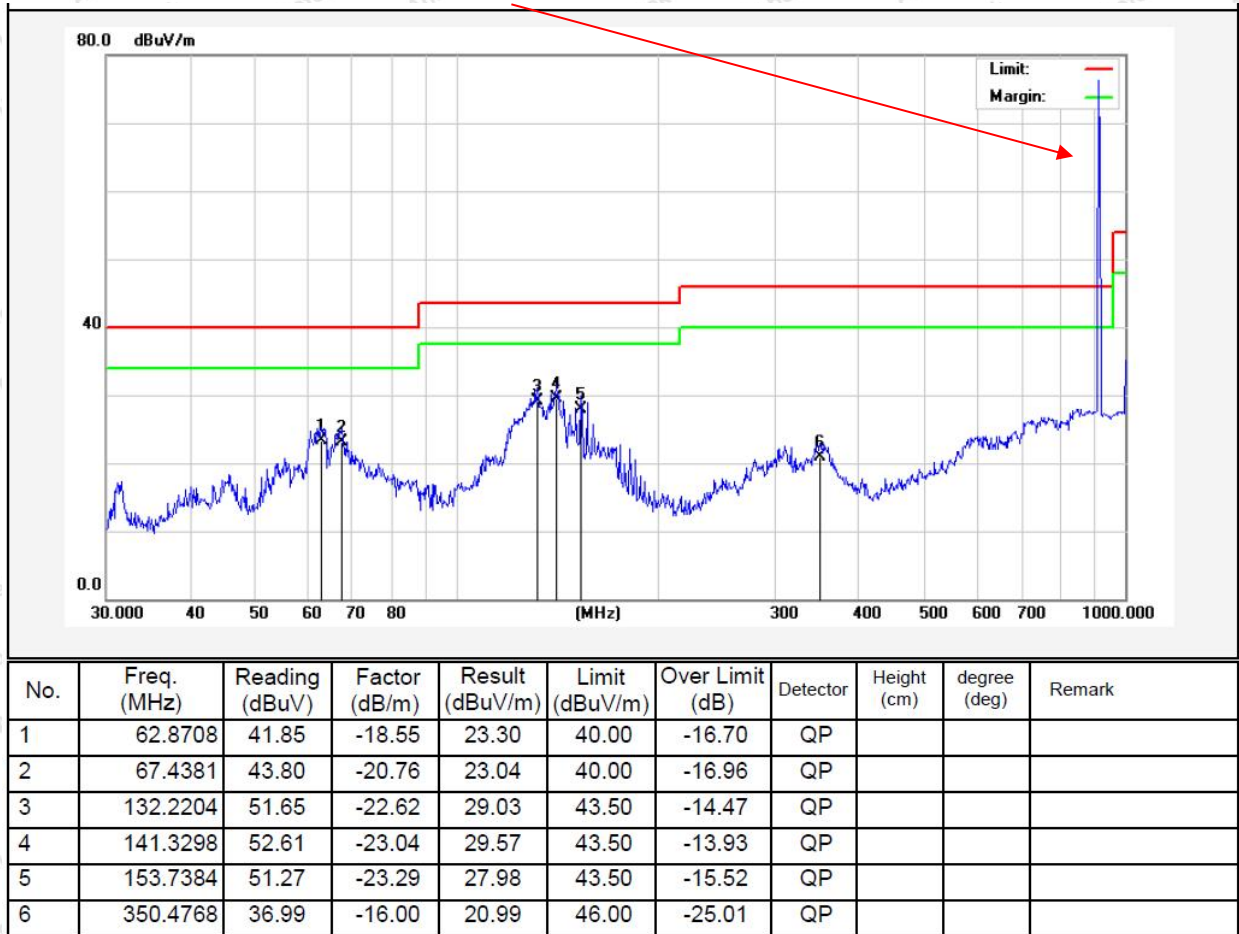

Test Results (1GHz-25GHz)

Test Mode: CH01					Test channel: Lowest				
Frequency (MHz)	Antenna Pol.	Reading (dBuV/m)	Cable Loss (dB)	Ant Factor (dB)	Amplifier (dB)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Det. Mode
1805.5000	H	43.65	7.39	28.73	26.31	53.46	74	-20.54	PK
1805.5000	H	35.98	7.39	28.73	26.31	45.79	54	-8.21	AV
2708.2500	H	42.70	8.10	29.71	27.01	53.50	74	-20.50	PK
2708.2500	H	34.68	8.10	29.71	27.01	45.48	54	-8.52	AV
3611.0000	H	--	--	--	--	--	--	--	PK
3611.0000	H	--	--	--	--	--	--	--	AV
1805.5000	V	42.30	7.39	28.73	26.31	52.11	74	-21.89	PK
1805.5000	V	35.07	7.39	28.73	26.31	44.88	54	-9.12	AV
2708.2500	V	43.05	8.10	29.71	27.01	53.85	74	-20.15	PK
2708.2500	V	34.24	8.10	29.71	27.01	45.04	54	-8.96	AV
3611.0000	V	--	--	--	--	--	--	--	PK
3611.0000	V	--	--	--	--	--	--	--	AV

Test Mode: CH08					Test channel: Middle				
Frequency (MHz)	Antenna Pol.	Reading (dBuV/m)	Cable Loss (dB)	Ant Factor (dB)	Amplifier (dB)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Det. Mode
1830.5000	H	47.95	7.41	28.72	26.31	57.77	74	-16.23	PK
1830.5000	H	36.86	7.41	28.72	26.31	46.68	54	-7.32	AV
2745.7500	H	45.72	8.11	29.71	27.01	56.53	74	-17.47	PK
2745.7500	H	36.02	8.11	29.71	27.01	46.83	54	-7.17	AV
3661.0000	H	--	--	--	--	--	--	--	PK
3661.0000	H	--	--	--	--	--	--	--	AV
1830.5000	V	46.63	7.41	28.72	26.31	56.45	74	-17.55	PK
1830.5000	V	35.75	7.41	28.72	26.31	45.57	54	-8.43	AV
2745.7500	V	45.54	8.11	29.71	27.01	56.35	74	-17.65	PK
2745.7500	V	34.79	8.11	29.71	27.01	45.60	54	-8.40	AV
3661.0000	V	--	--	--	--	--	--	--	PK
3661.0000	V	--	--	--	--	--	--	--	AV



Test Mode: CH16					Test channel: High				
Frequency (MHz)	Antenna Pol.	Reading (dBuV/m)	Cable Loss (dB)	Ant Factor (dB)	Amplifier (dB)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Det. Mode
1854.5000	H	48.07	7.43	28.69	26.31	57.88	74	-16.12	PK
1854.5000	H	36.08	7.43	28.69	26.31	45.89	54	-8.11	AV
2781.7500	H	46.76	8.15	29.84	27.01	57.74	74	-16.26	PK
2781.7500	H	34.05	8.15	29.84	27.01	45.03	54	-8.97	AV
3709.0000	H	--	--	--	--	--	--	--	PK
3709.0000	H	--	--	--	--	--	--	--	AV
1854.5000	V	47.26	7.43	28.69	26.31	57.07	74	-16.93	PK
1854.5000	V	35.76	7.43	28.69	26.31	45.57	54	-8.43	AV
2781.7500	V	45.91	8.15	29.84	27.01	56.89	74	-17.11	PK
2781.7500	V	35.25	8.15	29.84	27.01	46.23	54	-7.77	AV
3709.0000	V	--	--	--	--	--	--	--	PK
3709.0000	V	--	--	--	--	--	--	--	AV

Remark:

1. Level = Reading + Ant Factor + Cable Loss – Amplifier

2. “--” means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.



Radiated Band Edge:

Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Det.
902.0000	43.42	22.45	4.48	31.33	39.02	46.00	-6.98	H	QP
928.0000	39.98	22.59	4.54	31.35	35.76	46.00	-10.24	H	QP
902.0000	42.65	22.45	4.48	31.33	38.25	46.00	-7.75	V	QP
928.0000	40.47	22.59	4.54	31.35	36.25	46.00	-9.75	V	QP

Remark:

1. Level = Read level + Antenna Factor + Cable Loss – Preamp Factor




5. Maximum Peak Output Power Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (b)(3)
Test Limit	30dBm

5.2. Test Setup



5.3. Test Procedure

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

1. Set the RBW $\geq$ DTS bandwidth.
2. Set the VBW $\geq 3 \times$ RBW.
3. Set the span $\geq 3 \times$ RBW.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.


5.4. Test Data

Test Item	:	Max. peak output power
Test Voltage	:	DC 3.3V
Test Result	:	PASS


Test Mode	:	CH Low ~ CH High
Temperature	:	23.6℃
Humidity	:	53 %

Channel Frequency (MHz)	Peak Power output (dBm)	Limit (dBm)	Results
903.0	19.496	30	PASS
914.2	19.577	30	PASS
927.0	19.786	30	PASS



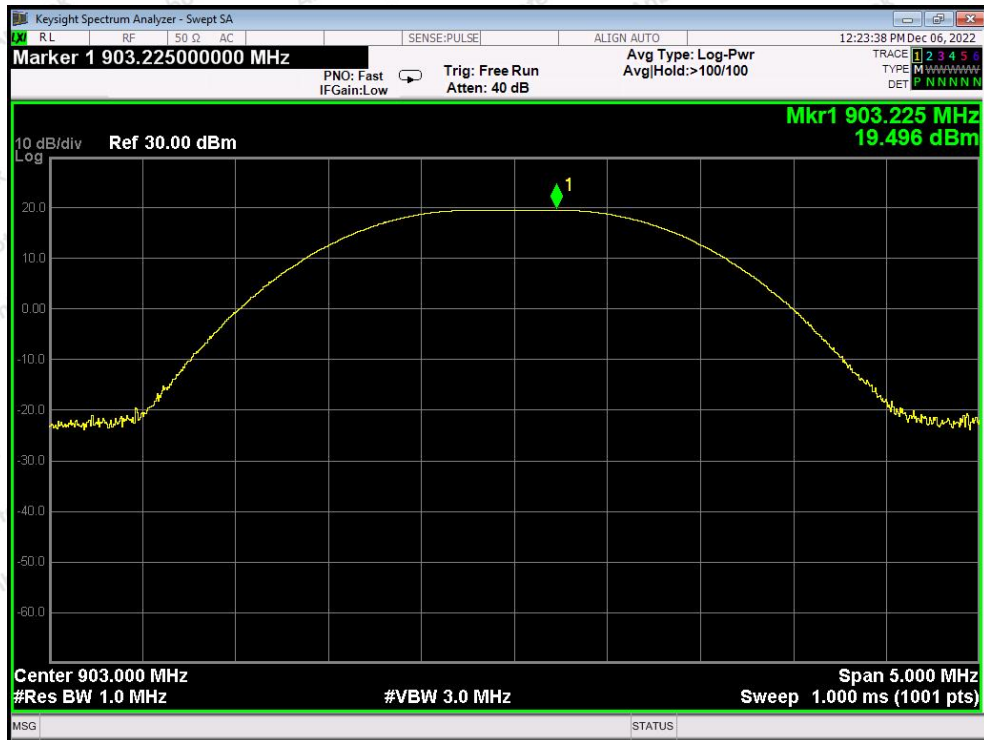


CH: Low

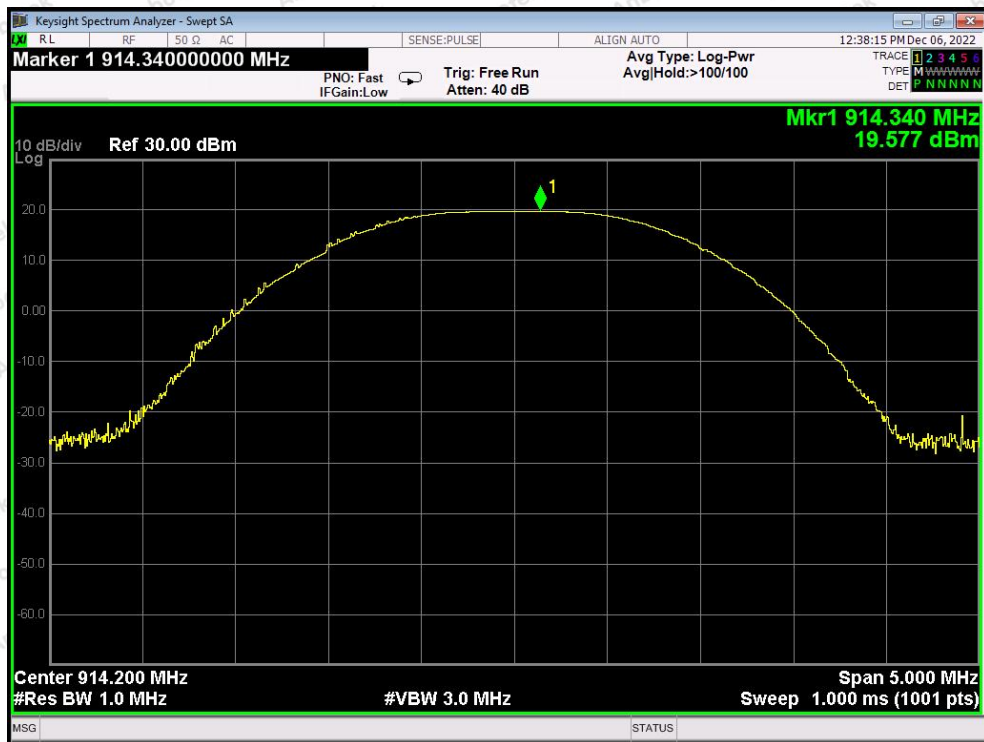

CH: Middle



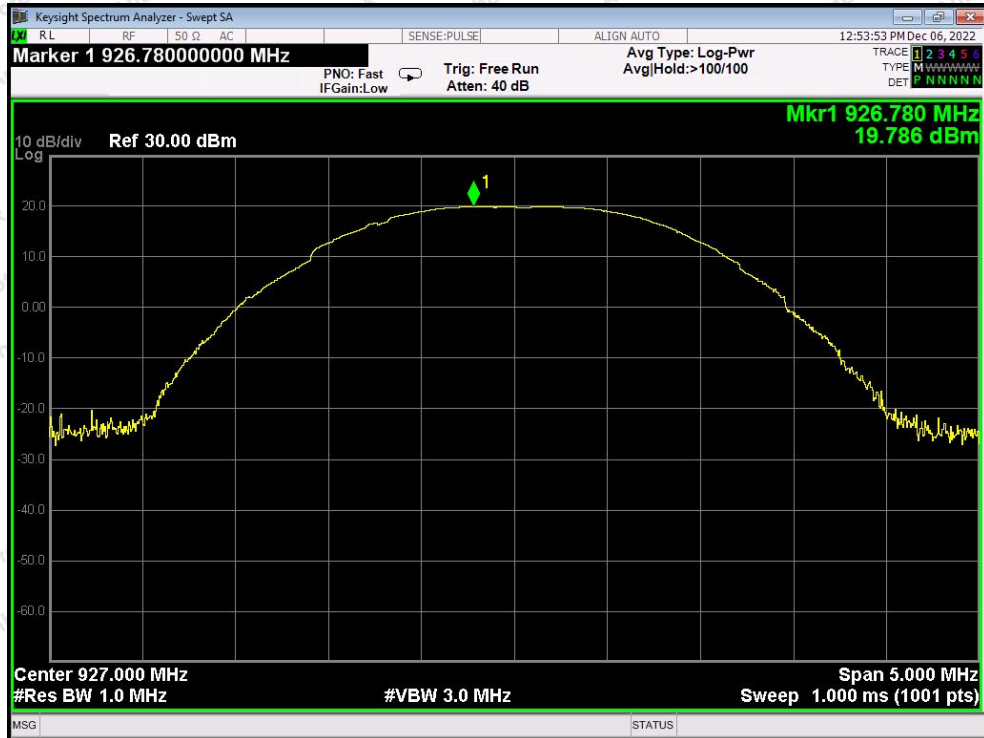

CH: High




6. 6DB Occupy Bandwidth Test

6.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(2)
Test Limit	>500kHz

6.2. Test Setup



6.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:
RBW = 100kHz, VBW $\geq$ 3*RBW =300kHz,
Detector= Peak
Trace mode= Max hold.
Sweep- auto couple.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.


6.4. Test Data

Test Item	:	6dB Bandwidth
Test Voltage	:	DC 3.3V
Test Result	:	PASS


Test Mode	:	CH Low ~ CH High
Temperature	:	23.6℃
Humidity	:	53 %

Channel	Frequency(MHz)	Bandwidth (kHz)	Limit (kHz)	Results
Low	903.0	662.03	>500	PASS
Middle	914.2	661.06		PASS
High	927.0	661.81		PASS



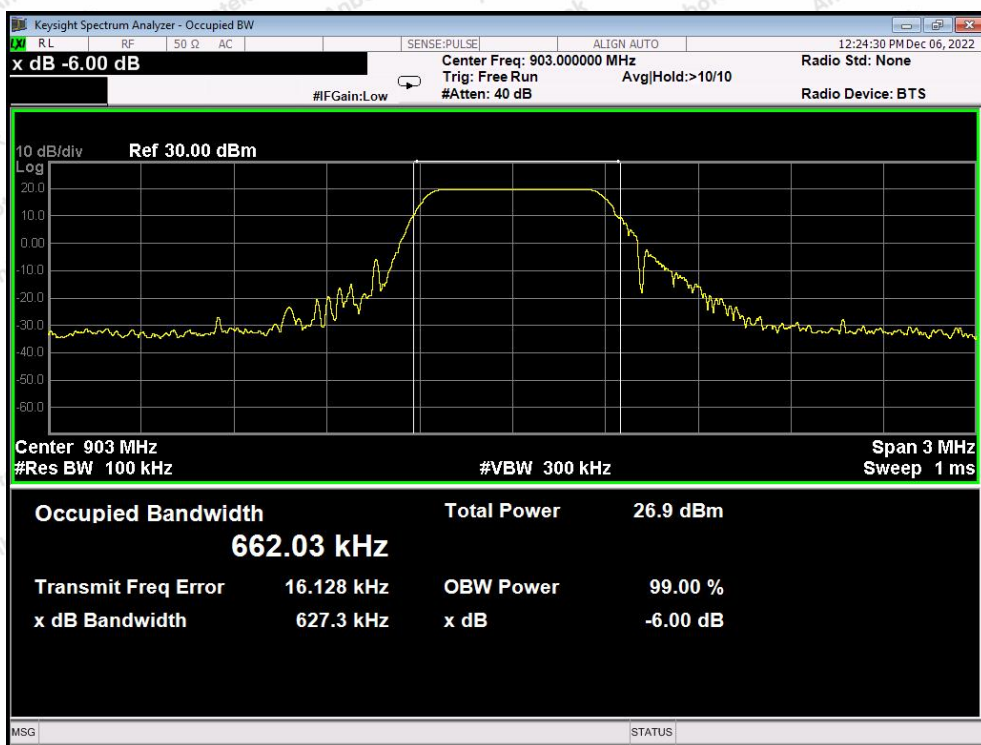


CH: Low

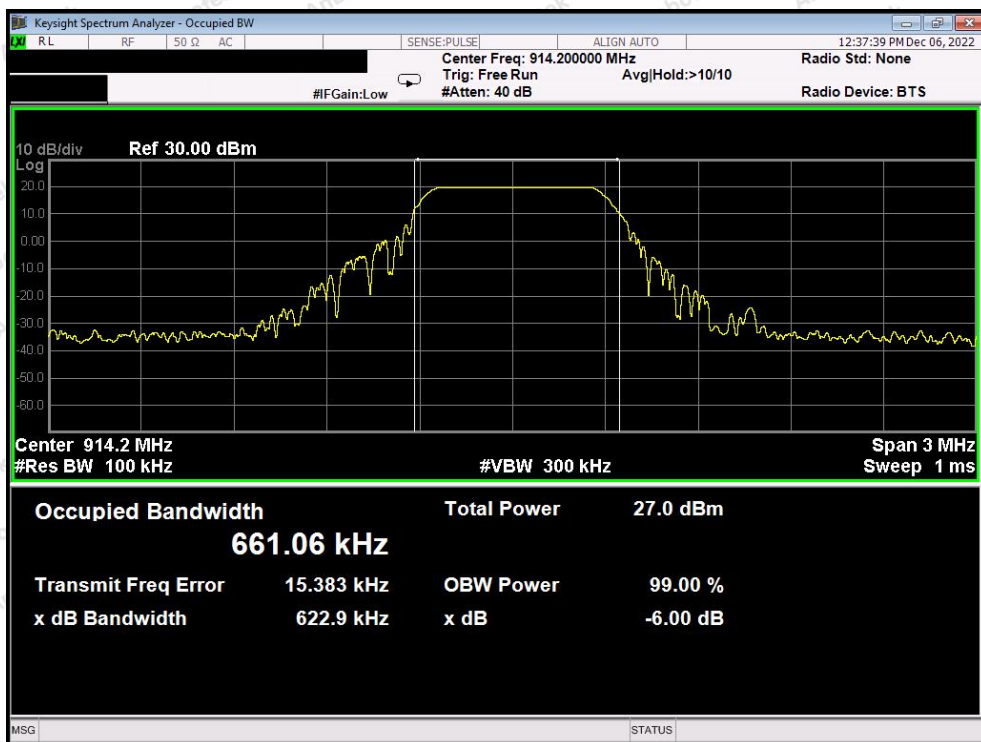

CH: Middle



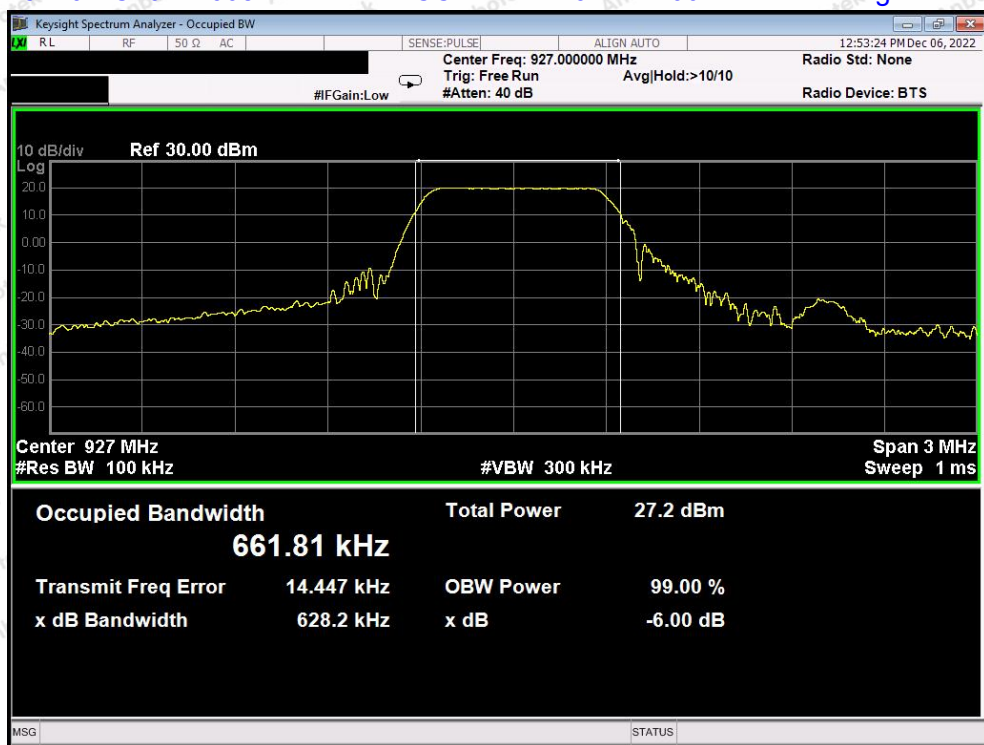

CH: High




7. Power Spectral Density Test

7.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (e)
Test Limit	8dBm/3KHz

7.2. Test Setup



7.3. Test Procedure


1. Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 1.5xDTSS BW
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

7.4. Test Data


Test Item	: Power Spectral Density	Test Mode	: CH Low ~ CH High
Test Voltage	: DC 3.3V	Temperature	: 23.6℃
Test Result	: PASS	Humidity	: 53 %

Channel	Frequency (MHz)	PSD (dBm/3KHz)	Limit (dBm/3KHz)	Results
Low	903.0	-13.530	8.00	PASS
Middle	914.2	-13.075	8.00	PASS
High	927.0	-13.838	8.00	PASS



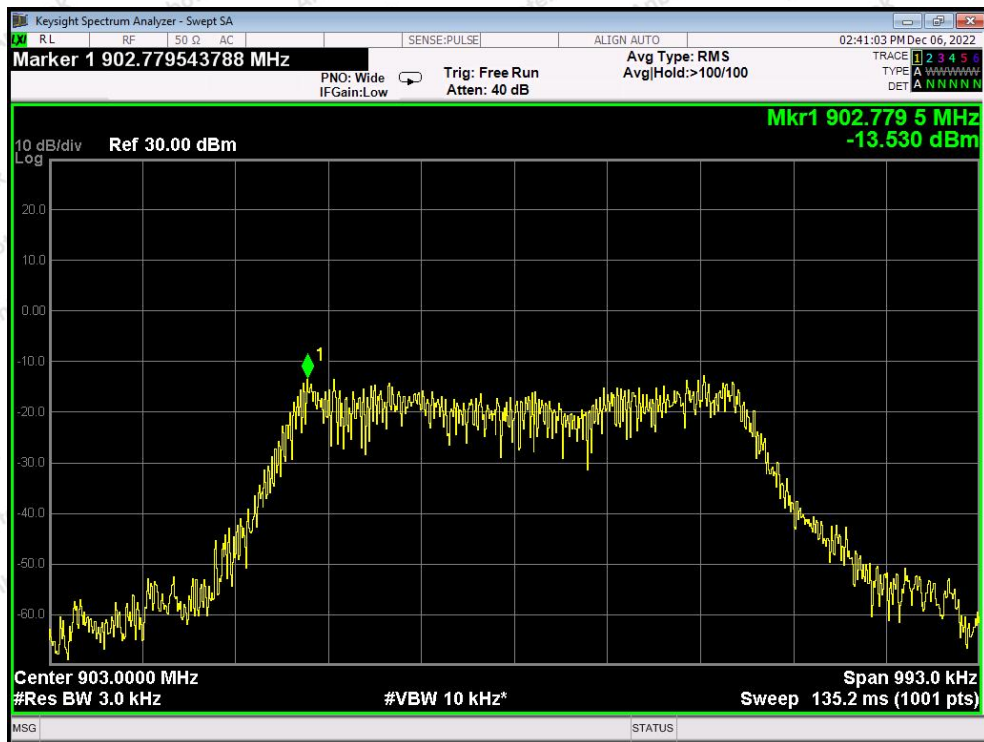


CH: Low

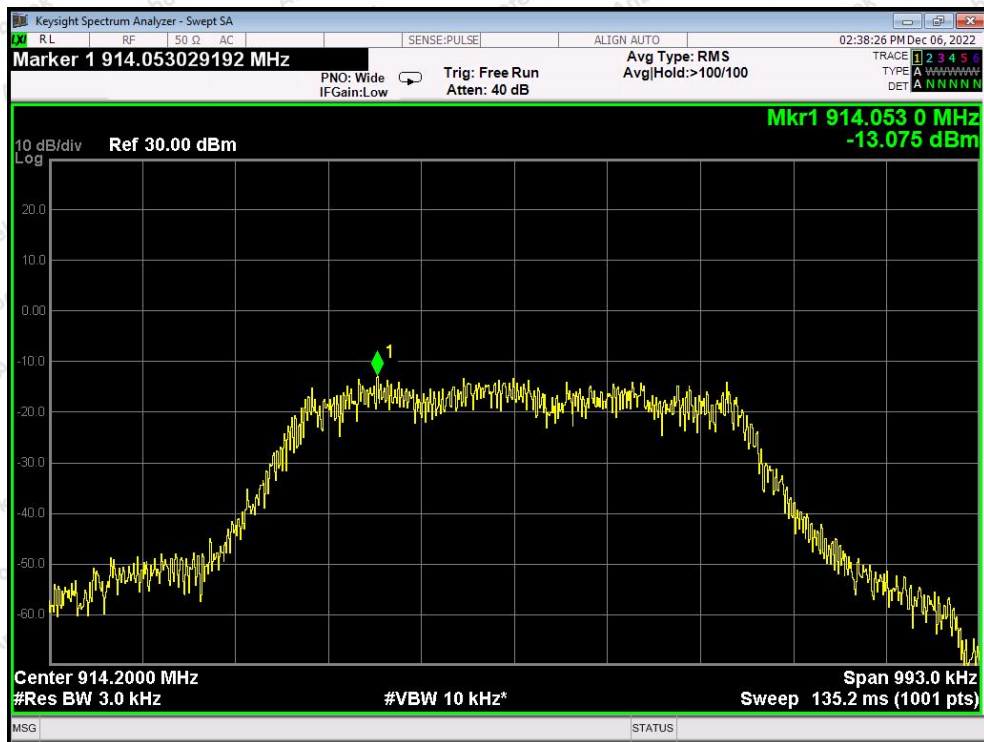

CH: Middle



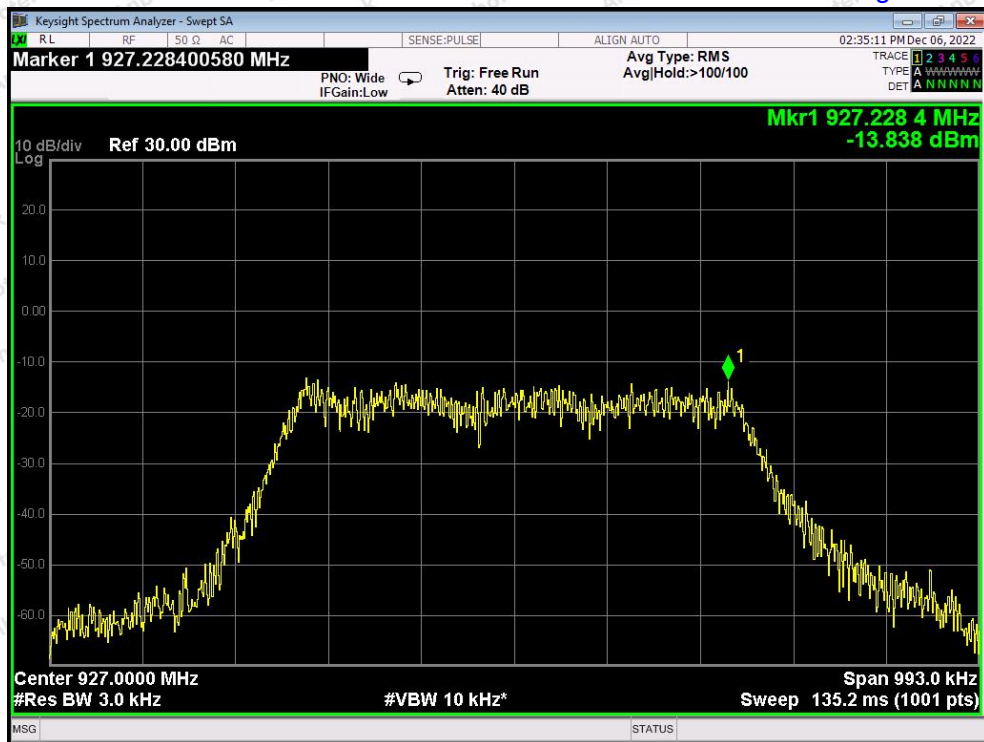

CH: High




8. 100kHz Bandwidth of Frequency Band Edge Requirement

8.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (d)
Test Limit	in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

8.2. Test Setup



8.3. Test Procedure

Using the following spectrum analyzer setting:


1. Set the RBW = 100KHz.
2. Set the VBW = 300KHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.

8.4. Test Data


Test Item	:	Band edge
Test Voltage	:	DC 3.3V
Test Result	:	PASS

Test Mode	:	CH Low ~ CH High
Temperature	:	23.6℃
Humidity	:	53 %



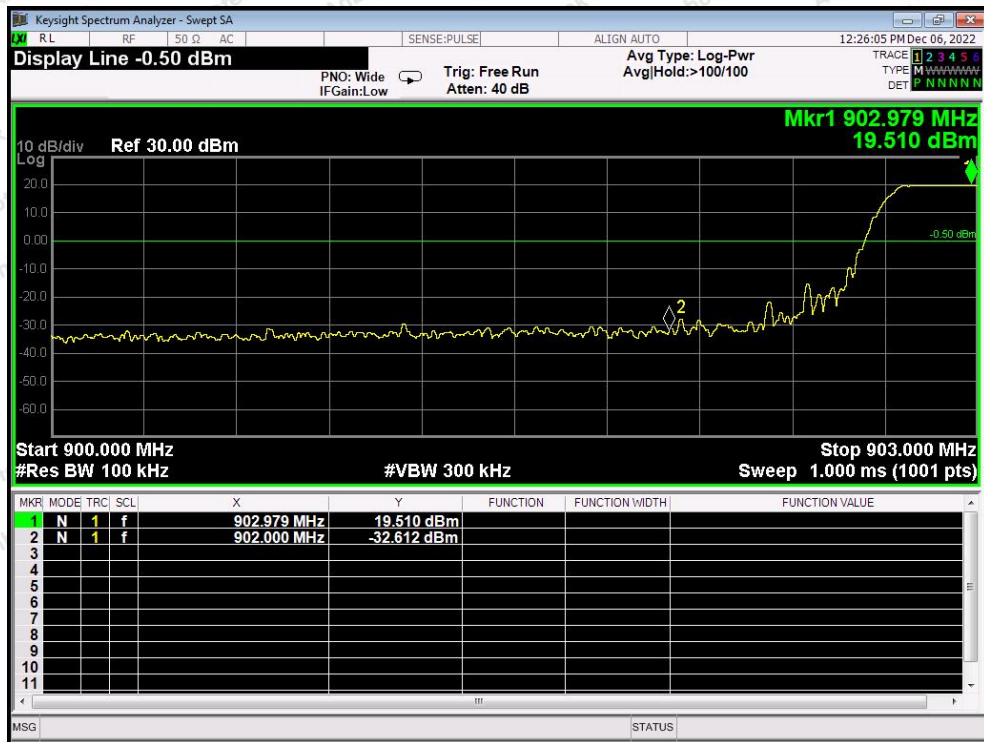

CH: Low

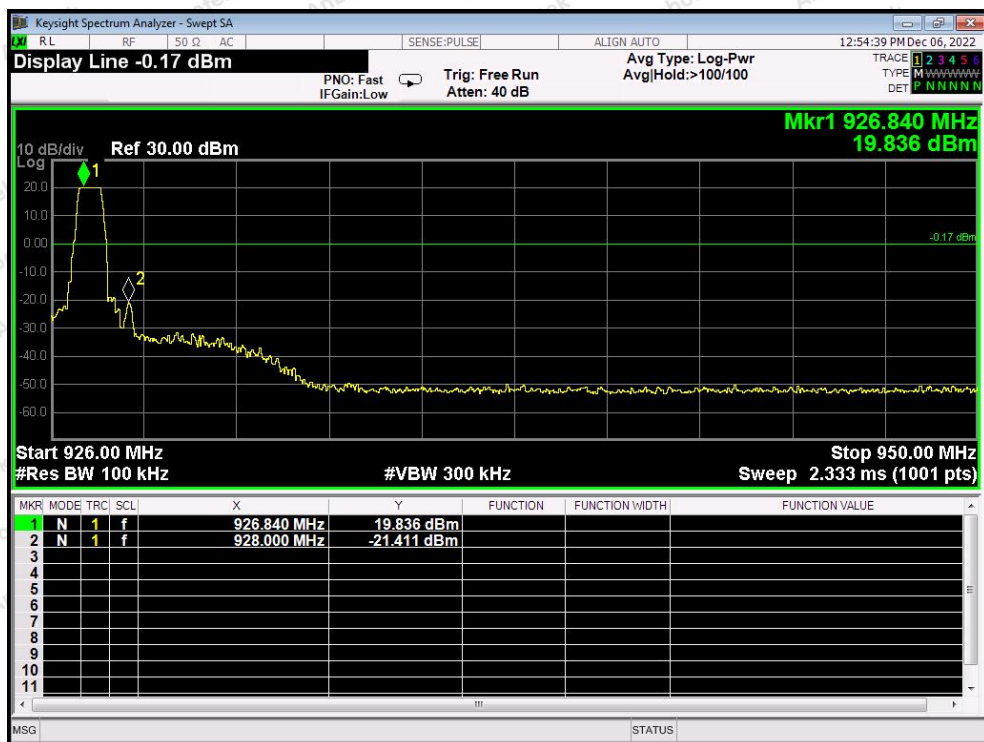

CH: High

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel: (86) 0755-26066440 Fax: (86) 0755-26014772 Email: service@anbotek.com


Code: AB-RF-05-b




Hotline
400-003-0500
www.anbotek.com.cn



Conducted Emission Method

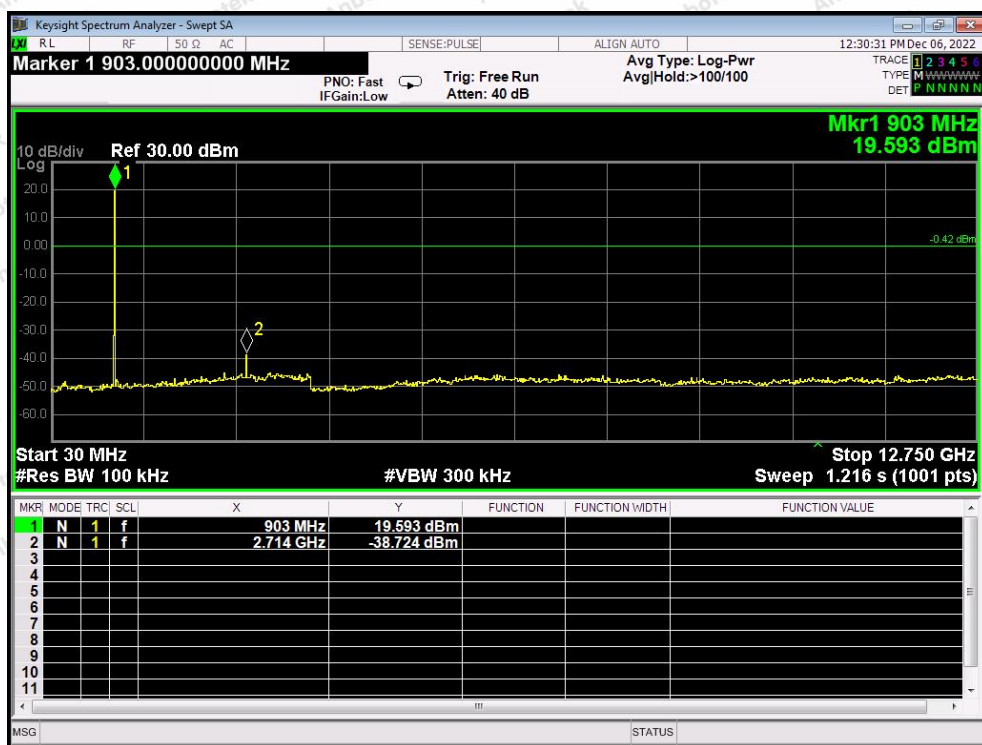


CH: Low

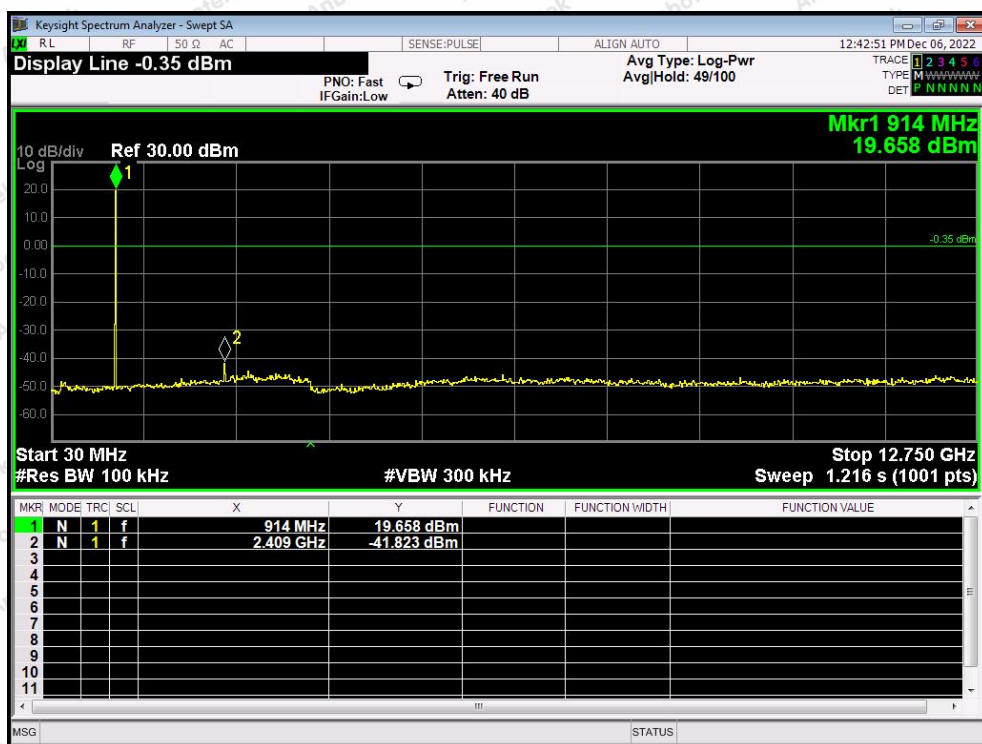

CH: Middle



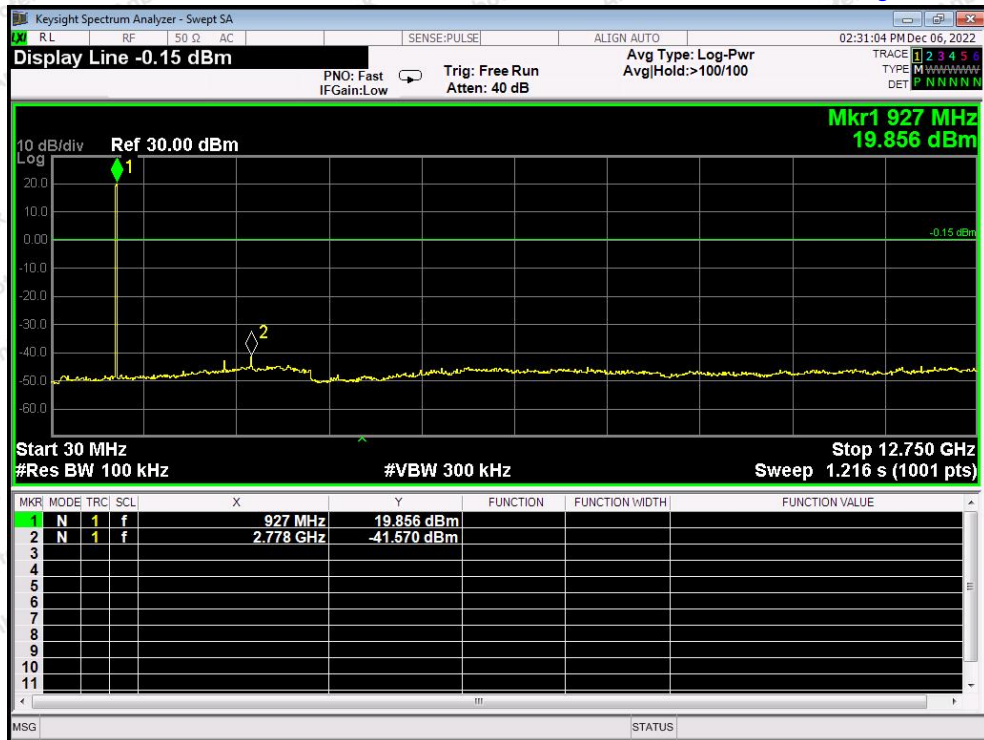

CH: High



9. Antenna Requirement

9.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c)
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 2) 15.247(c) (1)(i) requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna

9.2. Antenna Connected Construction

The antenna is a FPC antenna which permanently attached, and the best case gain of the antenna is 0.93 dBi. It complies with the standard requirement.





APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement



Photo of Radiation Spurious Emission Test

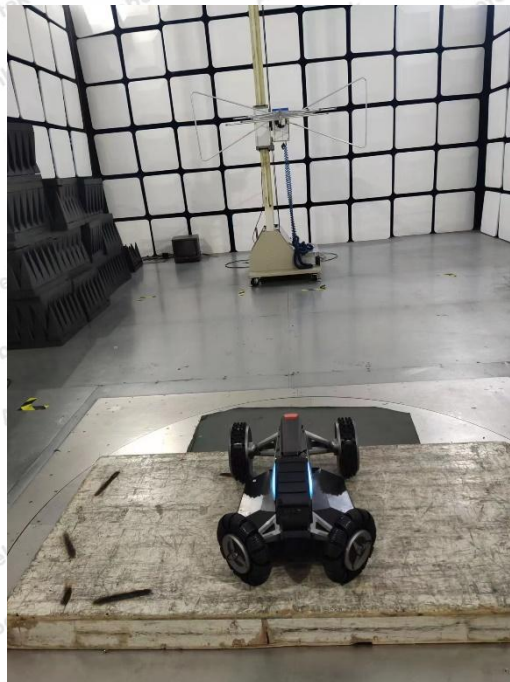

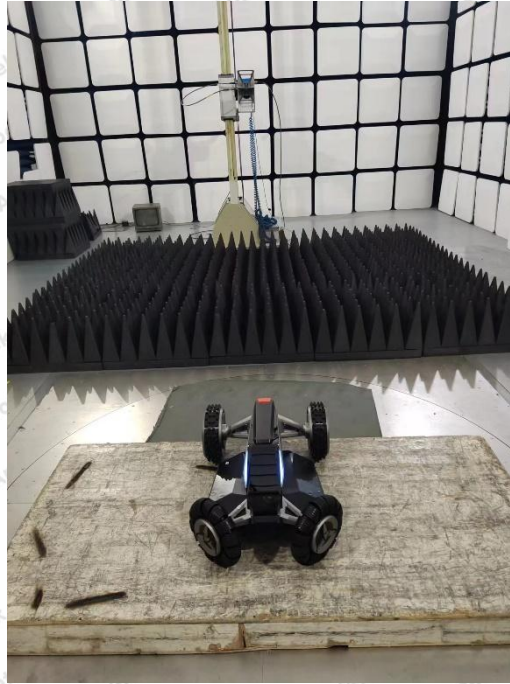

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to the test report 18220WC20122601.

APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to the test report 18220WC20122601.

----- End of Report -----

