



Test Mode:	802.11n HT20	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	DC 3.3V

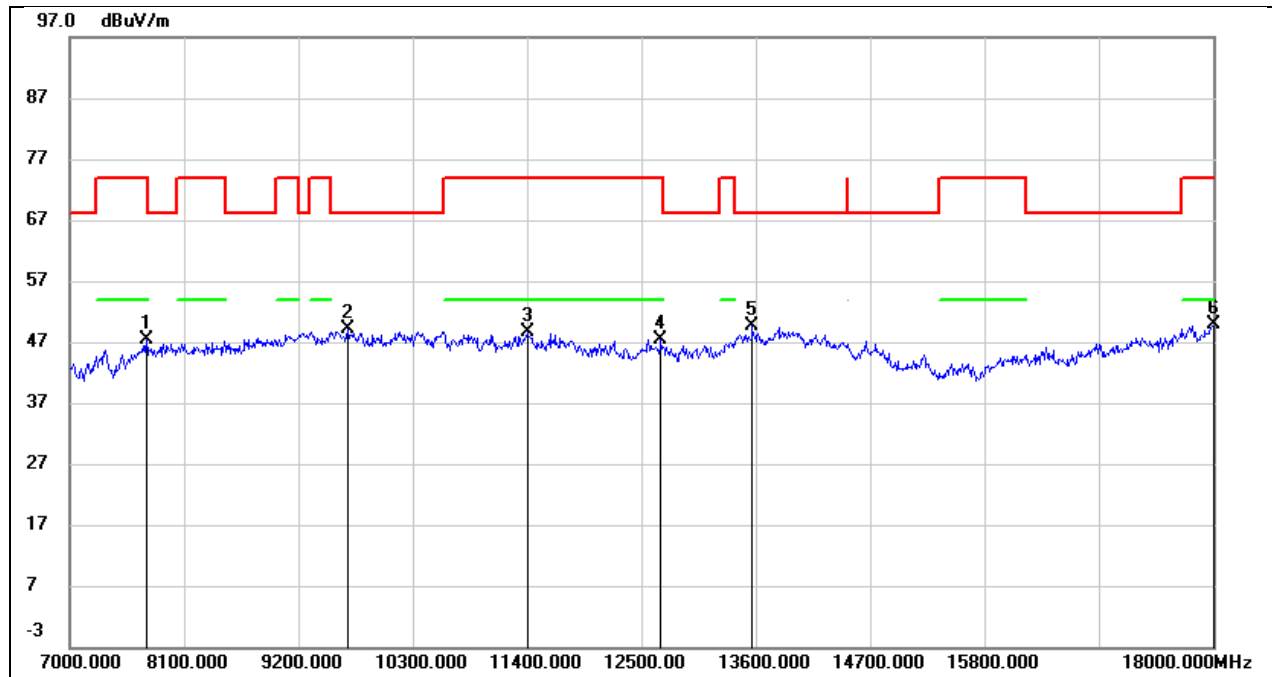


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7737.000	39.42	7.84	47.26	74.00	-26.74	peak
2	9673.000	35.82	13.42	49.24	68.20	-18.96	peak
3	11400.000	31.36	17.20	48.56	74.00	-25.44	peak
4	12687.000	27.20	20.17	47.37	74.00	-26.63	peak
5	13567.000	27.05	22.55	49.60	68.20	-18.60	peak
6	18000.000	21.26	28.51	49.77	74.00	-24.23	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	DC 3.3V

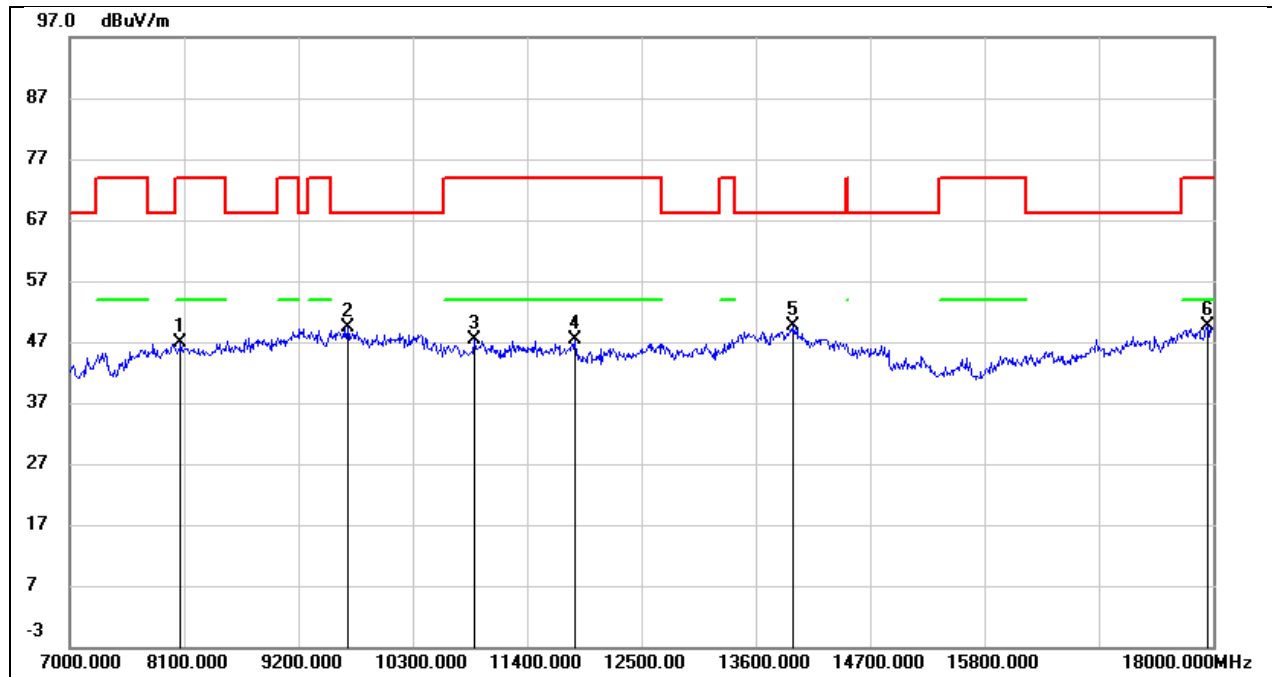


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8067.000	38.61	8.25	46.86	74.00	-27.14	peak
2	9673.000	35.89	13.42	49.31	68.20	-18.89	peak
3	10894.000	32.30	15.14	47.44	74.00	-26.56	peak
4	11862.000	29.16	18.13	47.29	74.00	-26.71	peak
5	13963.000	25.84	23.77	49.61	68.20	-18.59	peak
6	17945.000	21.57	28.01	49.58	74.00	-24.42	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 3.3V

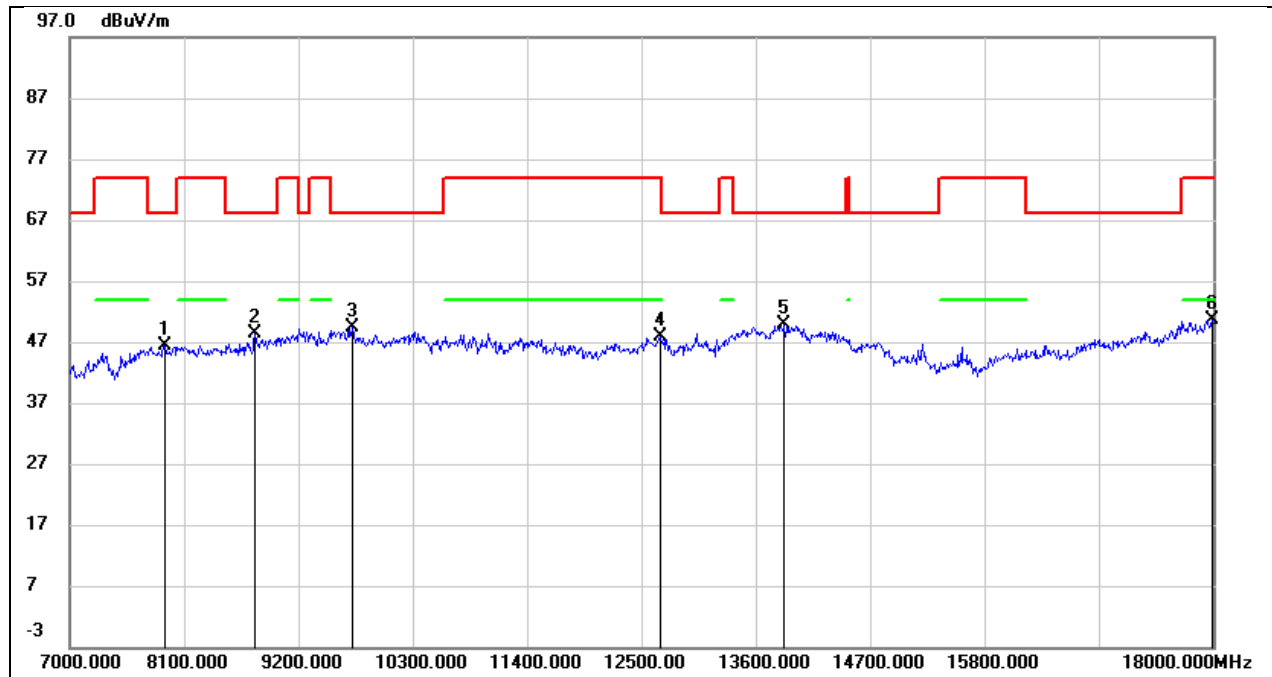


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7913.000	38.21	8.08	46.29	68.20	-21.91	peak
2	8782.000	38.94	9.53	48.47	68.20	-19.73	peak
3	9717.000	35.76	13.50	49.26	68.20	-18.94	peak
4	12676.000	27.77	20.14	47.91	74.00	-26.09	peak
5	13875.000	26.54	23.44	49.98	68.20	-18.22	peak
6	17989.000	22.22	28.40	50.62	74.00	-23.38	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	DC 3.3V

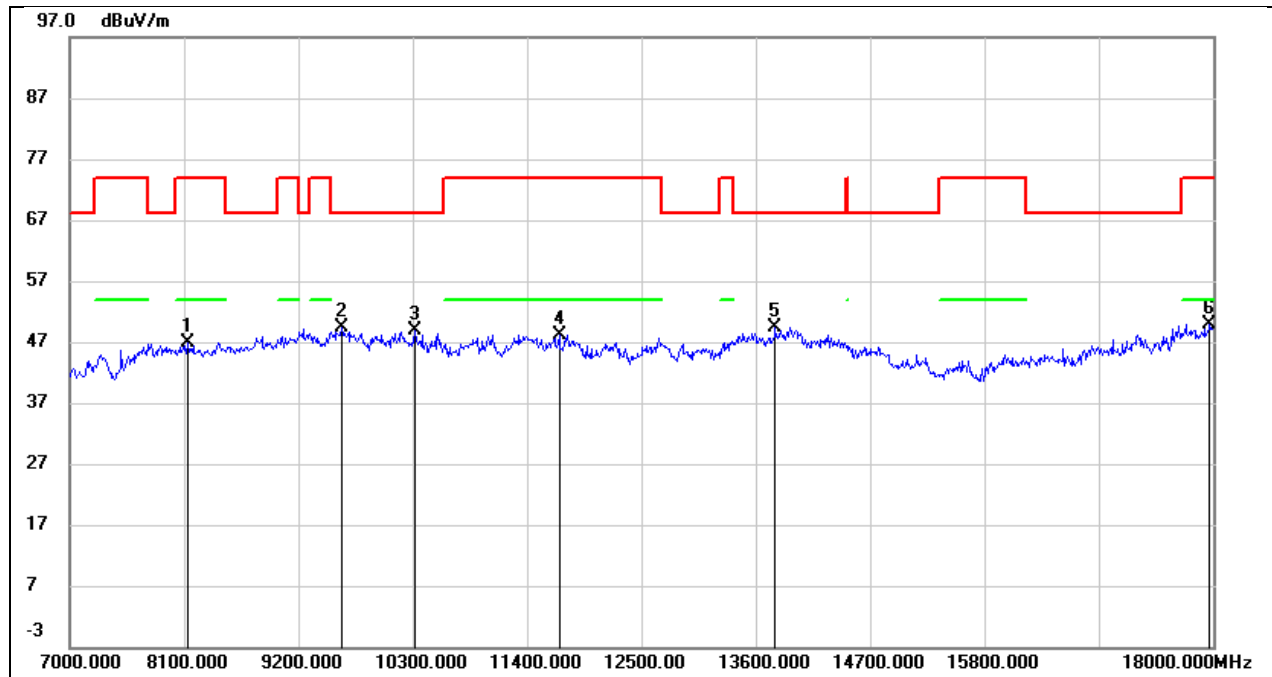


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8133.000	38.44	8.33	46.77	74.00	-27.23	peak
2	9618.000	36.05	13.31	49.36	68.20	-18.84	peak
3	10322.000	35.31	13.57	48.88	68.20	-19.32	peak
4	11708.000	30.26	17.91	48.17	74.00	-25.83	peak
5	13787.000	26.16	23.10	49.26	68.20	-18.94	peak
6	17967.000	21.74	28.21	49.95	74.00	-24.05	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 3.3V

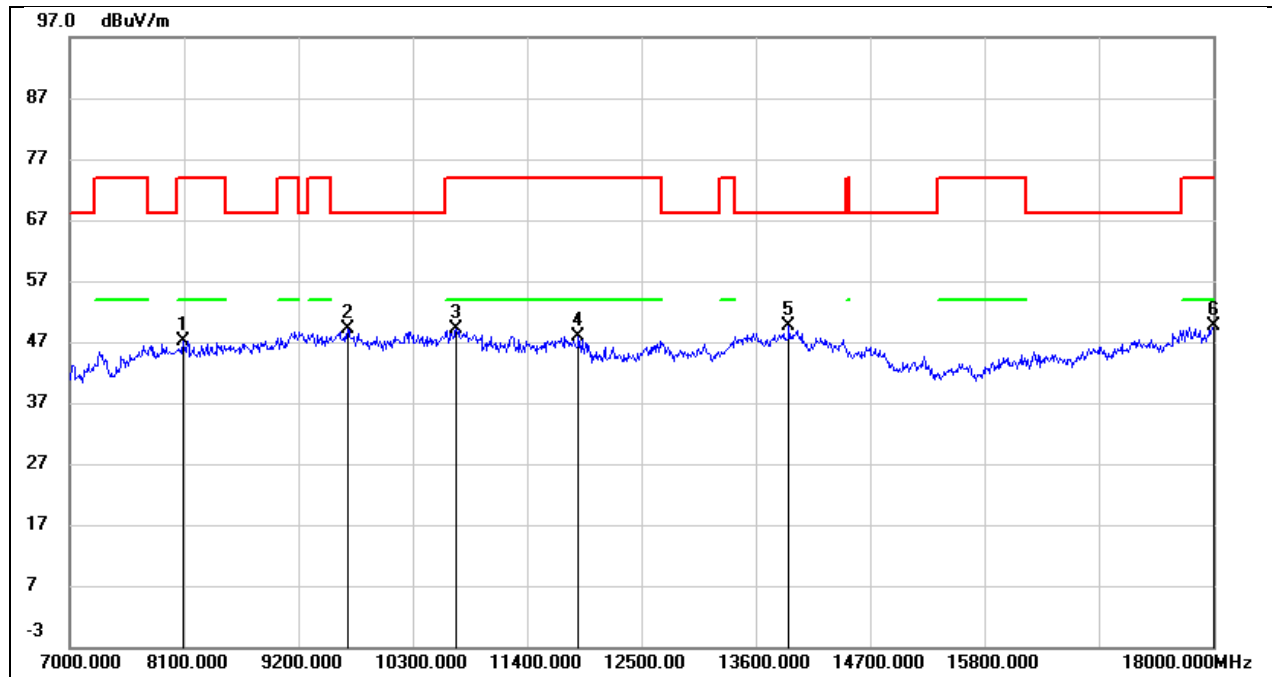


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8089.000	38.81	8.28	47.09	74.00	-26.91	peak
2	9673.000	35.72	13.42	49.14	68.20	-19.06	peak
3	10718.000	34.49	14.64	49.13	74.00	-24.87	peak
4	11895.000	29.55	18.25	47.80	74.00	-26.20	peak
5	13919.000	25.95	23.60	49.55	68.20	-18.65	peak
6	18000.000	21.02	28.51	49.53	74.00	-24.47	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 3.3V

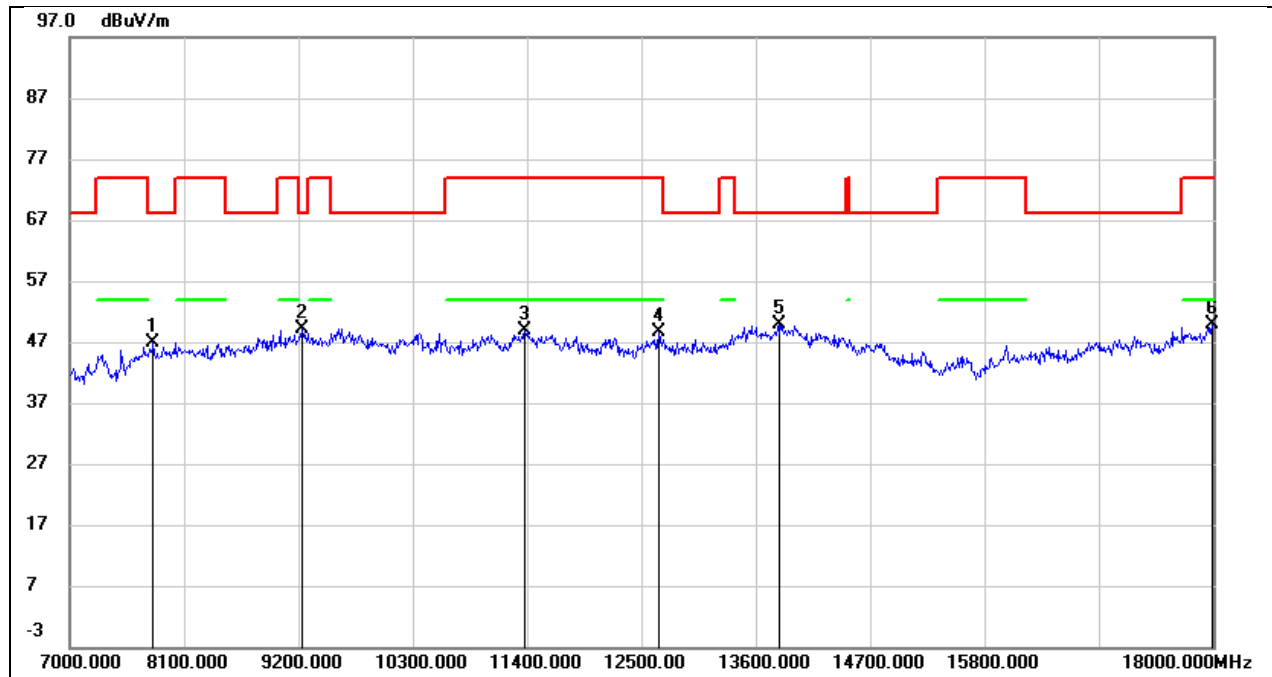


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7803.000	38.92	7.95	46.87	68.20	-21.33	peak
2	9233.000	37.61	11.52	49.13	68.20	-19.07	peak
3	11378.000	31.82	17.10	48.92	74.00	-25.08	peak
4	12665.000	28.59	20.09	48.68	74.00	-25.32	peak
5	13820.000	26.54	23.22	49.76	68.20	-18.44	peak
6	17989.000	21.47	28.40	49.87	74.00	-24.13	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 3.3V

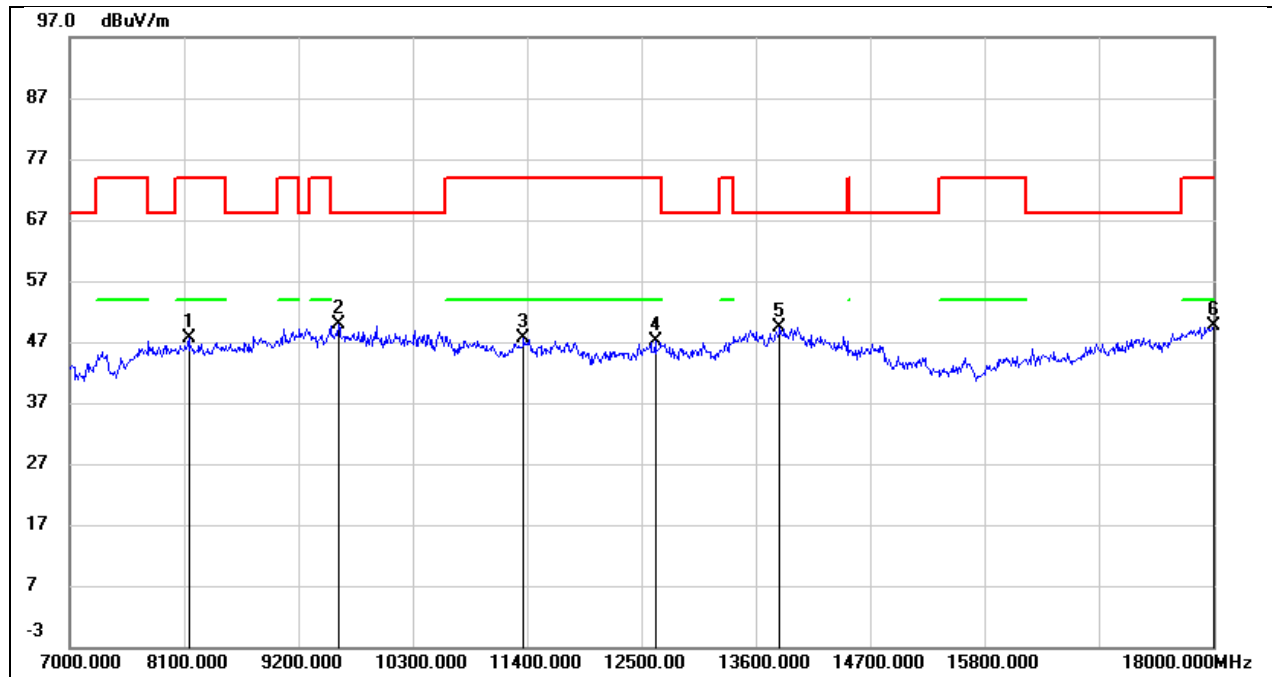


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8144.000	39.19	8.34	47.53	74.00	-26.47	peak
2	9585.000	36.66	13.19	49.85	68.20	-18.35	peak
3	11367.000	30.48	17.05	47.53	74.00	-26.47	peak
4	12632.000	27.07	19.99	47.06	74.00	-26.94	peak
5	13831.000	26.11	23.26	49.37	68.20	-18.83	peak
6	18000.000	21.09	28.51	49.60	74.00	-24.40	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 3.3V

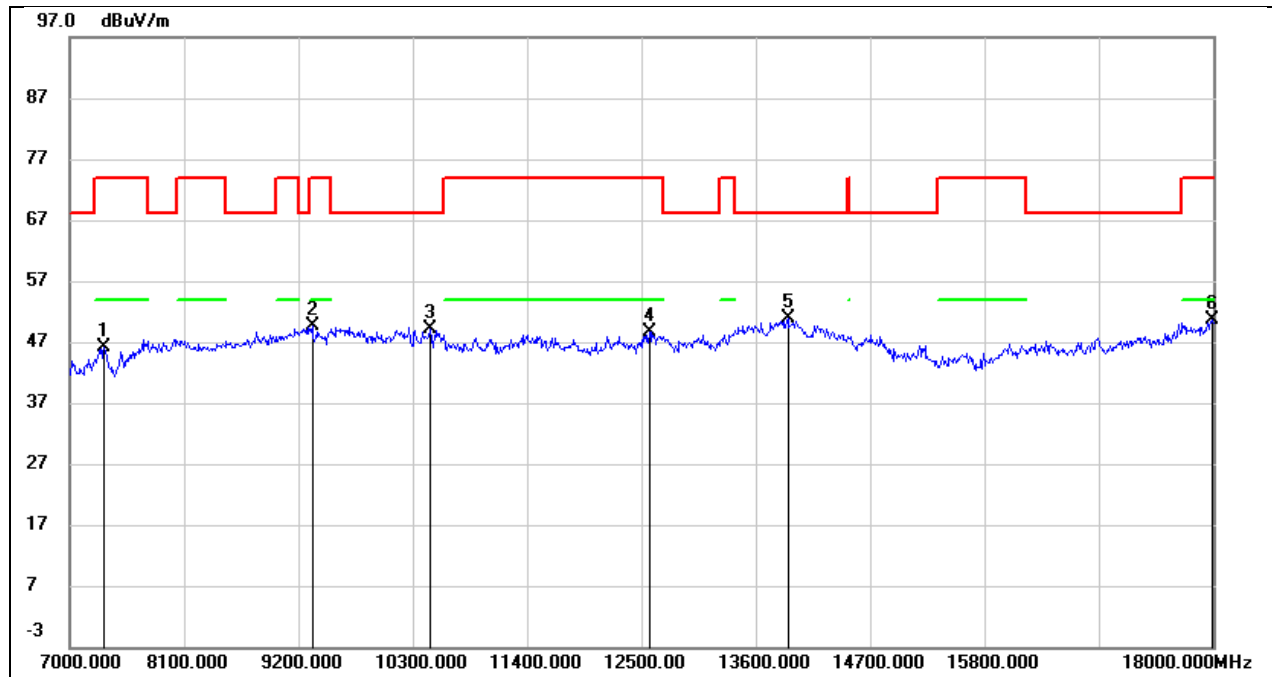


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7330.000	38.71	7.50	46.21	74.00	-27.79	peak
2	9332.000	37.86	11.82	49.68	74.00	-24.32	peak
3	10465.000	35.26	13.93	49.19	68.20	-19.01	peak
4	12577.000	28.66	19.87	48.53	74.00	-25.47	peak
5	13908.000	27.42	23.56	50.98	68.20	-17.22	peak
6	17989.000	22.18	28.40	50.58	74.00	-23.42	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	DC 3.3V

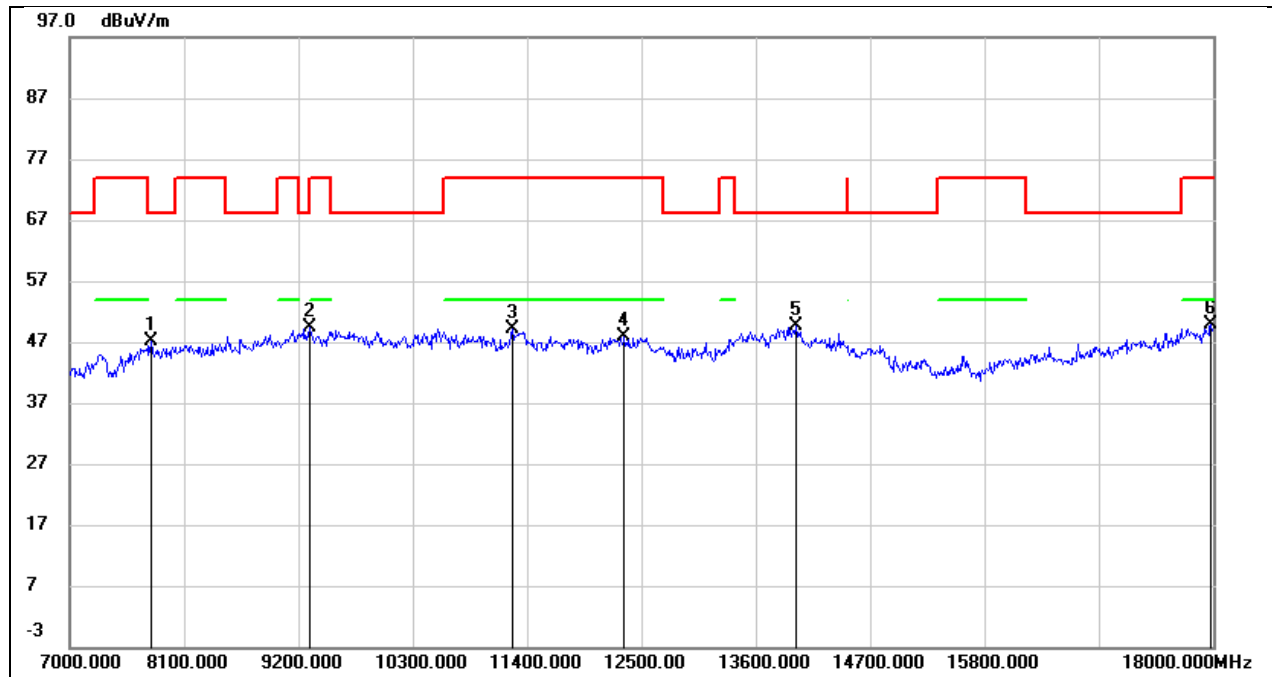


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7781.000	39.11	7.92	47.03	68.20	-21.17	peak
2	9310.000	37.73	11.75	49.48	74.00	-24.52	peak
3	11257.000	32.69	16.55	49.24	74.00	-24.76	peak
4	12335.000	28.34	19.46	47.80	74.00	-26.20	peak
5	13985.000	25.79	23.85	49.64	68.20	-18.56	peak
6	17978.000	21.64	28.31	49.95	74.00	-24.05	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	DC 3.3V

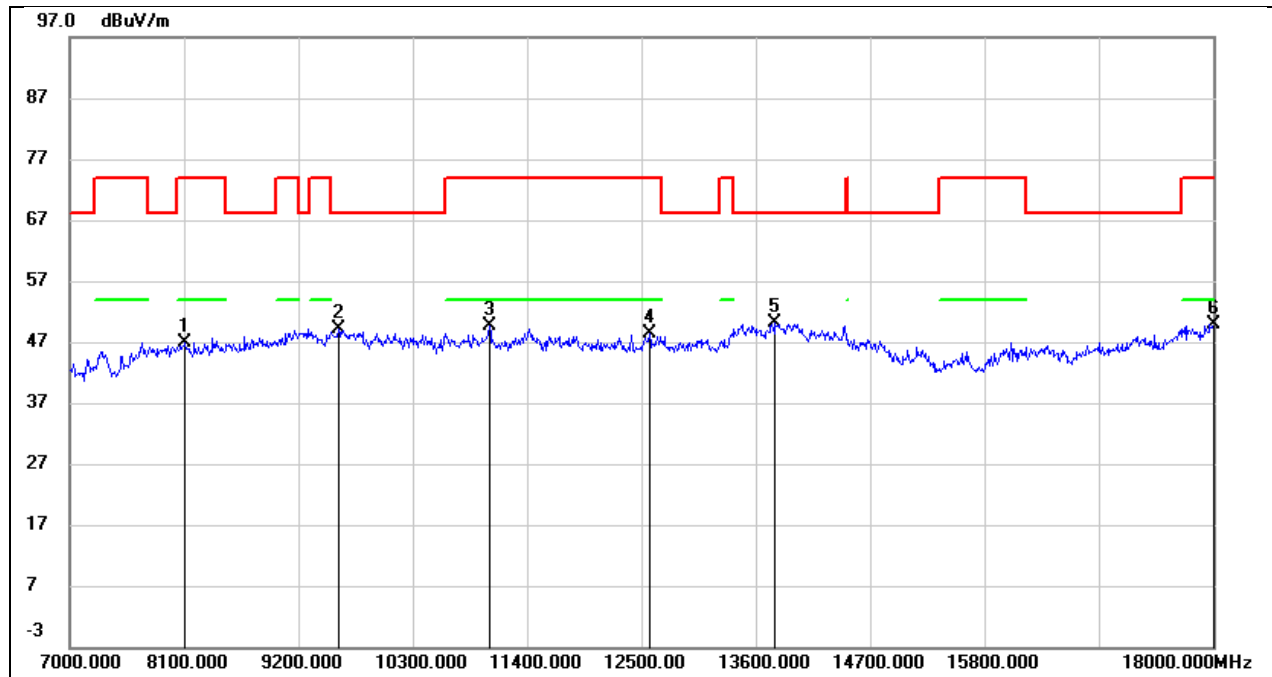


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8111.000	38.53	8.30	46.83	74.00	-27.17	peak
2	9585.000	35.85	13.19	49.04	68.20	-19.16	peak
3	11037.000	33.93	15.62	49.55	74.00	-24.45	peak
4	12577.000	28.45	19.87	48.32	74.00	-25.68	peak
5	13787.000	26.96	23.10	50.06	68.20	-18.14	peak
6	18000.000	21.40	28.51	49.91	74.00	-24.09	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	DC 3.3V

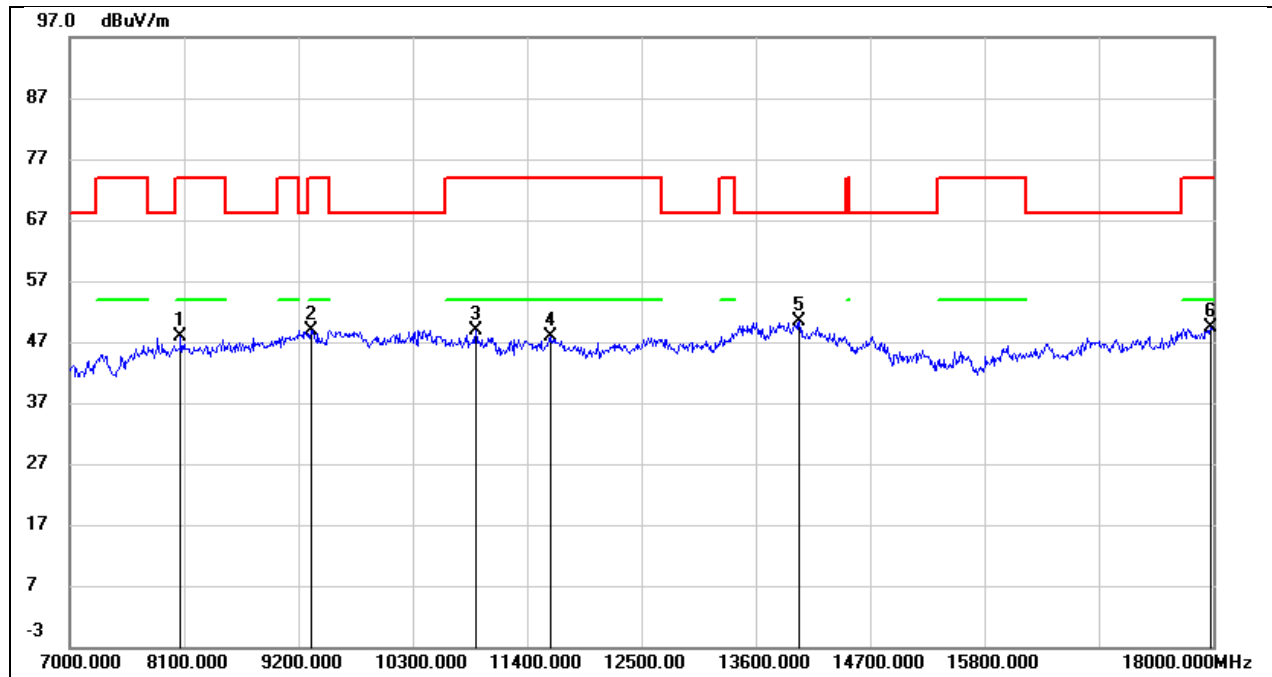


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8067.000	39.69	8.25	47.94	74.00	-26.06	peak
2	9321.000	37.13	11.79	48.92	74.00	-25.08	peak
3	10905.000	33.67	15.17	48.84	74.00	-25.16	peak
4	11620.000	30.08	17.88	47.96	74.00	-26.04	peak
5	14018.000	26.65	23.83	50.48	68.20	-17.72	peak
6	17978.000	21.19	28.31	49.50	74.00	-24.50	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5230
Polarity:	Vertical	Test Voltage:	DC 3.3V

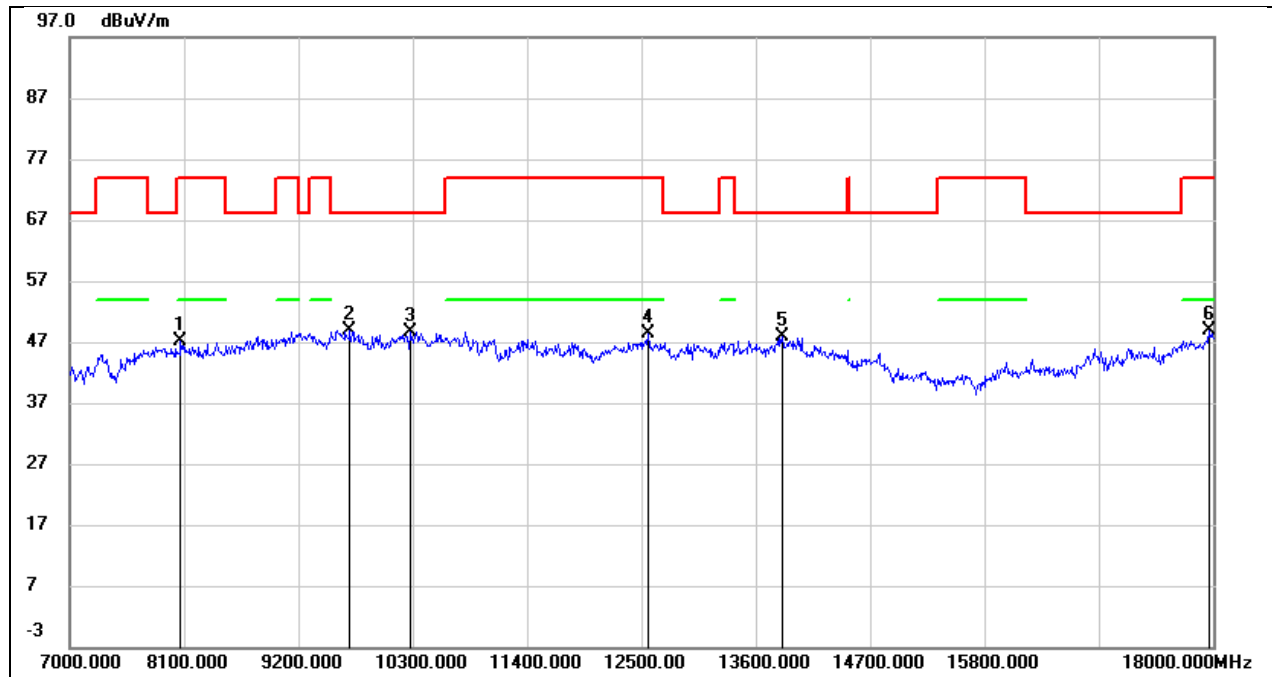


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8067.000	38.87	8.25	47.12	74.00	-26.88	peak
2	9695.000	35.46	13.45	48.91	68.20	-19.29	peak
3	10278.000	35.14	13.48	48.62	68.20	-19.58	peak
4	12566.000	28.48	19.85	48.33	74.00	-25.67	peak
5	13853.000	24.47	23.34	47.81	68.20	-20.39	peak
6	17956.000	20.66	28.10	48.76	74.00	-25.24	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5270
Polarity:	Horizontal	Test Voltage:	DC 3.3V

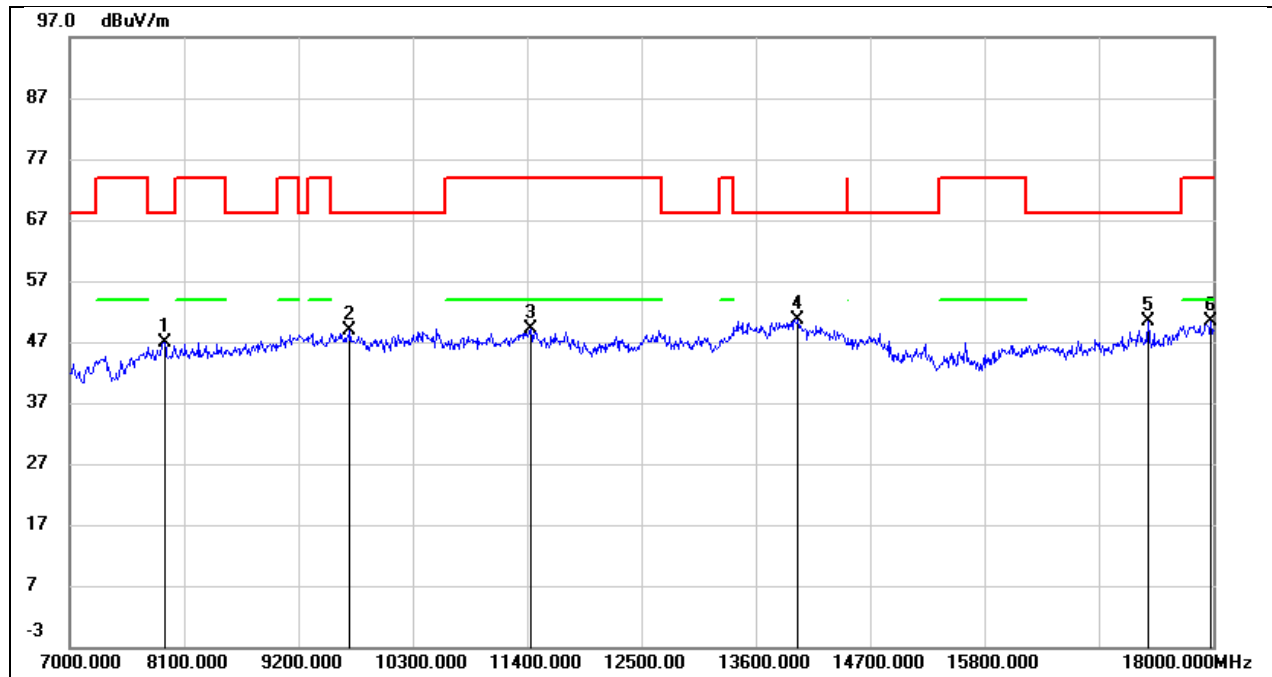


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7913.000	38.82	8.08	46.90	68.20	-21.30	peak
2	9695.000	35.38	13.45	48.83	68.20	-19.37	peak
3	11433.000	31.79	17.31	49.10	74.00	-24.90	peak
4	14007.000	26.85	23.88	50.73	68.20	-17.47	peak
5	17373.000	25.95	24.31	50.26	68.20	-17.94	peak
6	17978.000	22.07	28.31	50.38	74.00	-23.62	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5270
Polarity:	Vertical	Test Voltage:	DC 3.3V

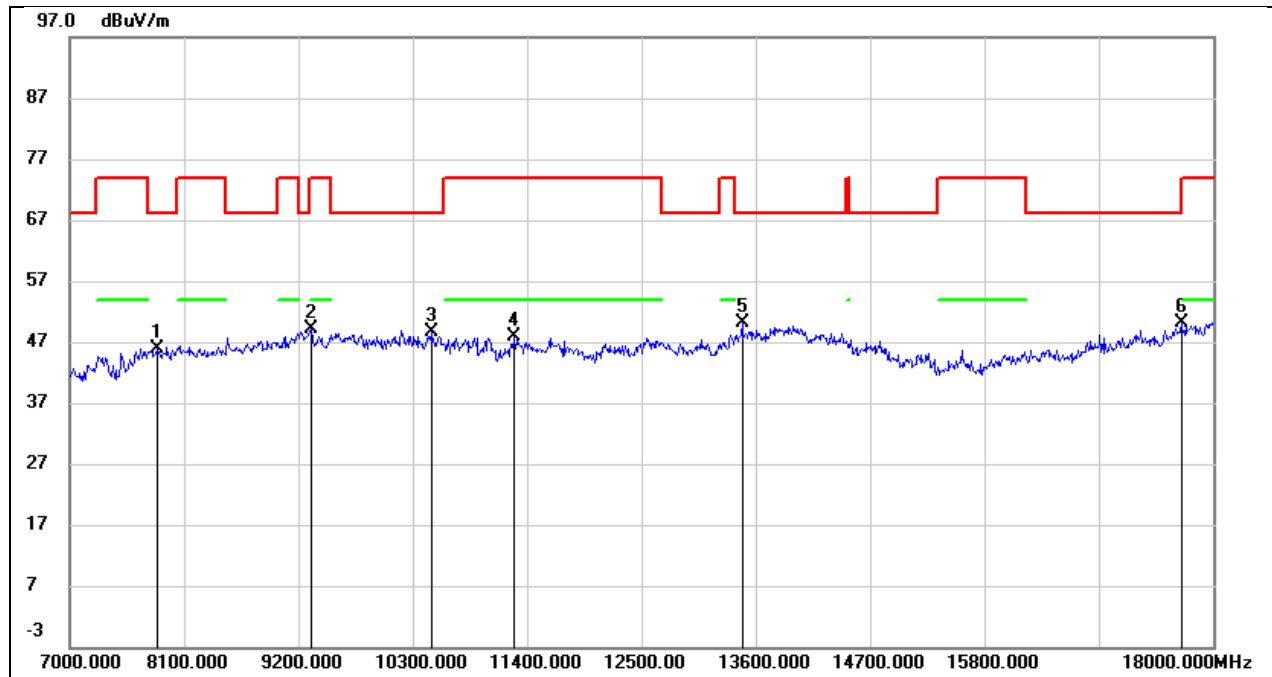


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7836.000	37.82	7.99	45.81	68.20	-22.39	peak
2	9321.000	37.36	11.79	49.15	74.00	-24.85	peak
3	10476.000	34.60	13.96	48.56	68.20	-19.64	peak
4	11279.000	31.25	16.64	47.89	74.00	-26.11	peak
5	13468.000	27.77	22.31	50.08	68.20	-18.12	peak
6	17692.000	24.39	25.77	50.16	68.20	-18.04	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	DC 3.3V

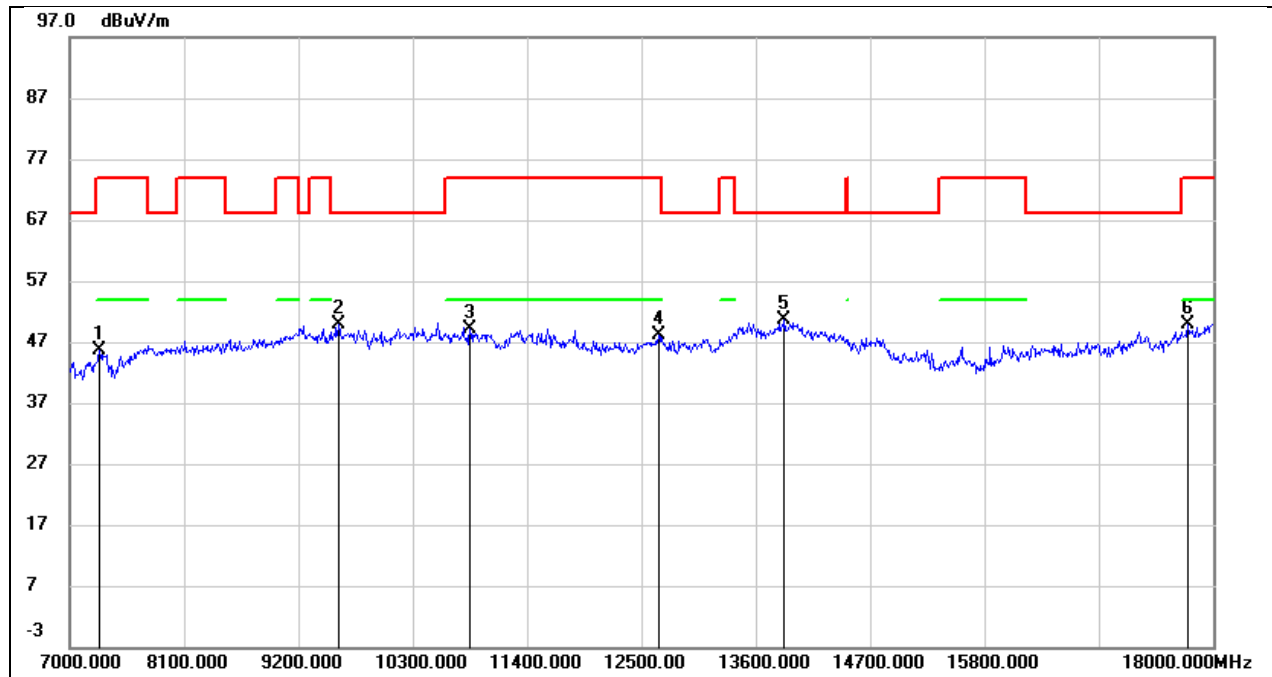


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	38.23	7.49	45.72	74.00	-28.28	peak
2	9585.000	36.61	13.19	49.80	68.20	-18.40	peak
3	10850.000	34.13	15.02	49.15	74.00	-24.85	peak
4	12665.000	28.11	20.09	48.20	74.00	-25.80	peak
5	13875.000	27.18	23.44	50.62	68.20	-17.58	peak
6	17758.000	23.68	26.31	49.99	74.00	-24.01	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5310
Polarity:	Vertical	Test Voltage:	DC 3.3V

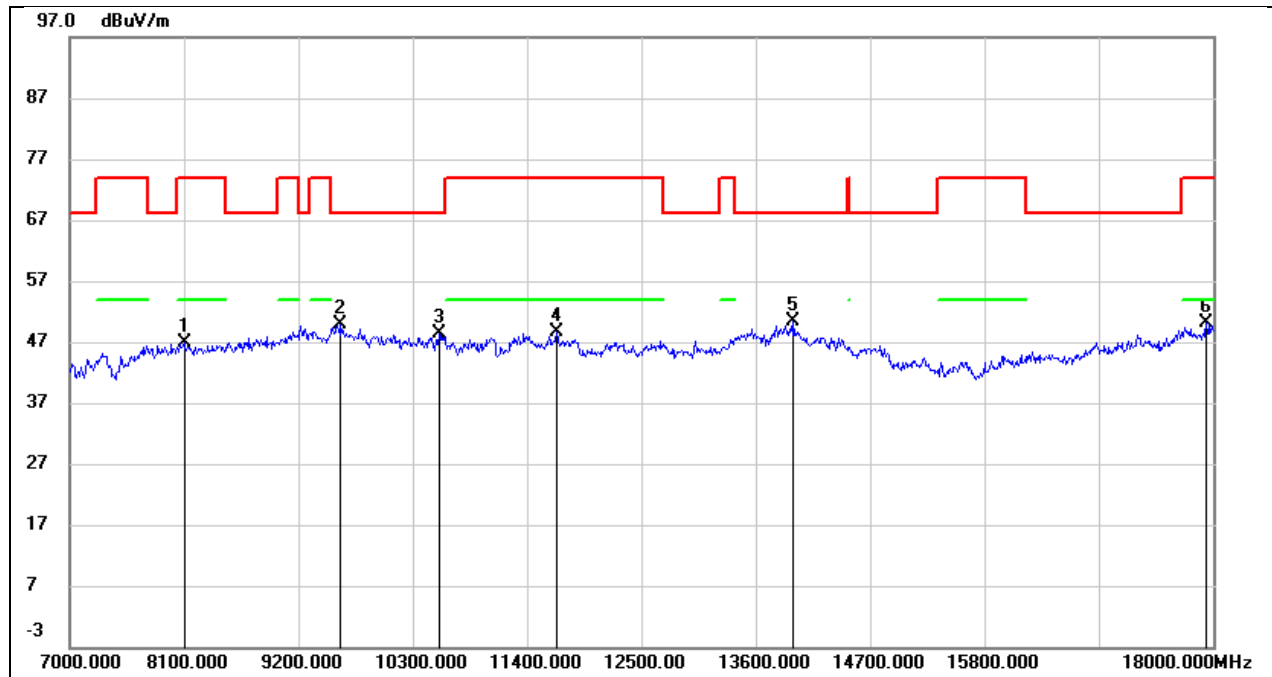


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8100.000	38.59	8.29	46.88	74.00	-27.12	peak
2	9607.000	36.53	13.30	49.83	68.20	-18.37	peak
3	10553.000	34.11	14.18	48.29	68.20	-19.91	peak
4	11686.000	30.65	17.91	48.56	74.00	-25.44	peak
5	13963.000	26.54	23.77	50.31	68.20	-17.89	peak
6	17934.000	22.19	27.90	50.09	74.00	-23.91	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	DC 3.3V

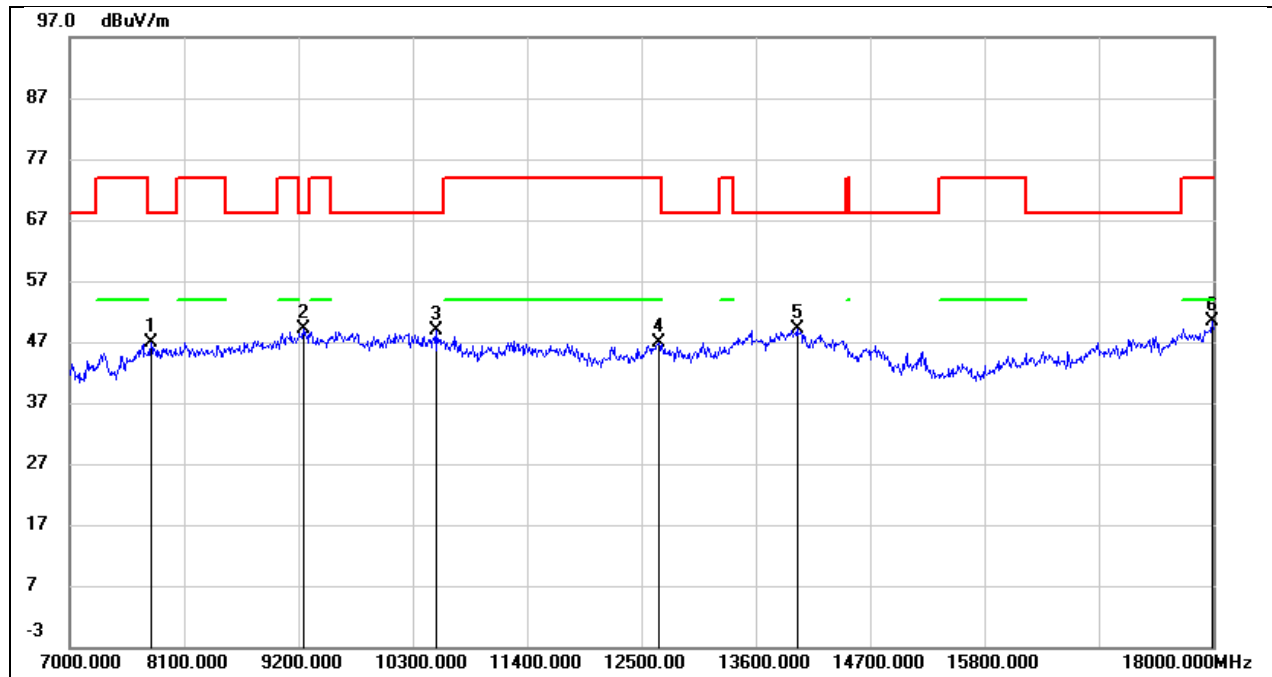


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7781.000	38.96	7.92	46.88	68.20	-21.32	peak
2	9244.000	37.59	11.56	49.15	68.20	-19.05	peak
3	10520.000	34.71	14.08	48.79	68.20	-19.41	peak
4	12665.000	26.75	20.09	46.84	74.00	-27.16	peak
5	13996.000	25.31	23.89	49.20	68.20	-19.00	peak
6	17989.000	22.00	28.40	50.40	74.00	-23.60	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5510
Polarity:	Vertical	Test Voltage:	DC 3.3V

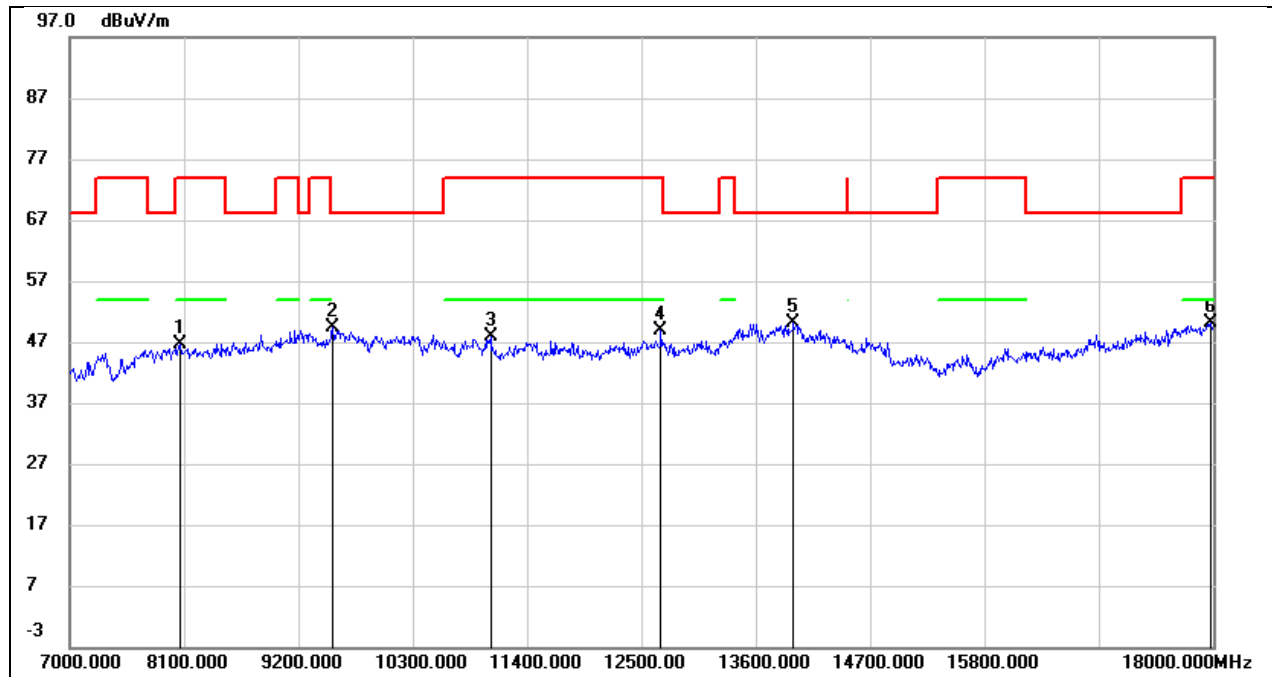


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8067.000	38.41	8.25	46.66	74.00	-27.34	peak
2	9530.000	36.41	12.85	49.26	68.20	-18.94	peak
3	11048.000	32.13	15.66	47.79	74.00	-26.21	peak
4	12687.000	28.62	20.17	48.79	74.00	-25.21	peak
5	13963.000	26.26	23.77	50.03	68.20	-18.17	peak
6	17978.000	21.74	28.31	50.05	74.00	-23.95	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5550
Polarity:	Horizontal	Test Voltage:	DC 3.3V

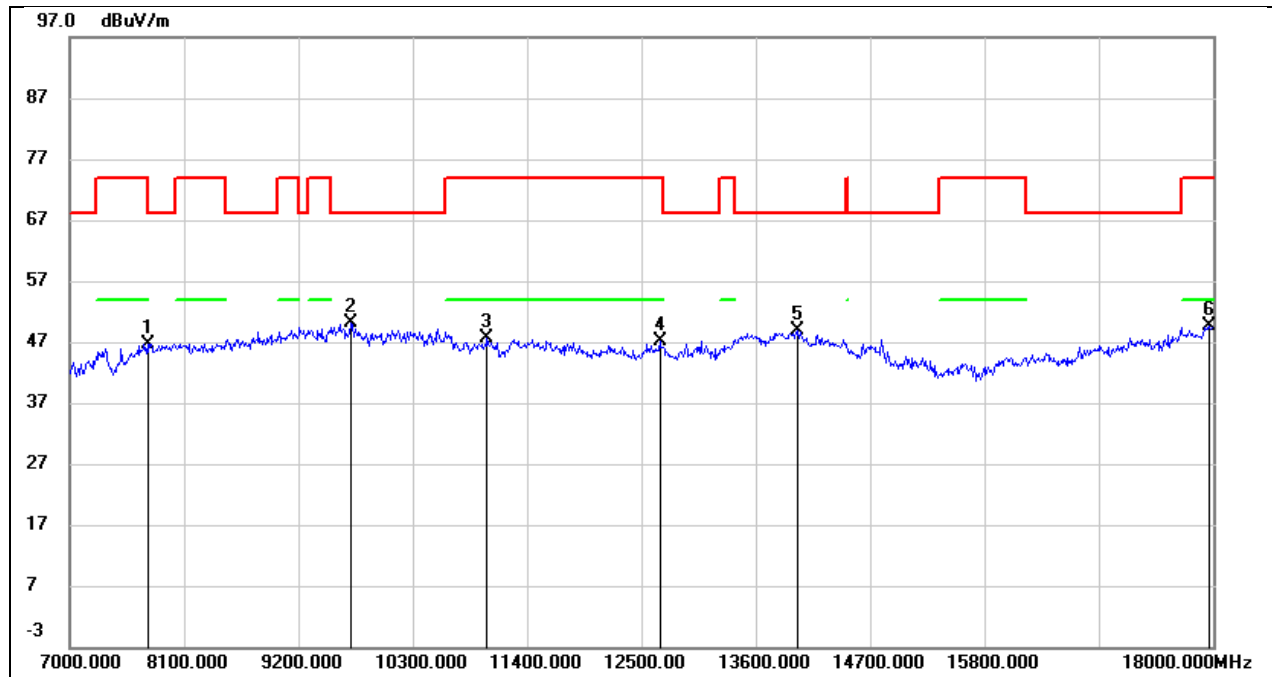


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7748.000	38.79	7.87	46.66	74.00	-27.34	peak
2	9706.000	36.54	13.49	50.03	68.20	-18.17	peak
3	11015.000	32.23	15.52	47.75	74.00	-26.25	peak
4	12676.000	26.92	20.14	47.06	74.00	-26.94	peak
5	13996.000	24.90	23.89	48.79	68.20	-19.41	peak
6	17967.000	21.49	28.21	49.70	74.00	-24.30	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5550
Polarity:	Vertical	Test Voltage:	DC 3.3V

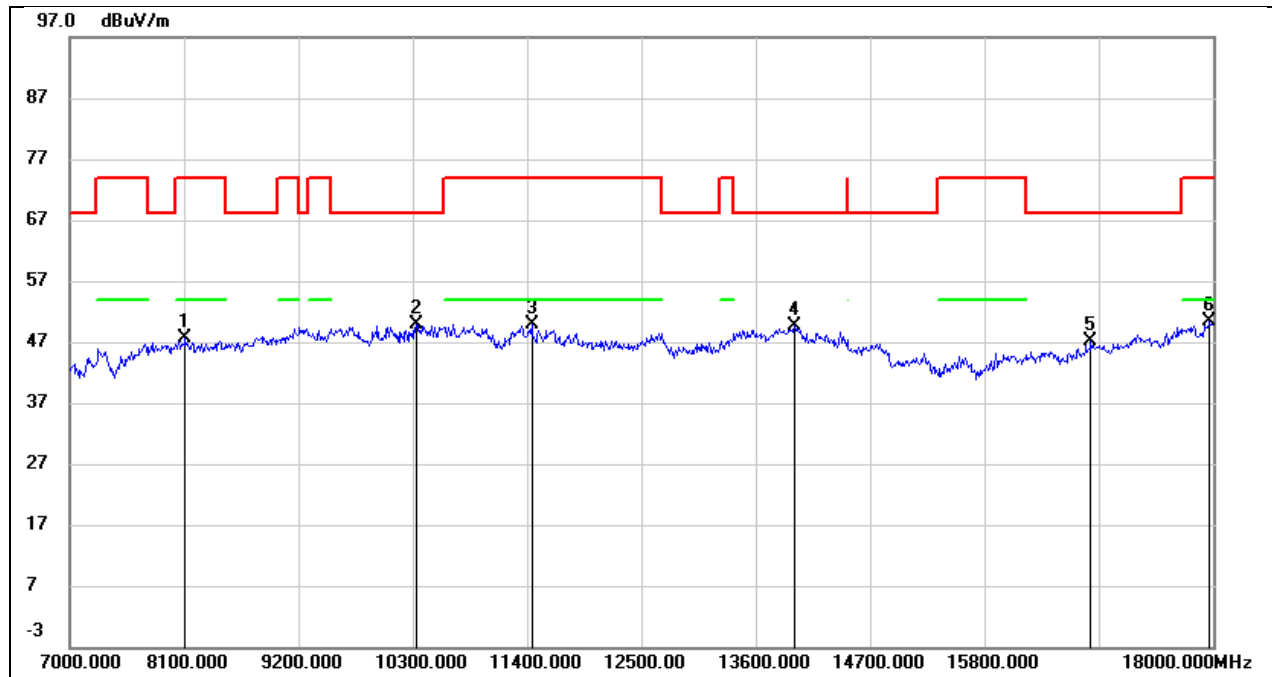


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8111.000	39.23	8.30	47.53	74.00	-26.47	peak
2	10333.000	36.34	13.60	49.94	68.20	-18.26	peak
3	11444.000	32.58	17.35	49.93	74.00	-24.07	peak
4	13974.000	25.76	23.81	49.57	68.20	-18.63	peak
5	16823.000	25.09	22.11	47.20	68.20	-21.00	peak
6	17967.000	22.12	28.21	50.33	74.00	-23.67	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5670
Polarity:	Horizontal	Test Voltage:	DC 3.3V

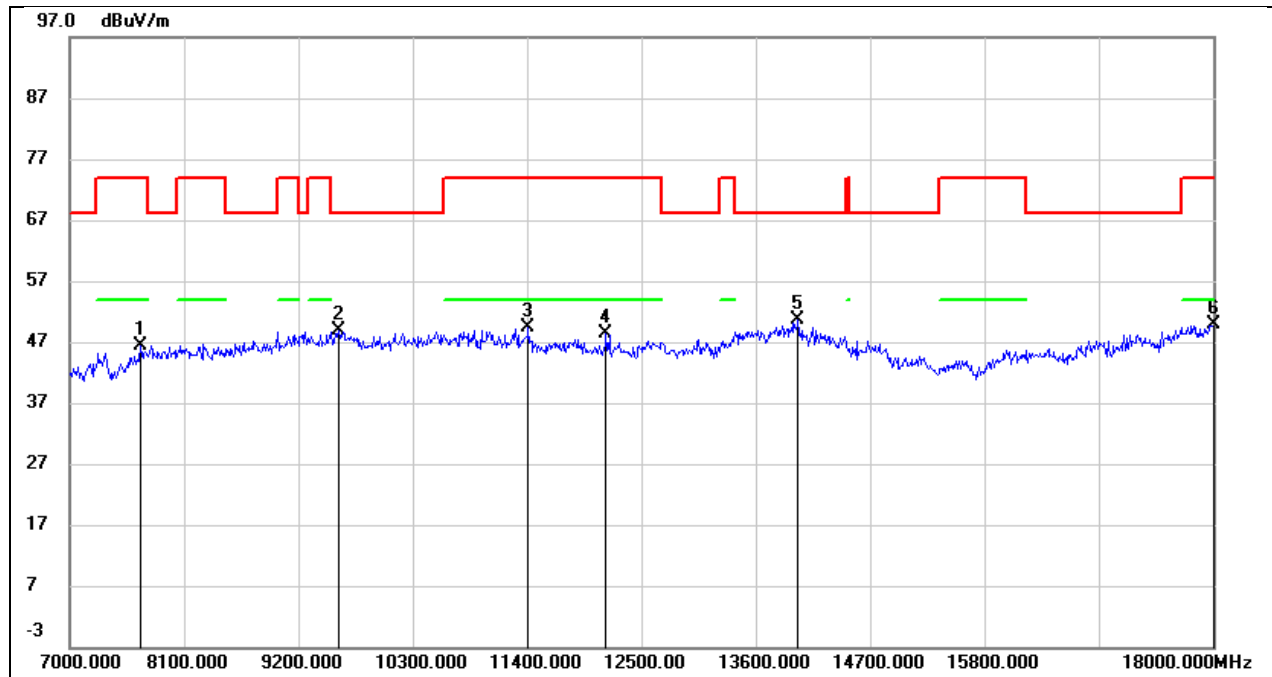


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7682.000	38.67	7.76	46.43	74.00	-27.57	peak
2	9585.000	35.66	13.19	48.85	68.20	-19.35	peak
3	11411.000	32.04	17.24	49.28	74.00	-24.72	peak
4	12159.000	29.27	18.99	48.26	74.00	-25.74	peak
5	14007.000	26.64	23.88	50.52	68.20	-17.68	peak
6	18000.000	21.48	28.51	49.99	74.00	-24.01	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5670
Polarity:	Vertical	Test Voltage:	DC 3.3V

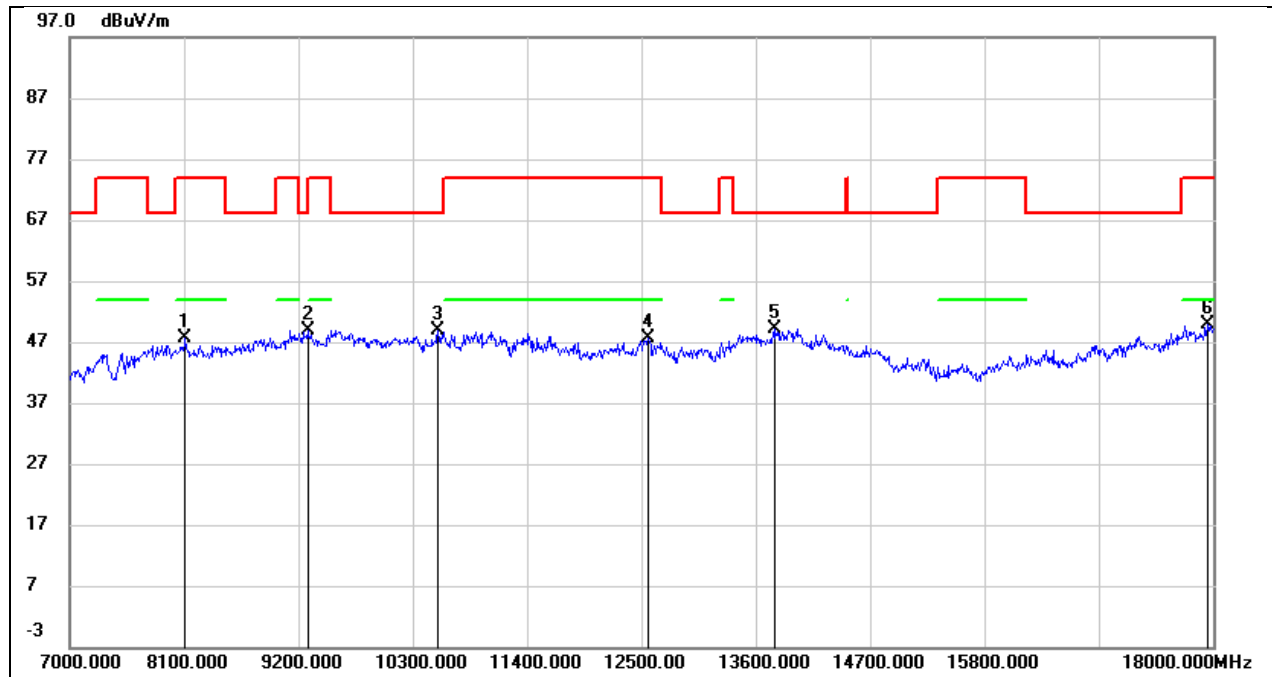


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8111.000	39.38	8.30	47.68	74.00	-26.32	peak
2	9288.000	37.32	11.68	49.00	68.20	-19.20	peak
3	10542.000	34.69	14.15	48.84	68.20	-19.36	peak
4	12566.000	27.70	19.85	47.55	74.00	-26.45	peak
5	13776.000	26.16	23.07	49.23	68.20	-18.97	peak
6	17945.000	21.99	28.01	50.00	74.00	-24.00	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5710
Polarity:	Horizontal	Test Voltage:	DC 3.3V

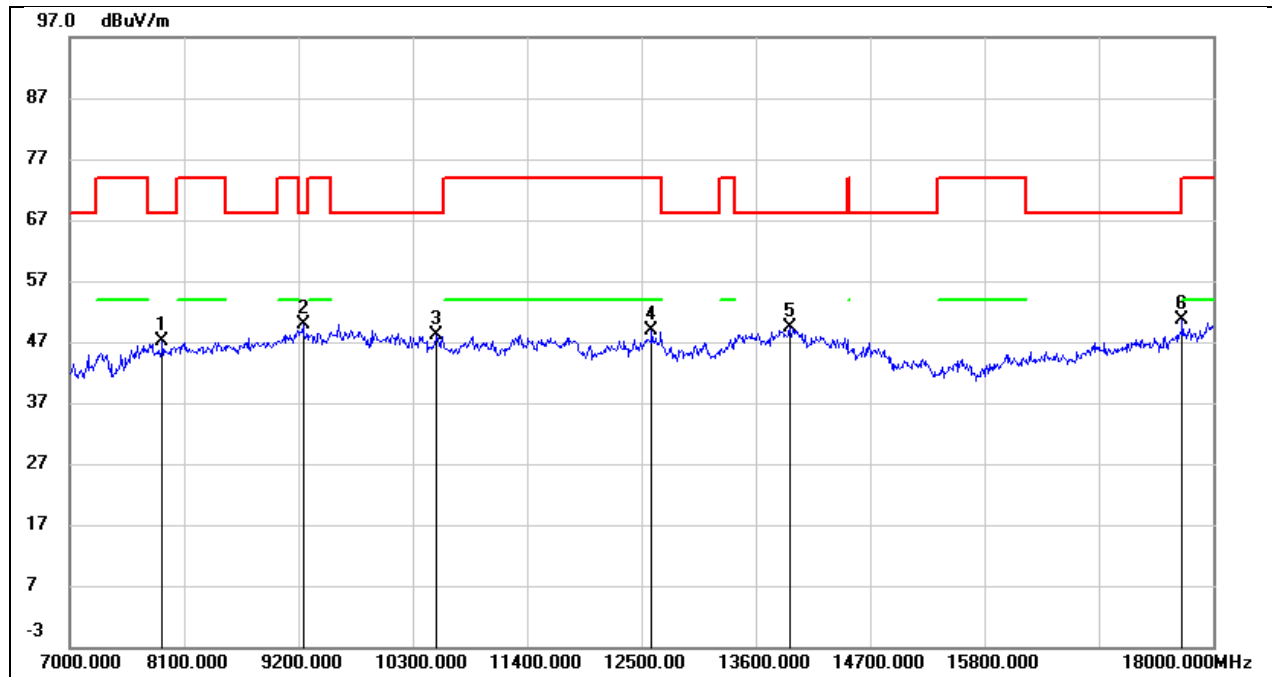


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7891.000	38.97	8.05	47.02	68.20	-21.18	peak
2	9244.000	38.38	11.56	49.94	68.20	-18.26	peak
3	10531.000	33.96	14.12	48.08	68.20	-20.12	peak
4	12599.000	28.95	19.88	48.83	74.00	-25.17	peak
5	13930.000	25.65	23.63	49.28	68.20	-18.92	peak
6	17703.000	24.77	25.86	50.63	74.00	-23.37	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5710
Polarity:	Vertical	Test Voltage:	DC 3.3V

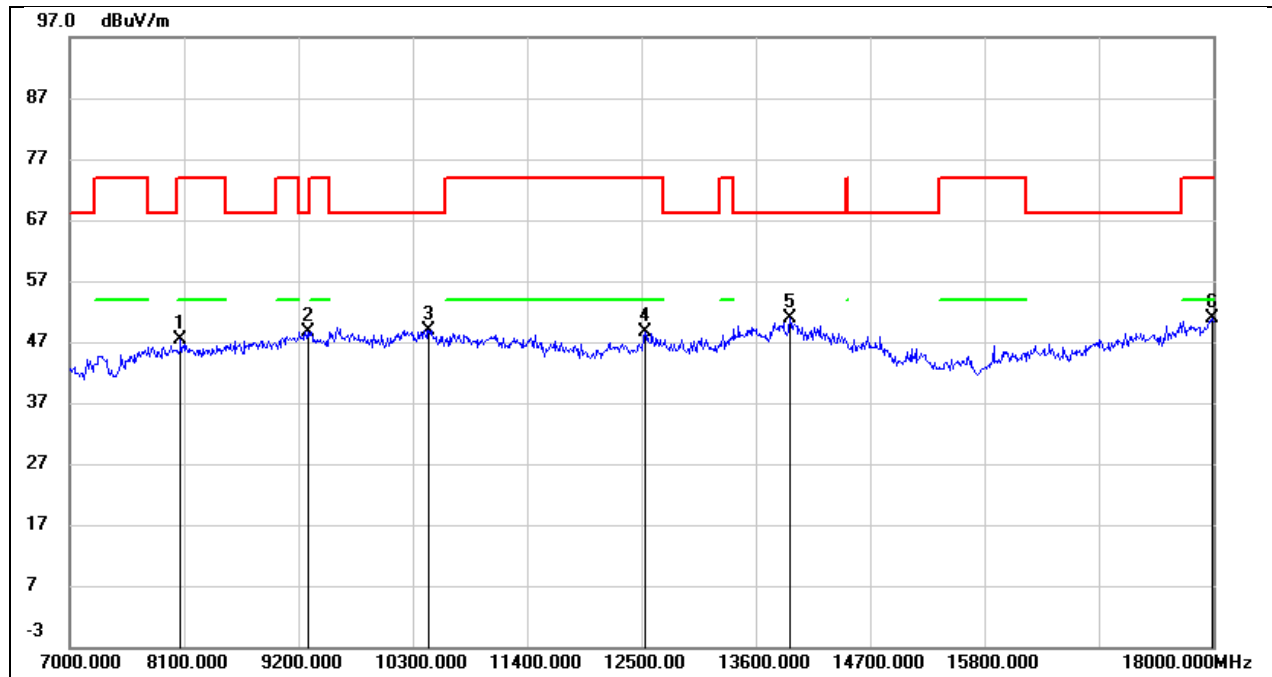


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8067.000	39.14	8.25	47.39	74.00	-26.61	peak
2	9288.000	36.94	11.68	48.62	68.20	-19.58	peak
3	10454.000	35.10	13.90	49.00	68.20	-19.20	peak
4	12533.000	28.92	19.82	48.74	74.00	-25.26	peak
5	13930.000	27.17	23.63	50.80	68.20	-17.40	peak
6	17989.000	22.51	28.40	50.91	74.00	-23.09	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	DC 3.3V

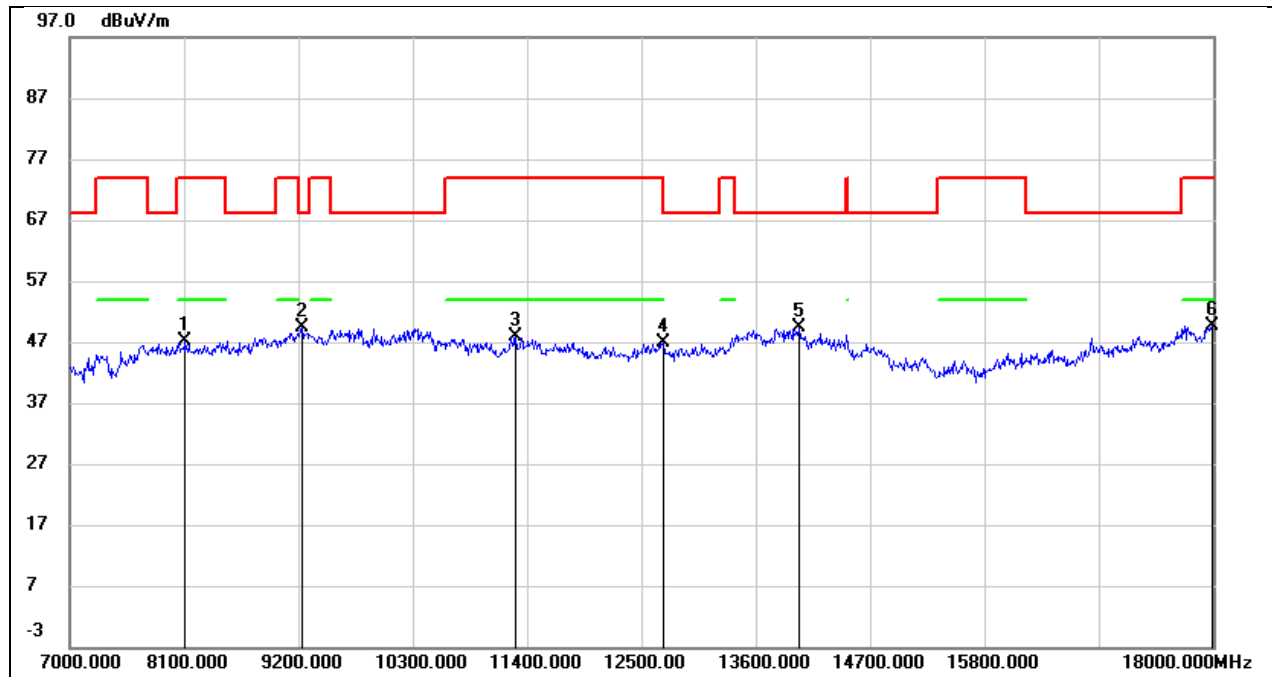


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8111.000	38.90	8.30	47.20	74.00	-26.80	peak
2	9233.000	37.95	11.52	49.47	68.20	-18.73	peak
3	11290.000	31.24	16.69	47.93	74.00	-26.07	peak
4	12709.000	26.59	20.24	46.83	68.20	-21.37	peak
5	14018.000	25.49	23.83	49.32	68.20	-18.88	peak
6	17989.000	21.27	28.40	49.67	74.00	-24.33	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5755
Polarity:	Vertical	Test Voltage:	DC 3.3V

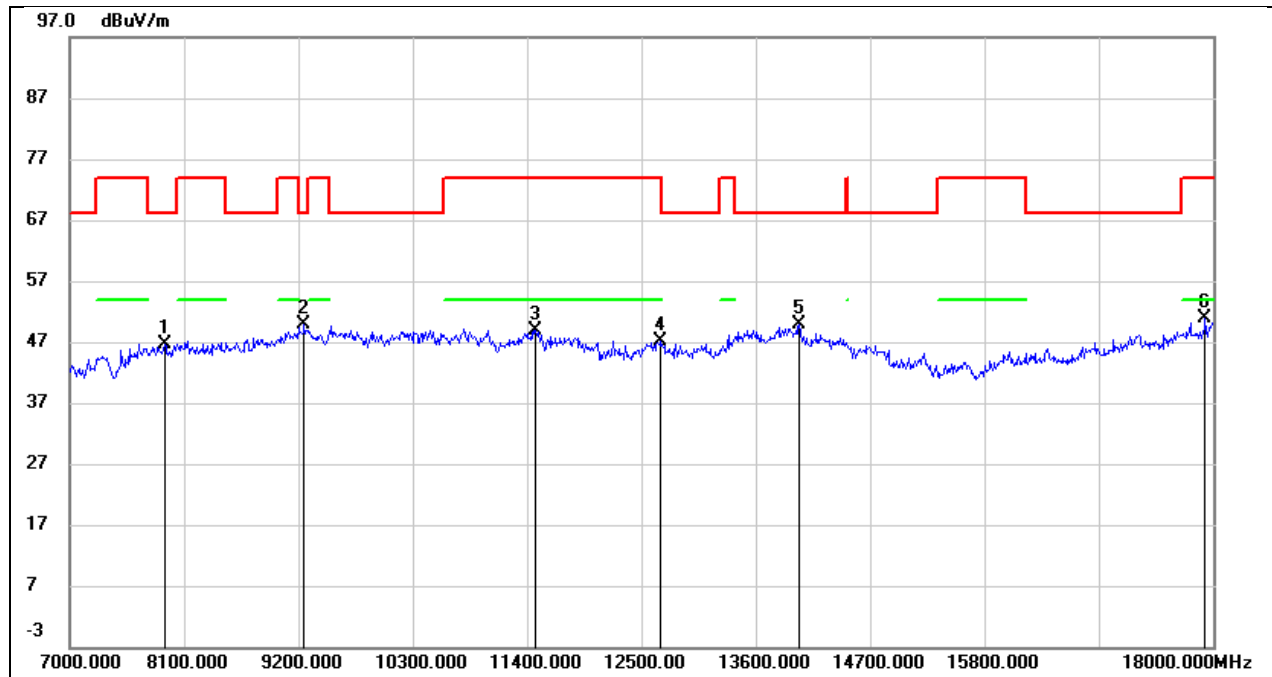


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7913.000	38.43	8.08	46.51	68.20	-21.69	peak
2	9255.000	38.20	11.59	49.79	68.20	-18.41	peak
3	11477.000	31.53	17.46	48.99	74.00	-25.01	peak
4	12687.000	26.99	20.17	47.16	74.00	-26.84	peak
5	14018.000	25.97	23.83	49.80	68.20	-18.40	peak
6	17923.000	23.07	27.79	50.86	74.00	-23.14	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	DC 3.3V

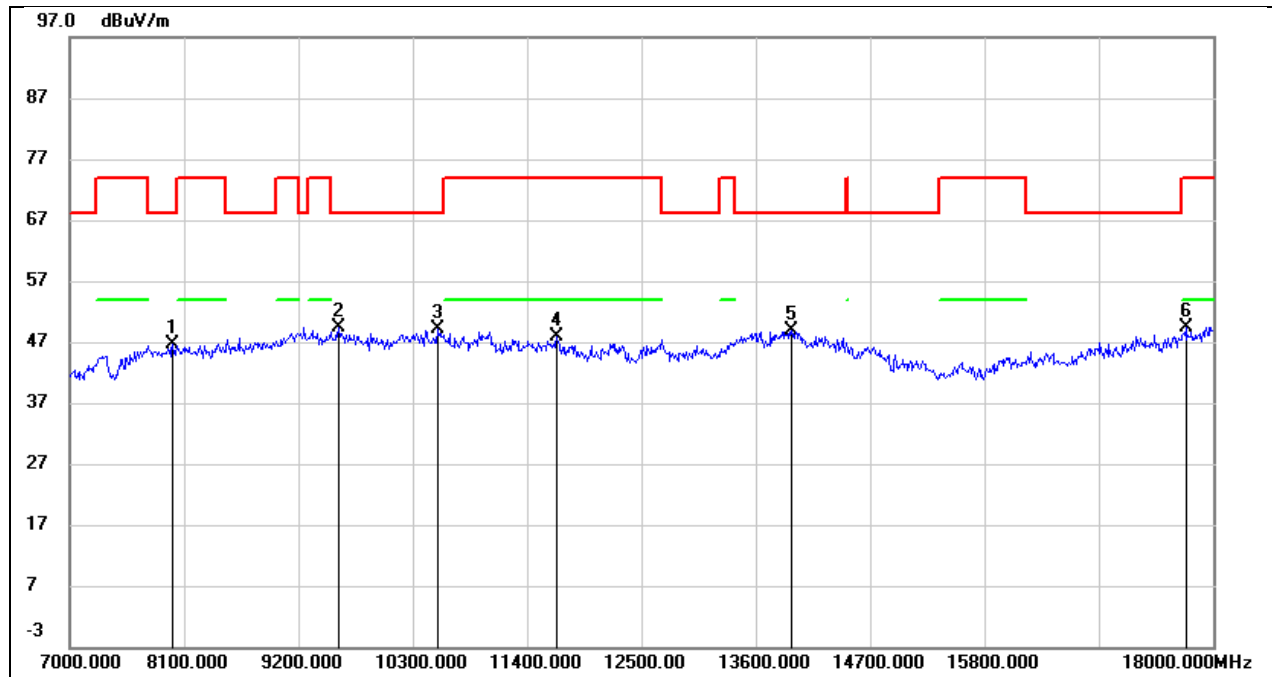


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7990.000	38.47	8.16	46.63	68.20	-21.57	peak
2	9585.000	36.23	13.19	49.42	68.20	-18.78	peak
3	10542.000	35.01	14.15	49.16	68.20	-19.04	peak
4	11686.000	30.05	17.91	47.96	74.00	-26.04	peak
5	13941.000	25.31	23.68	48.99	68.20	-19.21	peak
6	17736.000	23.34	26.13	49.47	74.00	-24.53	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5795
Polarity:	Vertical	Test Voltage:	DC 3.3V

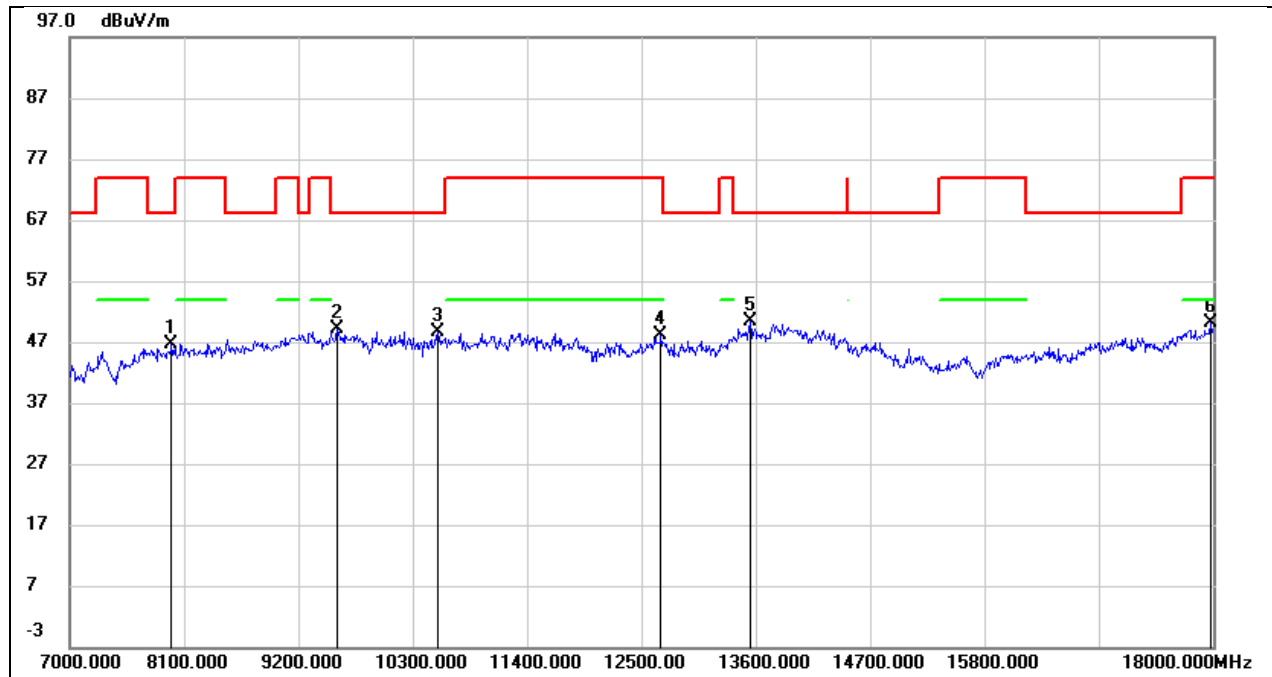


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7979.000	38.60	8.14	46.74	68.20	-21.46	peak
2	9574.000	35.97	13.13	49.10	68.20	-19.10	peak
3	10542.000	34.48	14.15	48.63	68.20	-19.57	peak
4	12687.000	27.95	20.17	48.12	74.00	-25.88	peak
5	13545.000	27.80	22.51	50.31	68.20	-17.89	peak
6	17978.000	21.85	28.31	50.16	74.00	-23.84	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	DC 3.3V

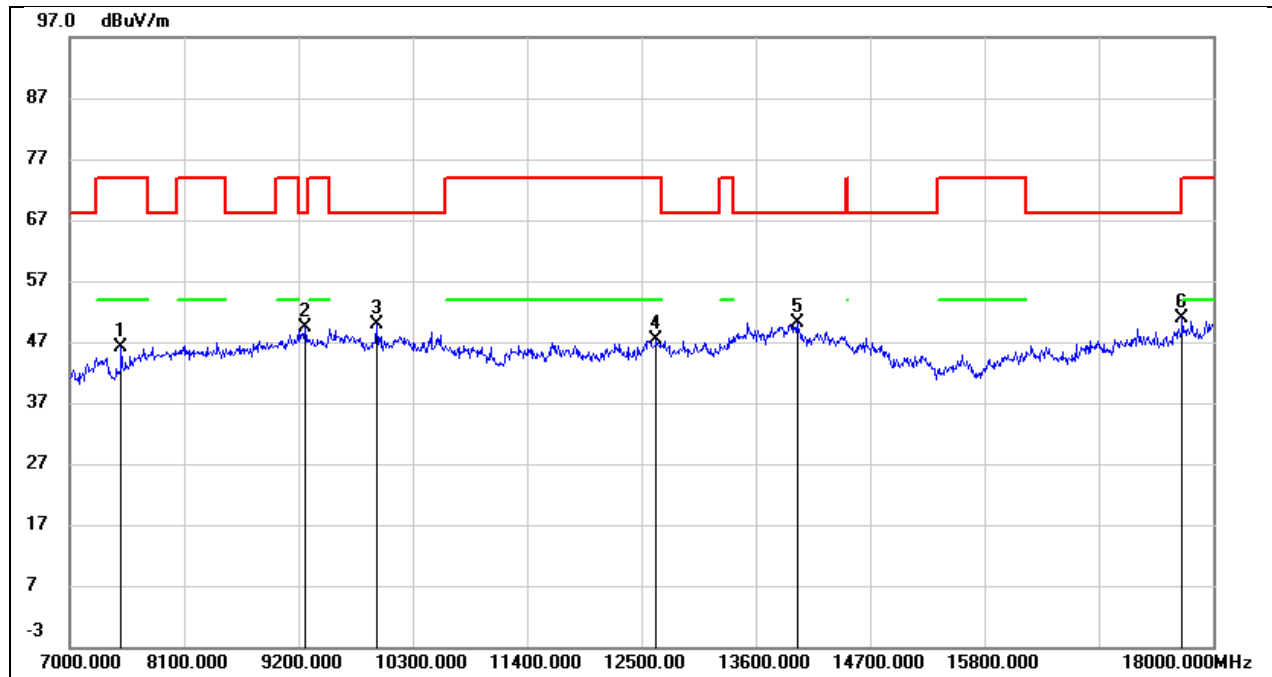


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7495.000	38.55	7.55	46.10	74.00	-27.90	peak
2	9266.000	37.69	11.62	49.31	68.20	-18.89	peak
3	9948.000	36.46	13.35	49.81	68.20	-18.39	peak
4	12643.000	27.33	20.03	47.36	74.00	-26.64	peak
5	13996.000	26.34	23.89	50.23	68.20	-17.97	peak
6	17703.000	24.92	25.86	50.78	74.00	-23.22	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5210
Polarity:	Vertical	Test Voltage:	DC 3.3V

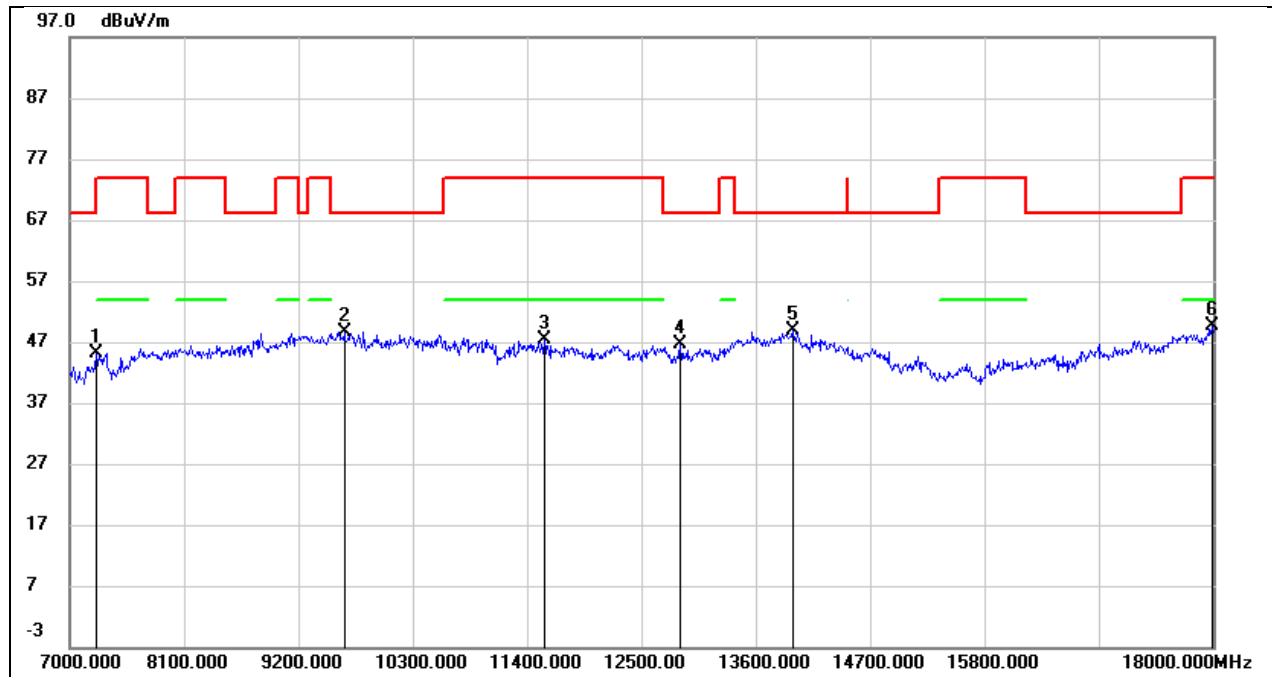


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7253.000	37.65	7.48	45.13	74.00	-28.87	peak
2	9640.000	35.23	13.36	48.59	68.20	-19.61	peak
3	11565.000	29.55	17.77	47.32	74.00	-26.68	peak
4	12874.000	26.02	20.50	46.52	68.20	-21.68	peak
5	13952.000	25.12	23.73	48.85	68.20	-19.35	peak
6	17989.000	21.21	28.40	49.61	74.00	-24.39	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5290
Polarity:	Horizontal	Test Voltage:	DC 3.3V

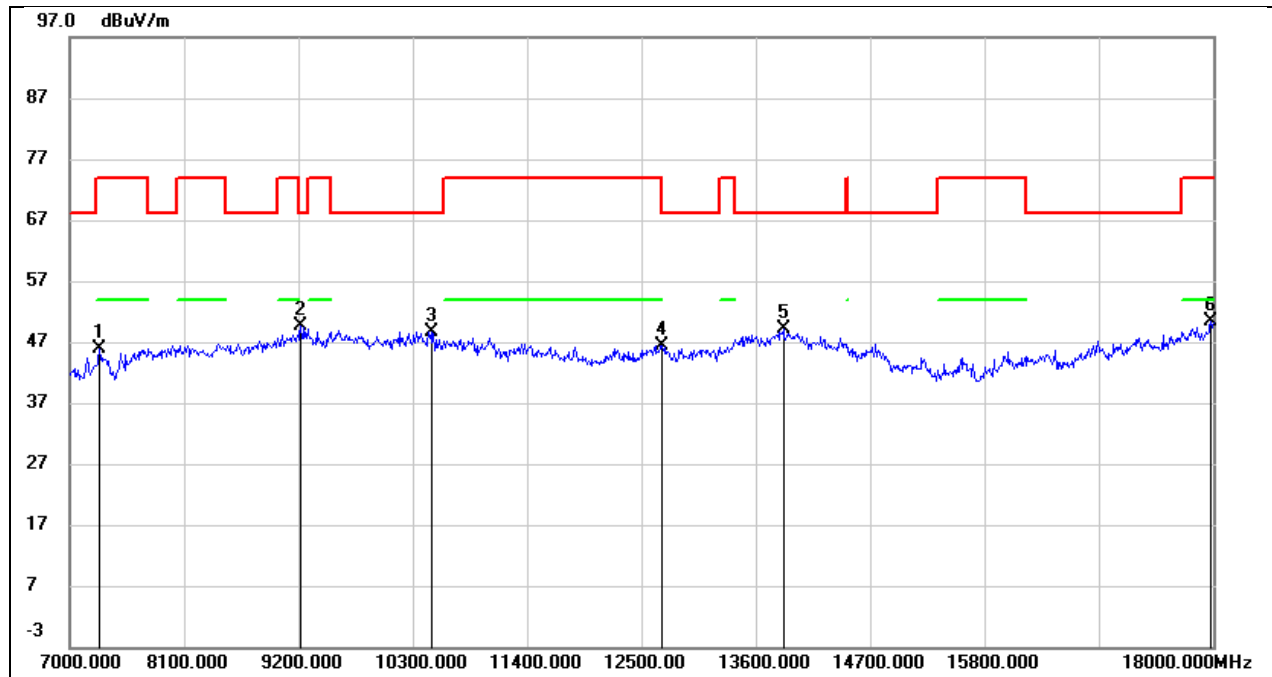


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	38.42	7.49	45.91	74.00	-28.09	peak
2	9222.000	38.15	11.49	49.64	68.20	-18.56	peak
3	10476.000	34.64	13.96	48.60	68.20	-19.60	peak
4	12698.000	26.27	20.20	46.47	74.00	-27.53	peak
5	13864.000	25.64	23.39	49.03	68.20	-19.17	peak
6	17978.000	22.04	28.31	50.35	74.00	-23.65	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5290
Polarity:	Vertical	Test Voltage:	DC 3.3V

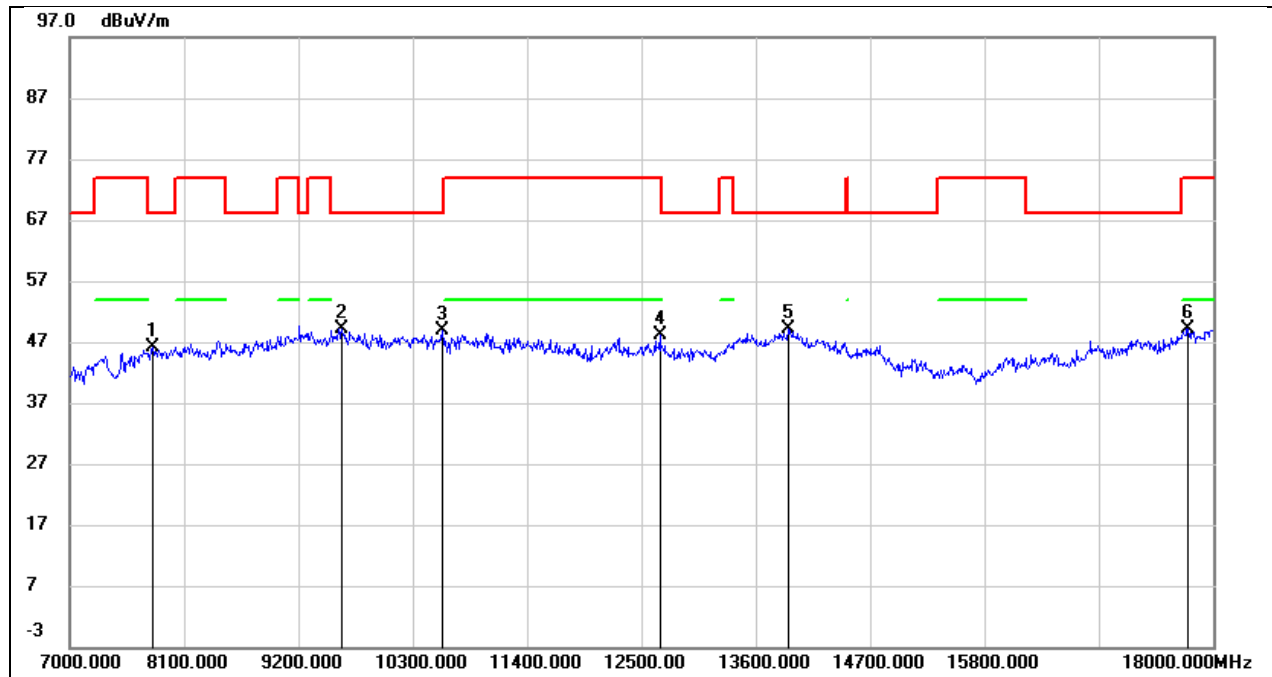


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7803.000	38.14	7.95	46.09	68.20	-22.11	peak
2	9618.000	35.88	13.31	49.19	68.20	-19.01	peak
3	10586.000	34.60	14.27	48.87	68.20	-19.33	peak
4	12676.000	27.90	20.14	48.04	74.00	-25.96	peak
5	13908.000	25.45	23.56	49.01	68.20	-19.19	peak
6	17758.000	22.86	26.31	49.17	74.00	-24.83	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5530
Polarity:	Horizontal	Test Voltage:	DC 3.3V

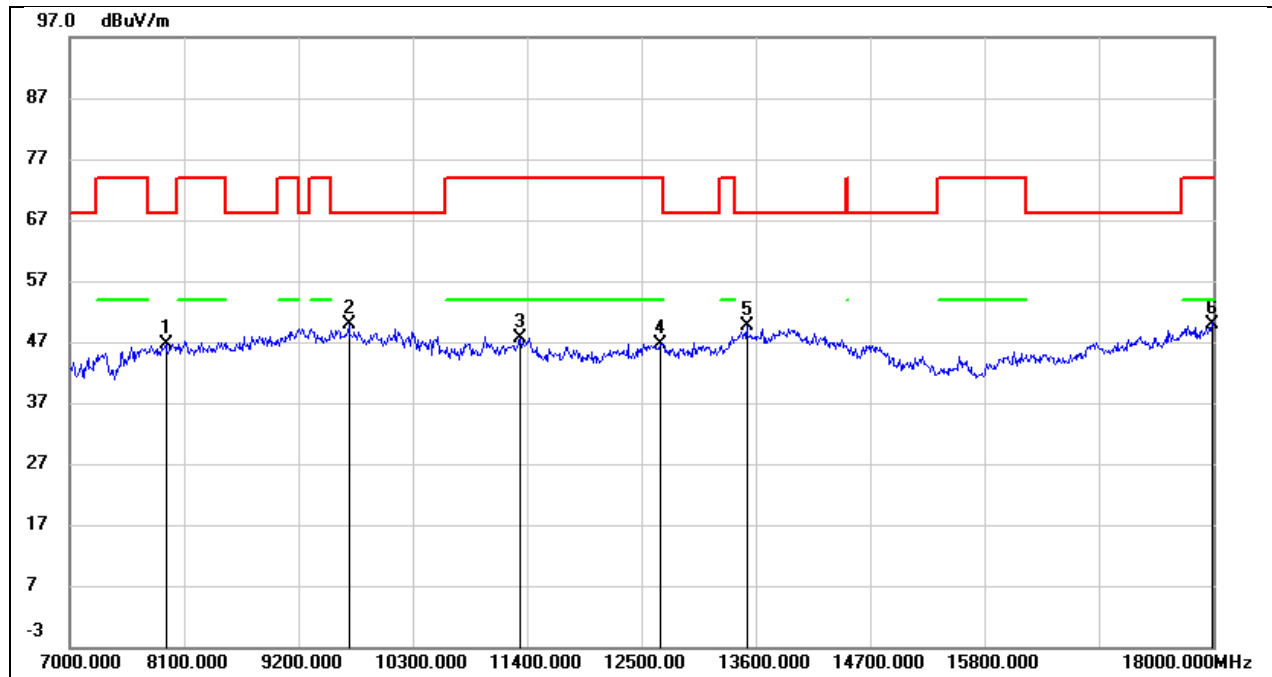


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7924.000	38.61	8.09	46.70	68.20	-21.50	peak
2	9684.000	36.34	13.44	49.78	68.20	-18.42	peak
3	11334.000	30.81	16.90	47.71	74.00	-26.29	peak
4	12676.000	26.59	20.14	46.73	74.00	-27.27	peak
5	13512.000	27.08	22.46	49.54	68.20	-18.66	peak
6	17989.000	21.60	28.40	50.00	74.00	-24.00	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5530
Polarity:	Vertical	Test Voltage:	DC 3.3V

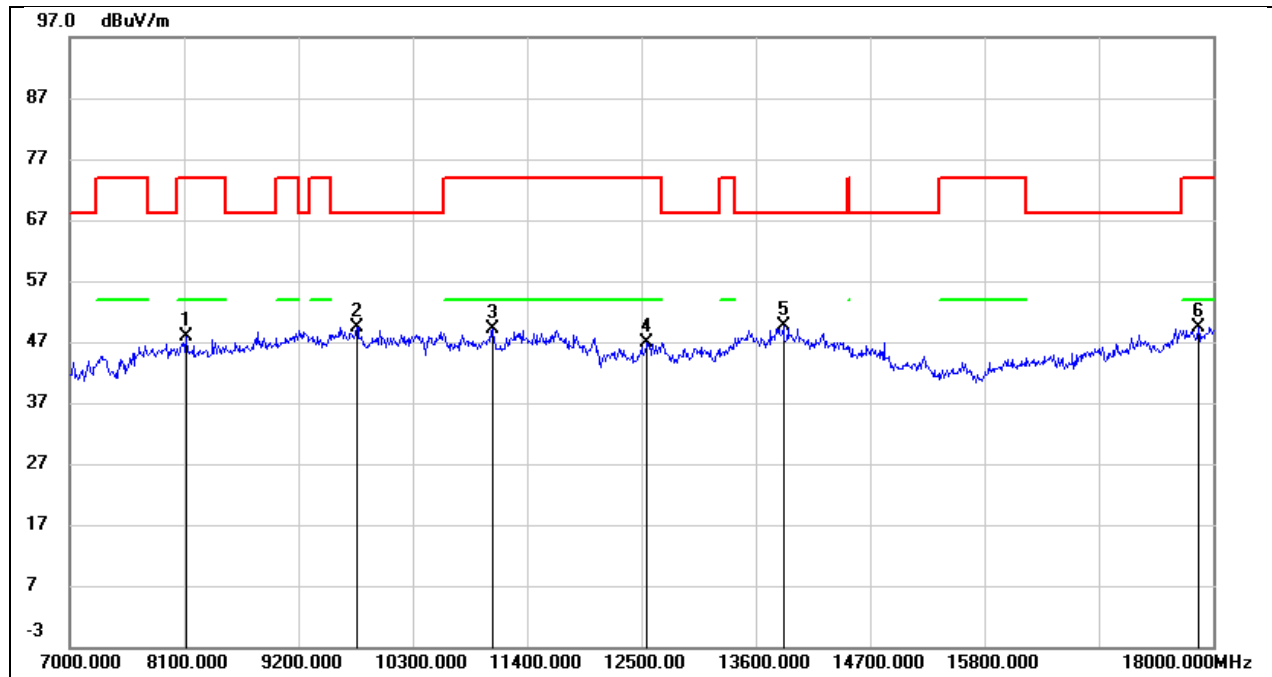


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8122.000	39.50	8.32	47.82	74.00	-26.18	peak
2	9761.000	35.86	13.58	49.44	68.20	-18.76	peak
3	11070.000	33.47	15.75	49.22	74.00	-24.78	peak
4	12555.000	27.10	19.84	46.94	74.00	-27.06	peak
5	13864.000	26.36	23.39	49.75	68.20	-18.45	peak
6	17857.000	22.21	27.18	49.39	74.00	-24.61	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5610
Polarity:	Horizontal	Test Voltage:	DC 3.3V

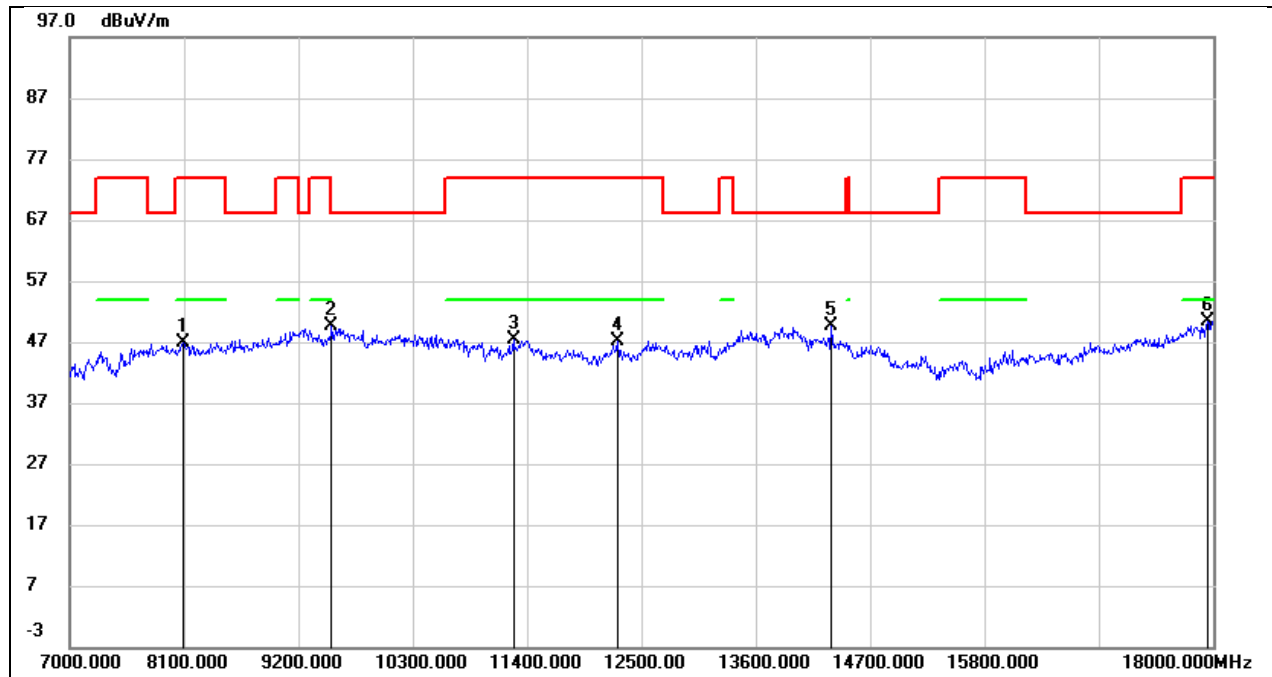


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8089.000	38.71	8.28	46.99	74.00	-27.01	peak
2	9519.000	36.87	12.77	49.64	68.20	-18.56	peak
3	11268.000	30.75	16.59	47.34	74.00	-26.66	peak
4	12269.000	27.98	19.27	47.25	74.00	-26.75	peak
5	14326.000	27.47	22.06	49.53	68.20	-18.67	peak
6	17945.000	22.47	28.01	50.48	74.00	-23.52	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5610
Polarity:	Vertical	Test Voltage:	DC 3.3V

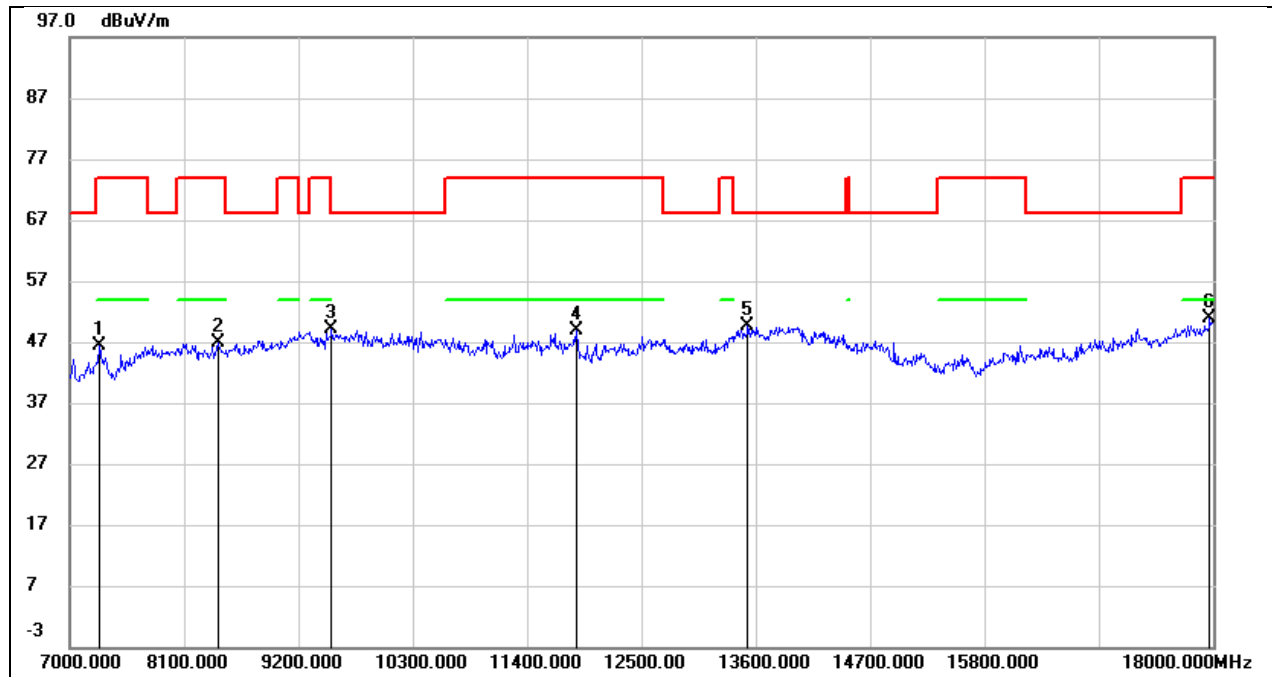


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	38.89	7.49	46.38	74.00	-27.62	peak
2	8430.000	38.33	8.60	46.93	74.00	-27.07	peak
3	9519.000	36.38	12.77	49.15	68.20	-19.05	peak
4	11873.000	30.68	18.16	48.84	74.00	-25.16	peak
5	13523.000	27.12	22.48	49.60	68.20	-18.60	peak
6	17967.000	22.62	28.21	50.83	74.00	-23.17	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5690
Polarity:	Horizontal	Test Voltage:	DC 3.3V

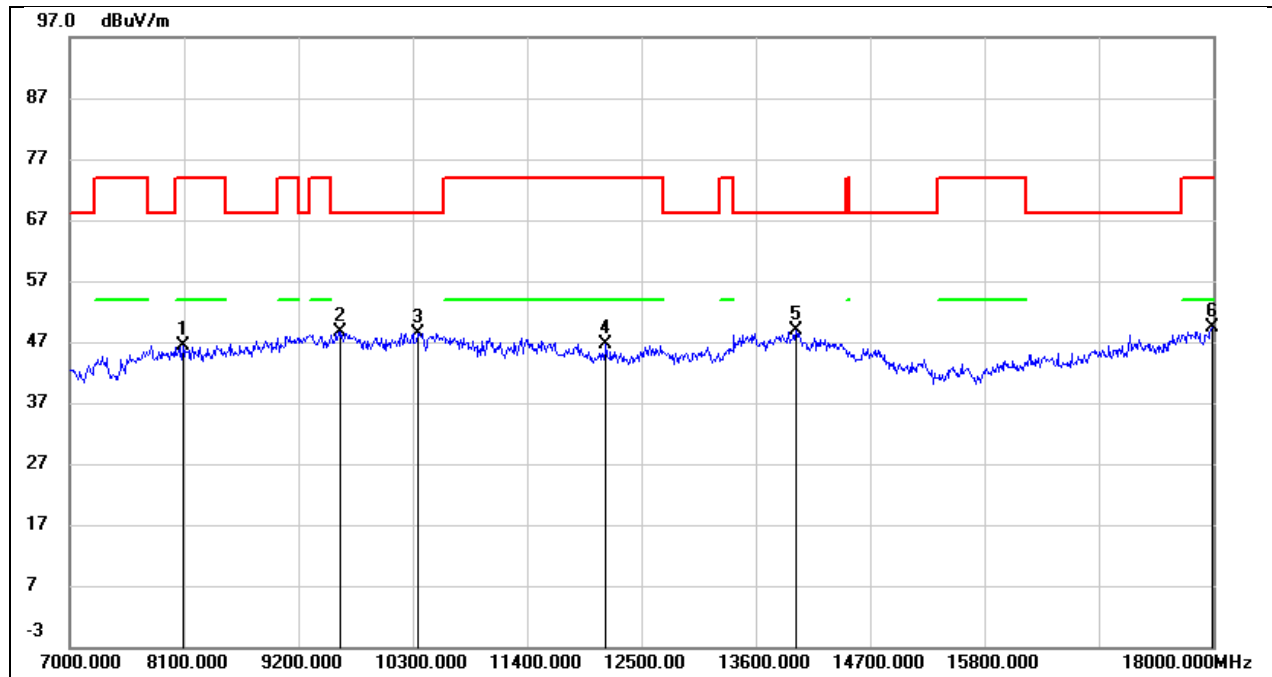


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8089.000	38.13	8.28	46.41	74.00	-27.59	peak
2	9607.000	35.36	13.30	48.66	68.20	-19.54	peak
3	10344.000	34.86	13.61	48.47	68.20	-19.73	peak
4	12159.000	27.52	18.99	46.51	74.00	-27.49	peak
5	13985.000	24.93	23.85	48.78	68.20	-19.42	peak
6	17989.000	21.06	28.40	49.46	74.00	-24.54	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5690
Polarity:	Vertical	Test Voltage:	DC 3.3V

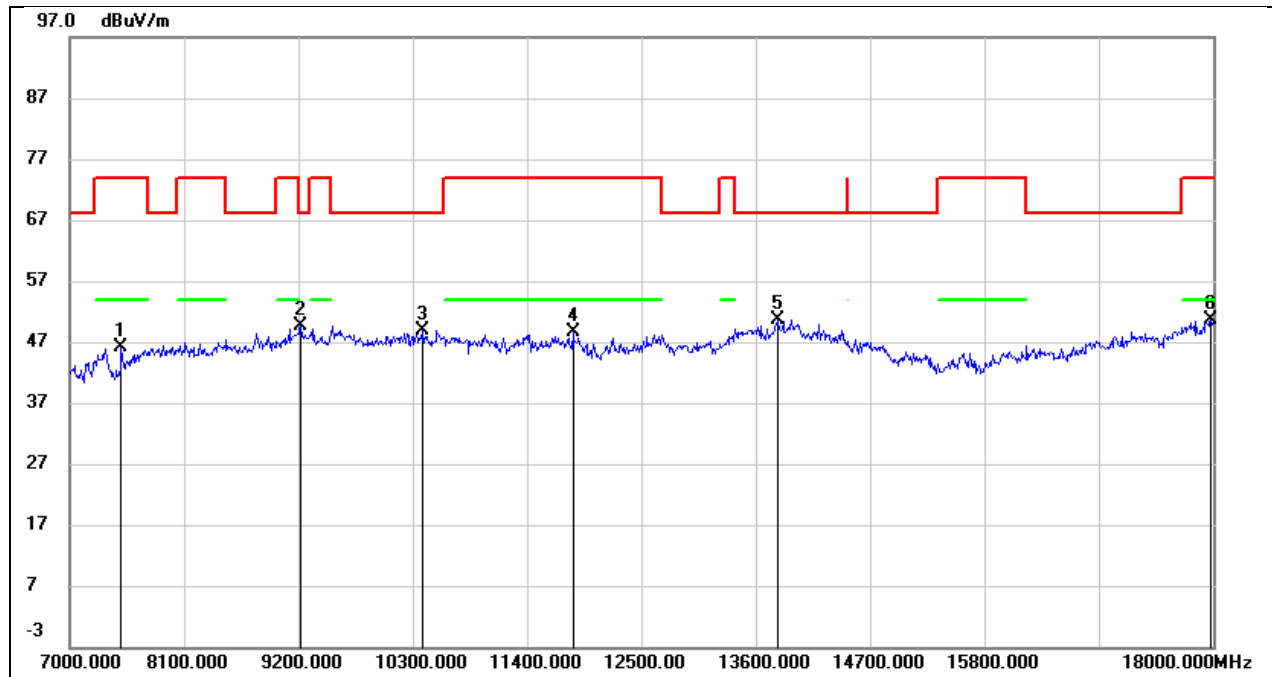


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7495.000	38.58	7.55	46.13	74.00	-27.87	peak
2	9222.000	38.11	11.49	49.60	68.20	-18.60	peak
3	10399.000	35.17	13.73	48.90	68.20	-19.30	peak
4	11840.000	30.68	18.06	48.74	74.00	-25.26	peak
5	13809.000	27.43	23.17	50.60	68.20	-17.60	peak
6	17978.000	22.28	28.31	50.59	74.00	-23.41	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5775
Polarity:	Horizontal	Test Voltage:	DC 3.3V

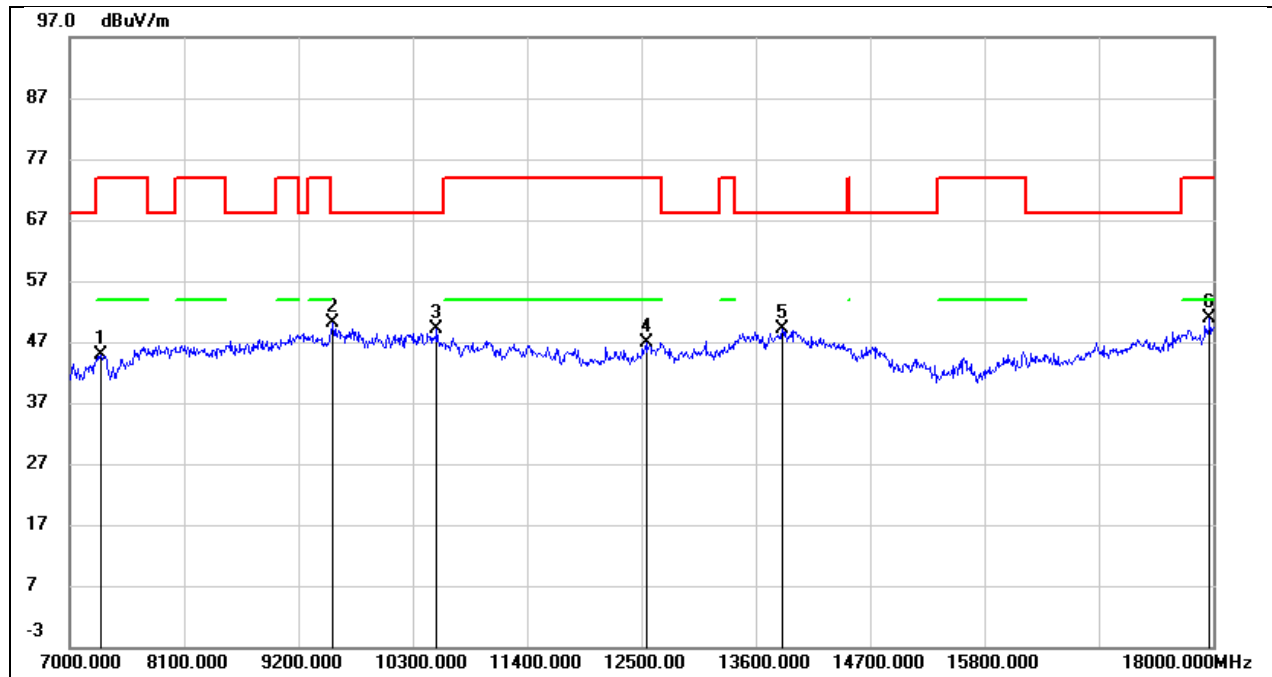


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	37.27	7.50	44.77	74.00	-29.23	peak
2	9530.000	37.33	12.85	50.18	68.20	-18.02	peak
3	10531.000	34.95	14.12	49.07	68.20	-19.13	peak
4	12544.000	27.14	19.83	46.97	74.00	-27.03	peak
5	13853.000	25.74	23.34	49.08	68.20	-19.12	peak
6	17967.000	22.67	28.21	50.88	74.00	-23.12	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5775
Polarity:	Vertical	Test Voltage:	DC 3.3V

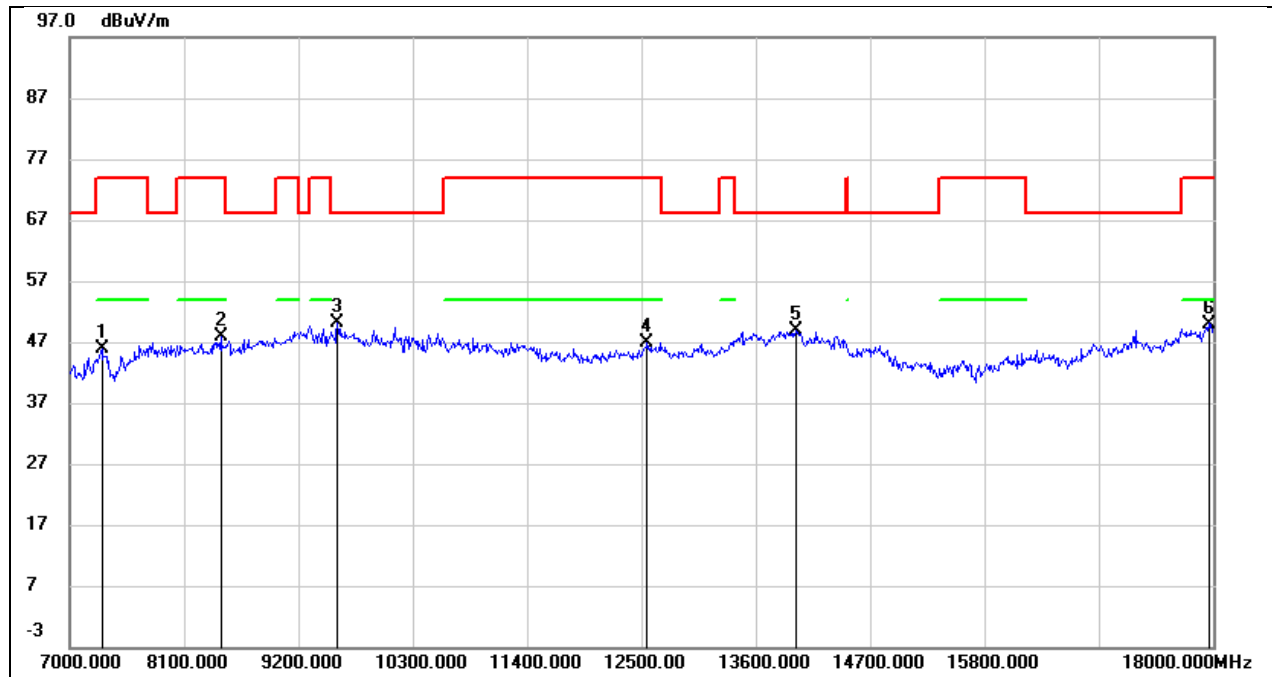


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	38.30	7.49	45.79	74.00	-28.21	peak
2	8452.000	39.30	8.62	47.92	74.00	-26.08	peak
3	9574.000	36.95	13.13	50.08	68.20	-18.12	peak
4	12555.000	26.92	19.84	46.76	74.00	-27.24	peak
5	13985.000	24.99	23.85	48.84	68.20	-19.36	peak
6	17956.000	21.90	28.10	50.00	74.00	-24.00	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

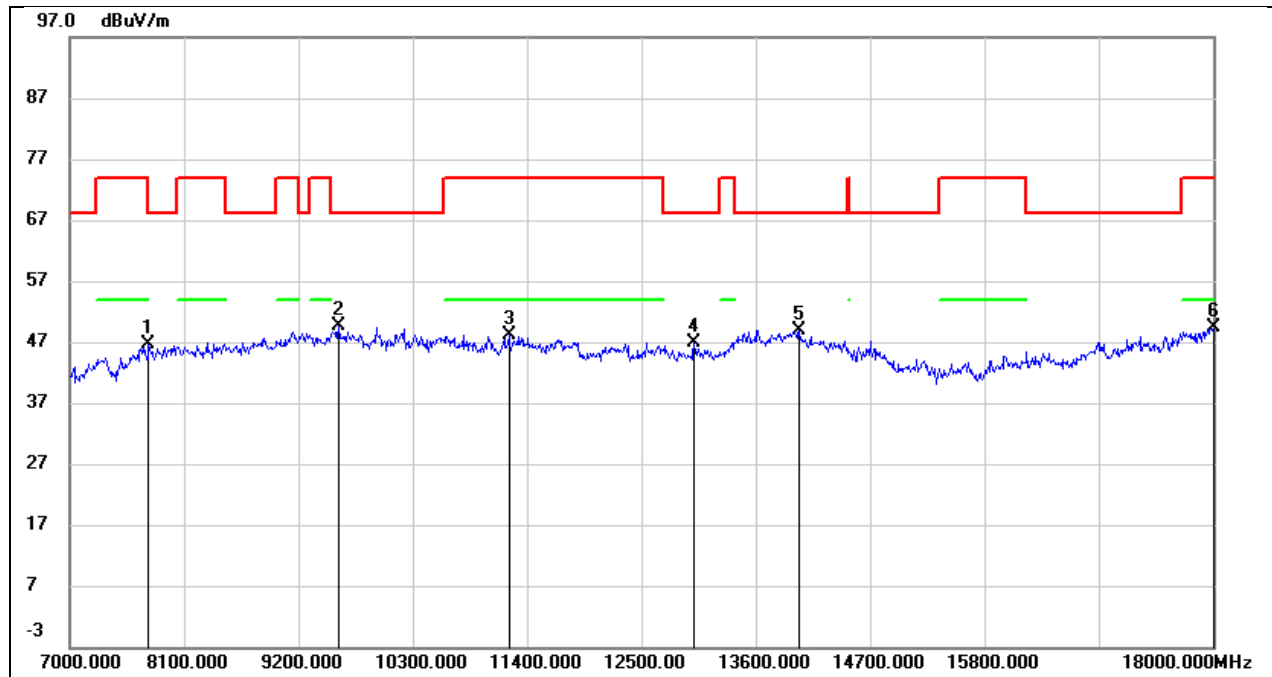


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7759.000	38.74	7.88	46.62	68.20	-21.58	peak
2	9585.000	36.33	13.19	49.52	68.20	-18.68	peak
3	11224.000	31.84	16.39	48.23	74.00	-25.77	peak
4	13006.000	26.46	20.48	46.94	68.20	-21.26	peak
5	14018.000	25.06	23.83	48.89	68.20	-19.31	peak
6	18000.000	20.84	28.51	49.35	74.00	-24.65	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3V

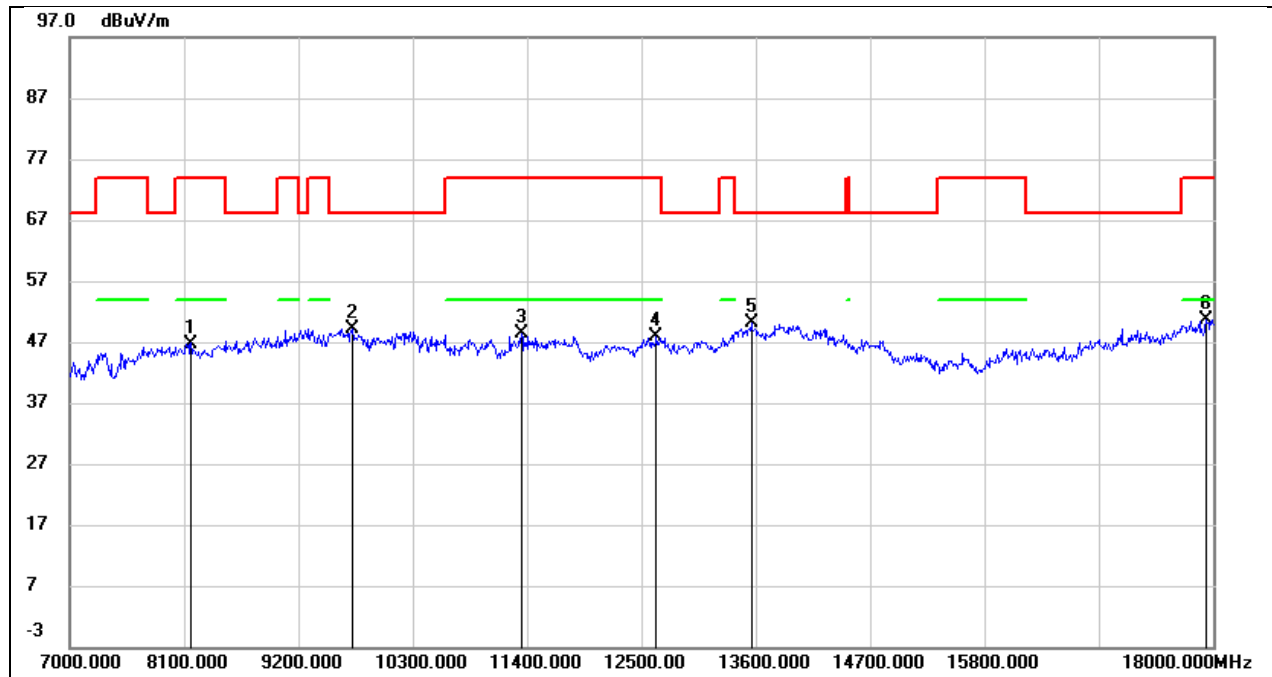


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8166.000	38.38	8.37	46.75	74.00	-27.25	peak
2	9717.000	35.69	13.50	49.19	68.20	-19.01	peak
3	11345.000	31.30	16.96	48.26	74.00	-25.74	peak
4	12643.000	27.81	20.03	47.84	74.00	-26.16	peak
5	13556.000	27.52	22.53	50.05	68.20	-18.15	peak
6	17934.000	22.71	27.90	50.61	74.00	-23.39	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	DC 3.3V

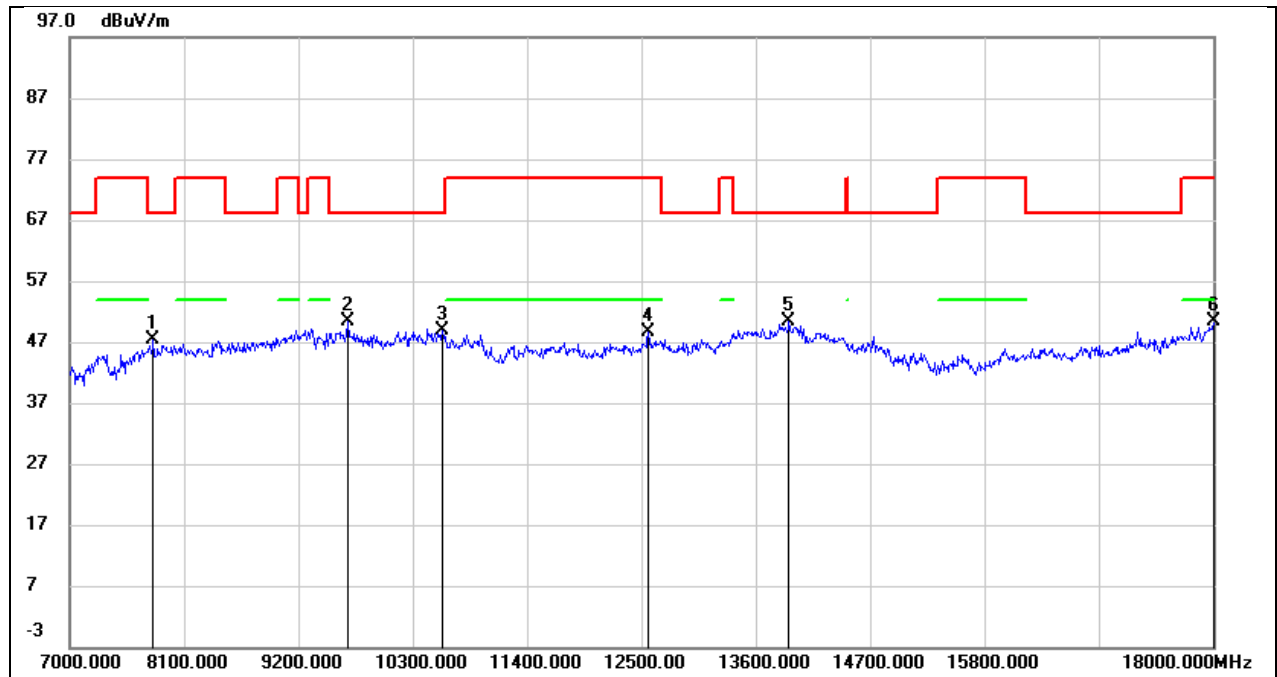


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7803.000	39.33	7.95	47.28	68.20	-20.92	peak
2	9673.000	36.86	13.42	50.28	68.20	-17.92	peak
3	10586.000	34.67	14.27	48.94	68.20	-19.26	peak
4	12566.000	28.70	19.85	48.55	74.00	-25.45	peak
5	13919.000	26.73	23.60	50.33	68.20	-17.87	peak
6	18000.000	21.89	28.51	50.40	74.00	-23.60	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	DC 3.3V

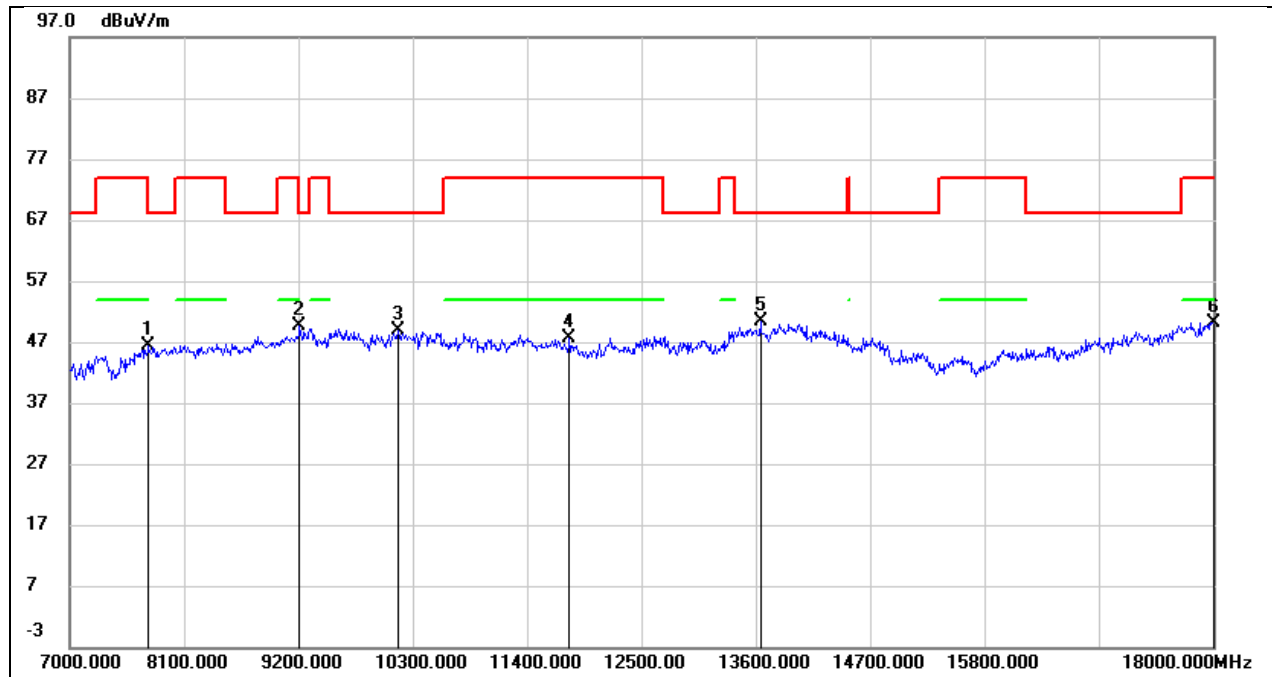


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7759.000	38.56	7.88	46.44	68.20	-21.76	peak
2	9211.000	38.30	11.45	49.75	68.20	-18.45	peak
3	10157.000	35.54	13.30	48.84	68.20	-19.36	peak
4	11807.000	29.72	17.95	47.67	74.00	-26.33	peak
5	13644.000	27.73	22.72	50.45	68.20	-17.75	peak
6	18000.000	21.74	28.51	50.25	74.00	-23.75	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	DC 3.3V

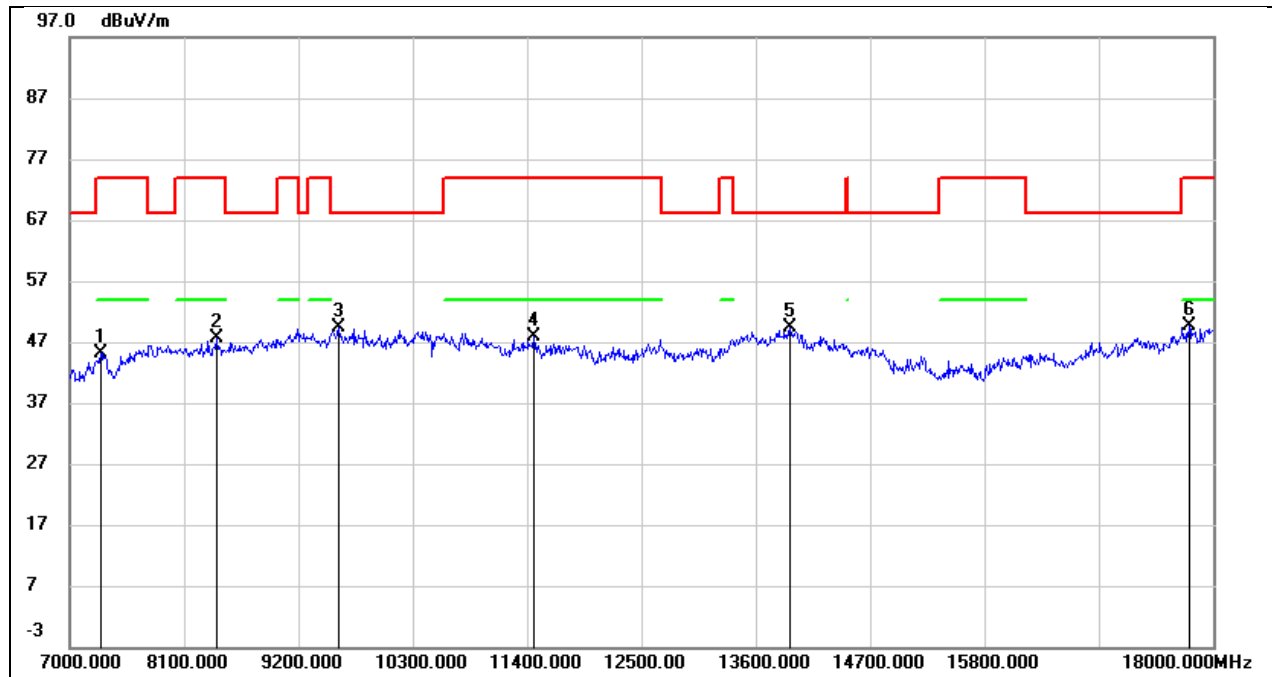


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	37.68	7.50	45.18	74.00	-28.82	peak
2	8408.000	39.02	8.59	47.61	74.00	-26.39	peak
3	9585.000	36.29	13.19	49.48	68.20	-18.72	peak
4	11466.000	30.58	17.42	48.00	74.00	-26.00	peak
5	13930.000	25.75	23.63	49.38	68.20	-18.82	peak
6	17769.000	23.21	26.41	49.62	74.00	-24.38	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	DC 3.3V

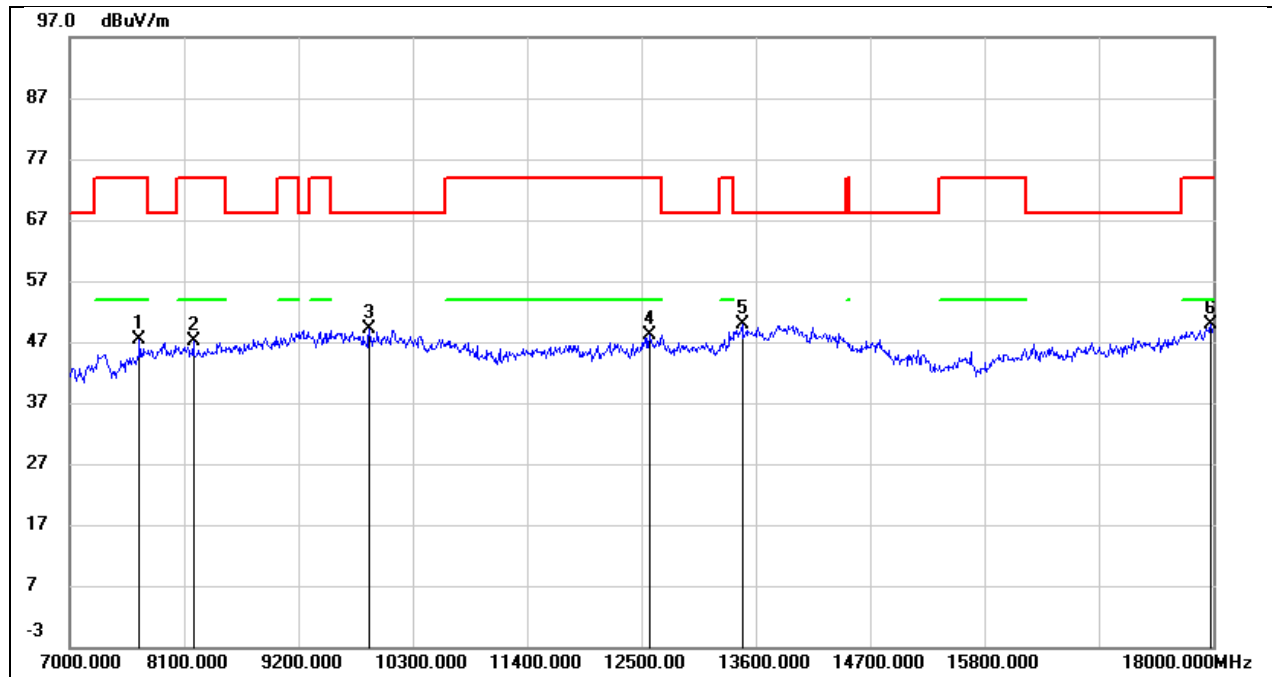


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7671.000	39.61	7.75	47.36	74.00	-26.64	peak
2	8188.000	38.74	8.40	47.14	74.00	-26.86	peak
3	9882.000	35.61	13.49	49.10	68.20	-19.10	peak
4	12577.000	28.17	19.87	48.04	74.00	-25.96	peak
5	13468.000	27.53	22.31	49.84	68.20	-18.36	peak
6	17978.000	21.45	28.31	49.76	74.00	-24.24	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	DC 3.3V

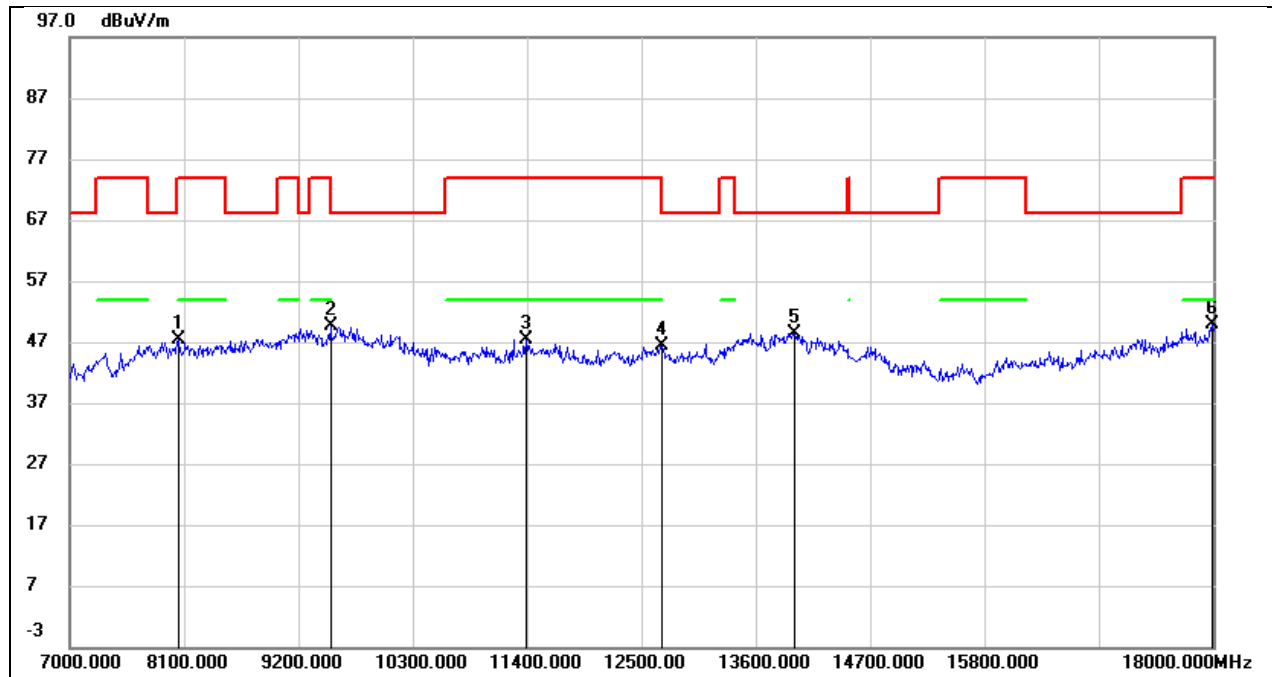


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8045.000	39.06	8.22	47.28	74.00	-26.72	peak
2	9508.000	36.98	12.71	49.69	68.20	-18.51	peak
3	11389.000	30.15	17.15	47.30	74.00	-26.70	peak
4	12698.000	26.09	20.20	46.29	74.00	-27.71	peak
5	13974.000	24.57	23.81	48.38	68.20	-19.82	peak
6	17989.000	21.47	28.40	49.87	74.00	-24.13	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5260
Polarity:	Vertical	Test Voltage:	DC 3.3V

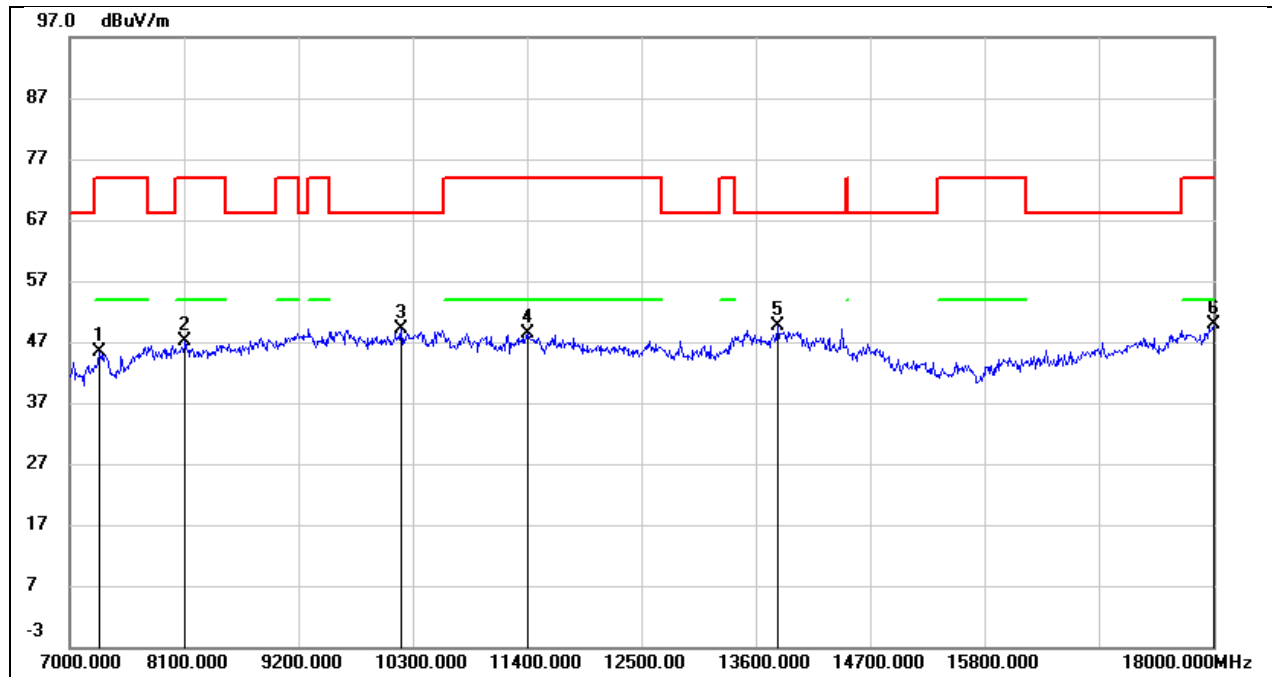


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	37.97	7.49	45.46	74.00	-28.54	peak
2	8111.000	38.75	8.30	47.05	74.00	-26.95	peak
3	10190.000	35.87	13.32	49.19	68.20	-19.01	peak
4	11411.000	31.25	17.24	48.49	74.00	-25.51	peak
5	13809.000	26.46	23.17	49.63	68.20	-18.57	peak
6	18000.000	21.38	28.51	49.89	74.00	-24.11	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5280
Polarity:	Horizontal	Test Voltage:	DC 3.3V

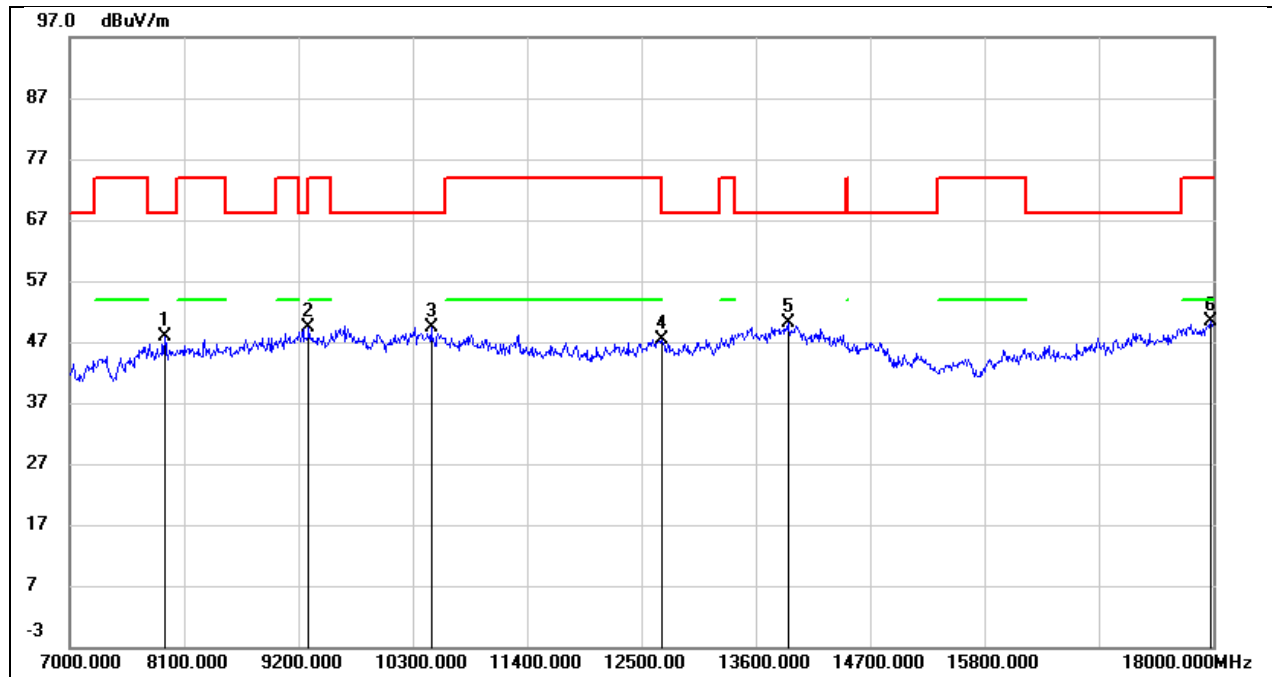


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7913.000	39.88	8.08	47.96	68.20	-20.24	peak
2	9299.000	37.58	11.72	49.30	68.20	-18.90	peak
3	10476.000	35.48	13.96	49.44	68.20	-18.76	peak
4	12698.000	27.28	20.20	47.48	74.00	-26.52	peak
5	13908.000	26.62	23.56	50.18	68.20	-18.02	peak
6	17978.000	22.03	28.31	50.34	74.00	-23.66	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5280
Polarity:	Vertical	Test Voltage:	DC 3.3V

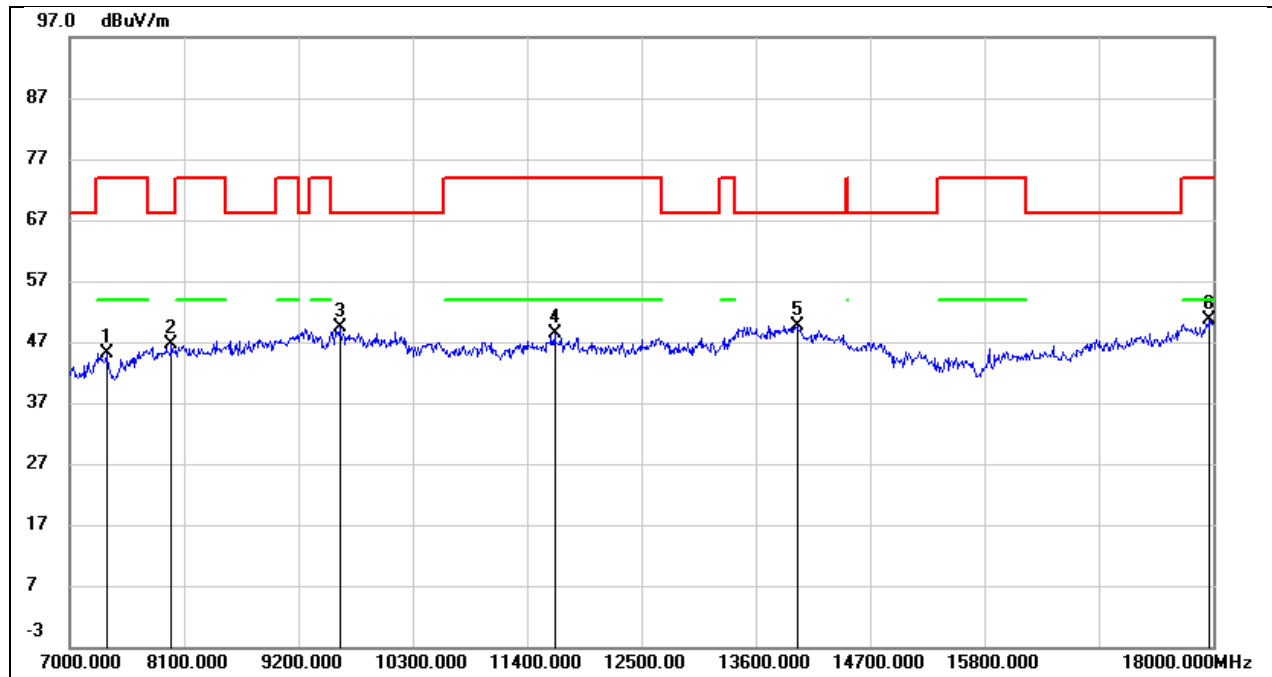


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	37.58	7.51	45.09	74.00	-28.91	peak
2	7979.000	38.59	8.14	46.73	68.20	-21.47	peak
3	9596.000	36.05	13.26	49.31	68.20	-18.89	peak
4	11664.000	30.61	17.88	48.49	74.00	-25.51	peak
5	13996.000	25.76	23.89	49.65	68.20	-18.55	peak
6	17967.000	22.38	28.21	50.59	74.00	-23.41	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 3.3V

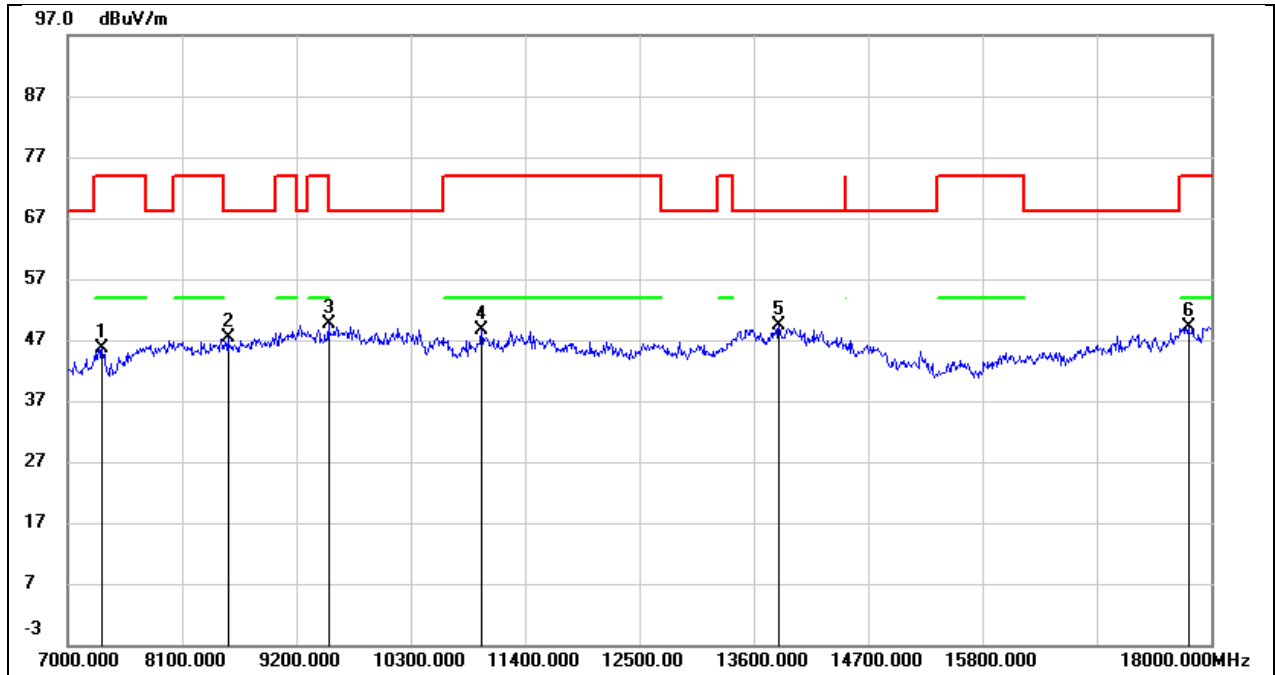


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7330.000	38.21	7.50	45.71	74.00	-28.29	peak
2	8540.000	38.63	8.75	47.38	68.20	-20.82	peak
3	9508.000	36.88	12.71	49.59	68.20	-18.61	peak
4	10982.000	33.15	15.40	48.55	74.00	-25.45	peak
5	13842.000	26.14	23.29	49.43	68.20	-18.77	peak
6	17780.000	22.66	26.50	49.16	74.00	-24.84	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	DC 3.3V

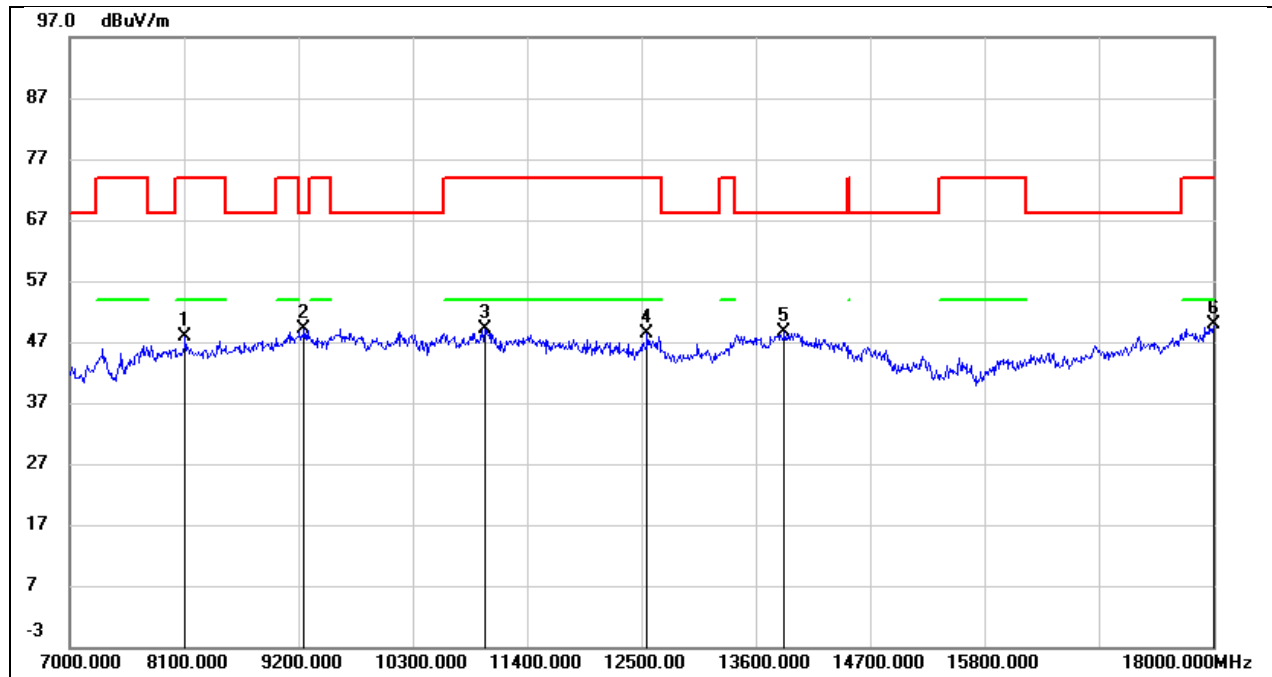


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8111.000	39.67	8.30	47.97	74.00	-26.03	peak
2	9255.000	37.65	11.59	49.24	68.20	-18.96	peak
3	10993.000	33.68	15.44	49.12	74.00	-24.88	peak
4	12555.000	28.45	19.84	48.29	74.00	-25.71	peak
5	13875.000	25.18	23.44	48.62	68.20	-19.58	peak
6	18000.000	21.33	28.51	49.84	74.00	-24.16	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 3.3V

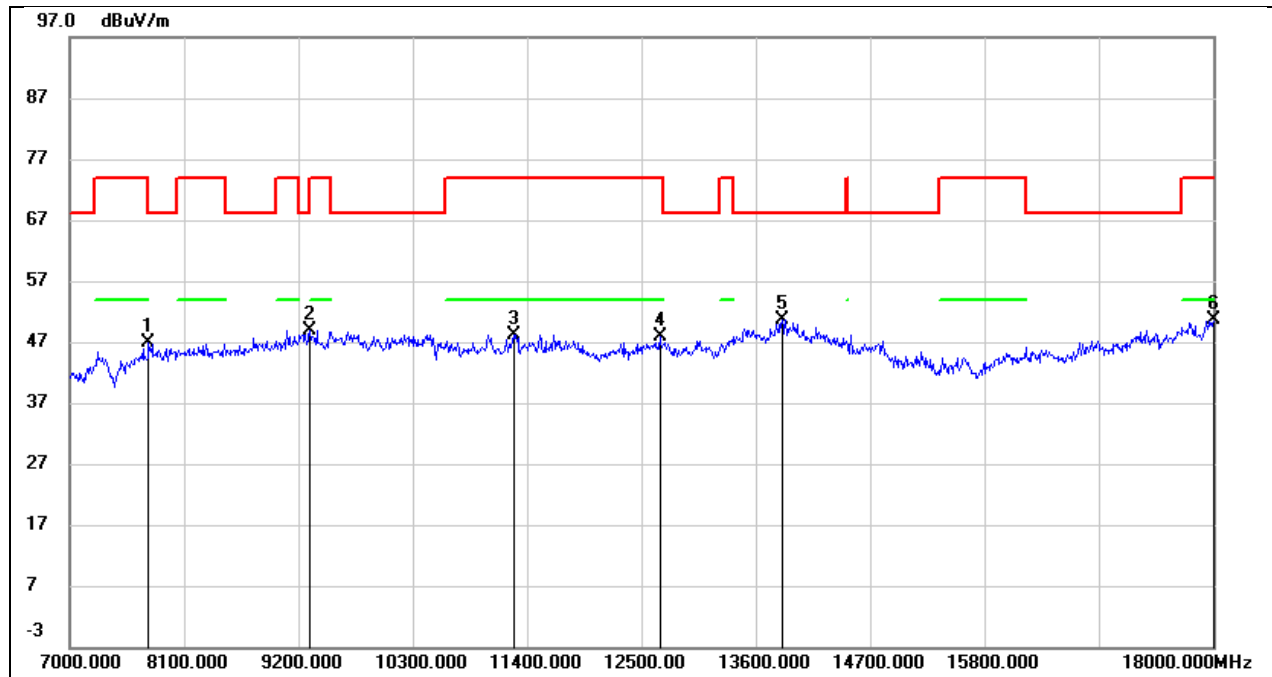


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7759.000	38.91	7.88	46.79	68.20	-21.41	peak
2	9310.000	37.12	11.75	48.87	74.00	-25.13	peak
3	11268.000	31.63	16.59	48.22	74.00	-25.78	peak
4	12676.000	27.70	20.14	47.84	74.00	-26.16	peak
5	13853.000	27.36	23.34	50.70	68.20	-17.50	peak
6	18000.000	22.07	28.51	50.58	74.00	-23.42	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	DC 3.3V

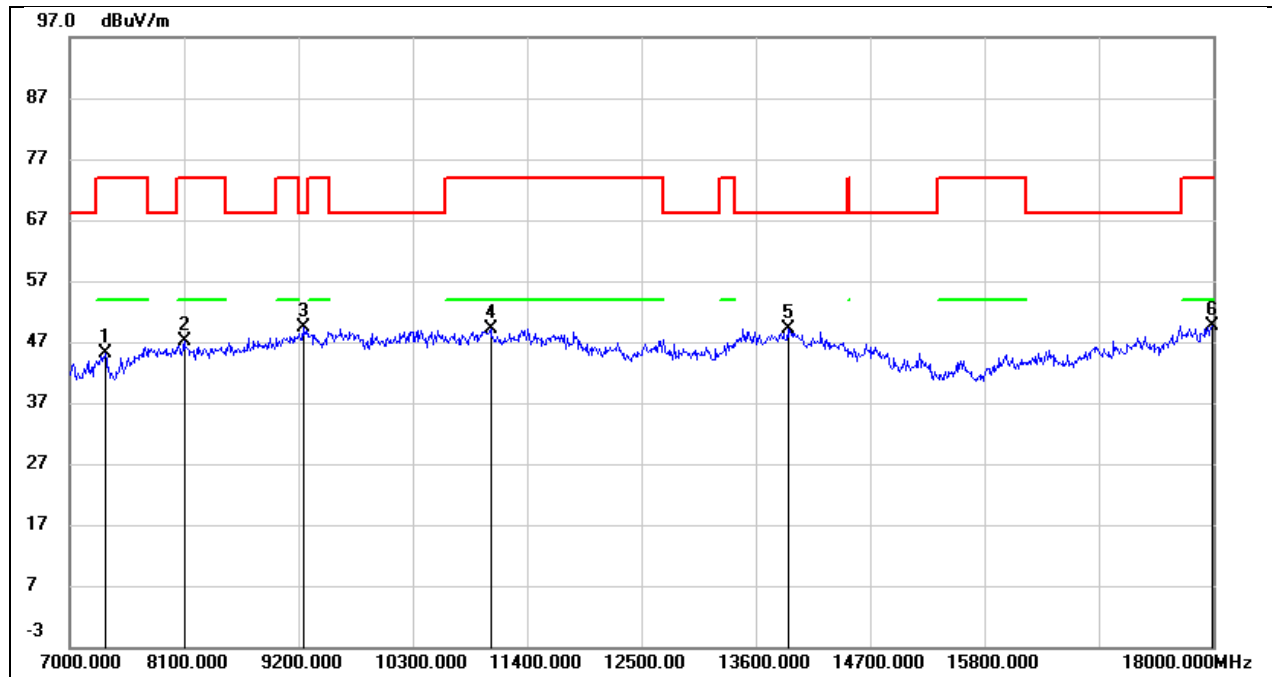


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	37.53	7.50	45.03	74.00	-28.97	peak
2	8100.000	38.89	8.29	47.18	74.00	-26.82	peak
3	9244.000	37.94	11.56	49.50	68.20	-18.70	peak
4	11048.000	33.54	15.66	49.20	74.00	-24.80	peak
5	13908.000	25.66	23.56	49.22	68.20	-18.98	peak
6	17989.000	21.33	28.40	49.73	74.00	-24.27	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5580
Polarity:	Horizontal	Test Voltage:	DC 3.3V

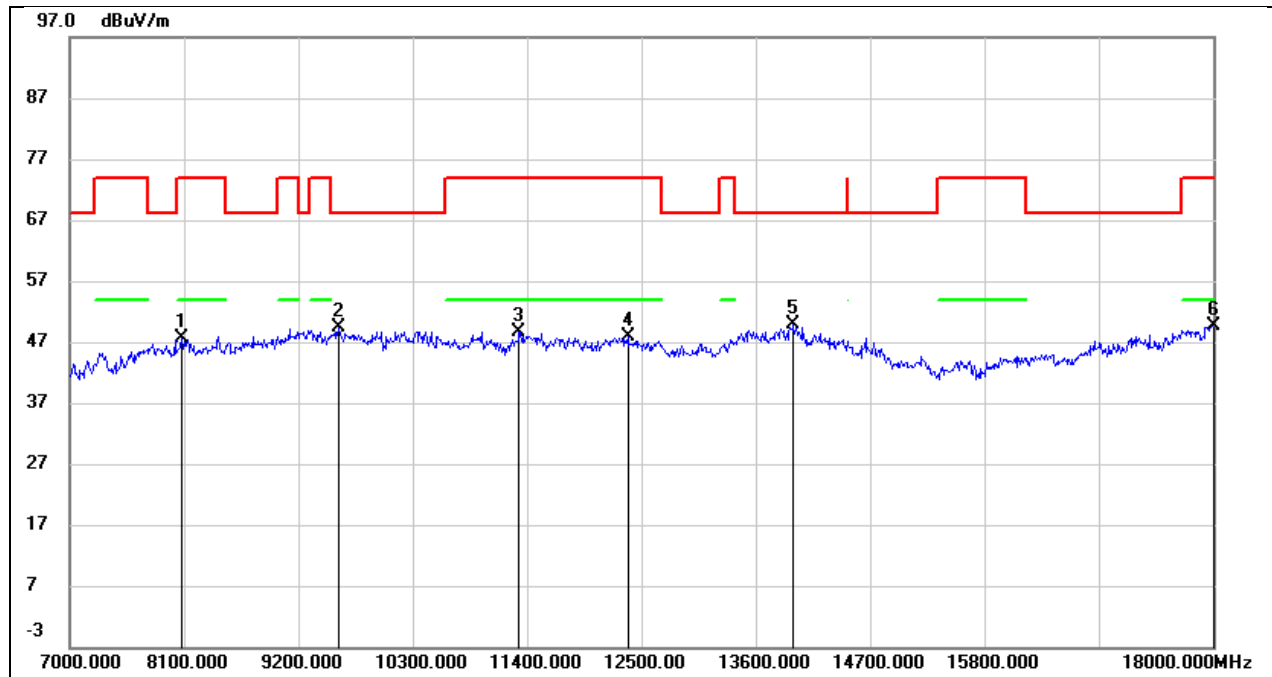


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8078.000	39.26	8.26	47.52	74.00	-26.48	peak
2	9585.000	36.07	13.19	49.26	68.20	-18.94	peak
3	11323.000	31.91	16.84	48.75	74.00	-25.25	peak
4	12368.000	28.32	19.55	47.87	74.00	-26.13	peak
5	13963.000	26.21	23.77	49.98	68.20	-18.22	peak
6	18000.000	21.17	28.51	49.68	74.00	-24.32	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5580
Polarity:	Vertical	Test Voltage:	DC 3.3V

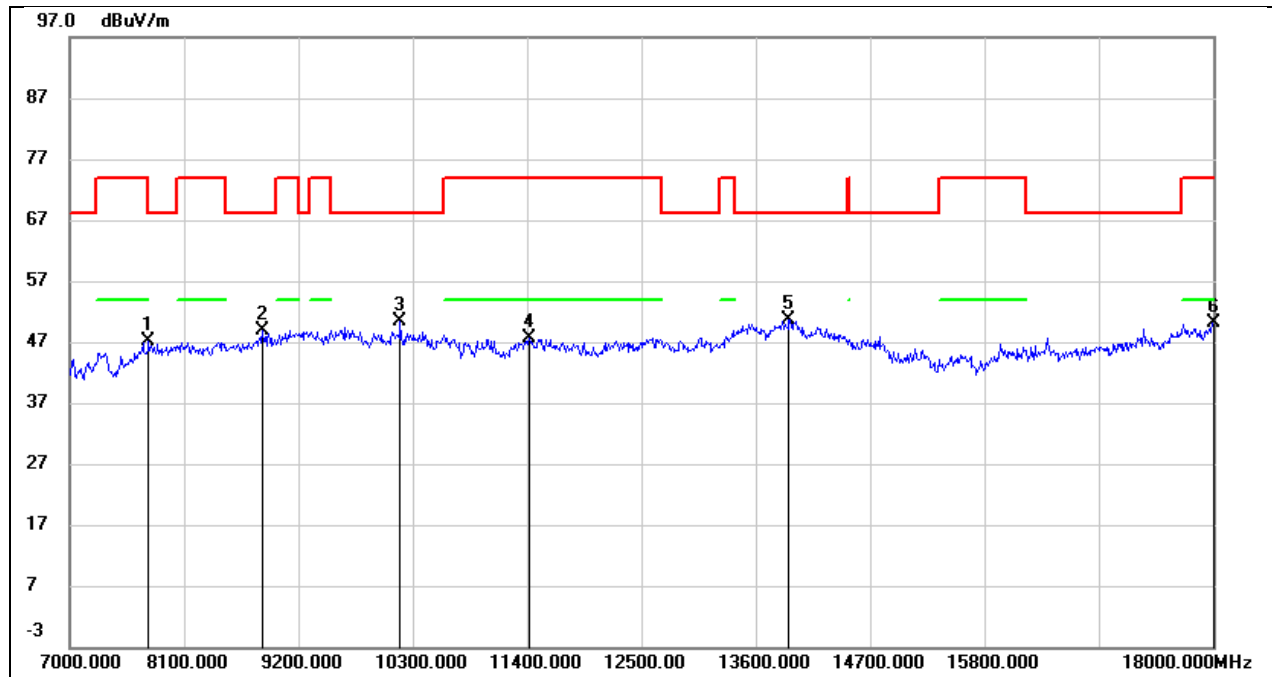


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7759.000	39.31	7.88	47.19	68.20	-21.01	peak
2	8848.000	39.07	9.83	48.90	68.20	-19.30	peak
3	10179.000	37.13	13.31	50.44	68.20	-17.76	peak
4	11422.000	30.45	17.27	47.72	74.00	-26.28	peak
5	13919.000	27.08	23.60	50.68	68.20	-17.52	peak
6	18000.000	21.68	28.51	50.19	74.00	-23.81	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 3.3V

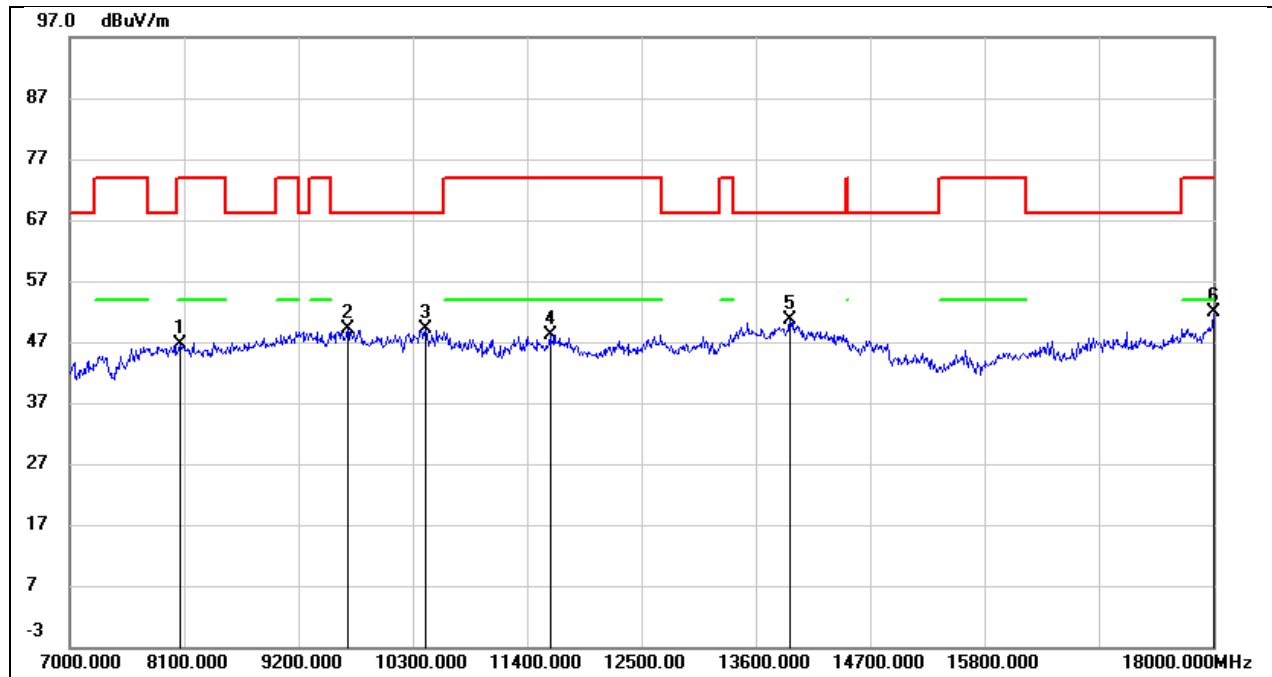


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8067.000	38.50	8.25	46.75	74.00	-27.25	peak
2	9673.000	35.74	13.42	49.16	68.20	-19.04	peak
3	10421.000	35.37	13.79	49.16	68.20	-19.04	peak
4	11620.000	30.32	17.88	48.20	74.00	-25.80	peak
5	13930.000	26.97	23.63	50.60	68.20	-17.60	peak
6	18000.000	23.31	28.51	51.82	74.00	-22.18	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	DC 3.3V

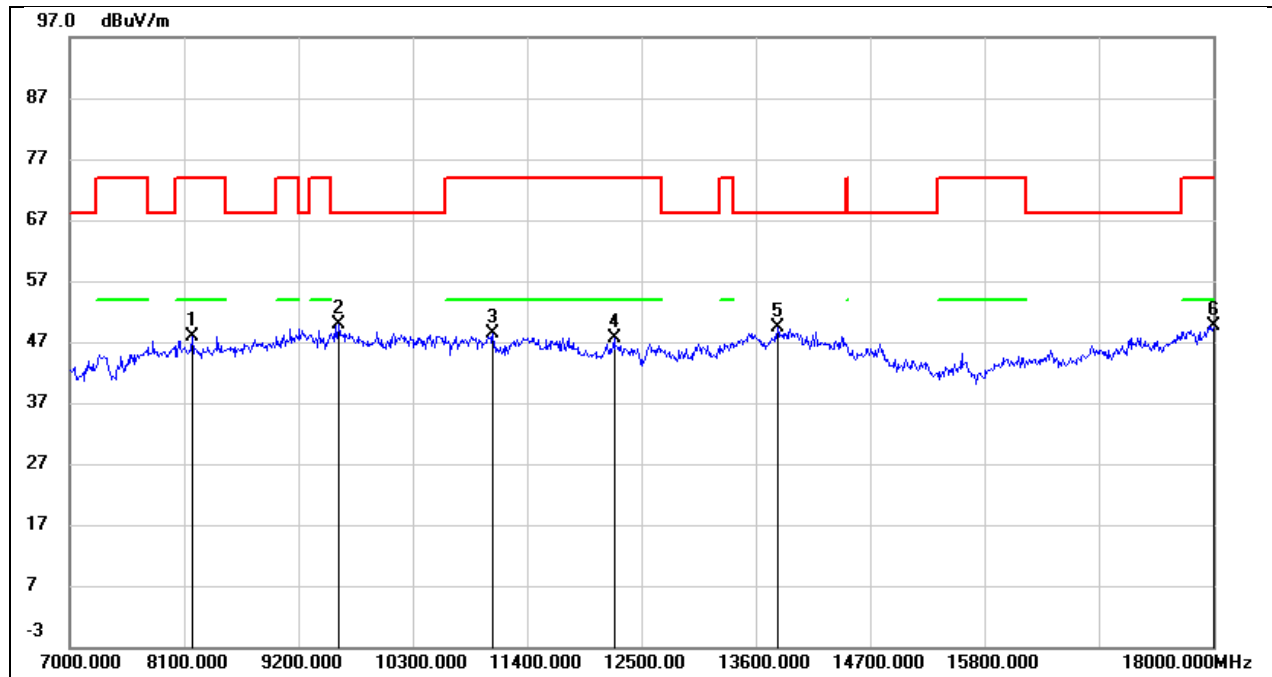


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8177.000	39.50	8.37	47.87	74.00	-26.13	peak
2	9585.000	36.78	13.19	49.97	68.20	-18.23	peak
3	11070.000	32.52	15.75	48.27	74.00	-25.73	peak
4	12236.000	28.33	19.19	47.52	74.00	-26.48	peak
5	13809.000	26.20	23.17	49.37	68.20	-18.83	peak
6	18000.000	21.15	28.51	49.66	74.00	-24.34	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	DC 3.3V

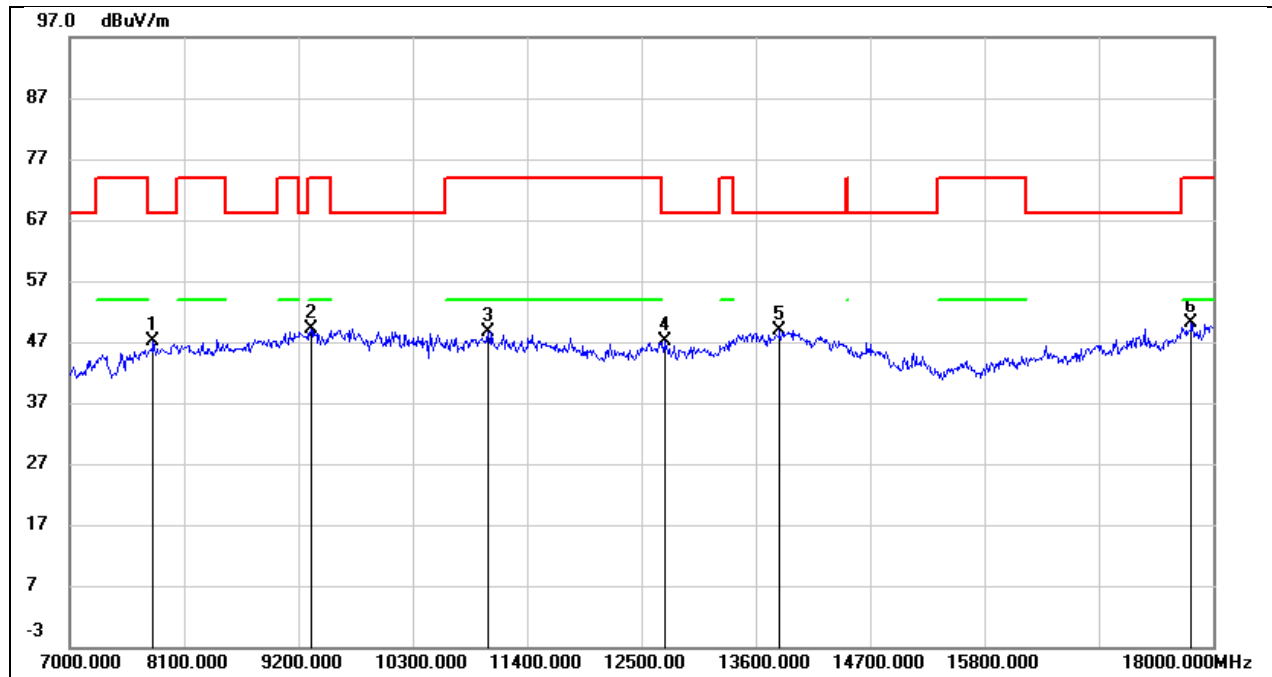


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7803.000	39.22	7.95	47.17	68.20	-21.03	peak
2	9321.000	37.29	11.79	49.08	74.00	-24.92	peak
3	11026.000	33.13	15.57	48.70	74.00	-25.30	peak
4	12720.000	26.83	20.27	47.10	68.20	-21.10	peak
5	13831.000	25.58	23.26	48.84	68.20	-19.36	peak
6	17791.000	23.62	26.58	50.20	74.00	-23.80	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	DC 3.3V

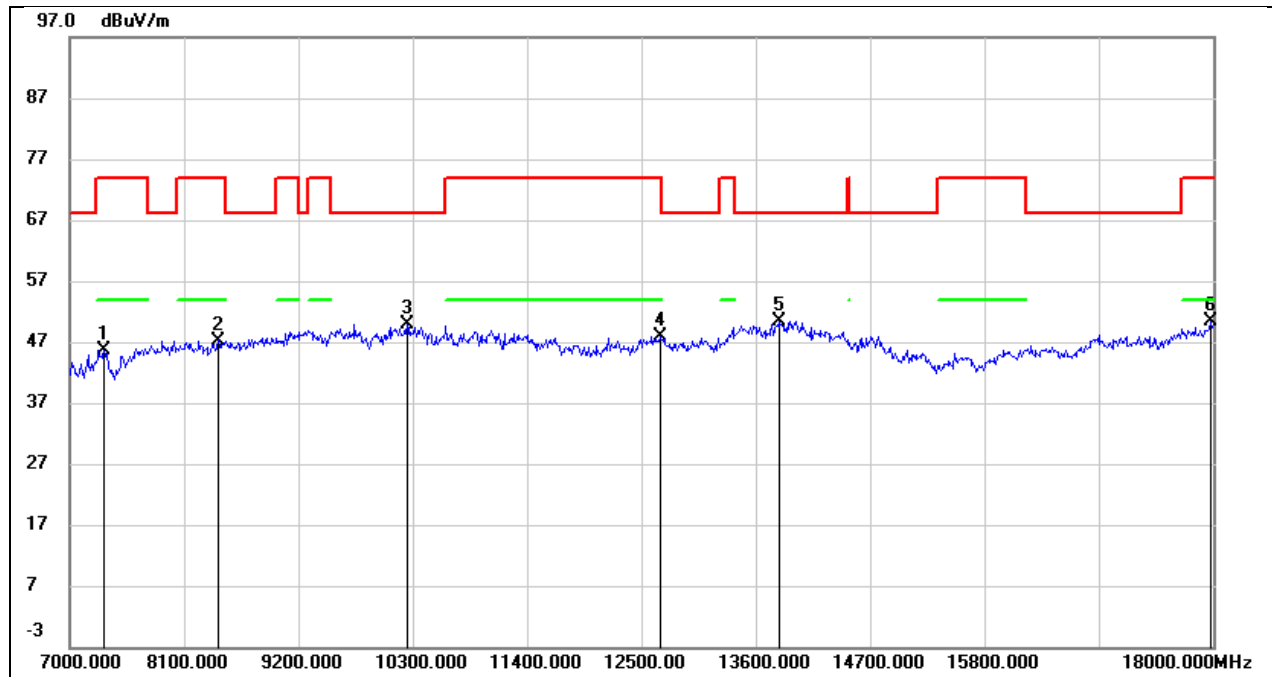


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7330.000	38.17	7.50	45.67	74.00	-28.33	peak
2	8430.000	38.65	8.60	47.25	74.00	-26.75	peak
3	10245.000	36.49	13.41	49.90	68.20	-18.30	peak
4	12676.000	27.82	20.14	47.96	74.00	-26.04	peak
5	13820.000	27.28	23.22	50.50	68.20	-17.70	peak
6	17978.000	22.00	28.31	50.31	74.00	-23.69	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 3.3V

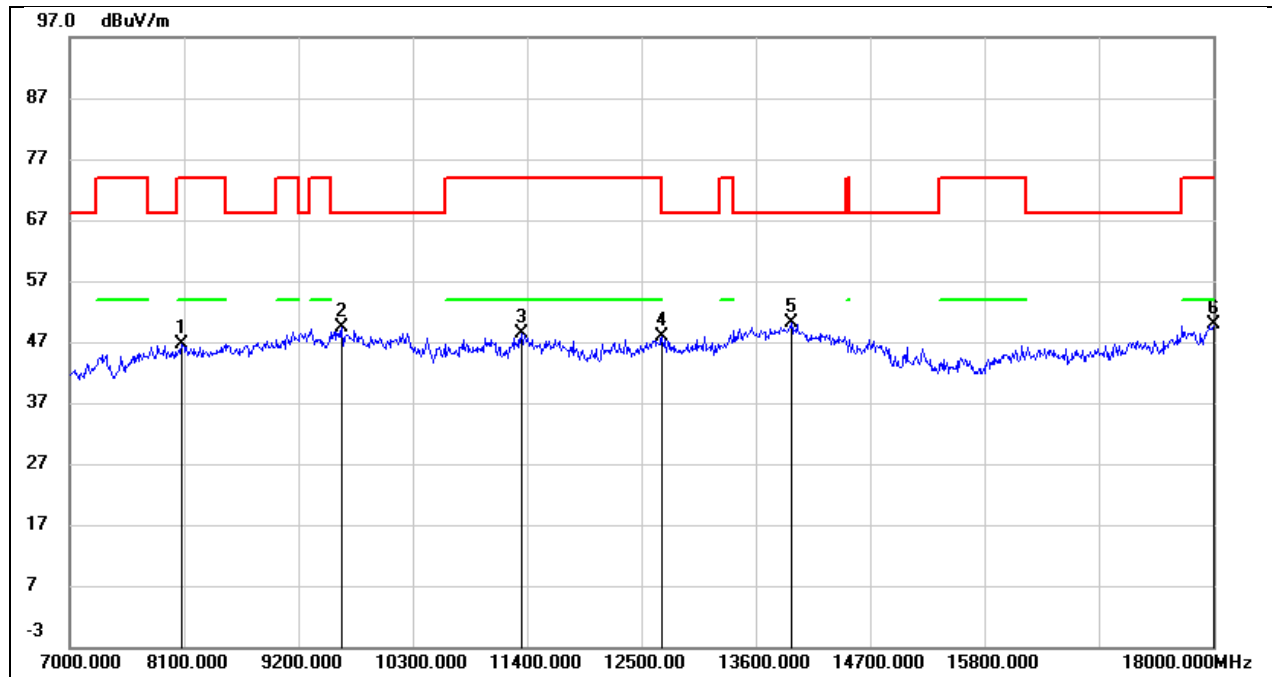


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8078.000	38.39	8.26	46.65	74.00	-27.35	peak
2	9618.000	35.96	13.31	49.27	68.20	-18.93	peak
3	11345.000	31.50	16.96	48.46	74.00	-25.54	peak
4	12698.000	27.70	20.20	47.90	74.00	-26.10	peak
5	13941.000	26.37	23.68	50.05	68.20	-18.15	peak
6	18000.000	21.28	28.51	49.79	74.00	-24.21	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	DC 3.3V

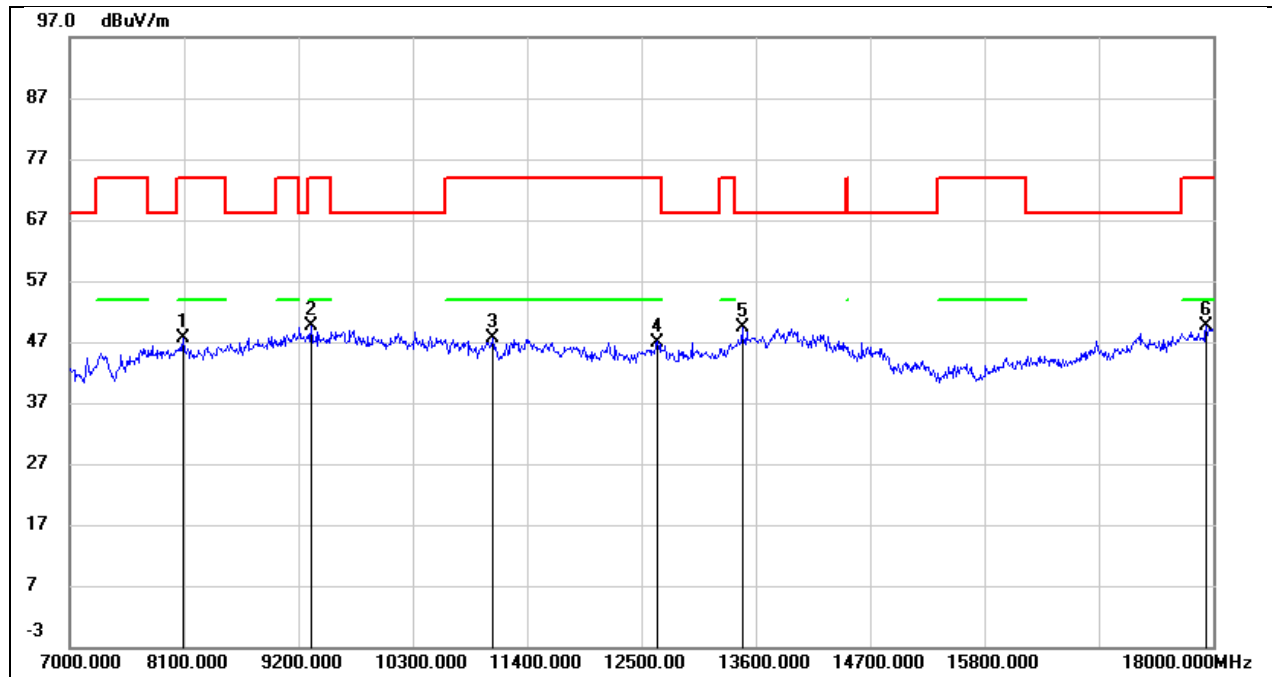


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8089.000	39.28	8.28	47.56	74.00	-26.44	peak
2	9321.000	37.73	11.79	49.52	74.00	-24.48	peak
3	11070.000	31.98	15.75	47.73	74.00	-26.27	peak
4	12654.000	26.94	20.06	47.00	74.00	-27.00	peak
5	13468.000	26.96	22.31	49.27	68.20	-18.93	peak
6	17934.000	21.71	27.90	49.61	74.00	-24.39	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 3.3V

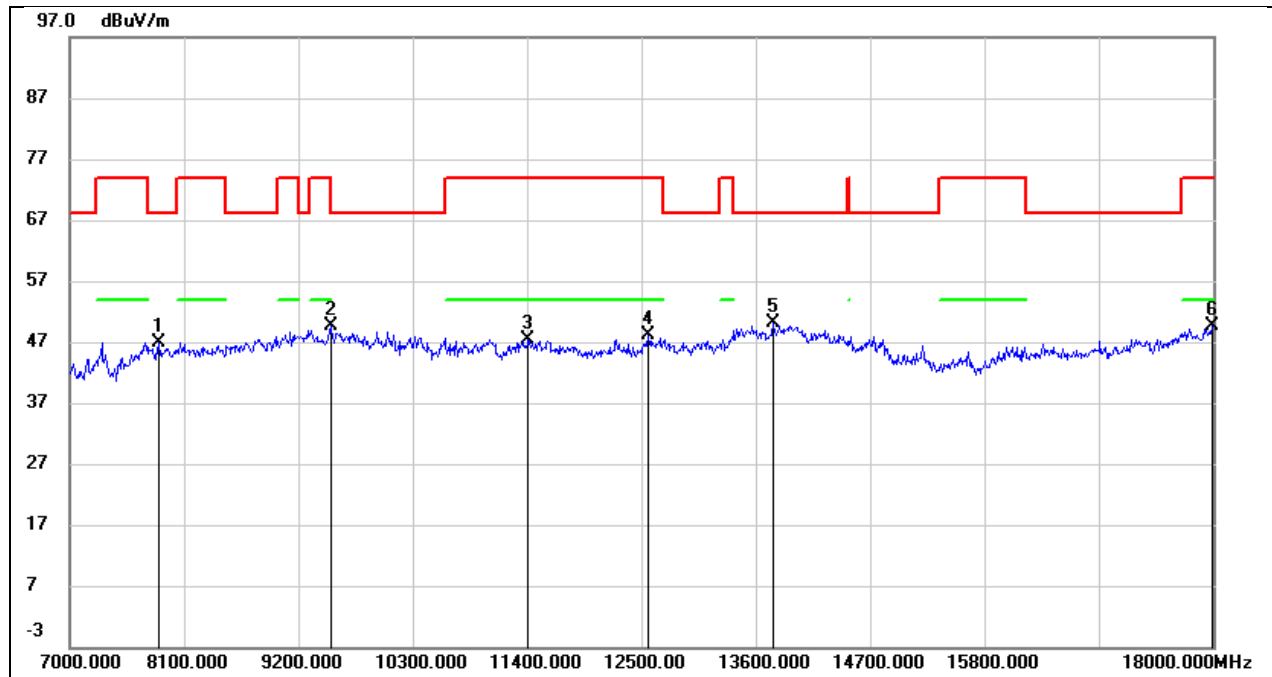


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7858.000	38.97	8.01	46.98	68.20	-21.22	peak
2	9508.000	36.82	12.71	49.53	68.20	-18.67	peak
3	11411.000	30.24	17.24	47.48	74.00	-26.52	peak
4	12566.000	28.20	19.85	48.05	74.00	-25.95	peak
5	13765.000	27.10	23.05	50.15	68.20	-18.05	peak
6	17989.000	21.26	28.40	49.66	74.00	-24.34	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 3.3V

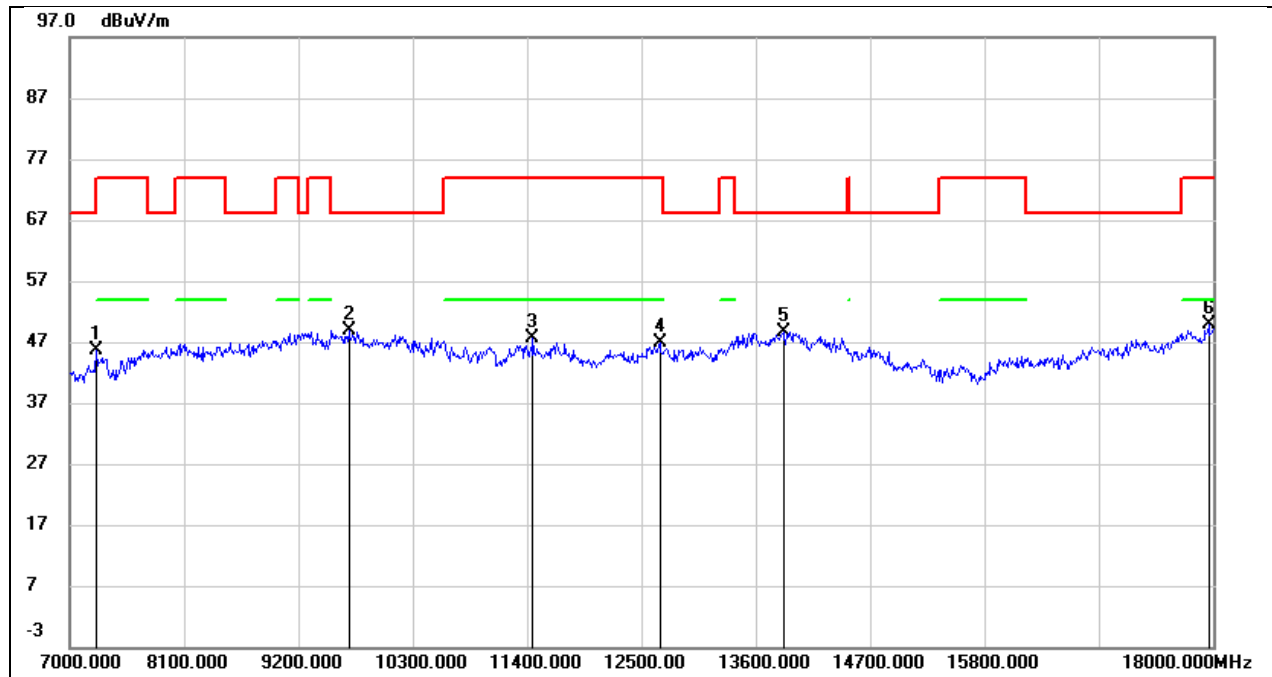


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7253.000	38.13	7.48	45.61	74.00	-28.39	peak
2	9684.000	35.35	13.44	48.79	68.20	-19.41	peak
3	11455.000	30.16	17.38	47.54	74.00	-26.46	peak
4	12676.000	26.82	20.14	46.96	74.00	-27.04	peak
5	13864.000	25.30	23.39	48.69	68.20	-19.51	peak
6	17956.000	21.87	28.10	49.97	74.00	-24.03	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 3.3V

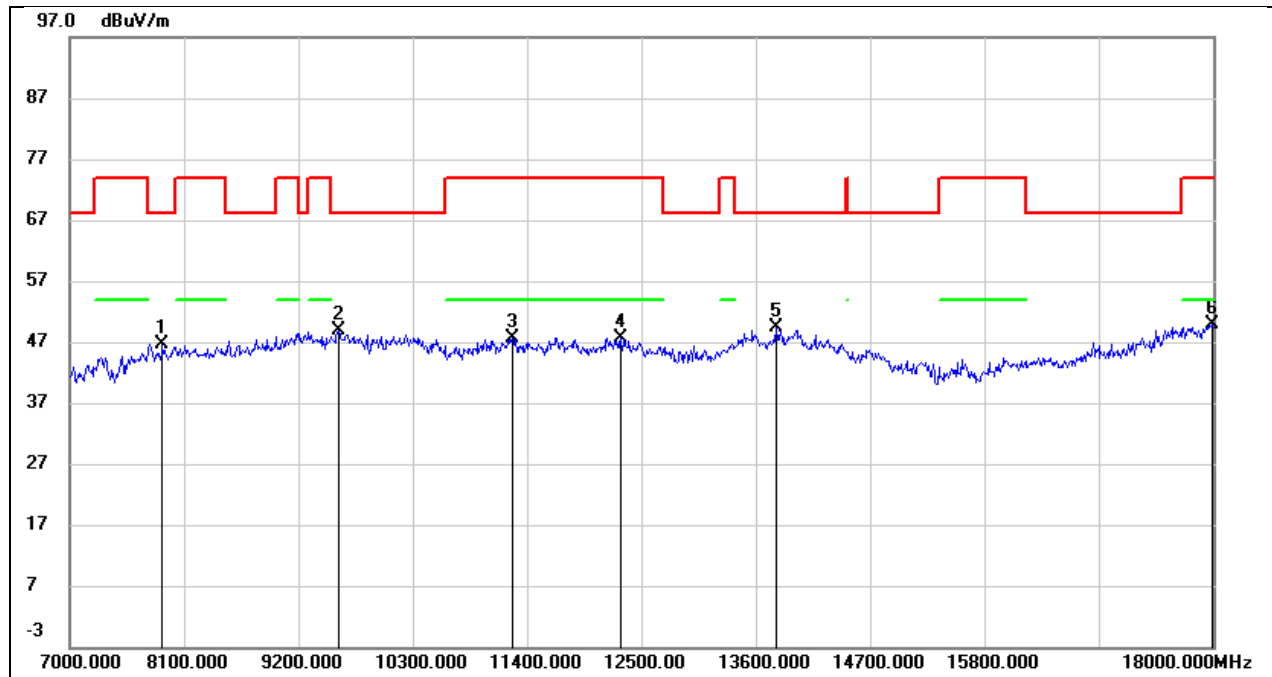


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7891.000	38.60	8.05	46.65	68.20	-21.55	peak
2	9585.000	35.65	13.19	48.84	68.20	-19.36	peak
3	11257.000	31.04	16.55	47.59	74.00	-26.41	peak
4	12302.000	28.36	19.37	47.73	74.00	-26.27	peak
5	13798.000	26.17	23.13	49.30	68.20	-18.90	peak
6	17989.000	21.52	28.40	49.92	74.00	-24.08	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 3.3V

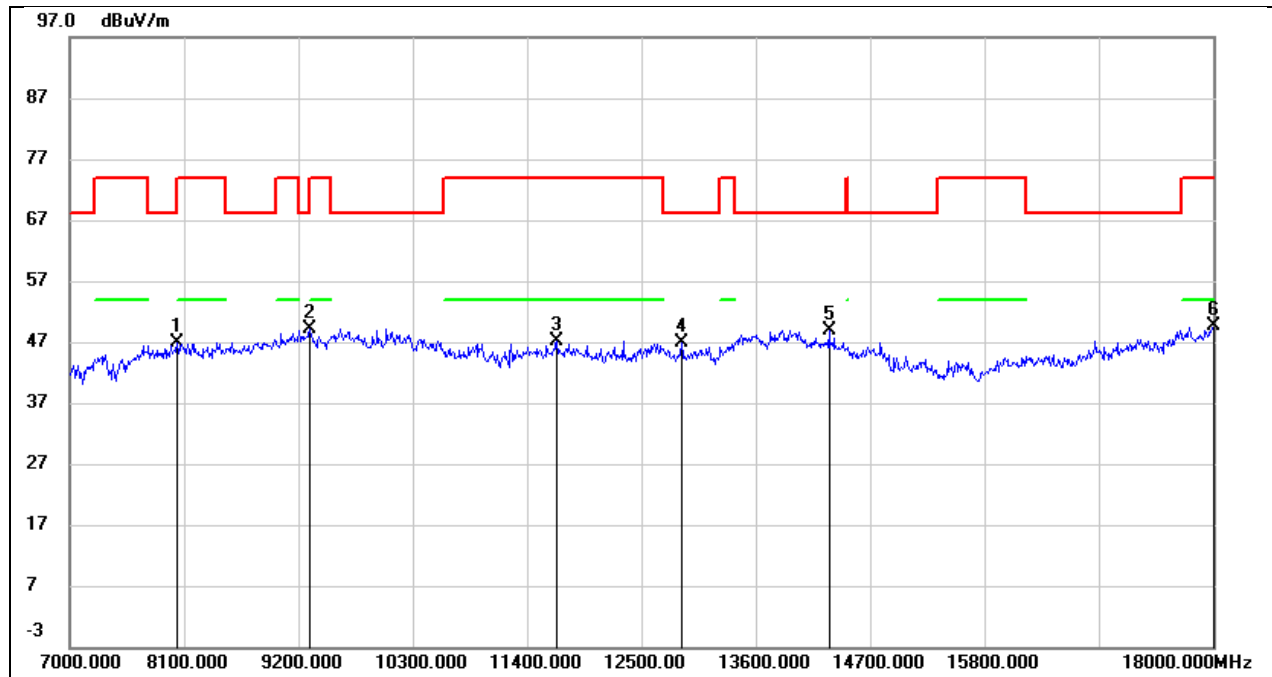


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8034.000	38.70	8.21	46.91	74.00	-27.09	peak
2	9310.000	37.48	11.75	49.23	74.00	-24.77	peak
3	11686.000	29.27	17.91	47.18	74.00	-26.82	peak
4	12885.000	26.30	20.51	46.81	68.20	-21.39	peak
5	14304.000	26.77	22.20	48.97	68.20	-19.23	peak
6	18000.000	21.00	28.51	49.51	74.00	-24.49	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	DC 3.3V

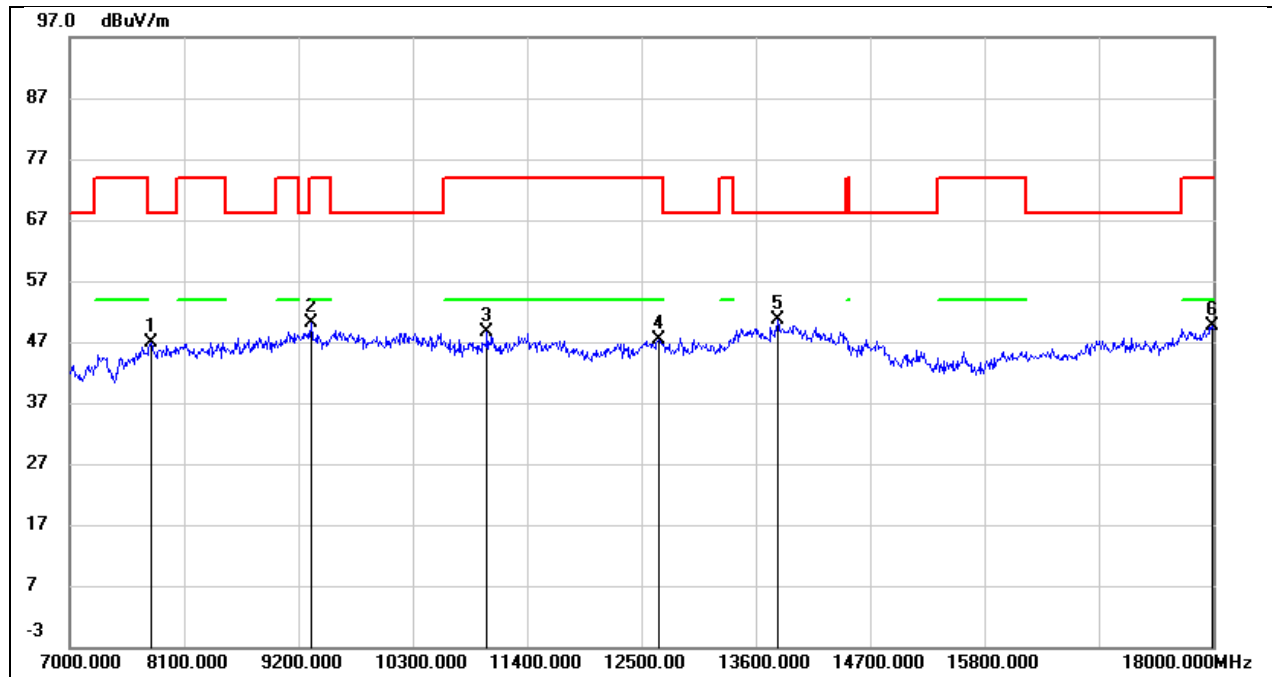


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7781.000	38.89	7.92	46.81	68.20	-21.39	peak
2	9321.000	38.30	11.79	50.09	74.00	-23.91	peak
3	11015.000	33.00	15.52	48.52	74.00	-25.48	peak
4	12665.000	27.20	20.09	47.29	74.00	-26.71	peak
5	13809.000	27.34	23.17	50.51	68.20	-17.69	peak
6	17989.000	21.20	28.40	49.60	74.00	-24.40	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	DC 3.3V

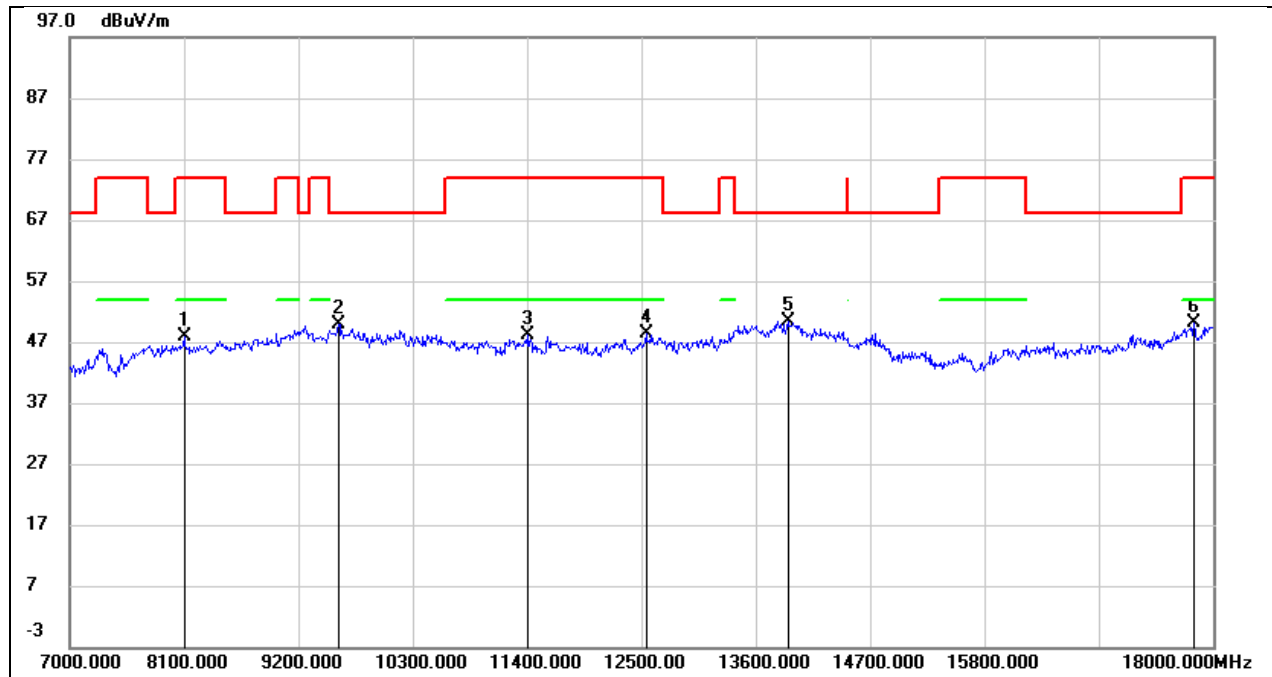


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8100.000	39.47	8.29	47.76	74.00	-26.24	peak
2	9585.000	36.59	13.19	49.78	68.20	-18.42	peak
3	11411.000	30.86	17.24	48.10	74.00	-25.90	peak
4	12544.000	28.47	19.83	48.30	74.00	-25.70	peak
5	13908.000	26.72	23.56	50.28	68.20	-17.92	peak
6	17813.000	23.25	26.78	50.03	74.00	-23.97	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	DC 3.3V

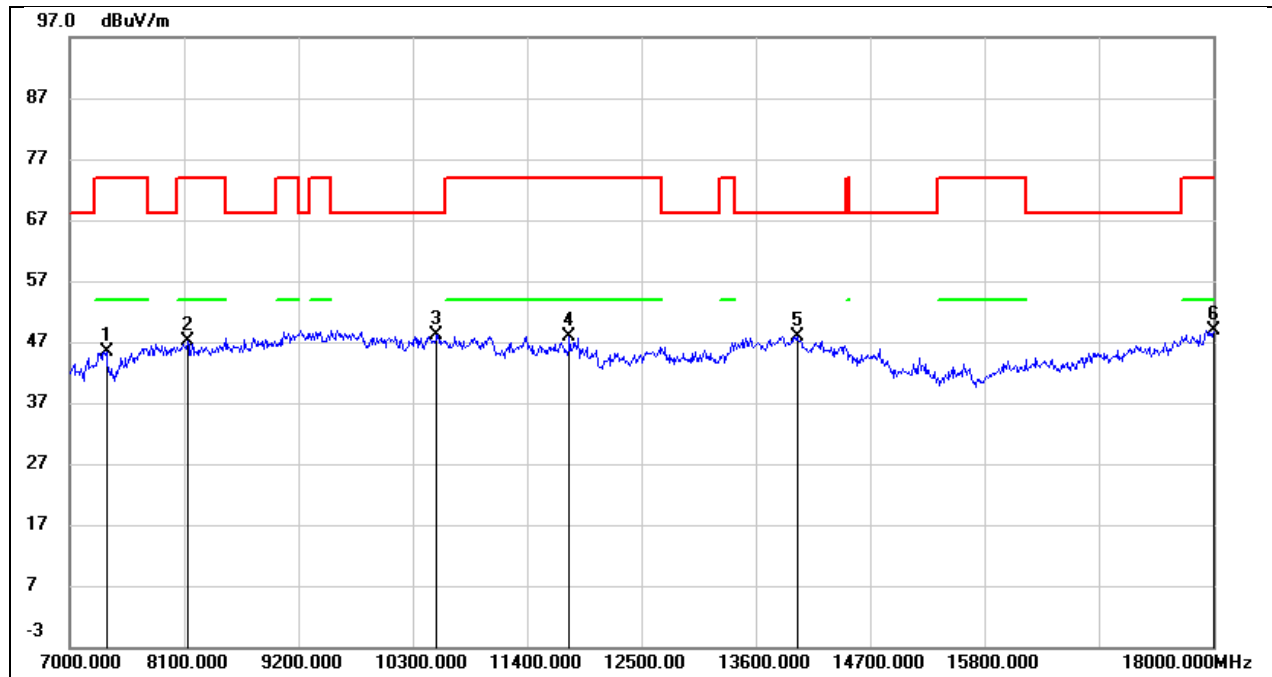


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	37.87	7.51	45.38	74.00	-28.62	peak
2	8133.000	38.76	8.33	47.09	74.00	-26.91	peak
3	10531.000	34.11	14.12	48.23	68.20	-19.97	peak
4	11807.000	29.85	17.95	47.80	74.00	-26.20	peak
5	13996.000	24.04	23.89	47.93	68.20	-20.27	peak
6	18000.000	20.36	28.51	48.87	74.00	-25.13	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5230
Polarity:	Vertical	Test Voltage:	DC 3.3V

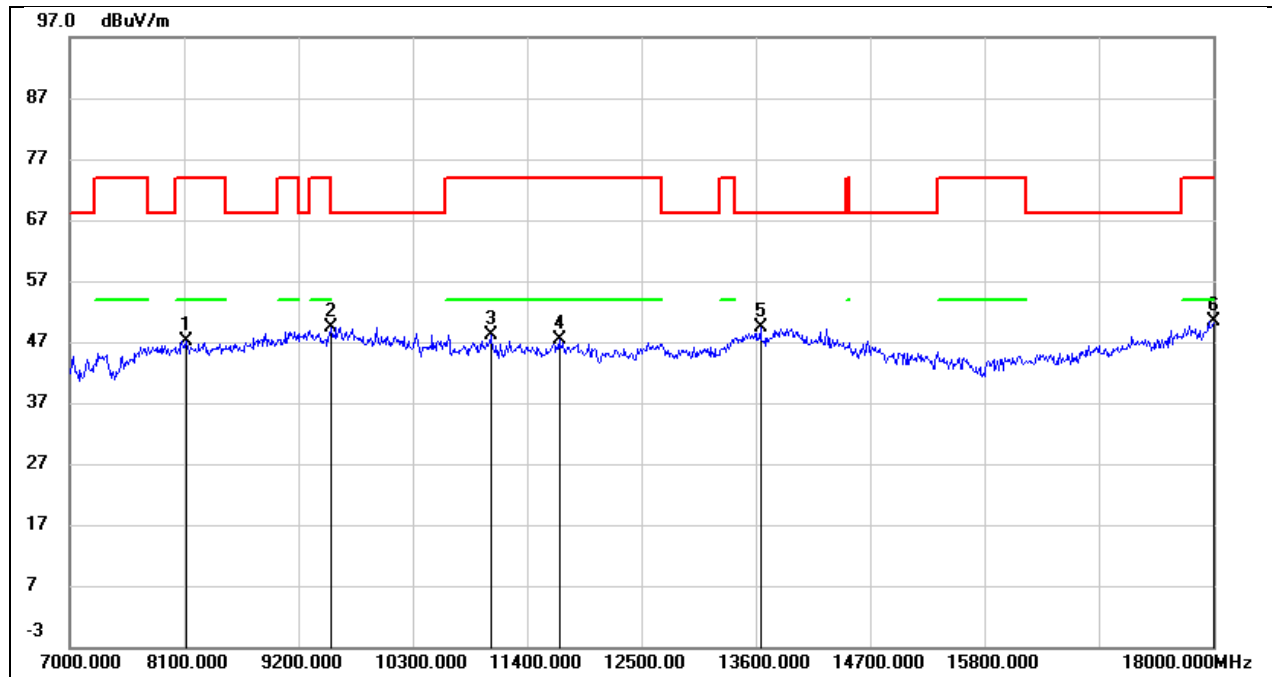


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8122.000	38.86	8.32	47.18	74.00	-26.82	peak
2	9519.000	36.71	12.77	49.48	68.20	-18.72	peak
3	11048.000	32.58	15.66	48.24	74.00	-25.76	peak
4	11708.000	29.45	17.91	47.36	74.00	-26.64	peak
5	13644.000	26.72	22.72	49.44	68.20	-18.76	peak
6	18000.000	21.91	28.51	50.42	74.00	-23.58	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5270
Polarity:	Horizontal	Test Voltage:	DC 3.3V

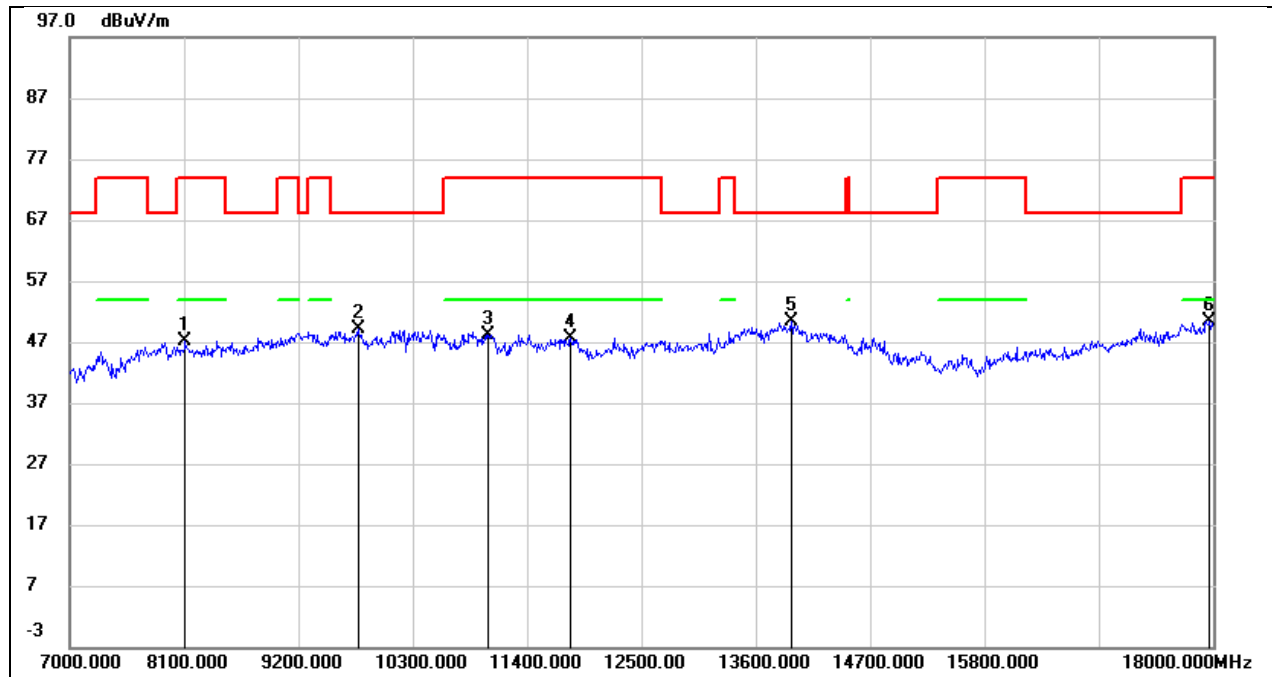


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8111.000	38.92	8.30	47.22	74.00	-26.78	peak
2	9772.000	35.49	13.61	49.10	68.20	-19.10	peak
3	11026.000	32.61	15.57	48.18	74.00	-25.82	peak
4	11818.000	29.70	17.99	47.69	74.00	-26.31	peak
5	13941.000	26.70	23.68	50.38	68.20	-17.82	peak
6	17967.000	22.24	28.21	50.45	74.00	-23.55	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5270
Polarity:	Vertical	Test Voltage:	DC 3.3V

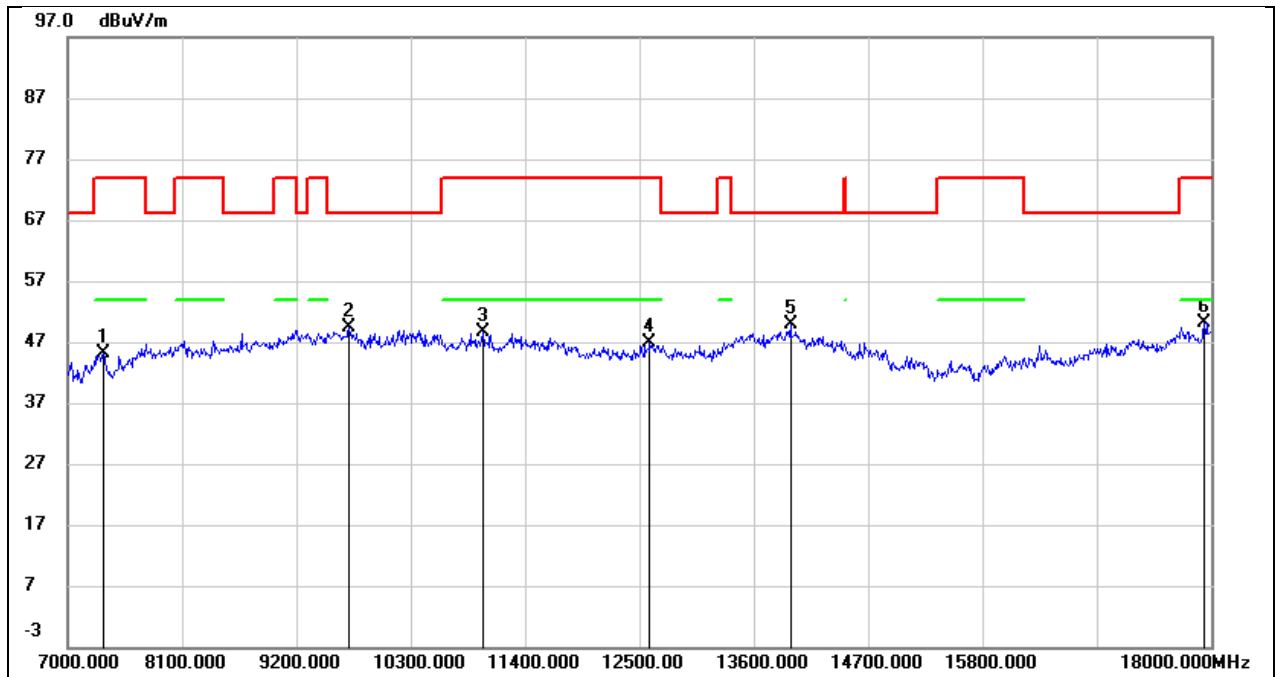


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	37.68	7.50	45.18	74.00	-28.82	peak
2	9706.000	35.93	13.49	49.42	68.20	-18.78	peak
3	10993.000	33.12	15.44	48.56	74.00	-25.44	peak
4	12599.000	26.97	19.88	46.85	74.00	-27.15	peak
5	13952.000	26.16	23.73	49.89	68.20	-18.31	peak
6	17934.000	22.24	27.90	50.14	74.00	-23.86	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	DC 3.3V

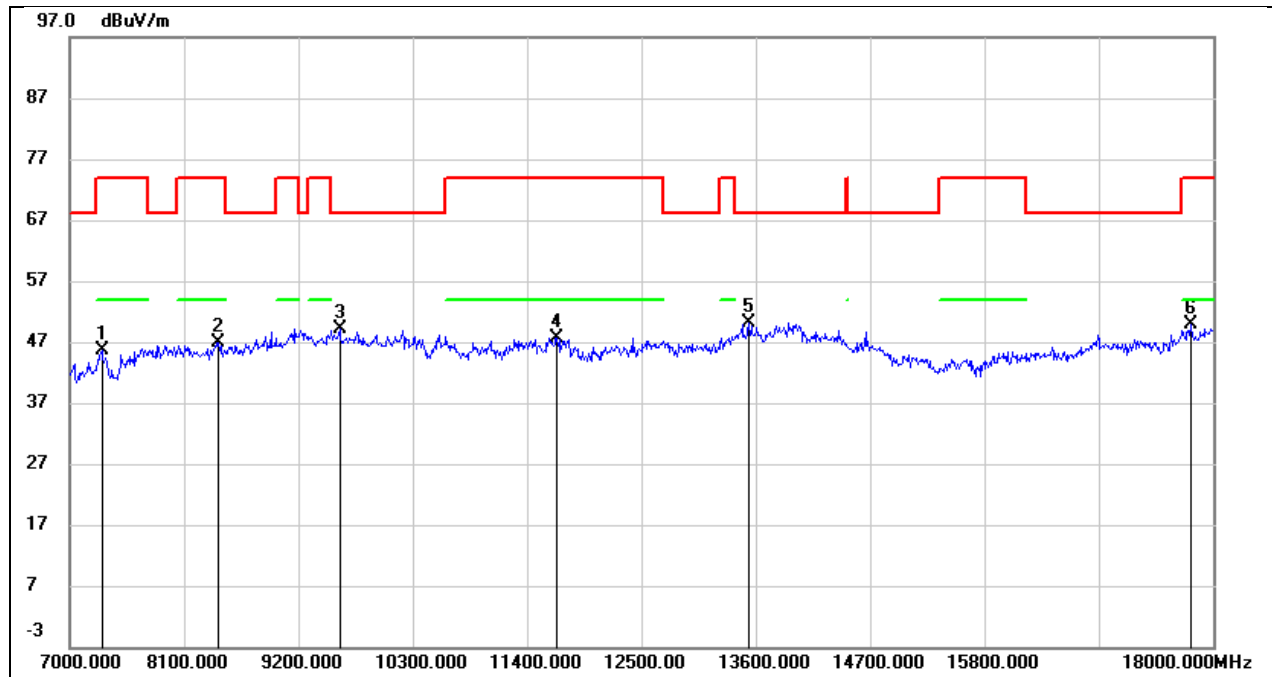


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	38.12	7.49	45.61	74.00	-28.39	peak
2	8430.000	38.24	8.60	46.84	74.00	-27.16	peak
3	9596.000	35.96	13.26	49.22	68.20	-18.98	peak
4	11686.000	29.83	17.91	47.74	74.00	-26.26	peak
5	13534.000	27.67	22.49	50.16	68.20	-18.04	peak
6	17780.000	23.28	26.50	49.78	74.00	-24.22	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5310
Polarity:	Vertical	Test Voltage:	DC 3.3V

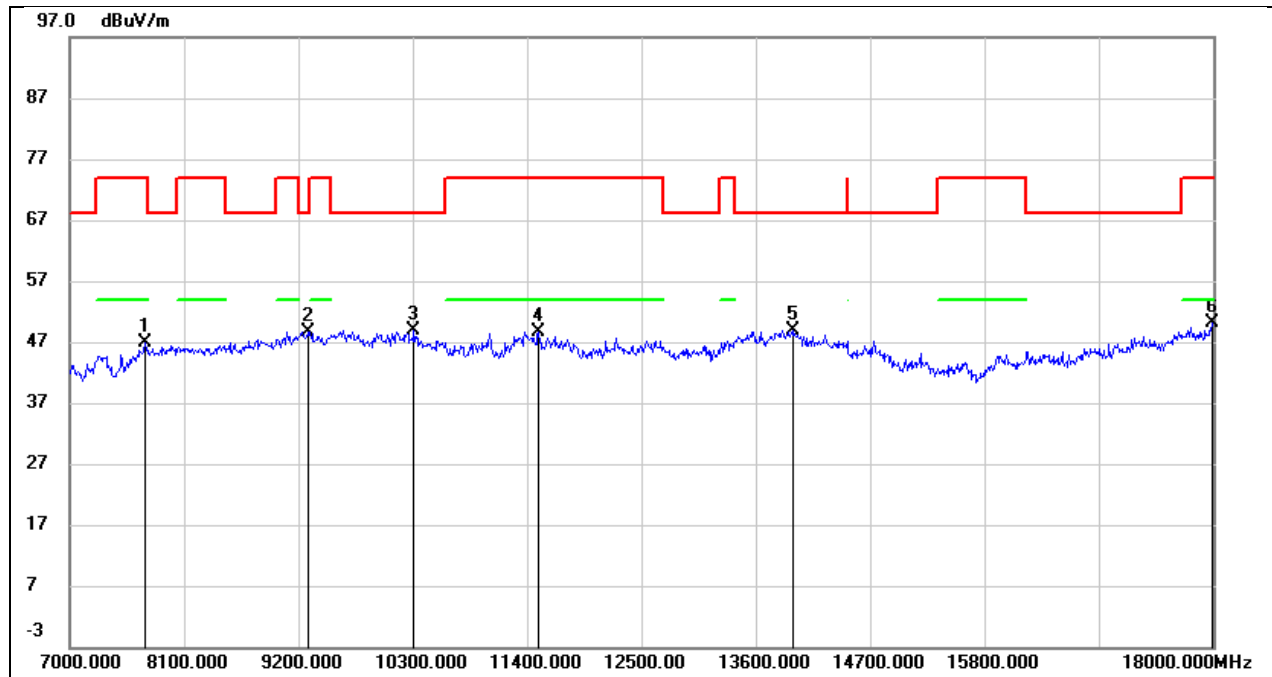


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7726.000	39.11	7.83	46.94	74.00	-27.06	peak
2	9288.000	37.04	11.68	48.72	68.20	-19.48	peak
3	10311.000	35.28	13.55	48.83	68.20	-19.37	peak
4	11510.000	31.05	17.57	48.62	74.00	-25.38	peak
5	13963.000	25.18	23.77	48.95	68.20	-19.25	peak
6	17989.000	21.72	28.40	50.12	74.00	-23.88	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	DC 3.3V

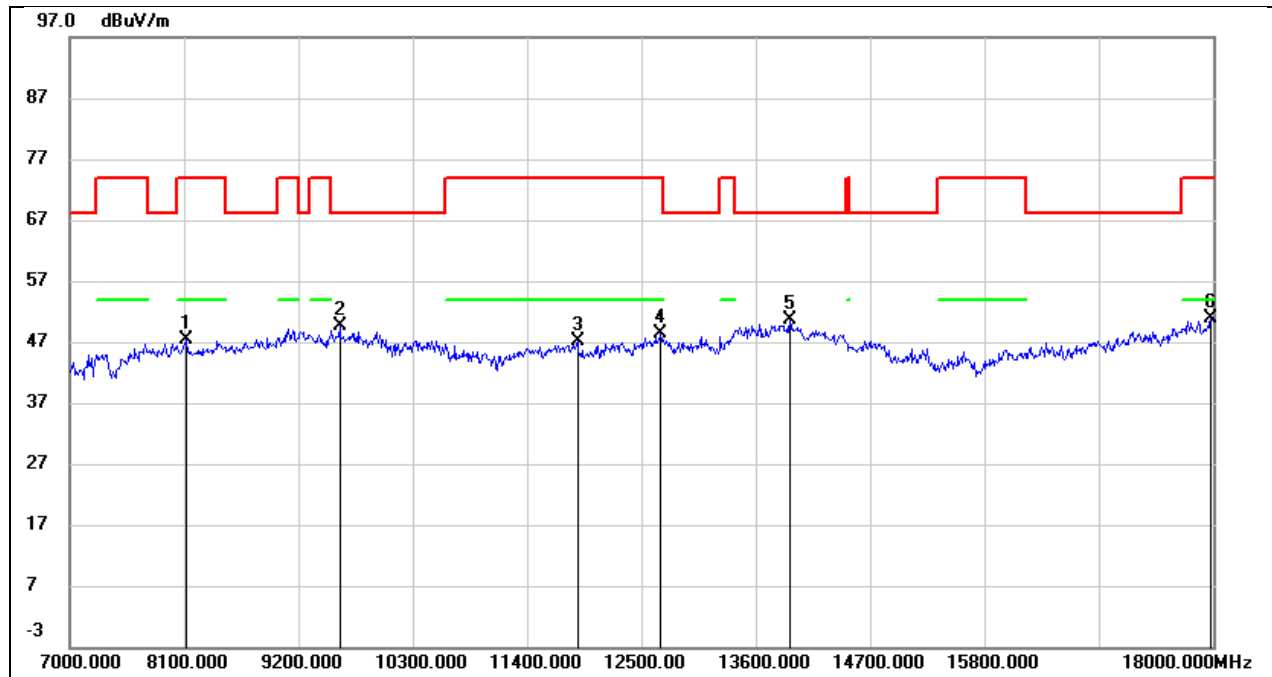


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8122.000	38.99	8.32	47.31	74.00	-26.69	peak
2	9596.000	36.31	13.26	49.57	68.20	-18.63	peak
3	11884.000	28.81	18.20	47.01	74.00	-26.99	peak
4	12687.000	28.24	20.17	48.41	74.00	-25.59	peak
5	13930.000	26.96	23.63	50.59	68.20	-17.61	peak
6	17978.000	22.66	28.31	50.97	74.00	-23.03	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5510
Polarity:	Vertical	Test Voltage:	DC 3.3V

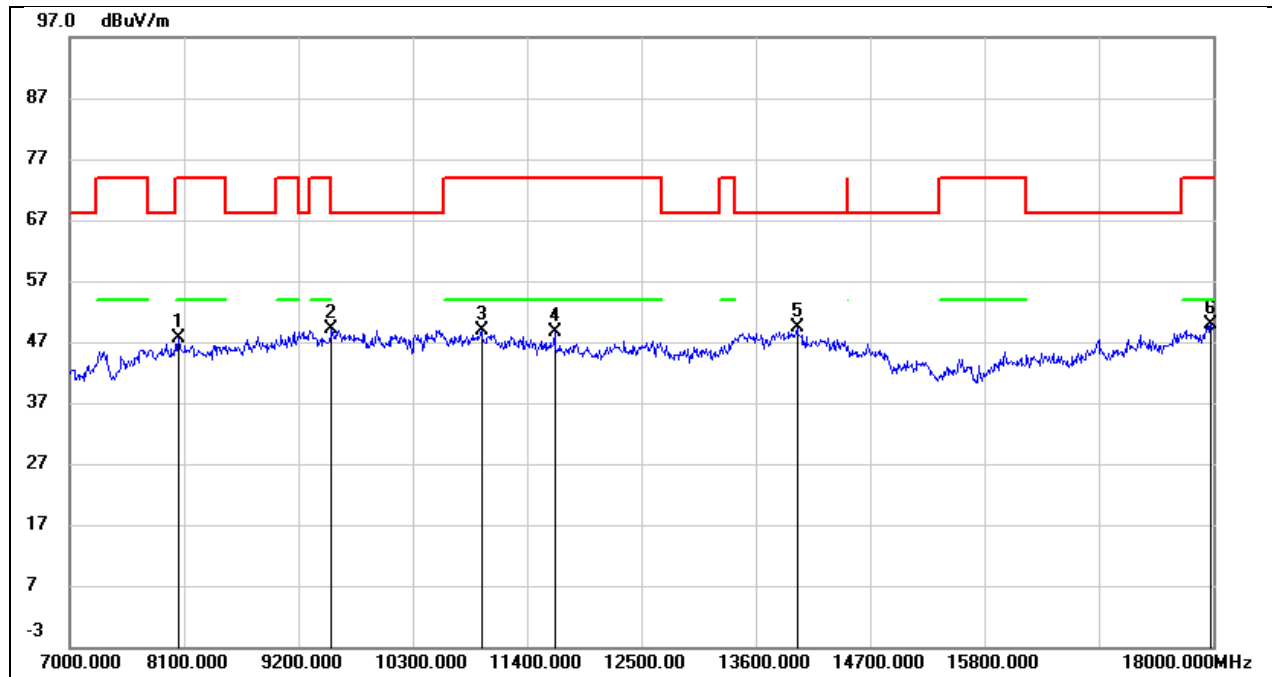


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8045.000	39.31	8.22	47.53	74.00	-26.47	peak
2	9519.000	36.30	12.77	49.07	68.20	-19.13	peak
3	10960.000	33.51	15.34	48.85	74.00	-25.15	peak
4	11664.000	30.84	17.88	48.72	74.00	-25.28	peak
5	13996.000	25.37	23.89	49.26	68.20	-18.94	peak
6	17978.000	21.67	28.31	49.98	74.00	-24.02	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5550
Polarity:	Horizontal	Test Voltage:	DC 3.3V

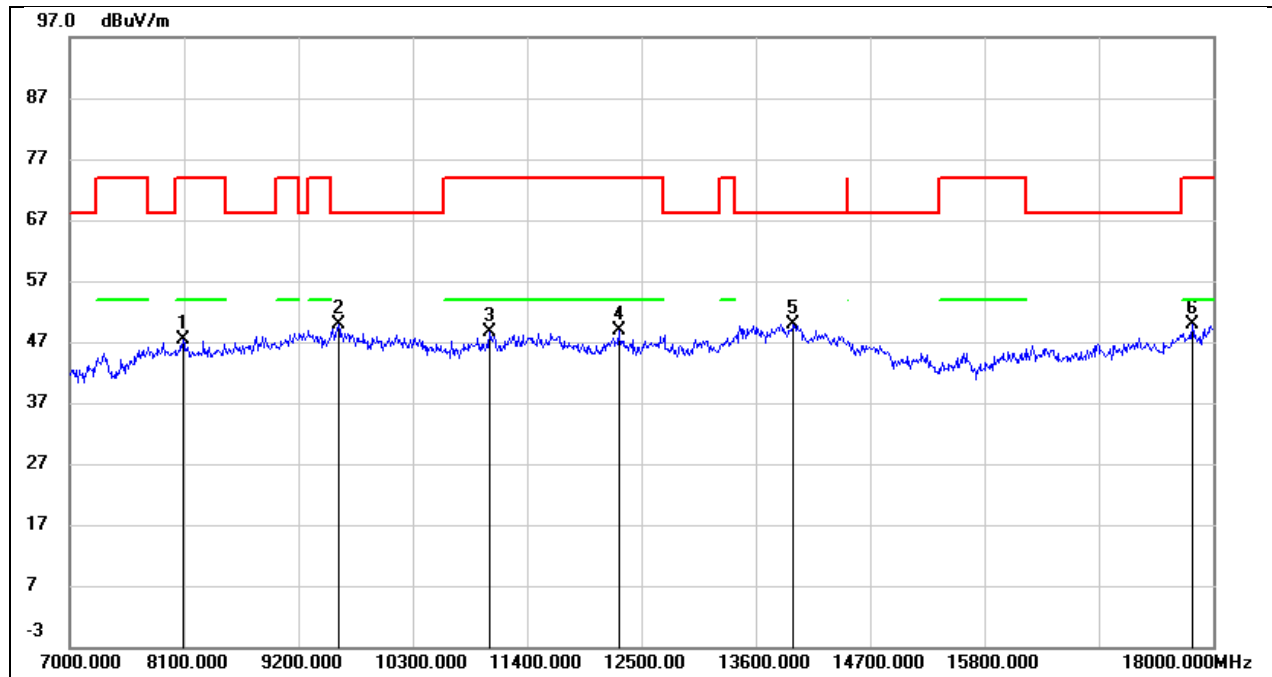


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8089.000	39.16	8.28	47.44	74.00	-26.56	peak
2	9585.000	36.58	13.19	49.77	68.20	-18.43	peak
3	11037.000	33.11	15.62	48.73	74.00	-25.27	peak
4	12280.000	29.56	19.32	48.88	74.00	-25.12	peak
5	13963.000	26.00	23.77	49.77	68.20	-18.43	peak
6	17802.000	23.26	26.68	49.94	74.00	-24.06	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5550
Polarity:	Vertical	Test Voltage:	DC 3.3V

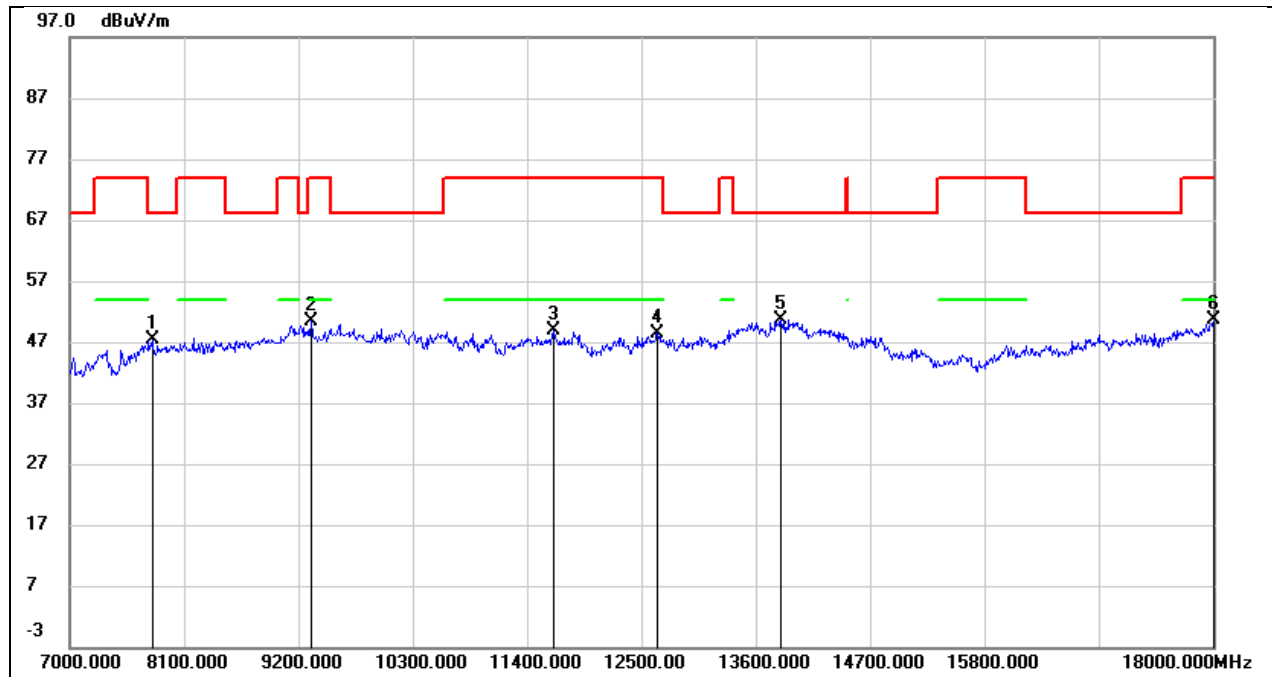


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7792.000	39.39	7.94	47.33	68.20	-20.87	peak
2	9321.000	38.61	11.79	50.40	74.00	-23.60	peak
3	11653.000	30.88	17.88	48.76	74.00	-25.24	peak
4	12654.000	28.38	20.06	48.44	74.00	-25.56	peak
5	13842.000	27.44	23.29	50.73	68.20	-17.47	peak
6	18000.000	22.14	28.51	50.65	74.00	-23.35	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5670
Polarity:	Horizontal	Test Voltage:	DC 3.3V

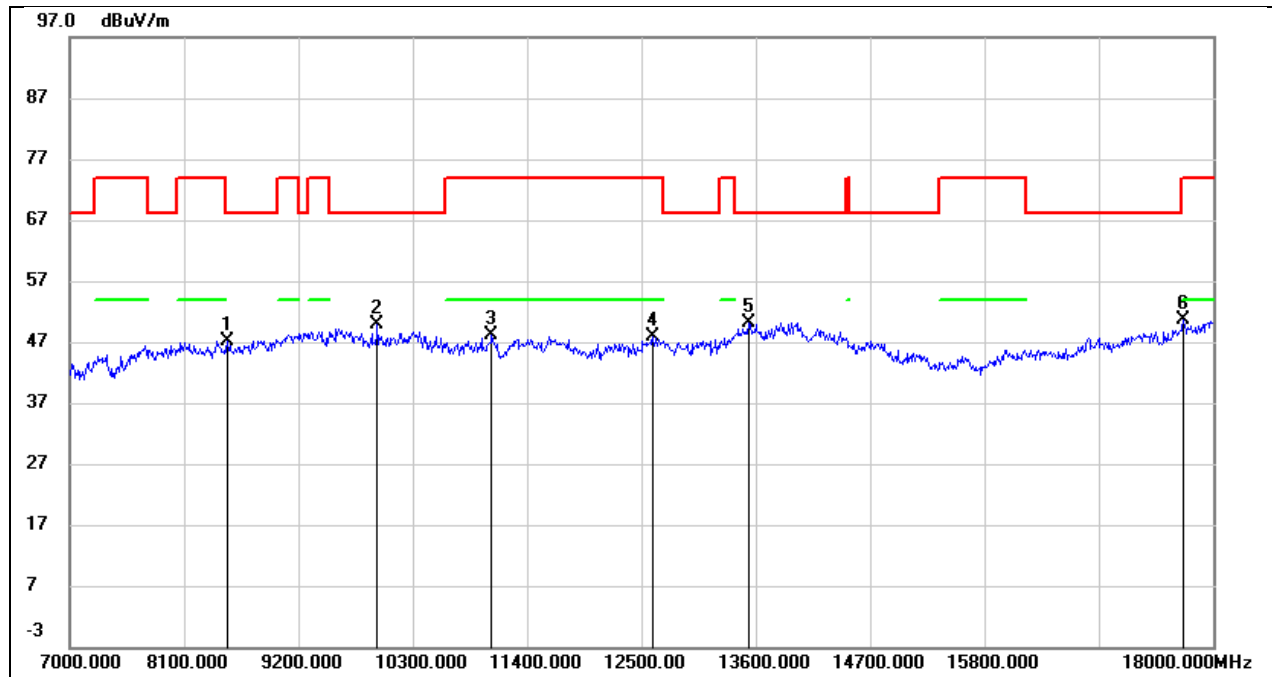


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8518.000	38.47	8.70	47.17	68.20	-21.03	peak
2	9959.000	36.56	13.33	49.89	68.20	-18.31	peak
3	11059.000	32.52	15.71	48.23	74.00	-25.77	peak
4	12610.000	28.01	19.92	47.93	74.00	-26.07	peak
5	13534.000	27.71	22.49	50.20	68.20	-18.00	peak
6	17714.000	24.66	25.96	50.62	74.00	-23.38	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5670
Polarity:	Vertical	Test Voltage:	DC 3.3V

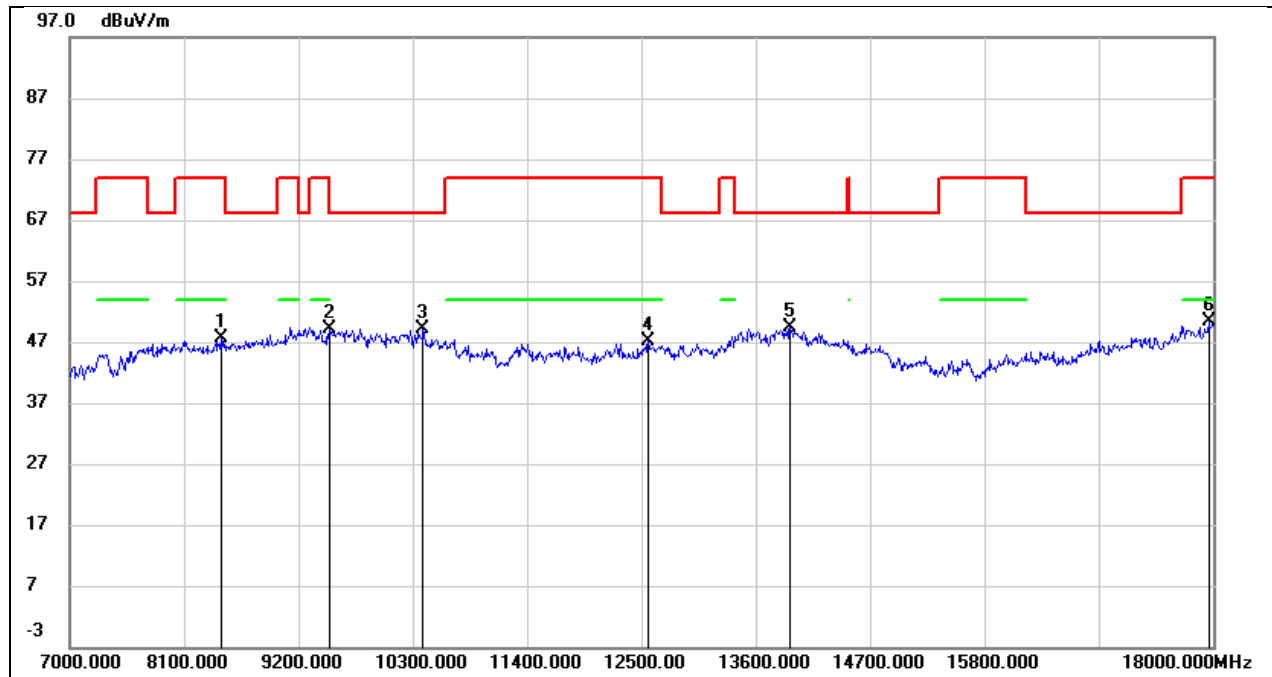


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8452.000	39.04	8.62	47.66	74.00	-26.34	peak
2	9497.000	36.59	12.65	49.24	74.00	-24.76	peak
3	10399.000	35.35	13.73	49.08	68.20	-19.12	peak
4	12566.000	27.34	19.85	47.19	74.00	-26.81	peak
5	13930.000	25.67	23.63	49.30	68.20	-18.90	peak
6	17956.000	22.16	28.10	50.26	74.00	-23.74	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5710
Polarity:	Horizontal	Test Voltage:	DC 3.3V

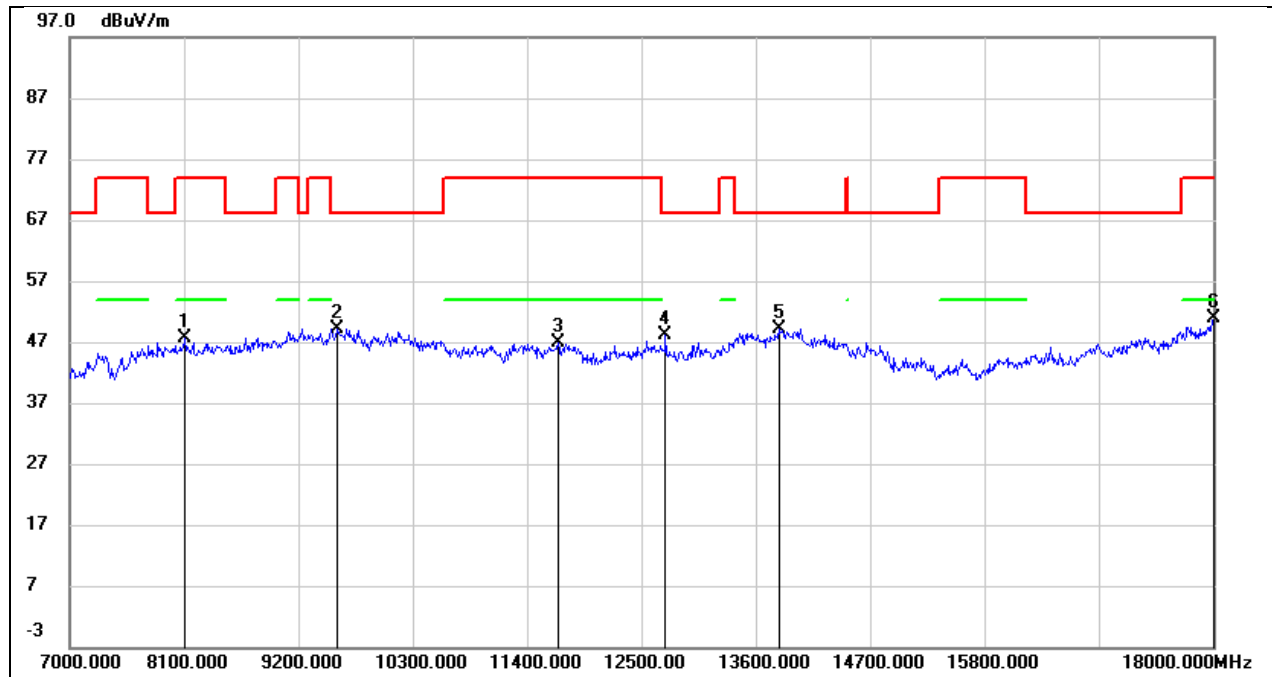


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8111.000	39.32	8.30	47.62	74.00	-26.38	peak
2	9574.000	36.07	13.13	49.20	68.20	-19.00	peak
3	11697.000	28.89	17.91	46.80	74.00	-27.20	peak
4	12731.000	27.72	20.32	48.04	68.20	-20.16	peak
5	13820.000	26.02	23.22	49.24	68.20	-18.96	peak
6	18000.000	22.26	28.51	50.77	74.00	-23.23	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5710
Polarity:	Vertical	Test Voltage:	DC 3.3V

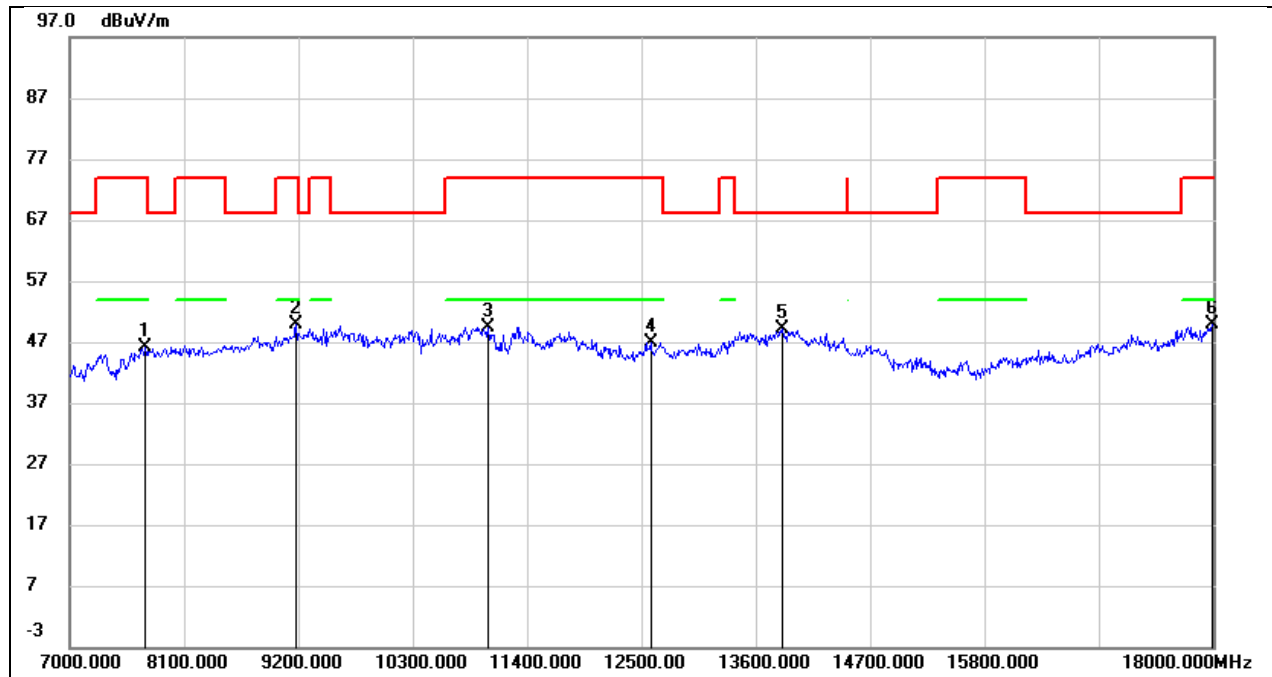


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7726.000	38.40	7.83	46.23	74.00	-27.77	peak
2	9178.000	38.62	11.32	49.94	74.00	-24.06	peak
3	11026.000	33.90	15.57	49.47	74.00	-24.53	peak
4	12588.000	27.00	19.87	46.87	74.00	-27.13	peak
5	13853.000	25.68	23.34	49.02	68.20	-19.18	peak
6	17989.000	21.57	28.40	49.97	74.00	-24.03	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	DC 3.3V

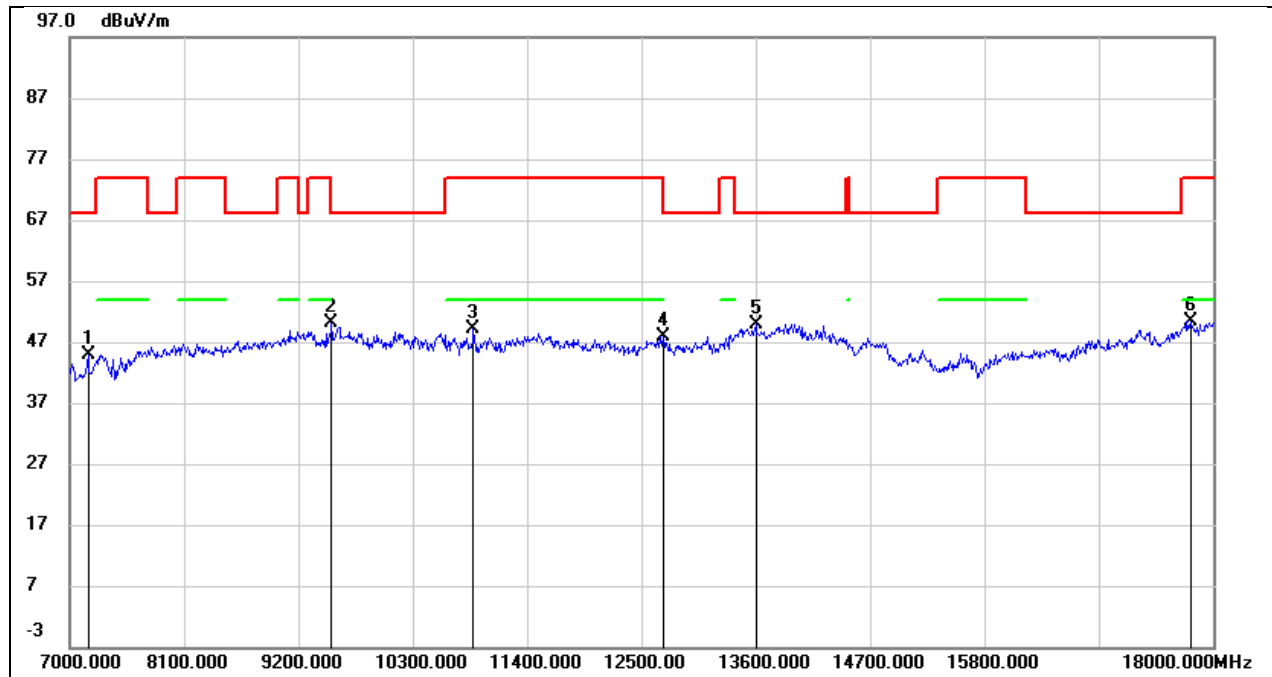


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7176.000	37.50	7.44	44.94	68.20	-23.26	peak
2	9519.000	37.32	12.77	50.09	68.20	-18.11	peak
3	10883.000	33.94	15.10	49.04	74.00	-24.96	peak
4	12709.000	27.67	20.24	47.91	68.20	-20.29	peak
5	13600.000	27.34	22.60	49.94	68.20	-18.26	peak
6	17791.000	23.79	26.58	50.37	74.00	-23.63	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5755
Polarity:	Vertical	Test Voltage:	DC 3.3V

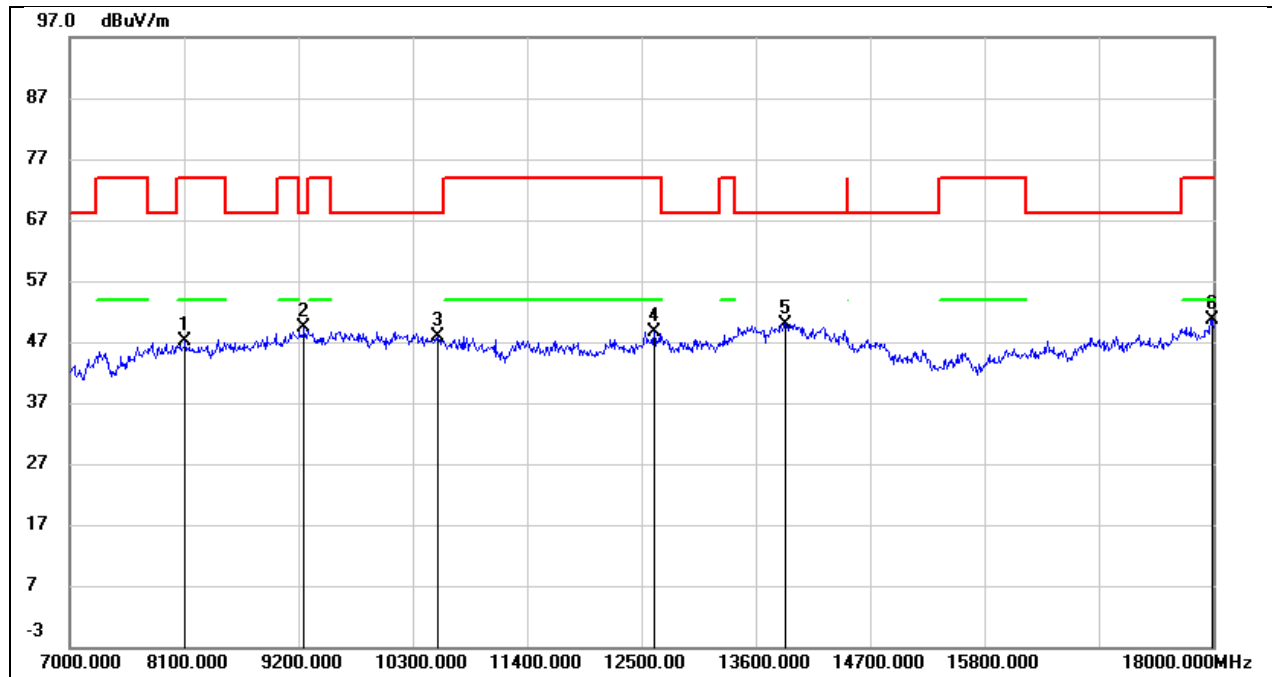


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8111.000	38.73	8.30	47.03	74.00	-26.97	peak
2	9255.000	37.78	11.59	49.37	68.20	-18.83	peak
3	10542.000	33.83	14.15	47.98	68.20	-20.22	peak
4	12621.000	28.75	19.94	48.69	74.00	-25.31	peak
5	13886.000	26.53	23.47	50.00	68.20	-18.20	peak
6	17989.000	22.30	28.40	50.70	74.00	-23.30	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	DC 3.3V

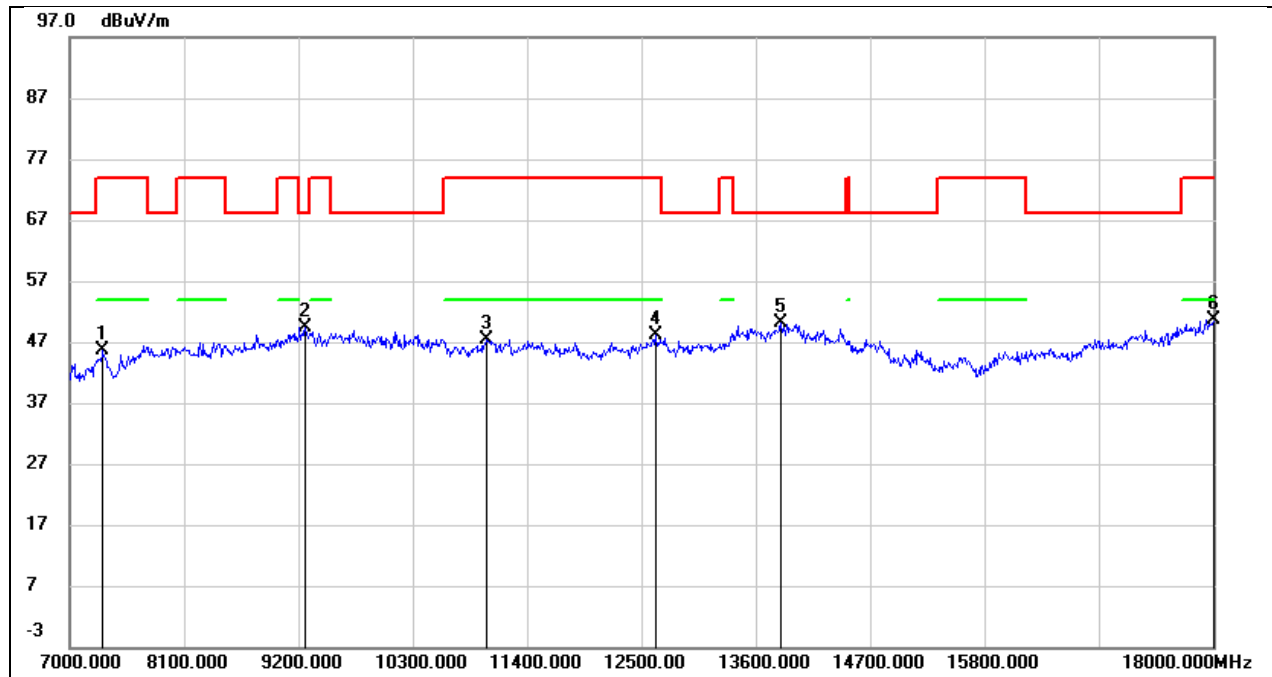


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	38.07	7.50	45.57	74.00	-28.43	peak
2	9266.000	37.68	11.62	49.30	68.20	-18.90	peak
3	11015.000	31.90	15.52	47.42	74.00	-26.58	peak
4	12632.000	28.02	19.99	48.01	74.00	-25.99	peak
5	13842.000	26.76	23.29	50.05	68.20	-18.15	peak
6	18000.000	22.15	28.51	50.66	74.00	-23.34	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5795
Polarity:	Vertical	Test Voltage:	DC 3.3V

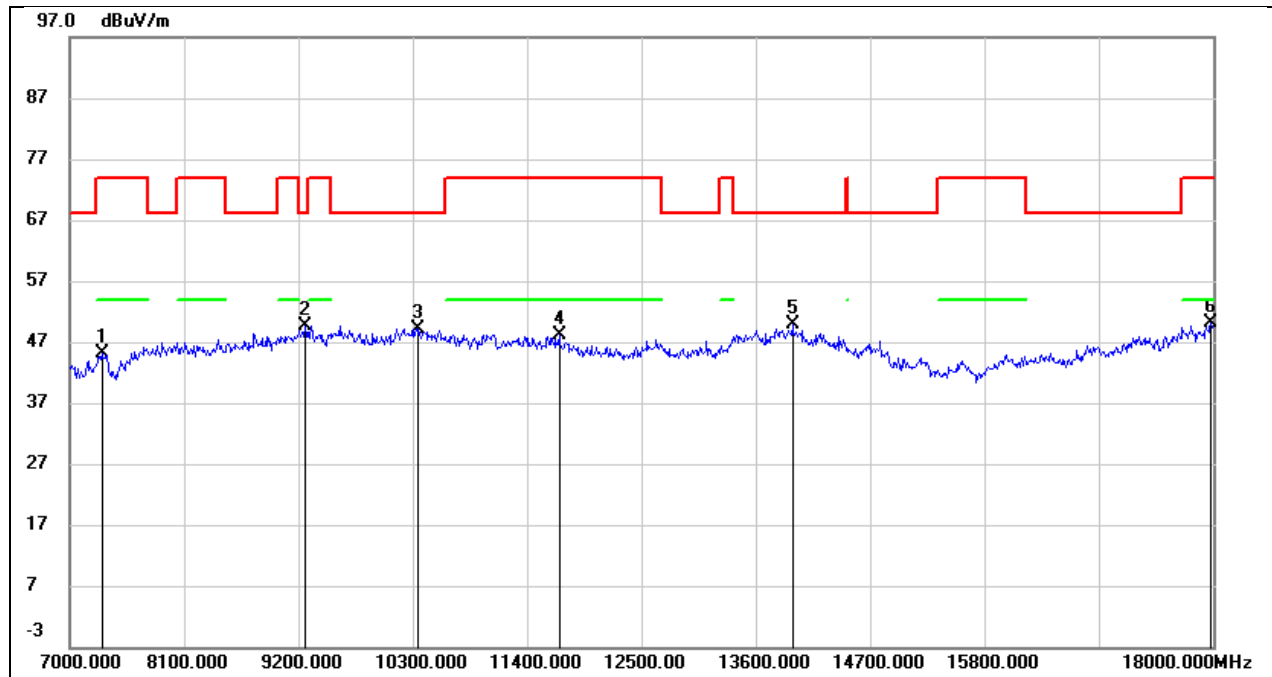


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	37.55	7.49	45.04	74.00	-28.96	peak
2	9266.000	38.00	11.62	49.62	68.20	-18.58	peak
3	10355.000	35.59	13.64	49.23	68.20	-18.97	peak
4	11708.000	30.10	17.91	48.01	74.00	-25.99	peak
5	13952.000	26.09	23.73	49.82	68.20	-18.38	peak
6	17978.000	21.87	28.31	50.18	74.00	-23.82	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	DC 3.3V

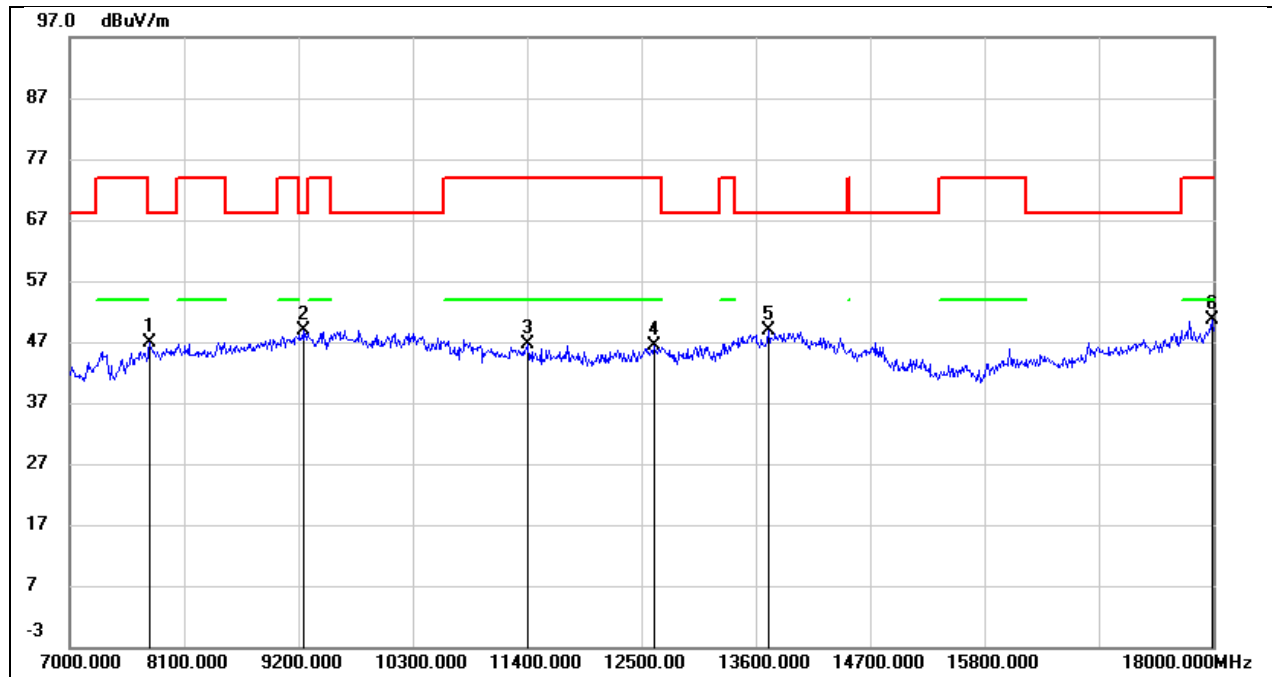


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7770.000	38.98	7.90	46.88	68.20	-21.32	peak
2	9244.000	37.36	11.56	48.92	68.20	-19.28	peak
3	11411.000	29.45	17.24	46.69	74.00	-27.31	peak
4	12621.000	26.46	19.94	46.40	74.00	-27.60	peak
5	13721.000	25.87	22.93	48.80	68.20	-19.40	peak
6	17989.000	22.15	28.40	50.55	74.00	-23.45	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5210
Polarity:	Vertical	Test Voltage:	DC 3.3V

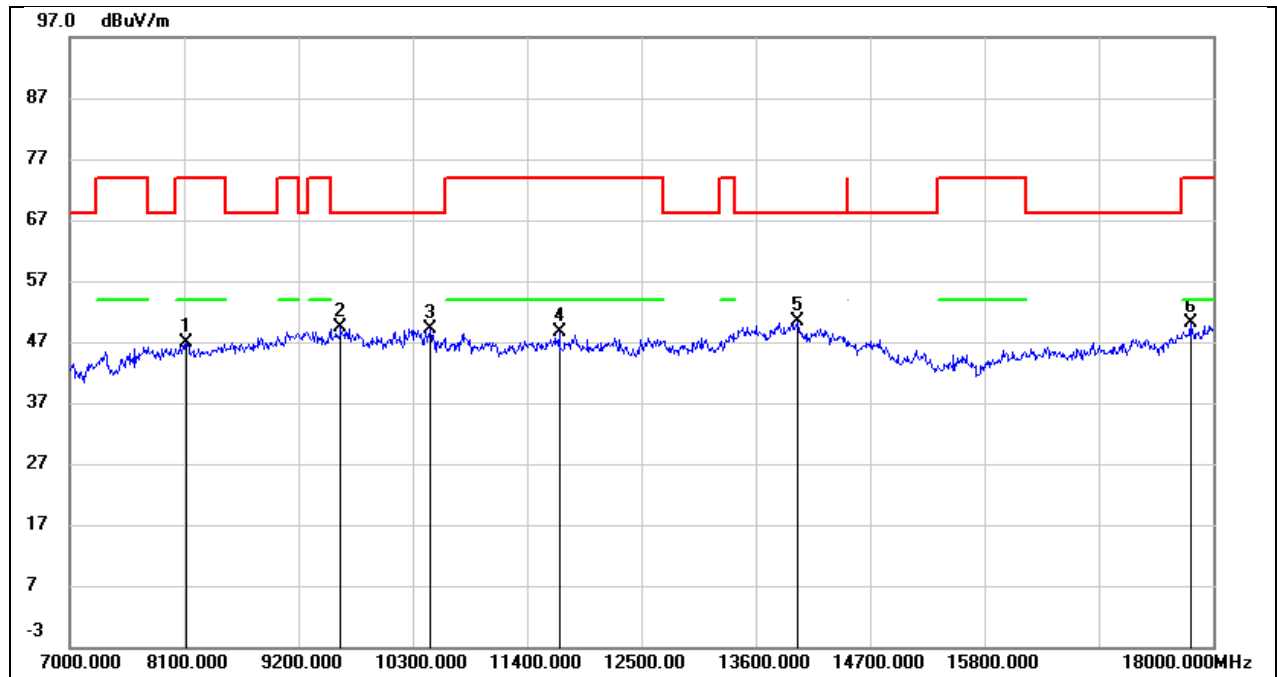


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8122.000	38.57	8.32	46.89	74.00	-27.11	peak
2	9607.000	36.18	13.30	49.48	68.20	-18.72	peak
3	10465.000	35.24	13.93	49.17	68.20	-19.03	peak
4	11708.000	30.78	17.91	48.69	74.00	-25.31	peak
5	14007.000	26.40	23.88	50.28	68.20	-17.92	peak
6	17780.000	23.53	26.50	50.03	74.00	-23.97	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5290
Polarity:	Horizontal	Test Voltage:	DC 3.3V

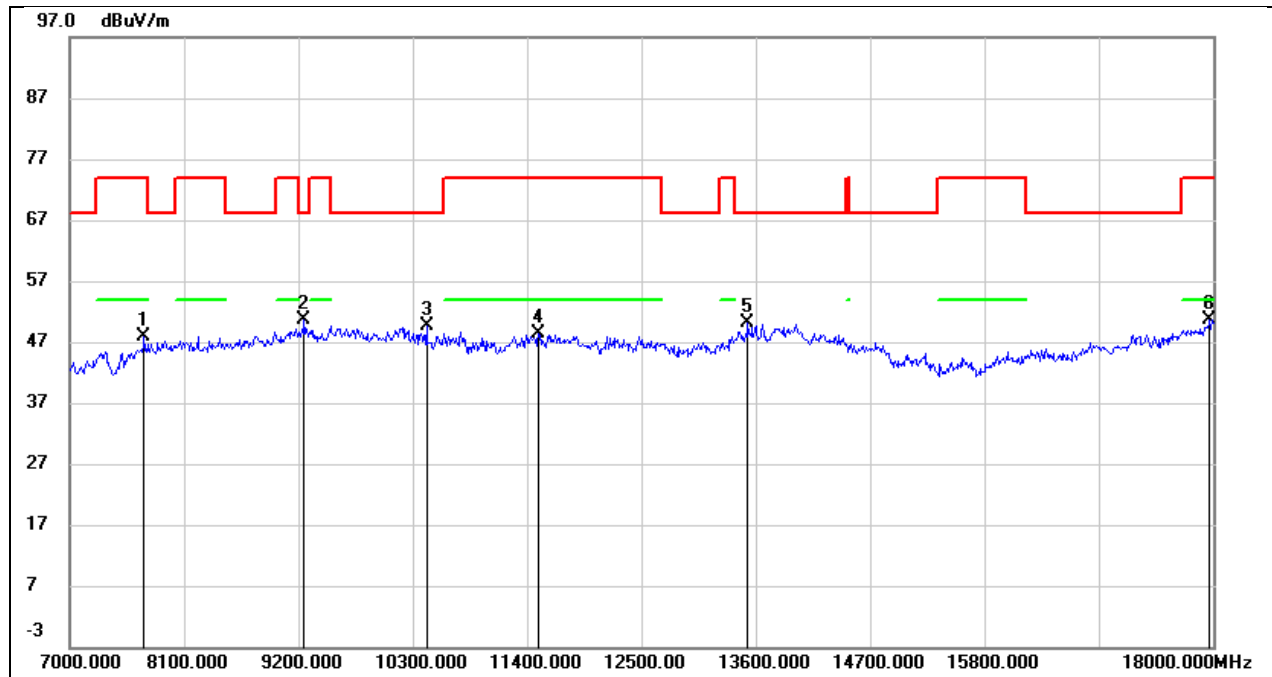


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7715.000	40.09	7.82	47.91	74.00	-26.09	peak
2	9255.000	38.94	11.59	50.53	68.20	-17.67	peak
3	10432.000	35.90	13.83	49.73	68.20	-18.47	peak
4	11510.000	30.75	17.57	48.32	74.00	-25.68	peak
5	13523.000	27.68	22.48	50.16	68.20	-18.04	peak
6	17967.000	22.40	28.21	50.61	74.00	-23.39	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5290
Polarity:	Vertical	Test Voltage:	DC 3.3V

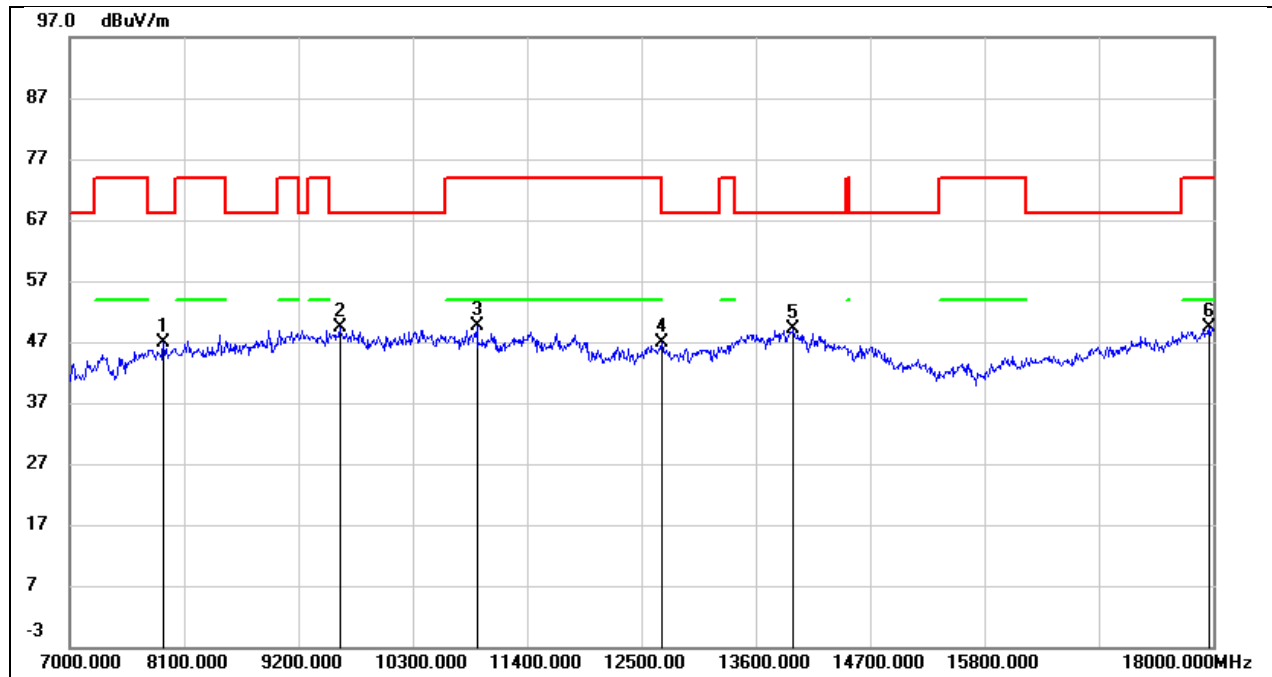


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7902.000	38.90	8.06	46.96	68.20	-21.24	peak
2	9596.000	36.07	13.26	49.33	68.20	-18.87	peak
3	10916.000	34.34	15.21	49.55	74.00	-24.45	peak
4	12698.000	26.69	20.20	46.89	74.00	-27.11	peak
5	13963.000	25.24	23.77	49.01	68.20	-19.19	peak
6	17956.000	21.30	28.10	49.40	74.00	-24.60	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5530
Polarity:	Horizontal	Test Voltage:	DC 3.3V

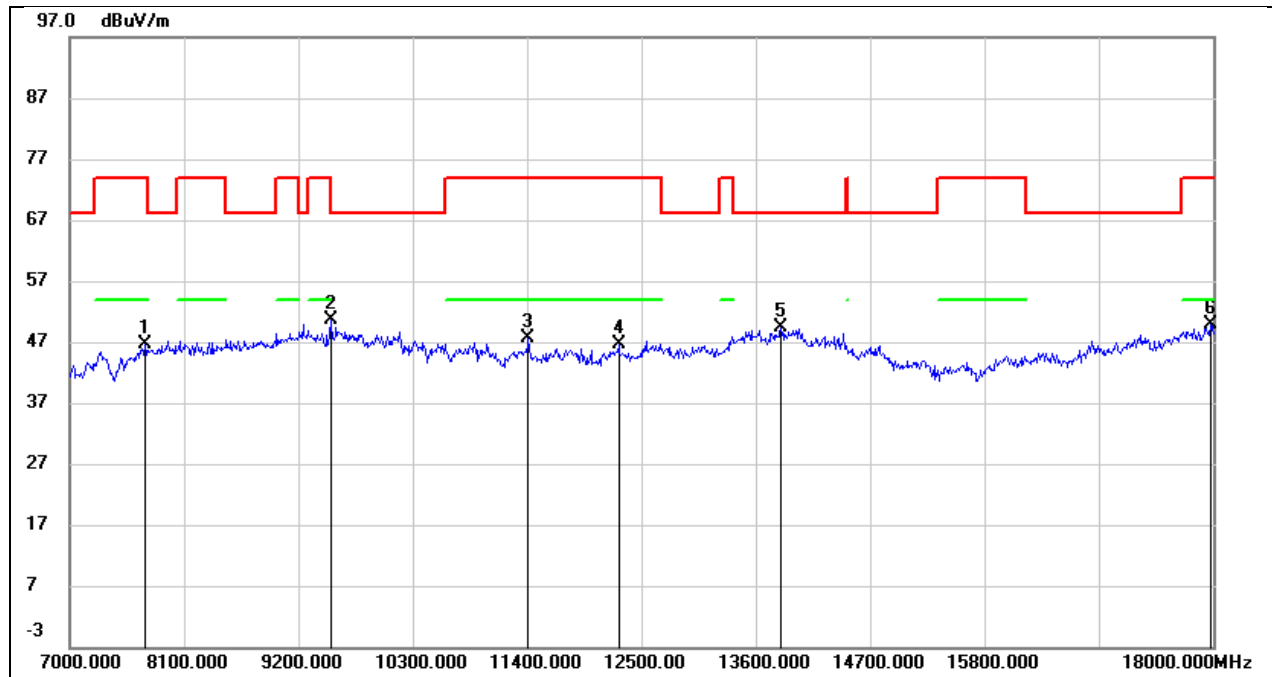


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7726.000	38.75	7.83	46.58	74.00	-27.42	peak
2	9508.000	37.96	12.71	50.67	68.20	-17.53	peak
3	11411.000	30.34	17.24	47.58	74.00	-26.42	peak
4	12280.000	27.30	19.32	46.62	74.00	-27.38	peak
5	13842.000	26.07	23.29	49.36	68.20	-18.84	peak
6	17978.000	21.55	28.31	49.86	74.00	-24.14	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5530
Polarity:	Vertical	Test Voltage:	DC 3.3V

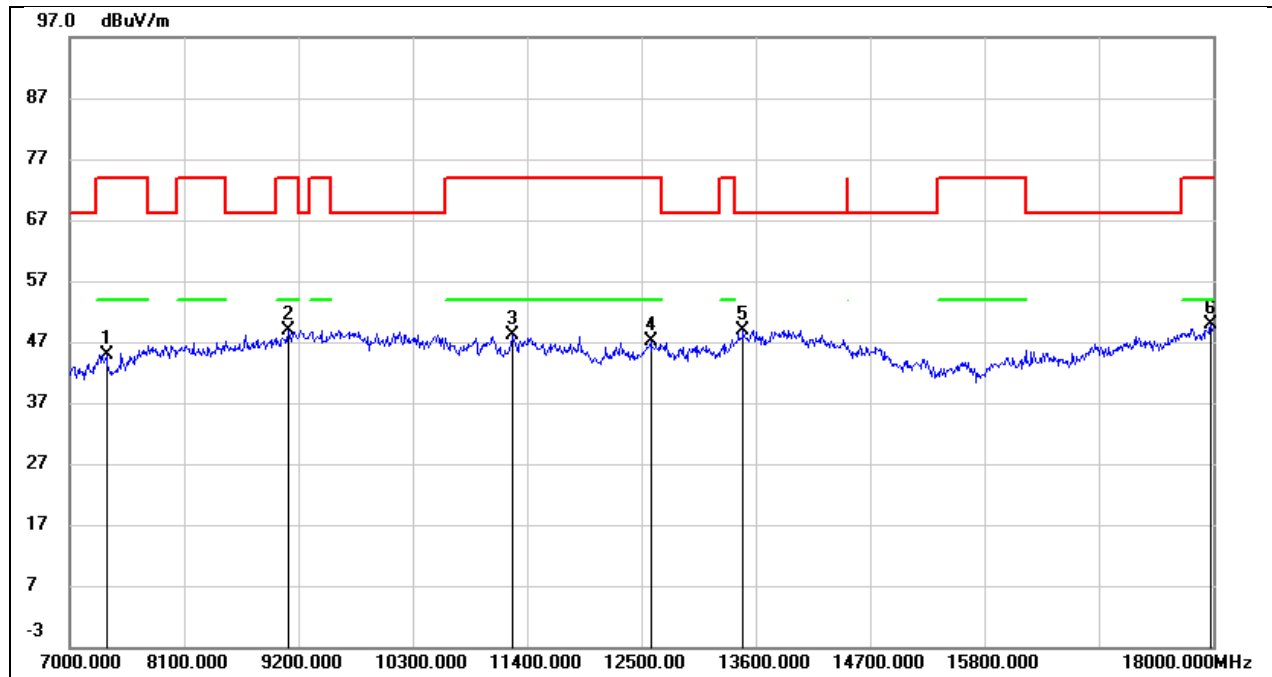


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	37.46	7.51	44.97	74.00	-29.03	peak
2	9101.000	37.99	10.99	48.98	74.00	-25.02	peak
3	11257.000	31.66	16.55	48.21	74.00	-25.79	peak
4	12588.000	27.17	19.87	47.04	74.00	-26.96	peak
5	13479.000	26.56	22.35	48.91	68.20	-19.29	peak
6	17978.000	21.64	28.31	49.95	74.00	-24.05	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5610
Polarity:	Horizontal	Test Voltage:	DC 3.3V

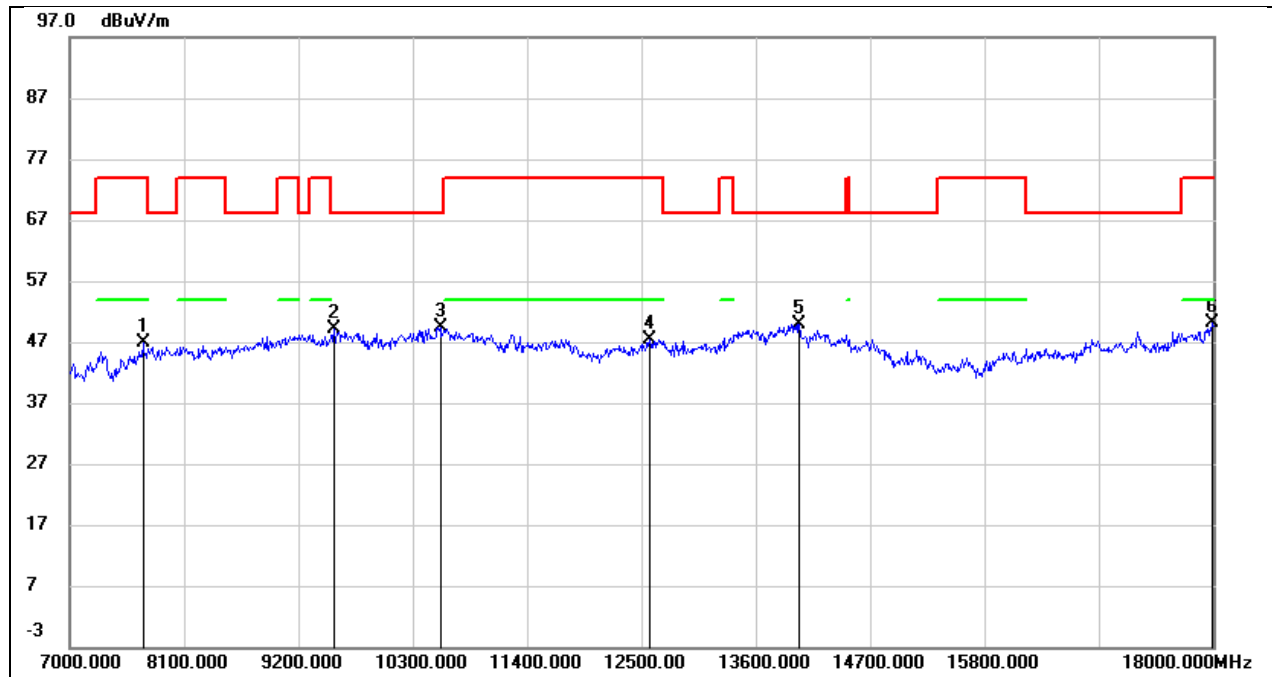


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7704.000	39.10	7.79	46.89	74.00	-27.11	peak
2	9541.000	36.16	12.91	49.07	68.20	-19.13	peak
3	10564.000	35.11	14.20	49.31	68.20	-18.89	peak
4	12577.000	27.47	19.87	47.34	74.00	-26.66	peak
5	14018.000	26.14	23.83	49.97	68.20	-18.23	peak
6	17989.000	21.85	28.40	50.25	74.00	-23.75	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5610
Polarity:	Vertical	Test Voltage:	DC 3.3V

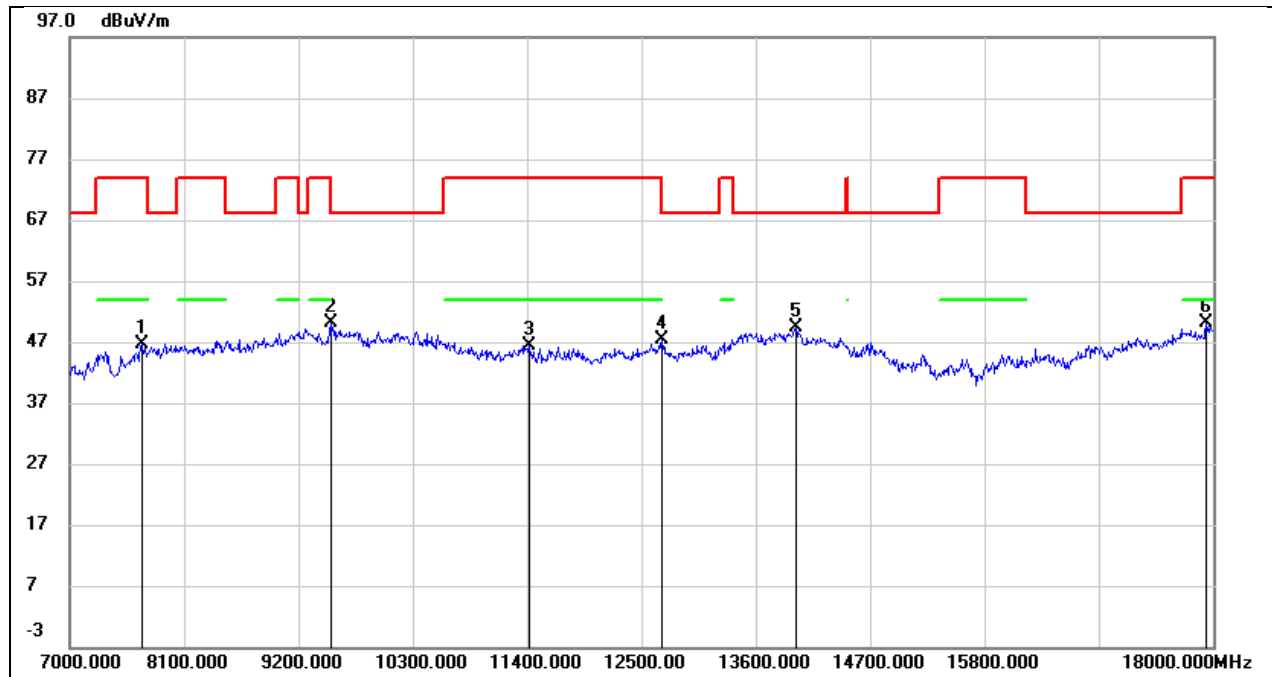


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7693.000	38.81	7.78	46.59	74.00	-27.41	peak
2	9508.000	37.37	12.71	50.08	68.20	-18.12	peak
3	11422.000	29.17	17.27	46.44	74.00	-27.56	peak
4	12698.000	27.28	20.20	47.48	74.00	-26.52	peak
5	13985.000	25.51	23.85	49.36	68.20	-18.84	peak
6	17934.000	22.19	27.90	50.09	74.00	-23.91	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5690
Polarity:	Horizontal	Test Voltage:	DC 3.3V

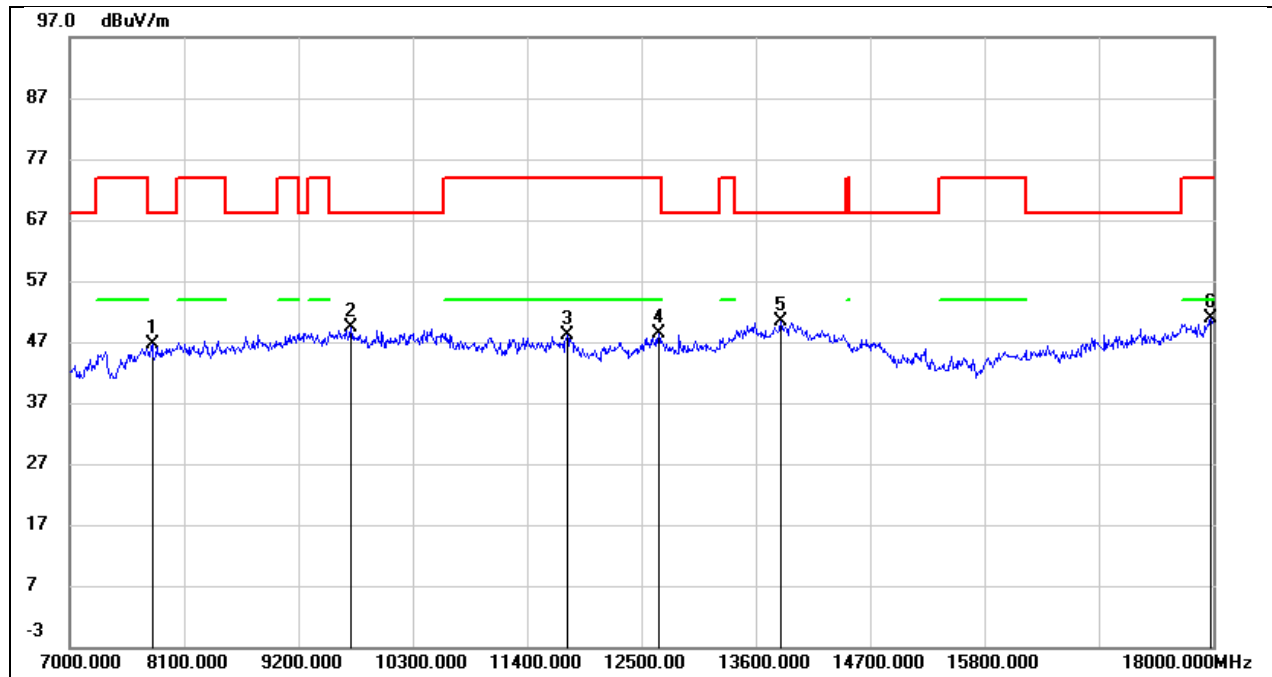


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7792.000	38.66	7.94	46.60	68.20	-21.60	peak
2	9706.000	35.99	13.49	49.48	68.20	-18.72	peak
3	11785.000	30.31	17.92	48.23	74.00	-25.77	peak
4	12665.000	28.29	20.09	48.38	74.00	-25.62	peak
5	13842.000	27.12	23.29	50.41	68.20	-17.79	peak
6	17978.000	22.54	28.31	50.85	74.00	-23.15	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5690
Polarity:	Vertical	Test Voltage:	DC 3.3V

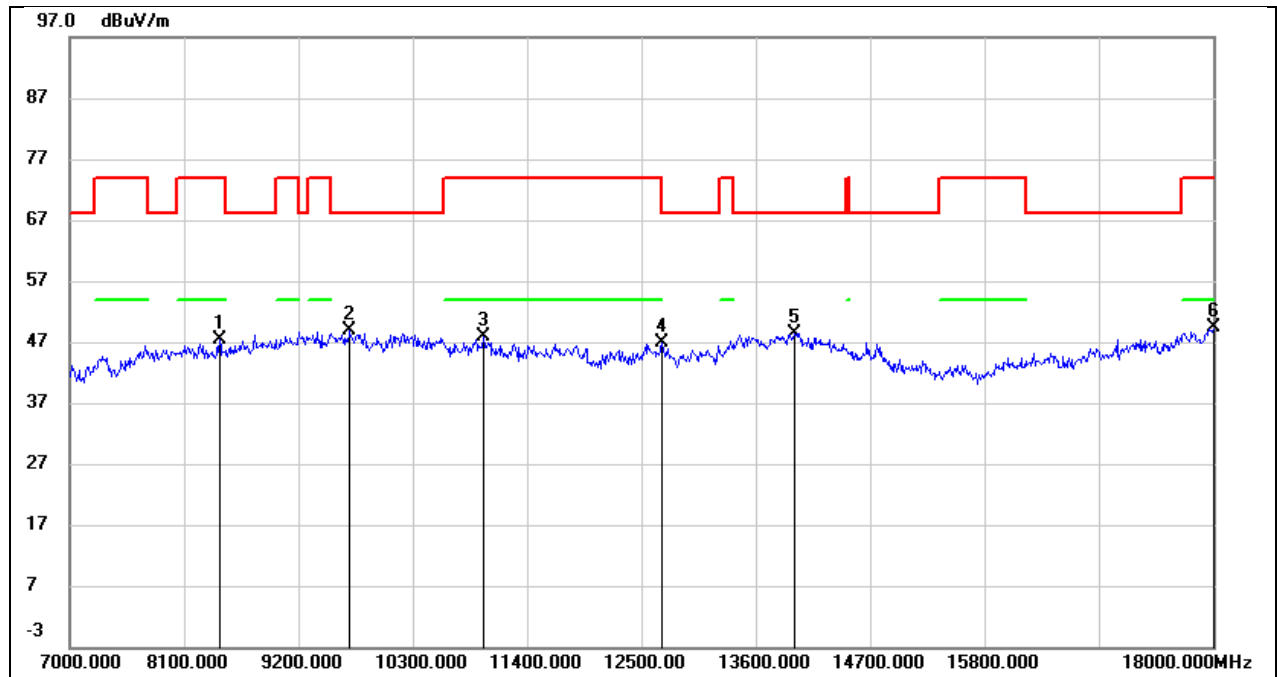


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8441.000	38.64	8.62	47.26	74.00	-26.74	peak
2	9695.000	35.54	13.45	48.99	68.20	-19.21	peak
3	10982.000	32.44	15.40	47.84	74.00	-26.16	peak
4	12698.000	26.58	20.20	46.78	74.00	-27.22	peak
5	13974.000	24.61	23.81	48.42	68.20	-19.78	peak
6	18000.000	20.98	28.51	49.49	74.00	-24.51	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5775
Polarity:	Horizontal	Test Voltage:	DC 3.3V

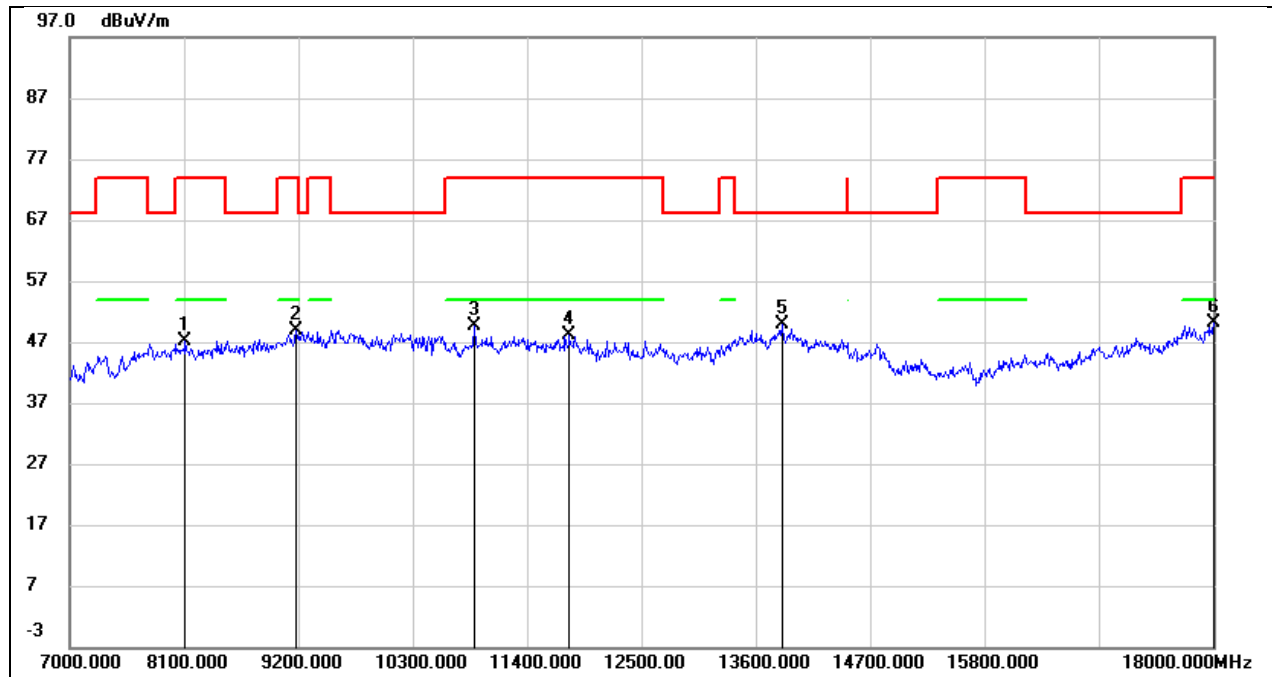

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8111.000	38.93	8.30	47.23	74.00	-26.77	peak
2	9178.000	37.61	11.32	48.93	74.00	-25.07	peak
3	10894.000	34.38	15.14	49.52	74.00	-24.48	peak
4	11807.000	30.22	17.95	48.17	74.00	-25.83	peak
5	13853.000	26.47	23.34	49.81	68.20	-18.39	peak
6	18000.000	21.74	28.51	50.25	74.00	-23.75	peak


Test Mode:	802.11ax HE80	Frequency(MHz):	5775
Polarity:	Vertical	Test Voltage:	DC 3.3V

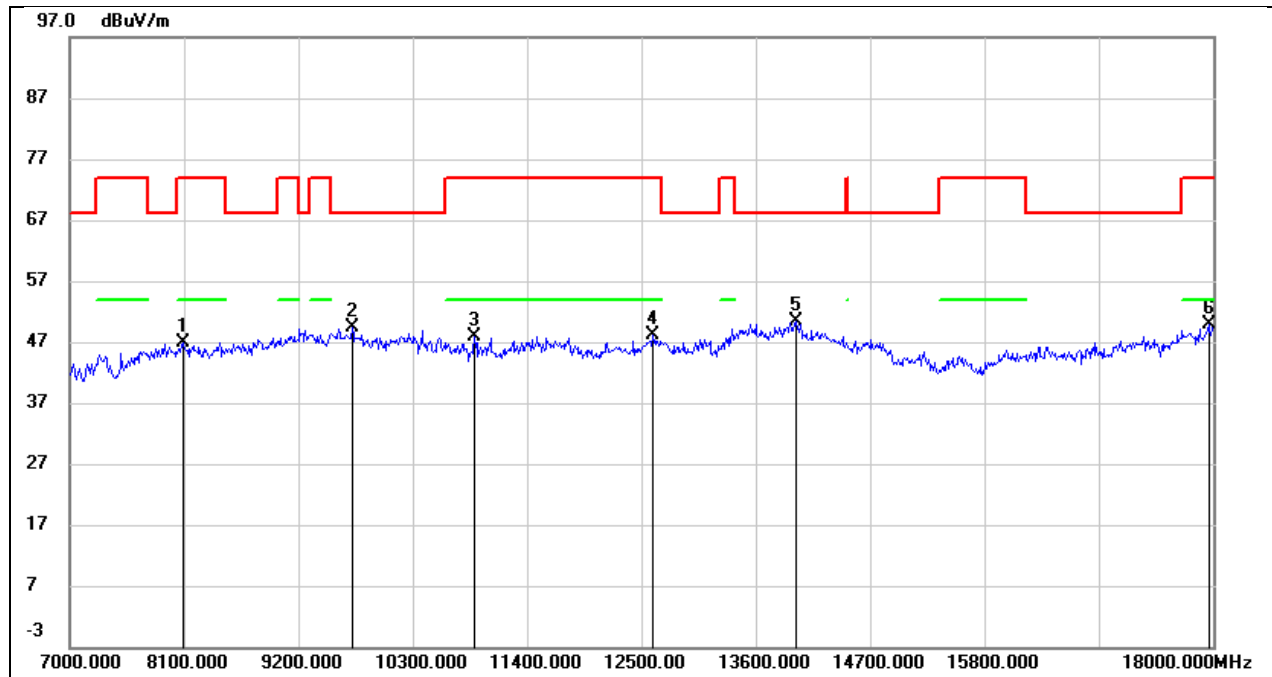

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8089.000	38.57	8.28	46.85	74.00	-27.15	peak
2	9717.000	35.84	13.50	49.34	68.20	-18.86	peak
3	10894.000	32.70	15.14	47.84	74.00	-26.16	peak
4	12610.000	28.31	19.92	48.23	74.00	-25.77	peak
5	13985.000	26.49	23.85	50.34	68.20	-17.86	peak
6	17956.000	21.68	28.10	49.78	74.00	-24.22	peak


8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

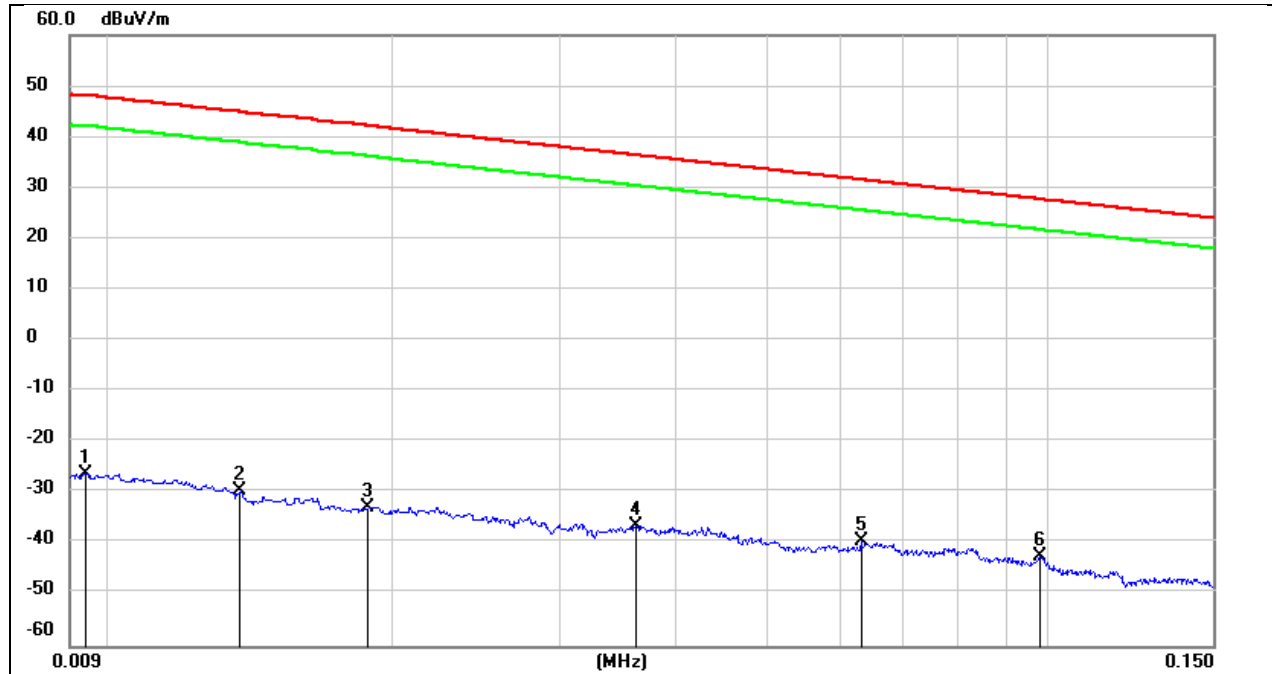


No.	Frequency	Reading	Correct	FCC Result	FCC Limit	ISED Result	ISED Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dBuA/m)	(dBuA/m)	(dB)	
1	0.0094	75.07	-101.35	-26.28	48.05	-77.78	-3.45	-74.33	peak
2	0.0137	71.72	-101.38	-29.66	44.87	-81.16	-6.63	-74.53	peak
3	0.0188	68.64	-101.35	-32.71	42.12	-84.21	-9.38	-74.83	peak
4	0.0362	65.01	-101.42	-36.41	36.43	-87.91	-15.07	-72.84	peak
5	0.0631	62.13	-101.54	-39.41	31.60	-90.91	-19.90	-71.01	peak
6	0.0981	59.27	-101.78	-42.51	27.77	-94.01	-23.73	-70.28	peak

Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

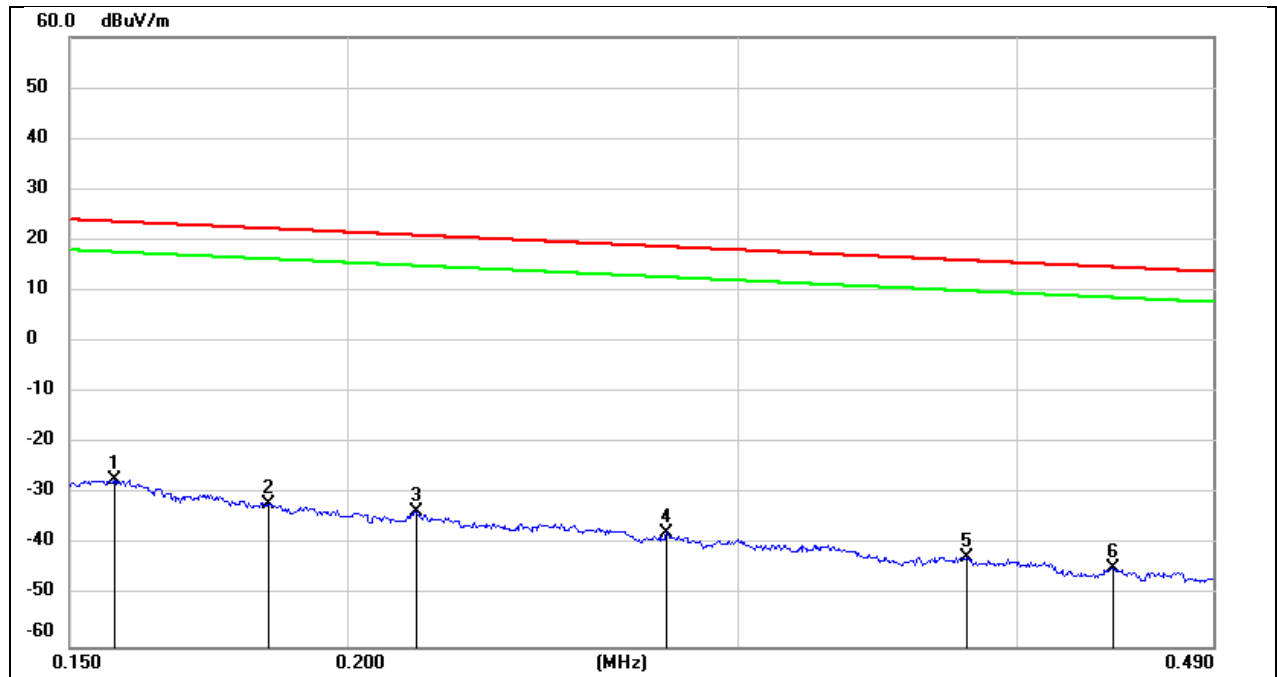

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1570	74.53	-101.65	-27.12	23.68	-78.62	-27.82	-50.80	peak
2	0.1842	69.62	-101.69	-32.07	22.30	-83.57	-29.20	-54.37	peak
3	0.2149	68.20	-101.75	-33.55	20.96	-85.05	-30.54	-54.51	peak
4	0.2785	64.21	-101.83	-37.62	18.70	-89.12	-32.80	-56.32	peak
5	0.3800	59.52	-101.94	-42.42	16.01	-93.92	-35.49	-58.43	peak
6	0.4415	57.35	-102.01	-44.66	14.70	-96.16	-36.80	-59.36	peak


Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

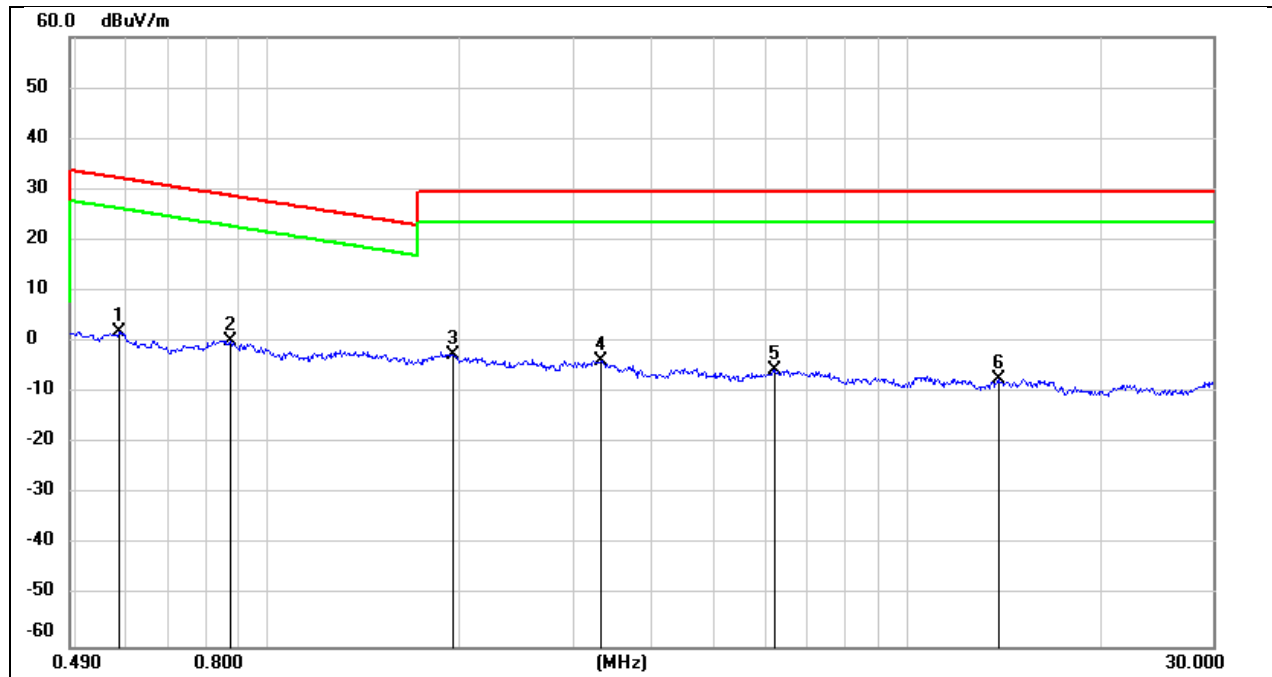

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.5846	64.09	-62.08	2.01	32.27	-49.49	-19.23	-30.26	peak
2	0.8750	62.43	-62.19	0.24	28.76	-51.26	-22.74	-28.52	peak
3	1.9435	59.23	-61.85	-2.62	29.54	-54.12	-21.96	-32.16	peak
4	3.3229	57.89	-61.50	-3.61	29.54	-55.11	-21.96	-33.15	peak
5	6.2149	55.70	-61.32	-5.62	29.54	-57.12	-21.96	-35.16	peak
6	13.8871	53.60	-60.97	-7.37	29.54	-58.87	-21.96	-36.91	peak


8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

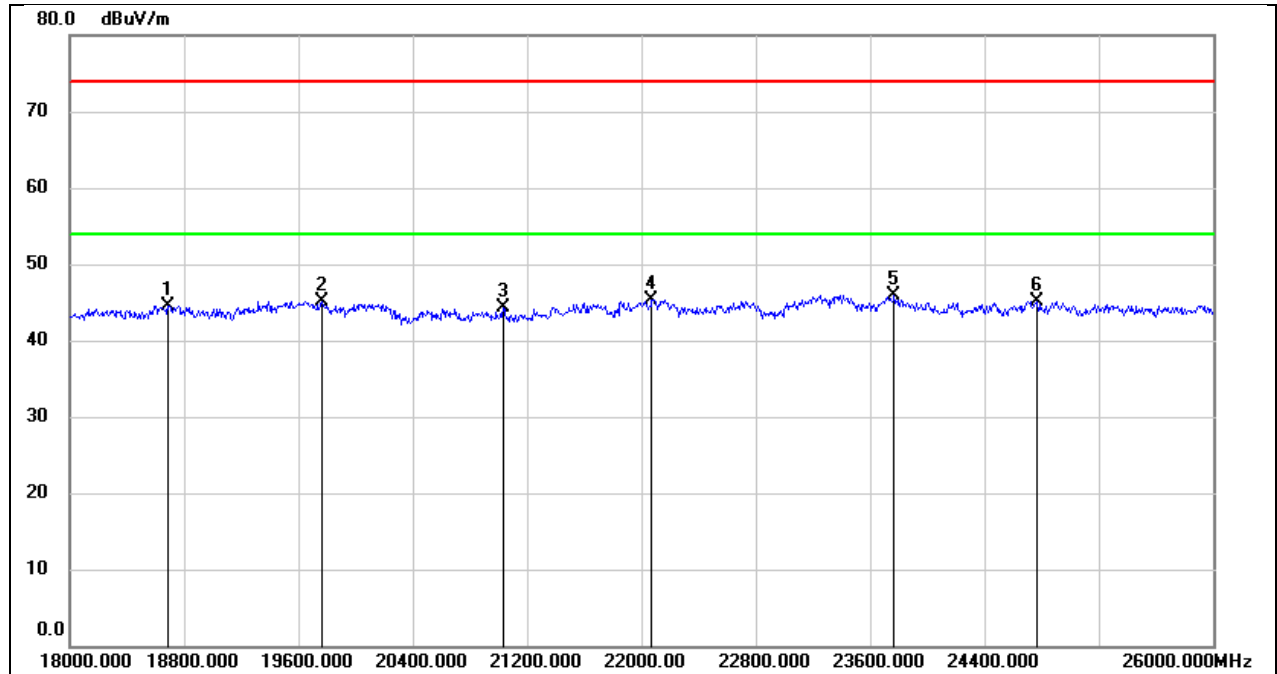

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18688.000	49.88	-5.38	44.50	74.00	-29.50	peak
2	19768.000	50.42	-5.26	45.16	74.00	-28.84	peak
3	21032.000	49.15	-4.87	44.28	74.00	-29.72	peak
4	22072.000	49.77	-4.41	45.36	74.00	-28.64	peak
5	23768.000	49.06	-3.16	45.90	74.00	-28.10	peak
6	24768.000	47.36	-2.31	45.05	74.00	-28.95	peak


Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3V

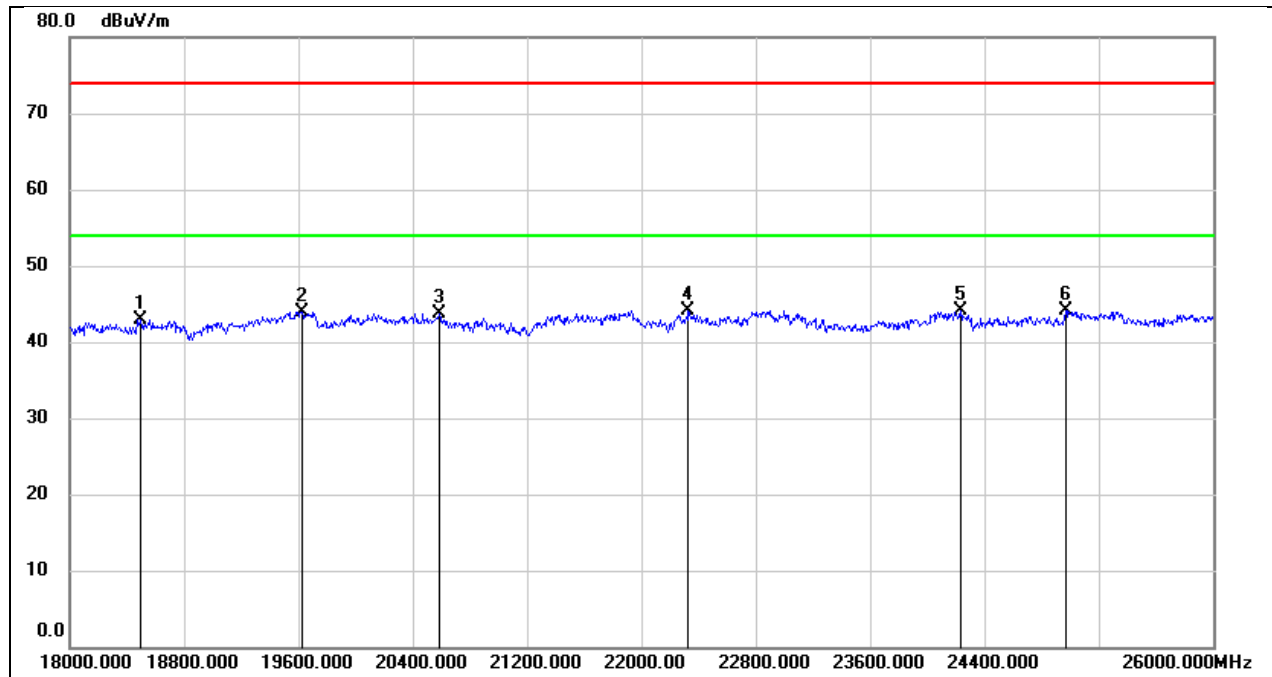

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18496.000	48.25	-5.25	43.00	74.00	-31.00	peak
2	19624.000	49.36	-5.40	43.96	74.00	-30.04	peak
3	20584.000	49.00	-5.27	43.73	74.00	-30.27	peak
4	22328.000	48.20	-4.11	44.09	74.00	-29.91	peak
5	24232.000	46.96	-2.82	44.14	74.00	-29.86	peak
6	24968.000	46.26	-2.14	44.12	74.00	-29.88	peak


8.6. SPURIOUS EMISSIONS(26 GHZ~40 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

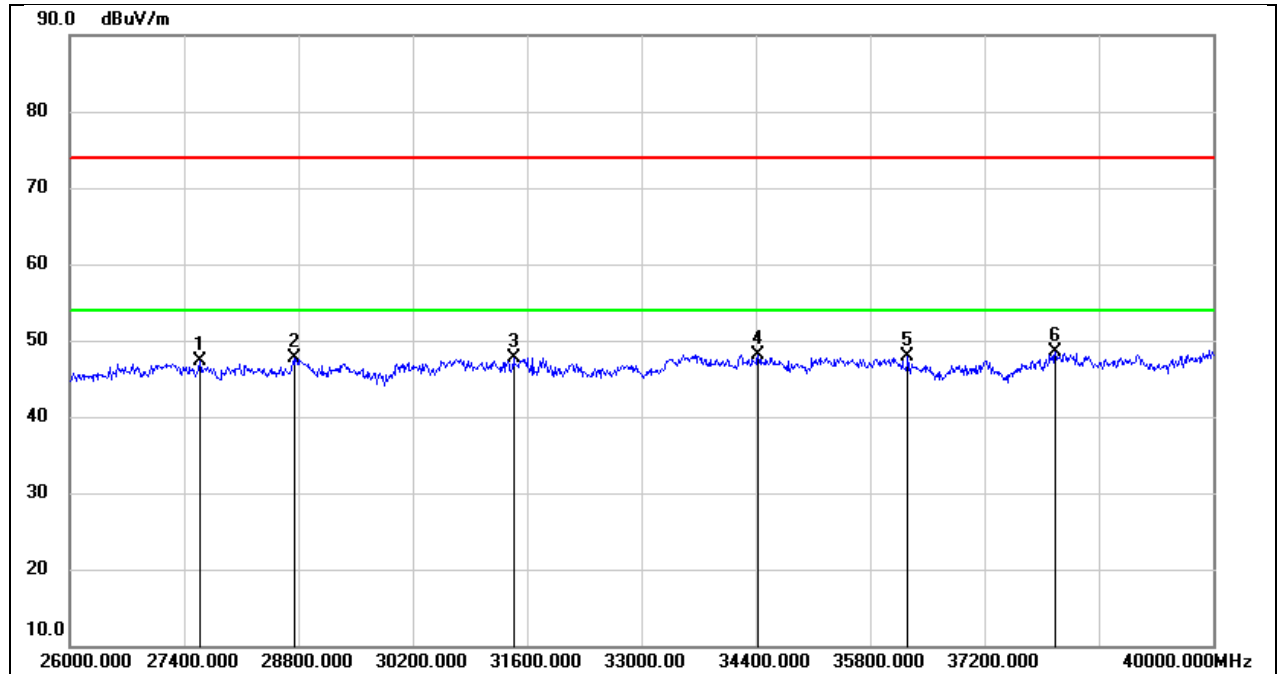

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	27596.000	50.71	-3.46	47.25	74.00	-26.75	peak
2	28758.000	48.21	-0.54	47.67	74.00	-26.33	peak
3	31432.000	48.75	-1.10	47.65	74.00	-26.35	peak
4	34428.000	47.20	0.99	48.19	74.00	-25.81	peak
5	36262.000	44.60	3.28	47.88	74.00	-26.12	peak
6	38068.000	45.06	3.42	48.48	74.00	-25.52	peak


Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3V

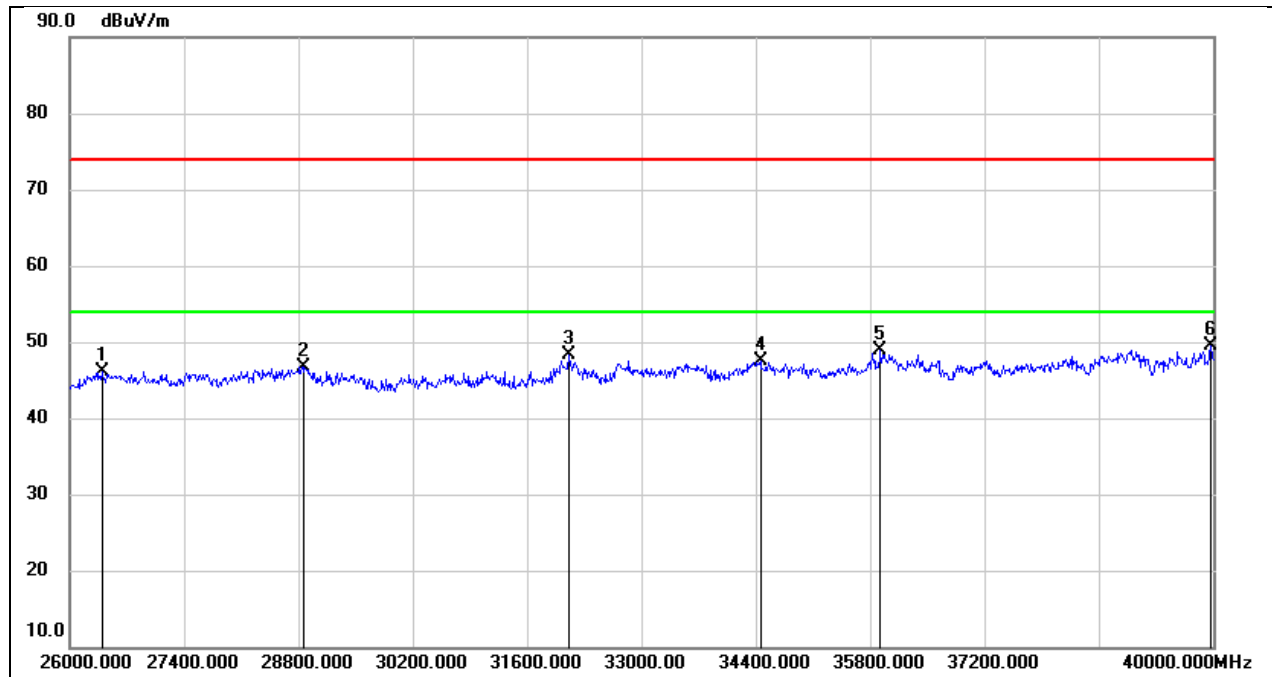

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26392.000	51.13	-5.00	46.13	74.00	-27.87	peak
2	28856.000	47.61	-0.90	46.71	74.00	-27.29	peak
3	32104.000	49.99	-1.75	48.24	74.00	-25.76	peak
4	34456.000	46.50	0.97	47.47	74.00	-26.53	peak
5	35926.000	44.94	3.88	48.82	74.00	-25.18	peak
6	39972.000	44.45	5.13	49.58	74.00	-24.42	peak


8.7. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

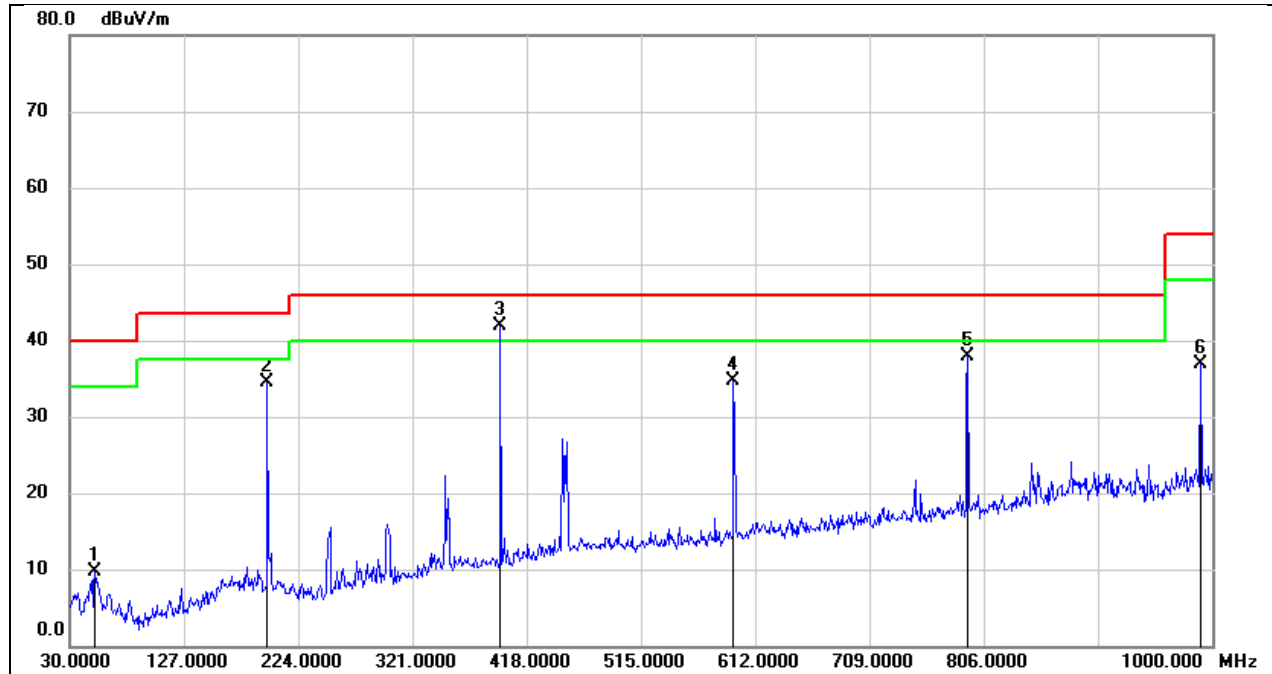

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	51.3400	25.20	-15.49	9.71	40.00	-30.29	QP
2	197.8100	47.69	-13.10	34.59	43.50	-8.91	QP
3	395.6900	52.79	-10.89	41.90	46.00	-4.10	QP
4	593.5700	42.13	-7.46	34.67	46.00	-11.33	QP
5	792.4200	42.37	-4.53	37.84	46.00	-8.16	QP
6	990.3000	39.14	-2.23	36.91	54.00	-17.09	QP

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3V

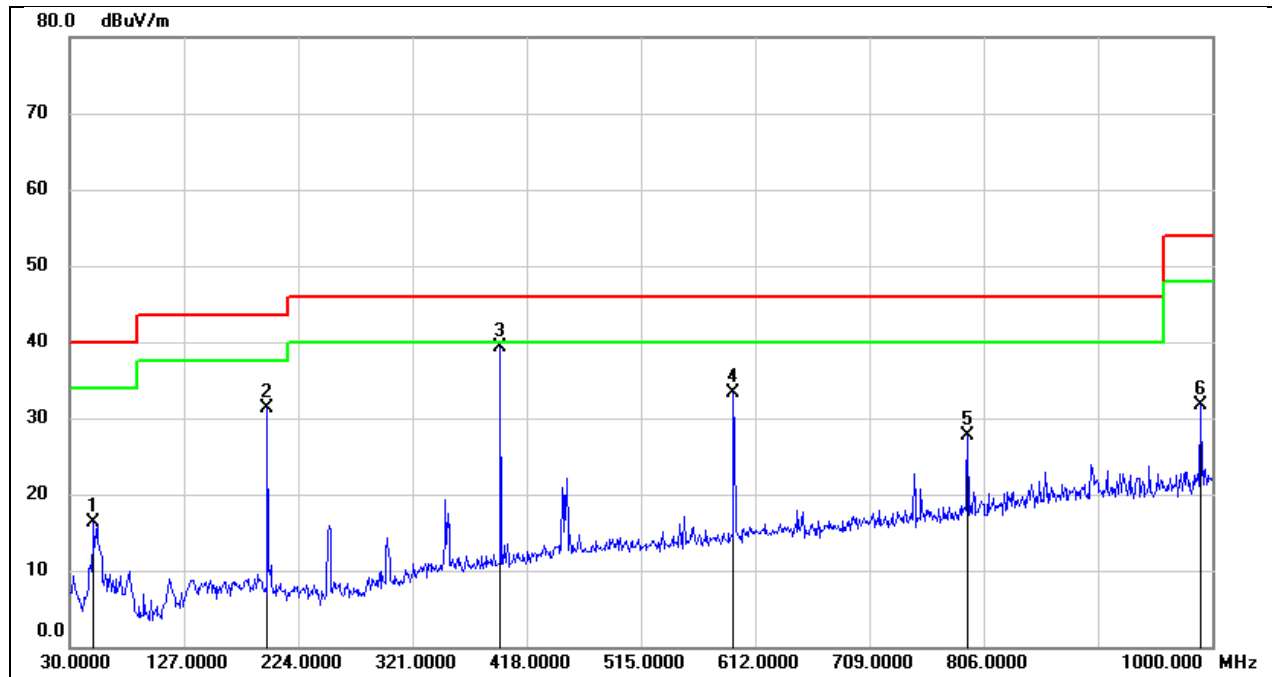

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	50.3700	31.86	-15.50	16.36	40.00	-23.64	QP
2	197.8100	44.39	-13.10	31.29	43.50	-12.21	QP
3	395.6900	50.10	-10.89	39.21	46.00	-6.79	QP
4	593.5700	40.76	-7.46	33.30	46.00	-12.70	QP
5	792.4200	32.32	-4.53	27.79	46.00	-18.21	QP
6	990.3000	33.98	-2.23	31.75	54.00	-22.25	QP

9. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

*Decreases with the logarithm of the frequency.


TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

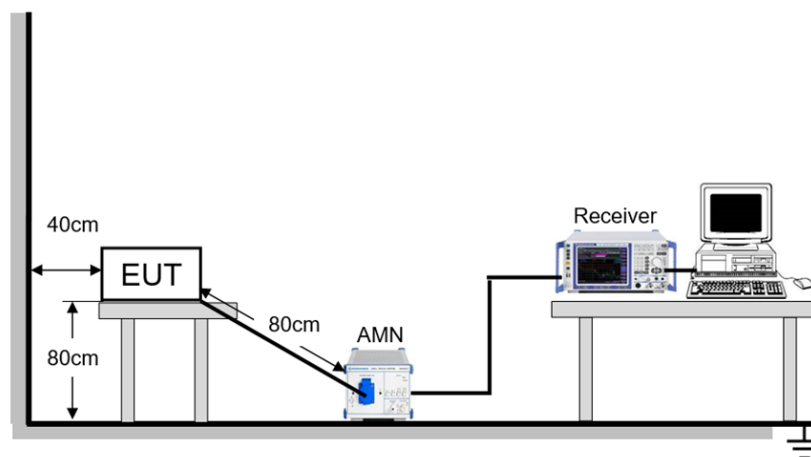

TEST ENVIRONMENT


Temperature	24.5°C	Relative Humidity	57%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V

TEST DATE / ENGINEER

Test Date	July 22, 2025	Test By	Deacon Tan
-----------	---------------	---------	------------

TEST RESULTS

Test Mode:	802.11a20	Frequency(MHz):	5180
Line:	Line		

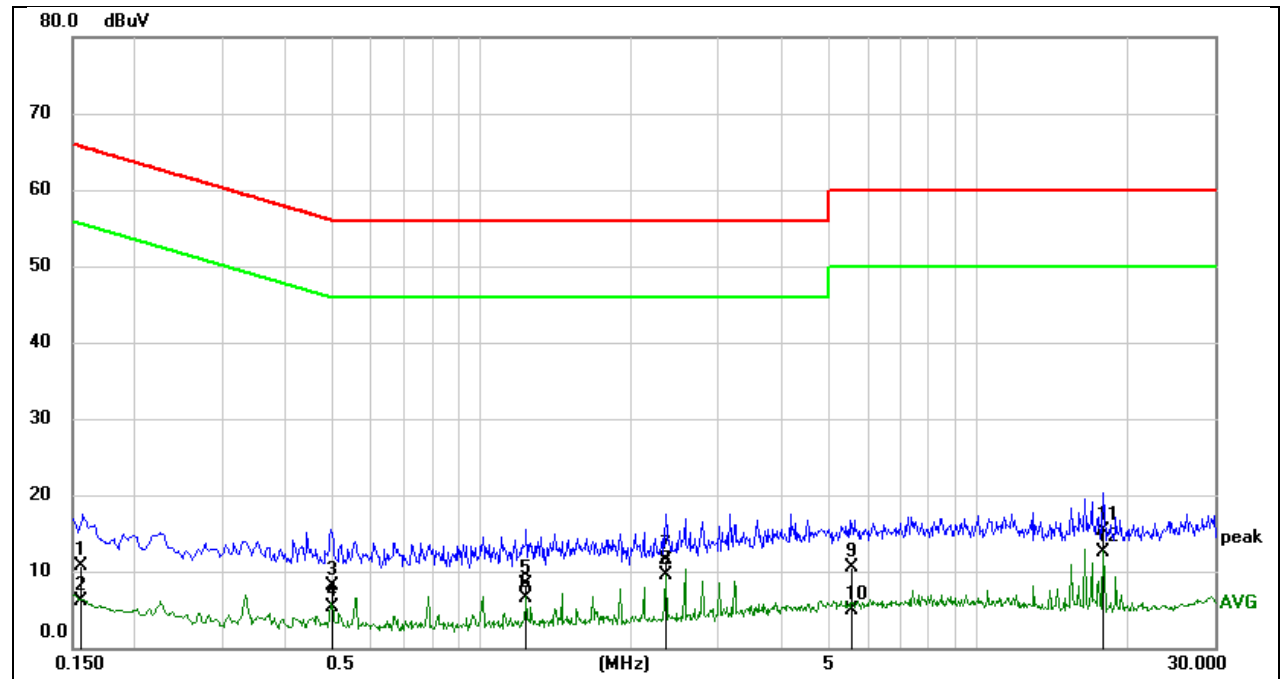


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1556	0.92	9.73	10.65	65.70	-55.05	QP
2	0.1556	-3.55	9.73	6.18	55.70	-49.52	AVG
3	0.4995	-1.61	9.64	8.03	56.01	-47.98	QP
4	0.4995	-4.30	9.64	5.34	46.01	-40.67	AVG
5	1.2291	-1.40	9.65	8.25	56.00	-47.75	QP
6	1.2291	-3.12	9.65	6.53	46.00	-39.47	AVG
7	2.3464	1.69	9.74	11.43	56.00	-44.57	QP
8	2.3464	-0.22	9.74	9.52	46.00	-36.48	AVG
9	5.5908	0.78	9.73	10.51	60.00	-49.49	QP
10	5.5908	-4.75	9.73	4.98	50.00	-45.02	AVG
11	17.9360	5.56	9.74	15.30	60.00	-44.70	QP
12	17.9360	2.76	9.74	12.50	50.00	-37.50	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	802.11a20	Frequency(MHz):	5180
Line:	Neutral		

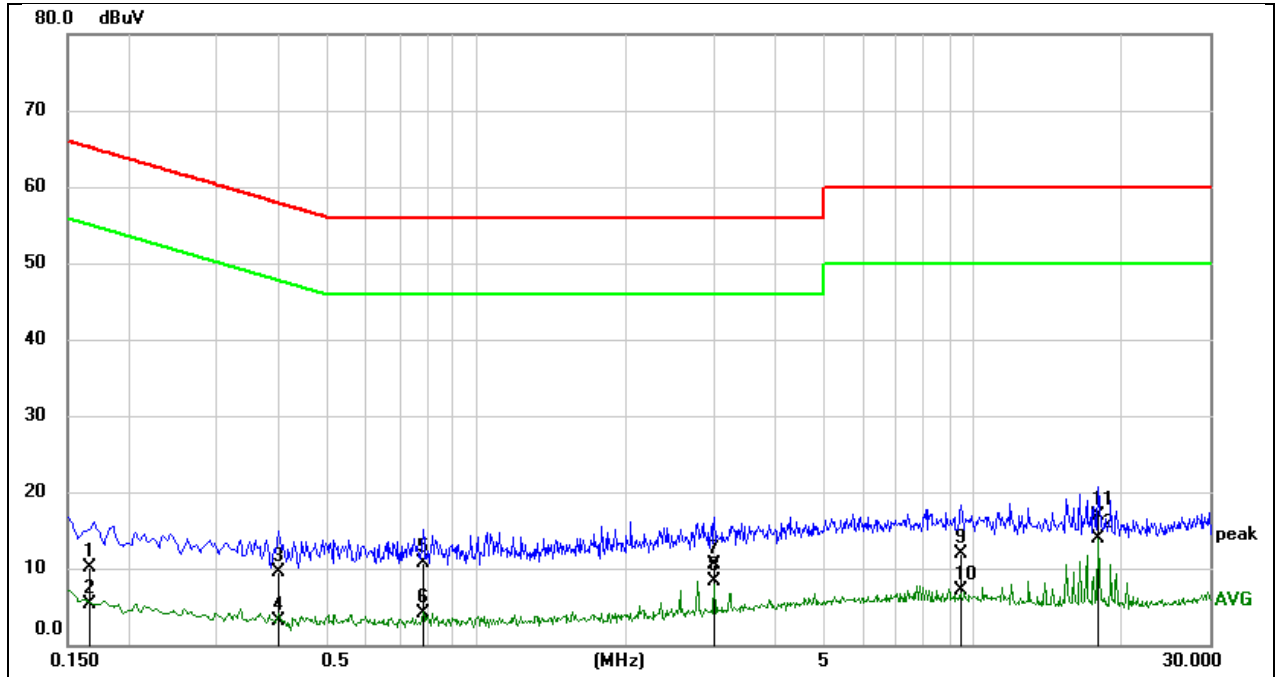

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1651	0.37	9.64	10.01	65.20	-55.19	QP
2	0.1651	-4.26	9.64	5.38	55.20	-49.82	AVG
3	0.3988	-0.12	9.64	9.52	57.88	-48.36	QP
4	0.3988	-6.58	9.64	3.06	47.88	-44.82	AVG
5	0.7822	1.00	9.63	10.63	56.00	-45.37	QP
6	0.7822	-5.48	9.63	4.15	46.00	-41.85	AVG
7	3.0176	0.78	9.63	10.41	56.00	-45.59	QP
8	3.0176	-1.32	9.63	8.31	46.00	-37.69	AVG
9	9.4653	2.25	9.73	11.98	60.00	-48.02	QP
10	9.4653	-2.71	9.73	7.02	50.00	-42.98	AVG
11	17.9346	7.14	9.74	16.88	60.00	-43.12	QP
12	17.9346	4.13	9.74	13.87	50.00	-36.13	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

10. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.407(a)

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

11. TEST DATA

11.1. APPENDIX A:DUTY CYCLE

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
a	2.065	2.082	0.9918	99.18	0.04	0.48	0.01
n20	1.92	1.938	0.9907	99.07	0.04	0.52	0.01
n40	1.536	1.554	0.9884	98.84	0.05	0.65	0.01
ac80	2.242	2.258	0.9929	99.29	0.03	0.45	0.01
ax20	3.814	3.832	0.9953	99.53	0.02	0.26	0.01
ax40	1.239	1.267	0.9779	97.79	0.10	0.81	1
ax80	1.843	1.862	0.9898	98.98	0.04	0.54	0.01


Note:


Duty Cycle Correction Factor=10log (1/x).


Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

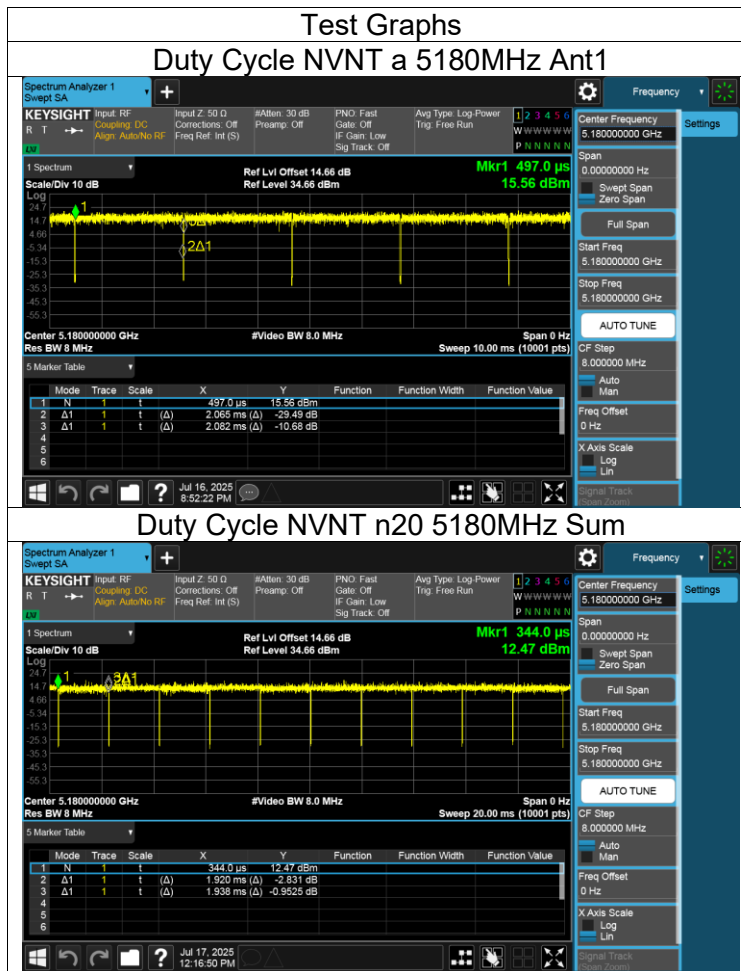

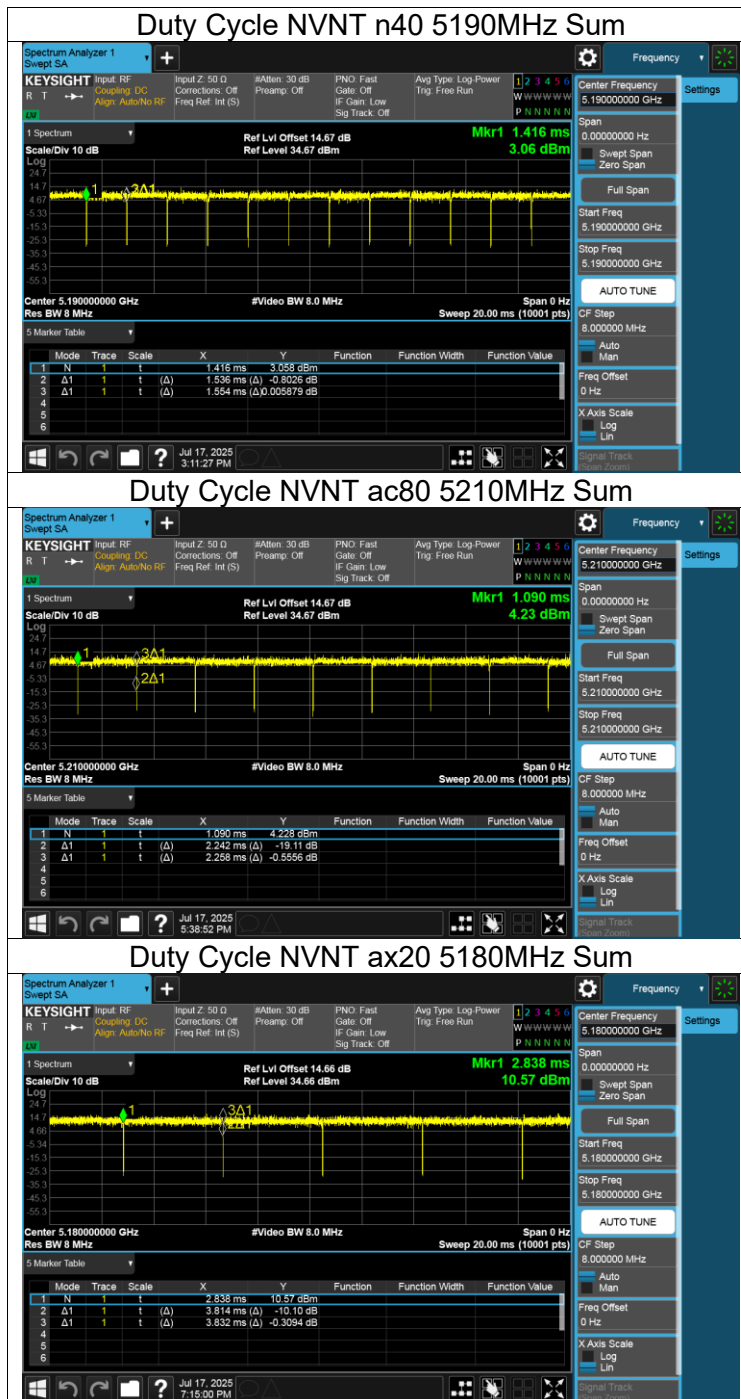

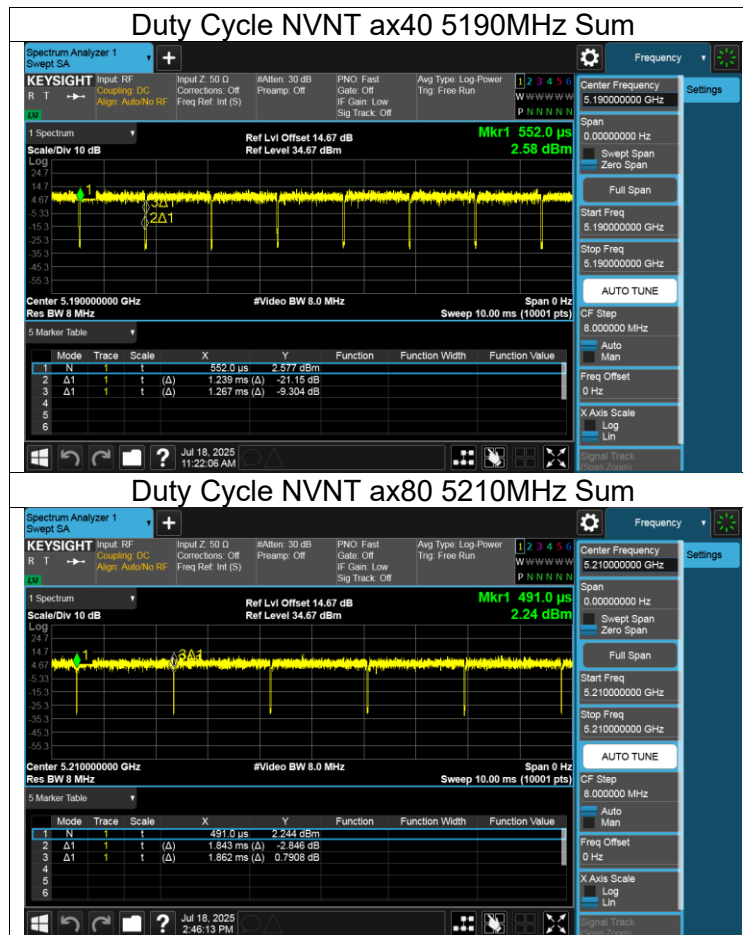

11.2. APPENDIX B: MAXIMUM CONDUCTED OUTPUT POWER

Mode	Frequency (MHz)	ANT1 (dBm)	ANT2 (dBm)	Total (dBm)	FCC limit (dBm)	ISED Limit (dBm)	ANT1 (dBm)	ANT2 (dBm)	Total (dBm)	EIRP limit (dBm)	Verdict
802.11a	5180	14.22	13.63	---	≤23.98	---	19.27	18.28	---	≤22.22	PASS
	5200	14.41	14.39	---	≤23.98	---	19.46	19.04	---	≤22.21	PASS
	5240	14.44	13.64	---	≤23.98	---	19.49	18.29	---	≤22.22	PASS
	5260	12.96	13.31	---	≤23.98	≤23.21	18.01	17.96	---	≤29.21	PASS
	5280	12.98	13.37	---	≤23.98	≤23.21	18.03	18.02	---	≤29.21	PASS
	5320	12.88	12.92	---	≤23.98	≤23.21	17.93	17.57	---	≤29.21	PASS
	5500	9.61	8.63	---	≤23.98	≤23.23	14.66	13.28	---	≤29.23	PASS
	5580	9.86	8.74	---	≤23.98	≤23.25	14.91	13.39	---	≤29.25	PASS
	5700	8.12	7.47	---	≤23.98	≤23.22	13.17	12.12	---	≤29.22	PASS
	5720-2C	7.73	6.57	---	≤22.94	≤22.25	12.78	11.22	---	≤28.25	PASS
	5720-3	0.29	-0.88	---	≤30.00	≤30.00	5.34	3.77	---	---	PASS
	5745	15.43	15.34	---	≤30.00	≤30.00	20.48	19.99	---	---	PASS
	5785	15.59	14.58	---	≤30.00	≤30.00	20.64	19.23	---	---	PASS
	5825	15.84	14.73	---	≤30.00	≤30.00	20.89	19.38	---	---	PASS
802.11n 20M	5180	7.06	6.36	9.73	≤23.98	---	12.11	11.01	14.78	≤22.48	PASS
	5200	7.34	6.13	9.79	≤23.98	---	12.39	10.78	14.84	≤22.48	PASS
	5240	7.57	5.67	9.73	≤23.98	---	12.62	10.32	14.78	≤22.48	PASS
	5260	16.14	14.41	18.37	≤23.98	≤23.48	21.19	19.06	23.42	≤29.48	PASS
	5280	16.32	14.71	18.60	≤23.98	≤23.48	21.37	19.36	23.65	≤29.48	PASS
	5320	16.28	14.14	18.35	≤23.98	≤23.48	21.33	18.79	23.40	≤29.48	PASS
	5500	10.28	9.52	12.93	≤23.98	≤23.48	15.33	14.17	17.98	≤29.48	PASS
	5580	10.85	9.49	13.23	≤23.98	≤23.48	15.90	14.14	18.28	≤29.48	PASS
	5700	10.97	8.34	12.86	≤23.98	≤23.48	16.02	12.99	17.91	≤29.48	PASS
	5720-2C	10.34	7.39	12.12	≤23.04	≤22.44	15.39	12.04	17.17	≤28.43	PASS
	5720-3	3.46	0.45	5.22	≤30.00	≤30.00	8.51	5.10	10.27	--	PASS
	5745	15.11	10.34	16.36	≤30.00	≤30.00	20.16	14.99	21.41	--	PASS
	5785	15.35	9.88	16.43	≤30.00	≤30.00	20.40	14.53	21.48	--	PASS
	5825	15.71	10.04	16.75	≤30.00	≤30.00	20.76	14.69	21.80	--	PASS
802.11n 40M	5190	10.68	9.44	13.11	≤23.98	---	15.73	14.09	18.16	≤23	PASS
	5230	11	9.13	13.18	≤23.98	---	16.05	13.78	18.23	≤23	PASS
	5270	11.35	9.46	13.52	≤23.98	≤23.98	16.40	14.11	18.57	≤30.00	PASS
	5310	11.13	8.95	13.19	≤23.98	≤23.98	16.18	13.60	18.24	≤30.00	PASS

	5510	8.6	7.74	11.20	≤23.98	≤23.98	13.65	12.39	16.25	≤30.00	PASS
	5550	8.46	7.28	10.92	≤23.98	≤23.98	13.51	11.93	15.97	≤30.00	PASS
	5670	9.33	6.57	11.18	≤23.98	≤23.98	14.38	11.22	16.23	≤30.00	PASS
	5710-2C	9.3	6.44	11.11	≤23.98	≤23.98	14.35	11.09	16.16	≤30.00	PASS
	5710-3	-0.69	-3.58	1.11	≤30.00	≤30.00	4.36	1.07	6.16	---	PASS
	5755	14.98	9.68	16.10	≤30.00	≤30.00	20.03	14.33	21.15	---	PASS
	5795	15.22	9.44	16.24	≤30.00	≤30.00	20.27	14.09	21.29	---	PASS
802.11ac 80M	5210	10.62	9.54	13.12	≤23.98	---	15.67	14.19	18.17	≤23	PASS
	5290	10.92	9.15	13.13	≤23.98	≤23.98	15.97	13.80	18.18	≤30.00	PASS
	5530	9.32	8.5	11.94	≤23.98	≤23.98	14.37	13.15	16.99	≤30.00	PASS
	5610	9.44	8.29	11.91	≤23.98	≤23.98	14.49	12.94	16.96	≤30.00	PASS
	5690-2C	9.2	7.01	11.25	≤23.98	≤23.98	14.25	11.66	16.30	≤30.00	PASS
	5690-3	-4.23	-6.4	-2.17	≤30.00	≤30.00	0.82	-1.75	2.88	---	PASS
	5775	12.4	9.07	14.06	≤30.00	≤30.00	17.45	13.72	19.11	---	PASS
802.11ax 20M	5180	7.28	6.7	10.01	≤23.98	---	12.33	11.35	15.06	≤22.76	PASS
	5200	7.64	6.33	10.04	≤23.98	---	12.69	10.98	15.09	≤22.76	PASS
	5240	7.91	5.95	10.05	≤23.98	---	12.96	10.60	15.10	≤22.76	PASS
	5260	15.31	13.52	17.52	≤23.98	≤23.76	20.36	18.17	22.57	≤29.76	PASS
	5280	15.26	13.43	17.45	≤23.98	≤23.76	20.31	18.08	22.50	≤29.76	PASS
	5320	13.86	11.99	16.04	≤23.98	≤23.76	18.91	16.64	21.09	≤29.76	PASS
	5500	7.72	7.08	10.42	≤23.98	≤23.76	12.77	11.73	15.47	≤29.76	PASS
	5580	8.13	7.22	10.71	≤23.98	≤23.76	13.18	11.87	15.76	≤29.76	PASS
	5700	8.34	5.78	10.26	≤23.98	≤23.76	13.39	10.43	15.31	≤29.76	PASS
	5720-2C	7.88	4.88	9.64	≤23.98	≤23.76	12.93	9.53	14.69	≤29.76	PASS
	5720-3	0.92	-2.14	2.66	≤30.00	≤30.00	5.97	2.51	7.71	---	PASS
	5745	15.48	10.43	16.66	≤30.00	≤30.00	20.53	15.08	21.71	---	PASS
	5785	15.52	9.9	16.57	≤30.00	≤30.00	20.57	14.55	21.62	---	PASS
	5825	15.97	10	16.95	≤30.00	≤30.00	21.02	14.65	22.00	---	PASS
802.11ax 40M	5190	9.84	8.53	12.24	≤23.98	---	14.89	13.18	17.29	≤23	PASS
	5230	10.13	8.33	12.33	≤23.98	---	15.18	12.98	17.38	≤23	PASS
	5270	11.49	9.68	13.69	≤23.98	≤23.98	16.54	14.33	18.74	≤30.00	PASS
	5310	11.45	9.4	13.56	≤23.98	≤23.98	16.50	14.05	18.61	≤30.00	PASS
	5510	9.03	8.14	11.62	≤23.98	≤23.98	14.08	12.79	16.67	≤30.00	PASS
	5550	8.66	7.7	11.22	≤23.98	≤23.98	13.71	12.35	16.27	≤30.00	PASS
	5670	9.55	7.01	11.47	≤23.98	≤23.98	14.60	11.66	16.52	≤30.00	PASS
	5710-2C	9.52	6.74	11.36	≤23.98	≤23.98	14.57	11.39	16.41	≤30.00	PASS
	5710-3	0.16	-2.62	2.00	≤30.00	≤30.00	5.21	2.03	7.05	---	PASS
	5755	15.97	10.48	17.05	≤30.00	≤30.00	21.02	15.13	22.10	---	PASS
	5795	16.45	10.74	17.48	≤30.00	≤30.00	21.50	15.39	22.53	---	PASS
802.11ax 80M	5210	10.85	9.83	13.38	≤23.98	---	15.90	14.48	18.43	≤23	PASS

	5290	11.34	9.51	13.53	≤23.98	≤23.98	16.39	14.16	18.58	≤30.00	PASS
	5530	9.54	8.8	12.20	≤23.98	≤23.98	14.59	13.45	17.25	≤30.00	PASS
	5610	9.89	8.59	12.30	≤23.98	≤23.98	14.94	13.24	17.35	≤30.00	PASS
	5690-2C	9.42	7.1	11.42	≤23.98	≤23.98	14.47	11.75	16.47	≤30.00	PASS
	5690-3	-3.18	-5.67	-1.24	≤30.00	≤30.00	1.87	-1.02	3.81	---	PASS
	5775	12.73	9.34	14.37	≤30.00	≤30.00	17.78	13.99	19.42	---	PASS

Note: 1. Conducted Power=Meas. Level+ Correction Factor

2. The Duty Cycle Factor (refer to section 7.1) had already compensated to the test data.



