


## Appendix F. FCC 3G SAR Measurement Procedures

### Conducted Output Power:

The EUT was tested according to the requirements of the FCC 3G procedures and the TS 34.121.

### WCDMA Setup Configuration:

- a. The EUT was connected to Base Station referred to the drawing of Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting
  - i. Data rates: Varied from RMC 12.2Kbps
  - ii. RMC Test Loop = Loop Mode 1
  - iii. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

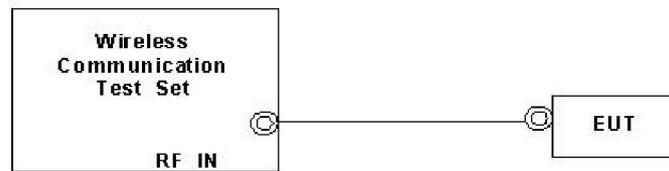

**Setup Configuration**

**HSDPA Setup Configuration:**

- a. The EUT was connected to Base Station referred to the drawing of Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each
  - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
  - iii. Set RMC12.2Kbps + HSDPA mode.
  - iv. Set Cell Power = -86 dBm
  - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
  - vi. Select HSDPA Uplink Parameters
  - vii. Set DeltaACK, DeltaNACK and DeltaCQI = 8
  - viii. Set Ack-Nack Repetition Factor to 3
  - ix. Set CQI Feedback Cycle (k) to 4 ms
  - x. Set CQI Repetition Factor to 2
  - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

**Table C.10.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ .

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ , and  $\Delta_{CQI} = 24/15$  with  $\beta_{HS} = 24/15 * \beta_c$ .

Note 3: CM = 1 for  $\beta_c/\beta_d=12/15, \beta_{HS}/\beta_c=24/15$ . For all other combinations of DPDCCH, DPCCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

**Setup Configuration**

**HSPA (HSUPA & HSPDA) Setup Configuration:**

- a. The EUT was connected to Base Station referred to the drawing of Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting \* :
  - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
  - ii. Set the Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
  - iii. Set Cell Power = -86 dBm
  - iv. Set Channel Type = 12.2k + HSPA
  - v. Set UE Target Power
  - vi. Power Ctrl Mode= Alternating bits
  - vii. Set and observe the E-TFCI
  - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1)	$\beta_{ec}$	$\beta_{ed}$ (Note 5) (Note 6)	$\beta_{ed}$ (SF)	$\beta_{ed}$ (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d=12/15, \beta_{HS}/\beta_c=24/15$ . For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 14/15$  and  $\beta_d = 15/15$ .

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6:  $\beta_{ed}$  can not be set directly, it is set by Absolute Grant Value.

**Setup Configuration**

**Note:** For details settings in the Agilent 8960 test equipment, please refer to the user guide “ HSUPA Measurement Guide with 8960 V7.5.0 Release 7 (2007-06) Ver.: v.02.18”



Call Setup Screen			
Call Control	Active Cell Operating Mode		Call Parms
Channel (UARFCN) Info	UE Information		Cell Power
	INSI: INEI: Power Class:		-86.00
Cell Parameters	UE Expected Open Loop Transmit Power		dBm/3.84 MHz
	Initial PRACH TX Power: -11.70 dBm Initial DPCCH TX Power: -0.56 dBm		Channel Type
Generator Info	Uplink Parameters		12.2k + HSPA
	Value		Paging Service
Uplink Parameters	PRACH Preambles	64	RB Test Mode
	PRACH Ramping Cycles(NMAX)	2	
UE Rep Neas	Available Subchannels (Bit Mask)	000000000001	HSPA Parameters
	Uplink DPCH Scrambling Code	0	
Close Menu	Uplink DPCH Bc/Bd Control	Manual	34,121 Preset Call Configs
	Manual Uplink DPCH Bc	11	
2 of 4	Manual Uplink DPCH Bd	15	Channel (UARFCN) Parms
	Maximum Uplink Transmit Power Level	21 dBm	
Active Cell		Sys Type: UTRA FDD	1 of 3
Idle			
	IntRef	Offset	

Example for HSPA Subtest 1, and other subtests following table, C11.1.3  
(Gain Factors ( $\beta_c = 11$  and  $\beta_d = 15$ ))

Call Setup Screen			
Call Control	Active Cell Operating Mode		Serving Grant
Additional Screens	UE Information		AG Mode
	INSI: INEI: Power Class:		Single Shot
Cell Parameters	UE Expected Open Loop Transmit Power		Single Shot AG
	Initial PRACH TX Power: -11.70 dBm Initial DPCCH TX Power: -0.56 dBm		20: (119/15)^2
Generator Info	Call Processing Status		Send Single Shot Absolute Grant
	Current Service Type: None RII Status: GIII State: Current DPCH		Send Relative Grant Up
Uplink Parameters	Abs Single Shot AG Index 15: (67/15)^2 Index 16: (75/15)^2 Index 17: (84/15)^2 Index 18: (95/15)^2 Index 19: (106/15)^2 Index 20: (119/15)^2		Send Relative Grant Down
	HSUPA In UE Rep E-DCH Last Received Throughput: ACKs Transmitted		Return
Trig Output Setup Sys Frame Clock	Active Cell		Sys Type: UTRA FDD
	Idle		
2 of 4	IntRef	Offset	1 of 2

Example: AG – Index = 20 for HSPA subtest 1



Call Setup Screen		
Screen Ctrl	Recorded E-TFCI Information	E-TFCI Record
Channel (UARFCN) Info	E-TFCI Recording State	E-TFCI Rec Count
	Idle	15
HSPA Information	Recorded E-TFCI Values	Start Recording E-TFCI Values
E-TFCI Recording Information	1: 75 11: 75 21: ---- 31: ---- 41: ---- 2: 75 12: 75 22: ---- 32: ---- 42: ---- 3: 75 13: 75 23: ---- 33: ---- 43: ---- 4: 75 14: 75 24: ---- 34: ---- 44: ---- 5: 75 15: 75 25: ---- 35: ---- 45: ---- 6: 75 16: ---- 26: ---- 36: ---- 46: ---- 7: 75 17: ---- 27: ---- 37: ---- 47: ---- 8: 75 18: ---- 28: ---- 38: ---- 48: ---- 9: 75 19: ---- 29: ---- 39: ---- 49: ---- 10: 75 20: ---- 30: ---- 40: ---- 50: ----	
Clear UE Info	15/15	Send Step Up TPC Bit Pattern
Return		Send Step Down TPC Bit Pattern
	<input type="checkbox"/> Background Active Cell Connected IntRef Offset	Sys Type: UTRA FDD

Example: Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1

**Reference:**

- [1] 941225 D01 SAR test for 3G devices v02, SAR Measurement Procedures for 3G Devices CDMA 2000/Ev-Do/WCDMA/HSDPA/HSPA Oct. 2007 Laboratory Division Office of Engineering and Technology Federal Communications Commission
- [2.] TS 34.121 Universal Mobile Telecommunications System (UMTS); Terminal Conformance Specification, Radio Transmission and Reception (FDD)
- [3.] HSUPA Measurement Guide with 8960 V7.5.0 Release 7 (2007-06) Ver.: v.02.18