

Appendix F. FCC 3G SAR Measurement Procedures

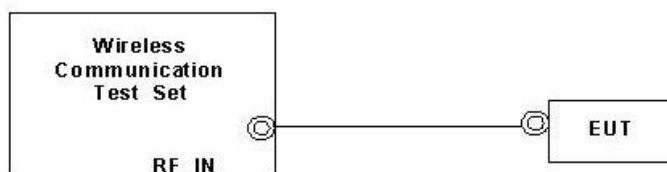
Conducted Output Power:

The EUT was tested according to the requirements of the FCC 3G procedures and the TS 34.121. The EUT's WCDMA and HSPA function is Release 6 version supporting HSDPA Category 10, and HSUPA Category 6. A detailed analysis of the output power for all WCDMA, HSPDA, and HSPA (HSUPA & HSDPA) modes is provided in the tables below. According to the FCC 3G procedures, handsets with both HSDPA and HSUPA should be tested according to Release 6 HSPA test procedures. Device was tested according to procedure KDB941225 - section Release 6 HSPA Data Devices as documented/evaluated in the following table. Power values for HSPA are configurations in WCDMA

WCDMA SAR Test mode - Conducted Power				
Mode	Setup	AWS band (1700)		
		CH1312	CH1413	CH1513
		1712.4 (MHz)	1732.6 (MHz)	1752.6 (MHz)
WCDMA	RMC 12.2Kbps	22.27	22.28	22.20
HSDPA	Subtest 1	21.80	21.56	21.83
	Subtest 2	21.70	21.65	21.89
	Subtest 3	20.76	20.65	20.75
	Subtest 4	20.64	20.61	20.95
HSUPA	Subtest 1	21.46	21.56	21.72
	Subtest 2	19.48	19.75	19.71
	Subtest 3	20.91	20.96	20.88
	Subtest 4	20.48	20.32	20.55
	Subtest 5	21.08	21.15	21.52

WCDMA Setup Configuration:

- a. The EUT was connected to Base Station referred to the drawing of Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting
 - i. Data rates: Varied from RMC 12.2Kbps
 - ii. RMC Test Loop = Loop Mode 1
 - iii. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

**Setup Configuration**

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station referred to the drawing of Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set DeltaACK, DeltaNACK and DeltaCQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSPA (HSUPA & HSPDA) Setup Configuration:

- a. The EUT was connected to Base Station referred to the drawing of Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d=12/15$, $\beta_{hs}/\beta_c=24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration

Note: For details settings in the Agilent 8960 test equipment, please refer to the user guide “HSUPA Measurement Guide with 8960 V7.5.0 Release 7 (2007-06) Ver.: v.02.18”

Call Setup Screen									
Call Control		Active Cell Operating Mode						Call Parms	
Channel (UARFCN) Info		UE Information INSI: INEI: Power Class:						Cell Power -86.00 dBm/3.84 MHz	
Cell Parameters								Channel Type 12.2k + HSPA	
Generator Info		UE Expected Open Loop Transmit Power Initial PRACH TX Power: -11.70 dBm Initial DPCH TX Power: -0.56 dBm						Paging Service RB Test Mode	
		Uplink Parameters				Value			
Uplink Parameters		PRACH Preambles				64		HSPA Parameters	
		PRACH Ramping Cycles(NMAX)				2			
		Available Subchannels (Bit Mask)				000000000001			
UE Rep Neas		Uplink DPCH Scrambling Code				0		34.121 Preset Call Configs	
		Uplink DPCH Bc/Bd Control				Manual			
		Manual Uplink DPCH Bc				11			
Close Menu		Manual Uplink DPCH Bd				15		Channel (UARFCN) Parms	
		Maximum Uplink Transmit Power Level				21 dBm			
		Active Cell				Sys Type: UTRA FDD			
		Idle							
2 of 4		IntRef Offset						1 of 3	

Example for HSPA Subtest 1, and other subtests following table, C11.1.3
(Gain Factors ($\beta_c = 11$ and $\beta_d = 15$))

Call Setup Screen									
Call Control		Active Cell Operating Mode						Serving Grant	
Additional Screens		UE Information INSI: INEI: Power Class:						AG Mode Single Shot	
Cell Parameters								Single Shot AG 20: (119/15)^2	
Generator Info		UE Expected Open Loop Transmit Power Initial PRACH TX Power: -11.70 dBm Initial DPCH TX Power: -0.56 dBm						Send Single Shot Absolute Grant	
		Call Processing Status Current Service Type: None MM Status: GMM State: Current DPCH: HSUPA In: UE Rep E-DCH: Last Received Throughput: ACKs Transmitted:						Send Relative Grant Up	
Uplink Parameters		Abs Single Shot AG Index 15: (67/15)^2 Index 16: (75/15)^2 Index 17: (84/15)^2 Index 18: (95/15)^2 Index 19: (106/15)^2 Index 20: (119/15)^2						Send Relative Grant Down	
UE Rep Neas		Information OSCH Cat: ---- Ratio: ---- % ---- kbps Transmitted: ----						Return	
Trig Output Setup		Active Cell				Sys Type: UTRA FDD			
Sys Frame Clock		Idle							
2 of 4		IntRef Offset						1 of 2	

Example: AG – Index = 20 for HSPA subtest 1

Call Setup Screen									
Screen Ctrl	Recorded E-TFCI Information								E-TFCI Record
Channel (UARFCN) Info	E-TFCI Recording State Idle								E-TFCI Rec Count
									15
HSPA Information	Recorded E-TFCI Values 1: 75 11: 75 21: ---- 31: ---- 41: ---- 2: 75 12: 75 22: ---- 32: ---- 42: ---- 3: 75 13: 75 23: ---- 33: ---- 43: ---- 4: 75 14: 75 24: ---- 34: ---- 44: ---- 5: 75 15: 75 25: ---- 35: ---- 45: ---- 6: 75 16: ---- 26: ---- 36: ---- 46: ---- 7: 75 17: ---- 27: ---- 37: ---- 47: ---- 8: 75 18: ---- 28: ---- 38: ---- 48: ---- 9: 75 19: ---- 29: ---- 39: ---- 49: ---- 10: 75 20: ---- 30: ---- 40: ---- 50: ----								Start Recording E-TFCI Values
E-TFCI Recording Information									
									Send Step Up TPC Bit Pattern
Clear UE Info									Send Step Down TPC Bit Pattern
Return									Return
Background Active Cell Connected Sys Type: UTRA FDD IntRef Offset									

Example: Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1



Reference:

- [1] 941225 D01 SAR test for 3G devices v02, SAR Measurement Procedures for 3G Devices CDMA 2000/Ev-Do/WCDMA/HSDPA/HSPA Oct. 2007 Laboratory Division Office of Engineering and Technology Federal Communications Commission
- [2.] TS 34.121 Universal Mobile Telecommunications System (UMTS); Terminal Conformance Specification, Radio Transmission and Reception (FDD)
- [3.] HSUPA Measurement Guide with 8960 V7.5.0 Release 7 (2007-06) Ver.: v.02.18