



ZigBee™ - Wall Switch

User Manual

**Battery-Powered Wall Switch (ON/OFF / Dimmer/Door
Bell/ Panic Button/ Scene & Mode Selector)
Model: ZB02C**

20140103
FW V1.0
HW V5.0


1. Introduction

Netvox ZB02C, a battery-powered wall switch, acts as an End Device in ZigBee network. It does not perform permit-join function as a coordinator or a router for other devices to join the network. It can be bound with the On/Off devices such as ZigBee enabled power plugs or power outlets.

What is ZigBee?

ZigBee is a short range wireless transmission technology based on IEEE802.15.4 standard and supports multiple network topologies such as point-to-point, point-to-multipoint, and mesh networks. It is defined for a general-purpose, cost-effective, low-power-consumption, low-data-rate, and easy-to-install wireless solution for industrial control, embedded sensing, medical data collection, smoke and intruder warning, building automation and home automation, etc.


2. Product Appearance

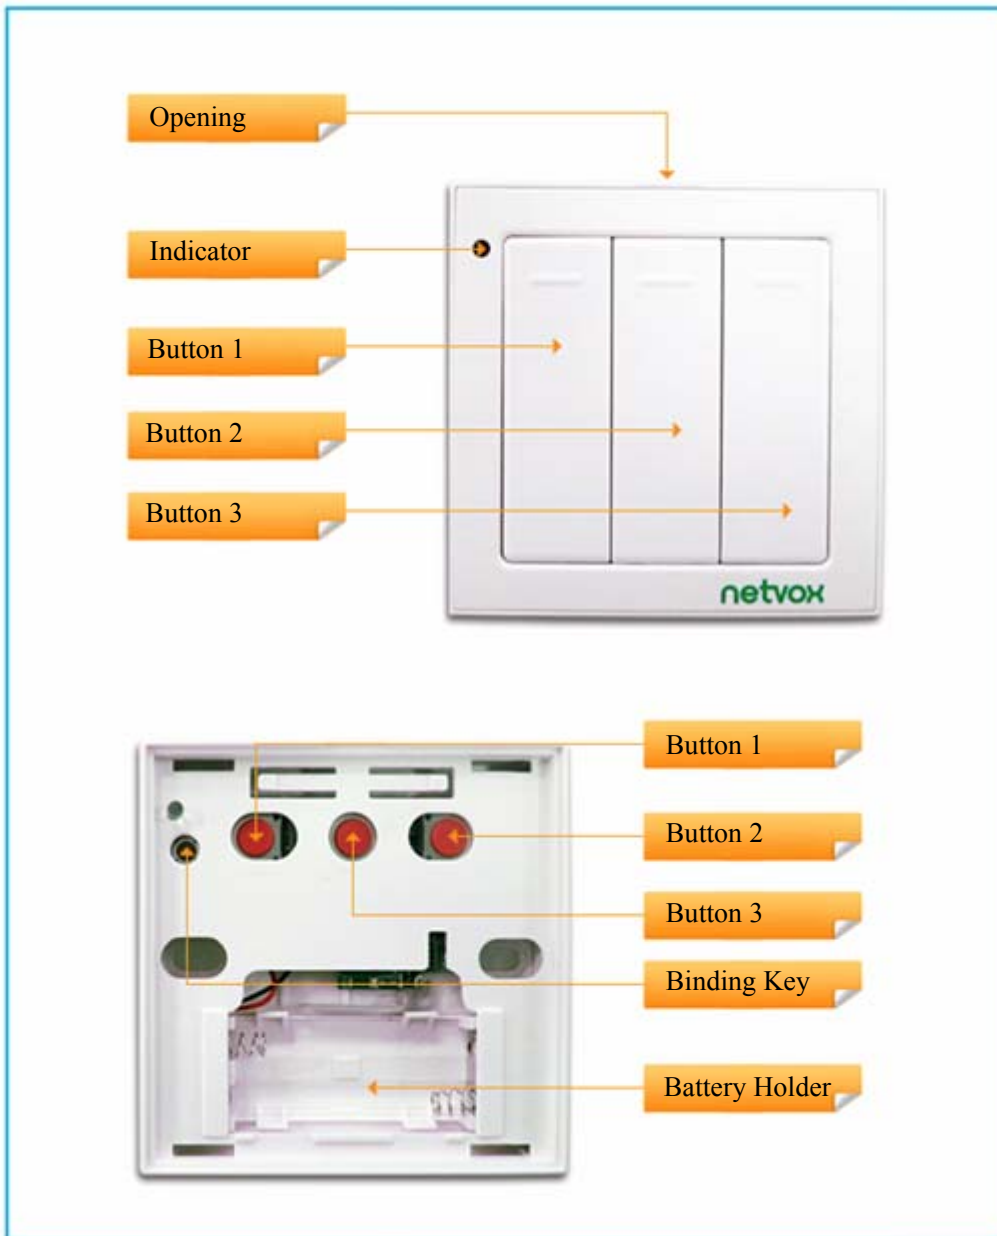

3. Specification

- Fully IEEE 802.15.4 compliant
- Utilizes 2.4GHz ISM band; up to 16 channels
- Power supply: 2 x AAA batteries.
- Operating consumption: $\leq 40\text{mA}$
- Standby consumption: $\leq 1\mu\text{A}$
- Up to 70 meters wireless transmission range in non-obstacle space
- Easy installation and configuration

4. Installation Diagram

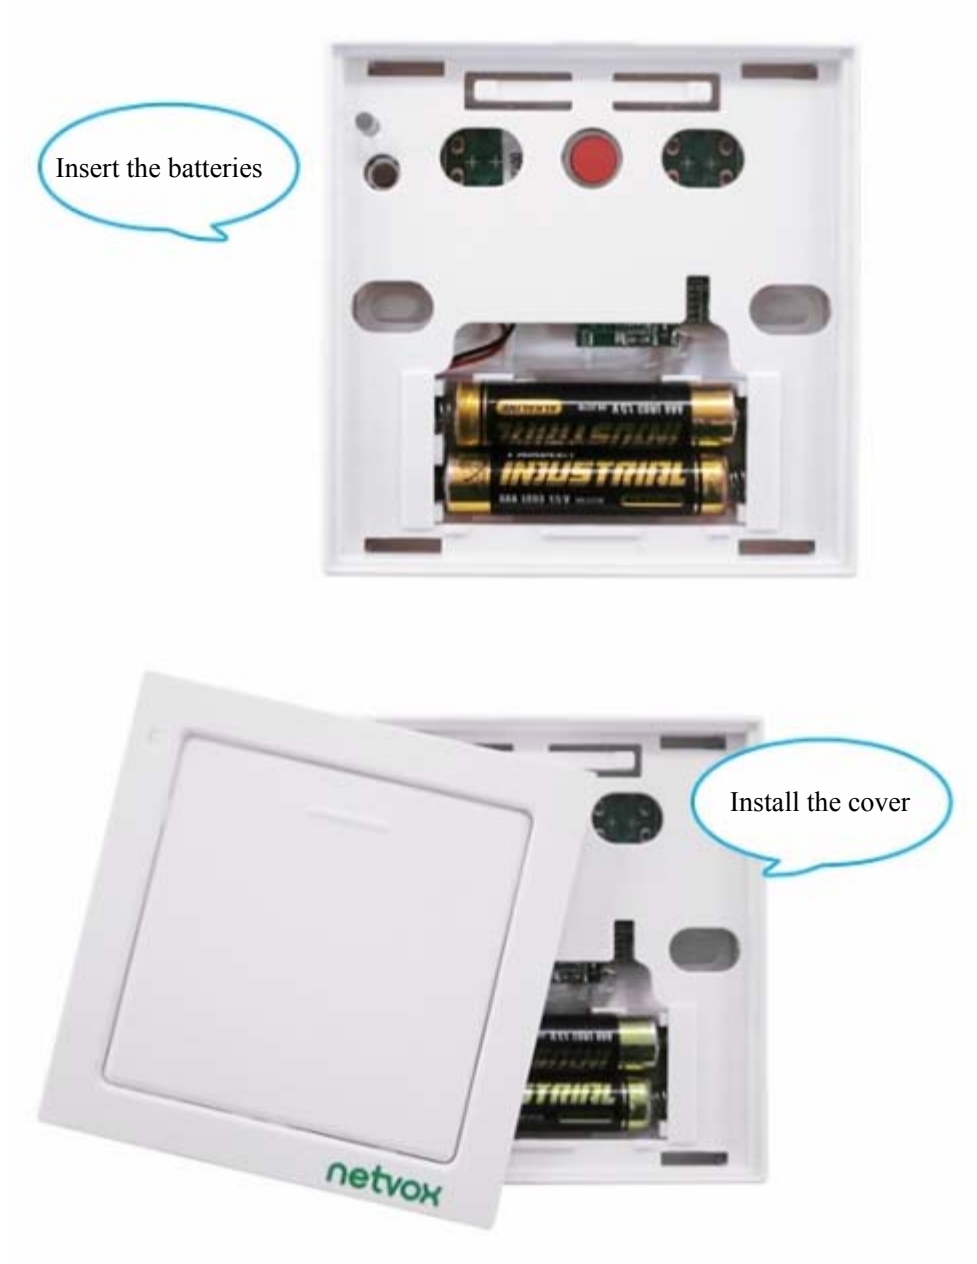

5. Setting up ZB02C

5-1. Turn On ZB02C

For power saving, ZB02C is designed to get into **sleeping mode** when there is no activity for 2 minutes.

To manually turn on ZB02C, press the *Binding Key* **once**.

- When ZB02C is first time used or after resetting → it will try to join the network.
- When ZB02C is in a ZigBee network → it will send out the device data, like IEEE address/Network address, and the indicator will flash **5 times**. ZB02C will be activated for 2 minutes.
- When ZB02C was in a ZigBee network, but by any change it is offline → it will start to rejoin the ZigBee network.

5-2. Join the ZigBee Network

After ZB02C is turned on, it will search for an existing ZigBee network and send a request to join the network automatically. While ZB02C is under the coverage from a coordinator or a router whose **permit-join feature is enabled**, ZB02C will be permitted to join the network.

- Step1. Enable the permit-join function (valid for 60 seconds) of a coordinator or a router (please refer to the user manual of the coordinator or the router to enable the permit-join feature).
- Step2. Turn on ZB02C. It will start to search and join the network.
- Step3. The indicator will flash **5 times** after it is joined successfully. Otherwise, the indicator will not flash.

ZB02C will try to join the network for 1 minute. Please try step1~3 again when it is failed to join the network.

5-3. Binding

ZB02C can be bound with the On/Off device such as Netvox Z801RX.

- Step1. Press and hold the *Binding Key* for 3 seconds. The indicator will flash **orange once**.
- Step2. Release the *Binding Key* and then press the *Binding Key* **N times** (N = the number of the button) within 5 seconds. For example, press the *Binding Key* 3 times when you would like to bind Button 3. The indicator will flash **N times**.
- Step3. Enable the binding feature of the On/Off device.
- Step4. The indicator flashes **5 times** after the binding is completed; otherwise, it will flash **10 times**.

5-4. Sleeping Mode

ZB02C is designed to go into sleeping mode for power-saving in some situations:

- A. While the device is in the network → the sleeping period is 5 minutes; it will wake up every 5 minutes to keep online.
- B. When it doesn't find a network to join → ZB02C will go to sleeping mode. It will wake up every 15 minutes to search a network to join.
- C. Once ZB02C was joined to a network and by any chance the network is no longer existed or the device is out of the network → ZB02C will wake up every 15 minutes to find the network it joined before.

It never keeps in sleeping mode and continues to find out a network every 15 minutes. This condition would consume up to 30 times power spending compared to normal-operating status. To prevent this unwanted power consumption, we recommend that users remove the batteries to power off the device.

5-5. Battery

When the operating voltage is lower than 2.4V, the indicator will flash **once**. ZB02C will send a low-power report to the ZigBee network.

5-6. Restore to Factory Setting

To restore it to factory setting, please follow the steps:

- Step1. Remove the batteries to power off ZB02C.
- Step2. Press and hold the *Binding Key*, then power on ZB02C.
- Step3. The indicator will generate flashes, and the restore is completed.

6. Important Maintenance Instructions

- Please keep the device in a dry place. Precipitation, humidity, and all types of liquids or moisture can contain minerals that corrode electronic circuits. In cases of accidental liquid spills to a device, please leave the device dry properly before storing or using.
- Do not use or store the device in dusty or dirty areas.
- Do not use or store the device in extremely hot temperatures. High temperatures may damage the device or battery.
- Do not use or store the device in extremely cold temperatures. When the device warms to its normal temperature, moisture can form inside the device and damage the device or battery.
- Do not drop, knock, or shake the device. Rough handling would break it.
- Do not use strong chemicals or washing to clean the device.
- Do not paint the device. Paint would cause improper operation.

Handle your device, battery, and accessories with care. The suggestions above help you keep your device operational. For damaged device, please contact the authorized service center in your area.

FCC Statement:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.