

**CFR 47 FCC PART 15 SUBPART C
ISED RSS-247 Issue 3**

TEST REPORT

For

WiFi/Bluetooth wireless Module

**MODEL NUMBER: OS-PD336-PD
SERIES MODEL NUMBER: OS-PD513-PD, OS-PD758-PD**

REPORT NUMBER: 4791874491.1-RF-1

ISSUE DATE: July 26, 2025

**FCC ID: 2A2P9-PD336513
IC: 27618-PD336513**

Prepared for

**EcoFlow Inc.
RM 401,Plant #1,Runheng Industrial Zone, Fuhai Street,Bao'an District, Shenzhen,
518000, China**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

**Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan,
Guangdong, China**

**Tel: +86 769 22038881
Fax: +86 769 33244054
Website: www.ul.com**

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	July 26, 2025	Initial Issue	

Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
AC Power Line Conducted Emission	ANSI C63.10-2013, Clause 6.2	FCC Part 15.207 RSS-GEN Clause 8.8	Pass
Conducted Output Power	ANSI C63.10-2013, Clause 11.9.2.3.1	FCC Part 15.247 (b)(3) RSS-247 Clause 5.4 (d)	Pass
6dB Bandwidth and 99% Occupied Bandwidth	ANSI C63.10-2013, Clause 11.8.1	FCC Part 15.247 (a)(2) RSS-247 Clause 5.2 (a) ISED RSS-Gen Clause 6.7	Pass
Power Spectral Density	ANSI C63.10-2013, Clause 11.10.5	FCC Part 15.247 (e) RSS-247 Clause 5.2 (b)	Pass
Conducted Band edge and spurious emission	ANSI C63.10-2013, Clause 11.11	FCC Part 15.247(d) RSS-247 Clause 5.5	Pass
Antenna Requirement	N/A	FCC Part 15.203/15.247 (c) RSS-GEN Clause 6.8	Pass
Radiated Band edge and Spurious Emission	ANSI C63.10-2013, Clause 11.12 & Clause 11.13	FCC Part 15.247 (d) FCC Part 15.205/15.209 RSS-247 Clause 5.5 RSS-GEN Clause 8.9	Pass
Duty Cycle	ANSI C63.10-2013, Clause 11.6	None; for reporting purposes only.	Pass

*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

*The measurement result for the sample received is <Pass> according to <CFR 47 FCC PART 15 SUBPART C

ISED RSS-247 Issue 3> when <Simple Acceptance> decision rule is applied.

CONTENTS

1. ATTESTATION OF TEST RESULTS.....	6
2. TEST METHODOLOGY.....	7
3. FACILITIES AND ACCREDITATION.....	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>8</i>
4.2. <i>MEASUREMENT UNCERTAINTY</i>	<i>8</i>
5. EQUIPMENT UNDER TEST	9
5.1. <i>DESCRIPTION OF EUT</i>	<i>9</i>
5.2. <i>CHANNEL LIST</i>	<i>9</i>
5.3. <i>MAXIMUM POWER</i>	<i>10</i>
5.4. <i>TEST CHANNEL CONFIGURATION.....</i>	<i>10</i>
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER</i>	<i>10</i>
5.6. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>12</i>
5.7. <i>SUPPORT UNITS FOR SYSTEM TEST.....</i>	<i>13</i>
5.8. <i>SETUP DIAGRAM</i>	<i>14</i>
6. MEASURING EQUIPMENT AND SOFTWARE USED.....	15
7. ANTENNA PORT TEST RESULTS	18
7.1. <i>CONDUCTED OUTPUT POWER</i>	<i>18</i>
7.2. <i>6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....</i>	<i>19</i>
7.3. <i>POWER SPECTRAL DENSITY</i>	<i>21</i>
7.4. <i>CONDUCTED BAND EDGE AND SPURIOUS EMISSION.....</i>	<i>22</i>
7.5. <i>DUTY CYCLE</i>	<i>24</i>
8. RADIATED TEST RESULTS.....	25
8.1. <i>RESTRICTED BANDEDGE-ANT1 FPC EXTERNAL ANTENNA</i>	<i>33</i>
8.2. <i>RESTRICTED BANDEDGE-ANT2 FPC EXTERNAL ANTENNA</i>	<i>44</i>
8.3. <i>RESTRICTED BANDEDGE-ANT1 PCB ONBOARD ANTENNA</i>	<i>55</i>
8.4. <i>RESTRICTED BANDEDGE-ANT2 FPC EXTERNAL ANTENNA(PD513)</i>	<i>66</i>
8.5. <i>SPURIOUS EMISSIONS(1 GHZ~3 GHZ)-ANT1 FPC EXTERNAL ANTENNA.....</i>	<i>77</i>
8.6. <i>SPURIOUS EMISSIONS(1 GHZ~3 GHZ)-ANT2 FPC EXTERNAL ANTENNA.....</i>	<i>83</i>
8.7. <i>SPURIOUS EMISSIONS(1 GHZ~3 GHZ)-ANT1 PCB ONBOARD ANTENNA</i>	<i>89</i>
8.8. <i>SPURIOUS EMISSIONS(1 GHZ~3 GHZ)-ANT2 FPC EXTERNAL ANTENNA(PD513)</i>	<i>95</i>

8.9.	SPURIOUS EMISSIONS(3 GHZ~18 GHZ)-ANT1 FPC EXTERNAL ANTENNA....	101
8.10.	SPURIOUS EMISSIONS(3 GHZ~18 GHZ)-ANT2 FPC EXTERNAL ANTENNA....	131
8.11.	SPURIOUS EMISSIONS(3 GHZ~18 GHZ)-ANT1 PCB ONBOARD ANTENNA	161
8.12.	SPURIOUS EMISSIONS(3 GHZ~18 GHZ)-ANT2 FPC EXTERNAL ANTENNA(PD513)	191
8.13.	SPURIOUS EMISSIONS(18 GHZ~26 GHZ)	221
8.14.	SPURIOUS EMISSIONS(9 KHZ~30 MHZ)	223
8.15.	SPURIOUS EMISSIONS(30 MHZ~1 GHZ)	226
9.	AC POWER LINE CONDUCTED EMISSION	228
10.	ANTENNA REQUIREMENT	231
11.	TEST DATA-Ant1.....	232
11.1.	APPENDIX A1: DUTY CYCLE	232
11.2.	APPENDIX B1: MAXIMUM CONDUCTED OUTPUT POWER	235
11.3.	APPENDIX C1: -6DB BANDWIDTH.....	236
11.4.	APPENDIX D1: OCCUPIED CHANNEL BANDWIDTH	242
11.5.	APPENDIX E1: MAXIMUM POWER SPECTRAL DENSITY LEVEL	248
11.6.	APPENDIX F1: BAND EDGE.....	254
11.7.	APPENDIX G1: CONDUCTED RF SPURIOUS EMISSION	262
12.	TEST DATA-Ant2.....	273
12.1.	APPENDIX A2: DUTY CYCLE	273
12.2.	APPENDIX B2: MAXIMUM CONDUCTED OUTPUT POWER	276
12.3.	APPENDIX C2: -6DB BANDWIDTH.....	277
12.4.	APPENDIX D2: OCCUPIED CHANNEL BANDWIDTH	283
12.5.	APPENDIX E2: MAXIMUM POWER SPECTRAL DENSITY LEVEL	289
12.6.	APPENDIX F2: BAND EDGE.....	295
12.7.	APPENDIX G2: CONDUCTED RF SPURIOUS EMISSION	303

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: EcoFlow Inc.
Address: RM 401,Plant #1,Runheng Industrial Zone, Fuhai Street,Bao'an District, Shenzhen, 518000, China

Manufacturer Information

Company Name: EcoFlow Inc.
Address: RM 401,Plant #1,Runheng Industrial Zone, Fuhai Street,Bao'an District, Shenzhen, 518000, China

EUT Information

EUT Name: WiFi/Bluetooth wireless Module
Model: OS-PD336-PD
Series Model: OS-PD513-PD, OS-PD758-PD
Model Difference: Refer the Model Declaration Letter.
Brand: ECOFLOW; EF ECOFLOW
Sample Received Date: July 15, 2025
Sample Status: Normal
Sample ID: 8708845
Date of Tested: July 15, 2025 to July 26, 2025


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C ISED RSS-247 Issue 3	Pass

Prepared By:



Johnson Liu
Laboratory Engineer

Checked By:



Kebo Zhang
Operations Leader

Approved By:



Stephen Guo
Operations Manager

2. TEST METHODOLOGY

All tests were performed in accordance with the standard CFR 47 FCC PART 15 SUBPART C
ISED RSS-247 Issue 3, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01
Radiated Test Site v01r01, KDB 662911 D01 Multiple Transmitter Output v02r01, CFR 47 FCC
Part 2, ANSI C63.10-2013 and ISED RSS-GEN Issue 5

3. FACILITIES AND ACCREDITATION

	<p>A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p>FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules.</p> <p>ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p>VCCI (Registration No.: C-20202, G-20240, R-20248 and T-20202) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber E, the VCCI registration No. is G-20240 and R-20248 Shielding Room F, the VCCI registration No. is C-20202 and T-20202</p>
--	---

Note 1:

All tests measurement facilities use to collect the measurement data are located at Room 101,
Building 2, No.4, Information Road, Songshan Lake, Dongguan, Guangdong, China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd.
Song Shan Lake Branch had been calibrated and compared to the open field sites and the test
anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to
measurements obtained on an open field site. And these measurements below 30 MHz had
been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz) 5.23 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
DTS and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.686 dB
Maximum Power Spectral Density Level	±0.743 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz) ±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	WiFi/Bluetooth wireless Module
Model:	OS-PD336-PD
Series Model:	OS-PD513-PD, OS-PD758-PD
Model Difference:	Refer the Model Declaration Letter.

Frequency Range:	2412 MHz to 2462 MHz
Type of Modulation:	IEEE 802.11b: DSSS(CCK, DQPSK, DBPSK) IEEE 802.11g/n: OFDM(64-QAM, 16-QAM, QPSK, BPSK) IEEE 802.11ax: OFDMA(1024-QAM, 256-QAM, 64-QAM, 16-QAM, QPSK, BPSK)
Radio Technology:	IEEE 802.11b/g/n HT20/n HT40/ax HE20
Normal Test Voltage:	DC 3.3V

5.2. CHANNEL LIST

Channel List For Bandwidth=20 MHz							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452	/	/

Channel List For Bandwidth=40 MHz							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	5	2432	7	2442	9	2452
4	2427	6	2437	8	2447	/	/

5.3. MAXIMUM POWER

IEEE Std. 802.11	Frequency (MHz)	Channel Number	Maximum Conducted AVG Output Power (dBm)
b	2412 ~ 2462	1-11[11]	20.11
g	2412 ~ 2462	1-11[11]	16.39
n HT20	2412 ~ 2462	1-11[11]	16.45
n HT40	2422 ~ 2452	3-9[7]	15.60
ax HE20	2412 ~ 2462	1-11[11]	13.28

5.4. TEST CHANNEL CONFIGURATION

IEEE Std. 802.11	Test Channel Number	Frequency
b	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
g	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
n HT20	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
n HT40	CH 3(Low Channel), CH 6(MID Channel), CH 9(High Channel)	2422 MHz, 2437 MHz, 2452 MHz
ax HE20	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band							
Test Software		EspRFTTestTool_v3.6_Manual					
Modulation Mode	Transmit Antenna Number	Test Channel					
		NCB: 20MHz			NCB: 40MHz		
		CH 1	CH 6	CH 11	CH 3	CH 6	CH 9
802.11b	1	0	0	0	/		
	2	0	0	0			
802.11g	1	12	12	12			
	2	8	8	8			
802.11n HT20	1	12	12	12			
	2	4	4	4			
802.11n HT40	1	/			12	12	12
	2				4	4	4
802.11ax HE20	1	16	16	16	/		
	2	18	16	16			

WORST-CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.4.

Maximum power setting referring to section 5.5.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps

802.11g mode: 6 Mbps

802.11n HT20 mode: MCS0

802.11n HT40 mode: MCS0

802.11ax HE20 mode: MCS0

All modes only support SISO mode.

For all models, the same chains corresponding to different antennas have the same power level, so there is no difference in the conducted test results for each antenna. Only the conducted test results of each chain were recorded in the report.

All kinds of antenna radiation test results were recorded in the report.

5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)	Remark
1	2412-2462	FPC External antenna	6.69	OS-PD336-PD
1	2412-2462	PCB Onboard antenna	4.49	OS-PD513-PD, OS-PD758-PD
2	2412-2462	FPC External antenna	5.53	OS-PD336-PD
2	2412-2462	FPC External antenna	3.66	OS-PD513-PD

Test Mode	Transmit and Receive Mode	Description
IEEE 802.11b	<input checked="" type="checkbox"/> 1TX, 1RX	ANT 1 or ANT 2 can be used as transmitting/receiving antenna.
IEEE 802.11g	<input checked="" type="checkbox"/> 1TX, 1RX	ANT 1 or ANT 2 can be used as transmitting/receiving antenna.
IEEE 802.11n HT20	<input checked="" type="checkbox"/> 1TX, 1RX	ANT 1 or ANT 2 can be used as transmitting/receiving antenna.
IEEE 802.11n HT40	<input checked="" type="checkbox"/> 1TX, 1RX	ANT 1 or ANT 2 can be used as transmitting/receiving antenna.
IEEE 802.11ax HE20	<input checked="" type="checkbox"/> 1TX, 1RX	ANT 1 or ANT 2 can be used as transmitting/receiving antenna.
Note: 1.EUT can't transmit simultaneously. (declared by client)		

5.7. SUPPORT UNITS FOR SYSTEM TEST

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remark
1	PC	Lenovo	E14	/
2	AC/DC Adaptor	Lenovo	ADLX65YDC3D	Input: AC 100-240V 1.8A 50-60Hz Output: 20V 3.25A/15V 3A/9V 2A/5V 2A

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	1.0	/


ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

TEST SETUP


The EUT can work in engineering mode with a software through a Laptop.

SETUP DIAGRAM FOR TESTS

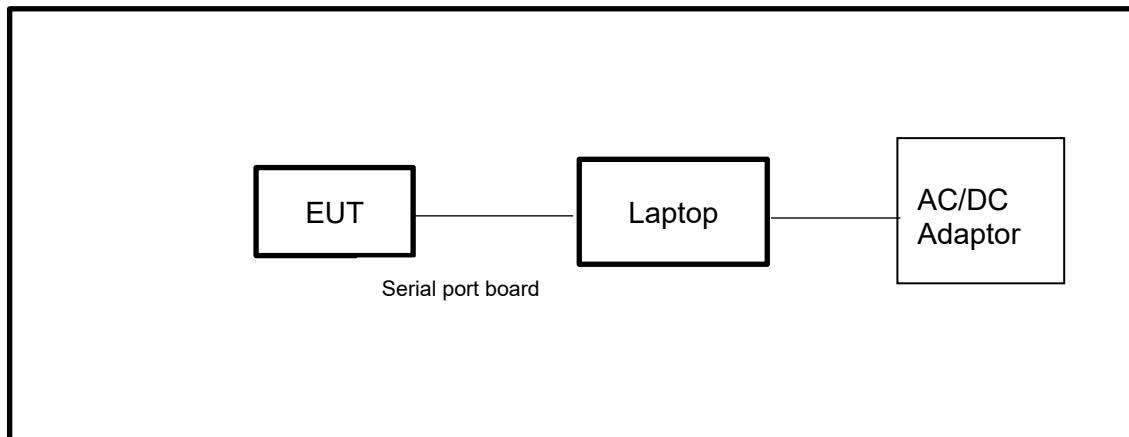

Note: AC/DC Adaptor is used for AC conducted power line test only.

5.8. SETUP DIAGRAM

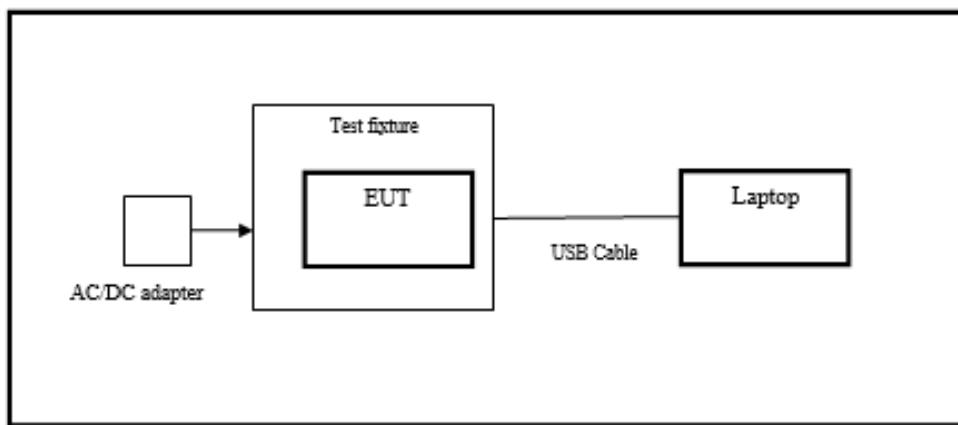

6. MEASURING EQUIPMENT AND SOFTWARE USED

R&S TS 8997 Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Dec.27,2024	Dec.26,2025
Vector Signal Generator	R&S	SMBV100A	261637	Sep.28, 2024	Sep.27, 2025
Signal Generator	R&S	SMB100A	178553	Sep.28, 2024	Sep.27, 2025
Signal Analyzer	R&S	FSV40	101118	Sep.28, 2024	Sep.27, 2025
Software					
Description	Manufacturer	Name		Version	
For R&S TS 8997 Test System	Rohde & Schwarz	EMC 32		10.60.10	
Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.13, 2024	Sep.12, 2025
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Sep.28, 2024	Sep.27, 2025
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Sep.28, 2024	Sep.27, 2025
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Sep.28, 2024	Sep.27, 2025
DC power supply	Keysight	E3642A	MY55159130	Sep.28, 2024	Sep.27, 2025
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Sep.28, 2024	Sep.27, 2025
Attenuator	Aglient	8495B	2814a12853	Sep.28, 2024	Sep.27, 2025
RF Control Unit	Tonsend	JS0806-2	23B80620666	Dec.27,2024	Dec.26,2025
Software					
Description	Manufacturer	Name		Version	
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System		V3.2.22	

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Sep.28, 2024	Sep.27, 2025
Two-Line V-Network	R&S	ENV216	101983	Sep.28, 2024	Sep.27, 2025
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Sep.28, 2024	Sep.27, 2025
Software					
Description		Manufacturer		Name	Version
Test Software for Conducted Emissions		Farad		EZ-EMC	Ver. UL-3A1

Radiated Emissions(Below 1G)					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Sep.28, 2024	Sep.27, 2025
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	June 28, 2024	June.27 2027
Preamplifier	HP	8447D	2944A09099	Sep.28, 2024	Sep.27, 2025
Loop antenna	Schwarzbeck	1519B	00008	Dec.09, 2024	Dec.08, 2027
Software					
Description		Manufacturer		Name	Version
Test Software for Radiated Emissions		Farad		EZ-EMC	Ver. UL-3A1

Radiated Emissions(Above 1G)					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Signal Analyzer	R&S	FSV40	101117	Sep.28, 2024	Sep.27, 2025
Preamplifier	TDK	PA-02-001-3000	TRS-302-00051	Sep.28, 2024	Sep.27, 2025
Horn Antenna	ETS-Lindgren	3117	00213191	Feb.7,2023	Feb.6,2026
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Sep.28, 2024	Sep.27, 2025
High Gain Horn Antenna	Schwarzbeck	BBHA-9170	697	Jun. 30, 2024	Jun. 29, 2027
Preamplifier	TDK	PA-02-2	TRS-307-00002	Sep.28, 2024	Sep.27, 2025
Preamplifier	TDK	PA-02-3	TRS-308-00002	Sep.28, 2024	Sep.27, 2025
Highpass Filter	Wainwright	WHKX10-2700-3000-1800-40SS	24	Sep.28, 2024	Sep.27, 2025
Software					

Description	Manufacturer	Name	Version
Test Software for Radiated Emission	Tonscend	JS32-RE	5.0.0
Test Software for Radiated Emissions	Farad	EZ-EMC	Ver. UL-3A1

Other Instrument					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Oct.8, 2024	Oct.7, 2025
Barometer	Yiyi	Baro	N/A	Oct.10, 2024	Oct.9, 2025
Attenuator	Agilent	8495B	2814a12853	Sep.28, 2024	Sep.27, 2025

7. ANTENNA PORT TEST RESULTS

7.1. CONDUCTED OUTPUT POWER

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3) ISED RSS-247 5.4 (d)	AVG Output Power	1 watt or 30 dBm	2400-2483.5

TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 11.9.2.3.1.

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the average output power, after any corrections for external attenuators and cables.

The test result in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle.

TEST SETUP

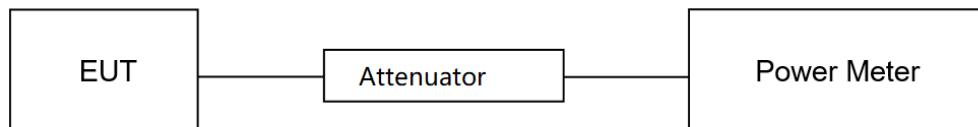

TEST ENVIRONMENT

Temperature	22.5°C	Relative Humidity	50.1%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V

TEST DATE / ENGINEER

Test Date	July 25, 2025	Test By	Walker Yuan
-----------	---------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix B1&B2

7.2. 6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2) ISED RSS-247 5.2 (a)	6 dB Bandwidth	≥ 500 kHz	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	For reporting purposes only.	2400-2483.5


TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.8 for DTS bandwidth and clause 6.9 for Occupied Bandwidth.

Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Frequency Span	For 6 dB Bandwidth: Enough to capture all products of the modulation carrier emission For 99 % Occupied Bandwidth: Between 1.5 times and 5.0 times the OBW
Detector	Peak
RBW	For 6 dB Bandwidth: 100 kHz For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth: $\geq 3 \times$ RBW For 99 % Occupied Bandwidth: $\geq 3 \times$ RBW
Trace	Max hold
Sweep	Auto couple

- a) Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.
- b) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

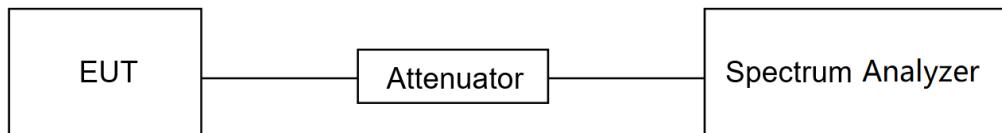TEST SETUP**TEST ENVIRONMENT**

Temperature	22.5°C	Relative Humidity	50.1%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V

TEST DATE / ENGINEER

Test Date	July 25, 2025	Test By	Walker Yuan
-----------	---------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix C1&C2&D1&D2

7.3. POWER SPECTRAL DENSITY

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e) ISED RSS-247 5.2 (b)	Power Spectral Density	8 dBm in any 3 kHz band	2400-2483.5

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.10.5.


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	power averaging (rms)
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	$1.5 \times \text{OBW}$ bandwidth
Trace	Employ trace averaging(rms)mode over a minimum of 100 traces
Sweep time	Auto couple

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST SETUP

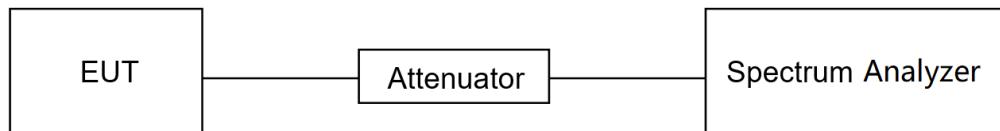

TEST ENVIRONMENT

Temperature	22.5°C	Relative Humidity	50.1%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V

TEST DATE / ENGINEER

Test Date	July 25, 2025	Test By	Walker Yuan
-----------	---------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix E1&E2

7.4. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d) ISED RSS-247 5.5	Conducted Bandedge and Spurious Emissions	at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.11 and 11.13.

Connect the EUT to the spectrum analyzer and use the following settings for reference level measurement:


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times$ RBW
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times$ RBW
measurement points	\geq span/RBW
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11.

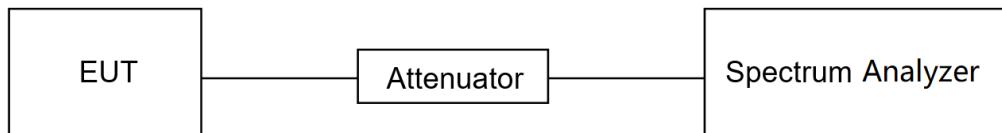TEST SETUP**TEST ENVIRONMENT**

Temperature	22.5°C	Relative Humidity	50.1%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V

TEST DATE / ENGINEER

Test Date	July 25, 2025	Test By	Walker Yuan
-----------	---------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix F1&F2&G1&G2

7.5. DUTY CYCLE


LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.6 Zero – Span Spectrum Analyzer method.

TEST SETUP

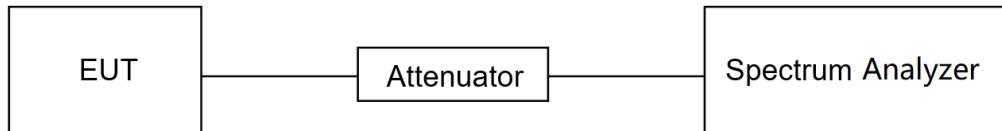

TEST ENVIRONMENT

Temperature	22.5°C	Relative Humidity	50.1%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V

TEST DATE / ENGINEER

Test Date	July 25, 2025	Test By	Walker Yuan
-----------	---------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix A1&A2

8. RADIATED TEST RESULTS

LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Please refer to ISED RSS-GEN Clause 8.9 and Clause 8.10.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (μ A/m)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

ISED Restricted bands please refer to ISED RSS-GEN Clause 8.10

Table 7 – Restricted frequency bands ^{Note 1}		
MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.8 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.877 - 5.883	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2855 - 2900	
13.36 - 13.41	3260 - 3287	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST PROCEDURE

Below 30 MHz

The setting of the spectrum analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X kHz resulted in a level of Y dB μ V/m, which is equivalent to $Y-51.5 = Z$ dB μ A/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.


Above 1 GHz

The setting of the spectrum analyzer

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.5. ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

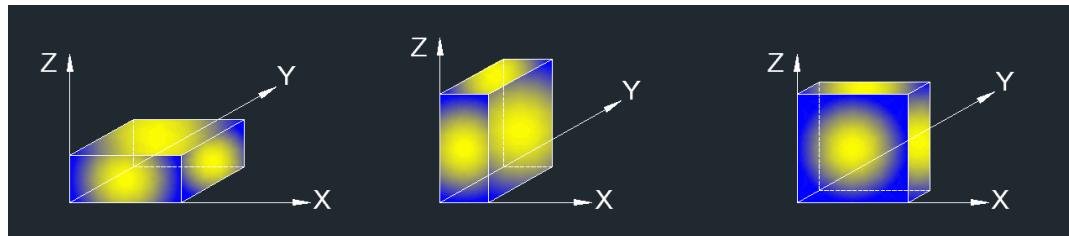

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

For Restricted Bandedge:

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. PK=Peak: Peak detector.
4. AV=Average: $VBW=1/Ton$, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (9 kHz ~ 30 MHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes, models, antennas have been tested, but only the worst data was recorded in the report.
5. $dBuA/m = dBuV/m - 20\log_{10}[120\pi] = dBuV/m - 51.5$

For Radiate Spurious Emission (30 MHz ~ 1 GHz):

Note:

1. Result Level = Read Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All modes, models, antennas have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 3 GHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (3 GHz ~ 18 GHz):

Note:


1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (18 GHz ~ 26 GHz):


Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes, models, antennas have been tested, but only the worst data was recorded in the report.


TEST SETUP

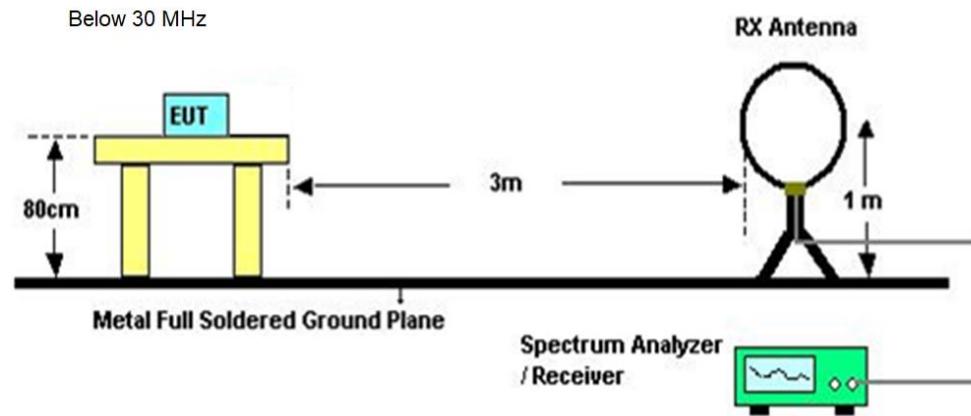

Below 1 GHz and above 30 MHz

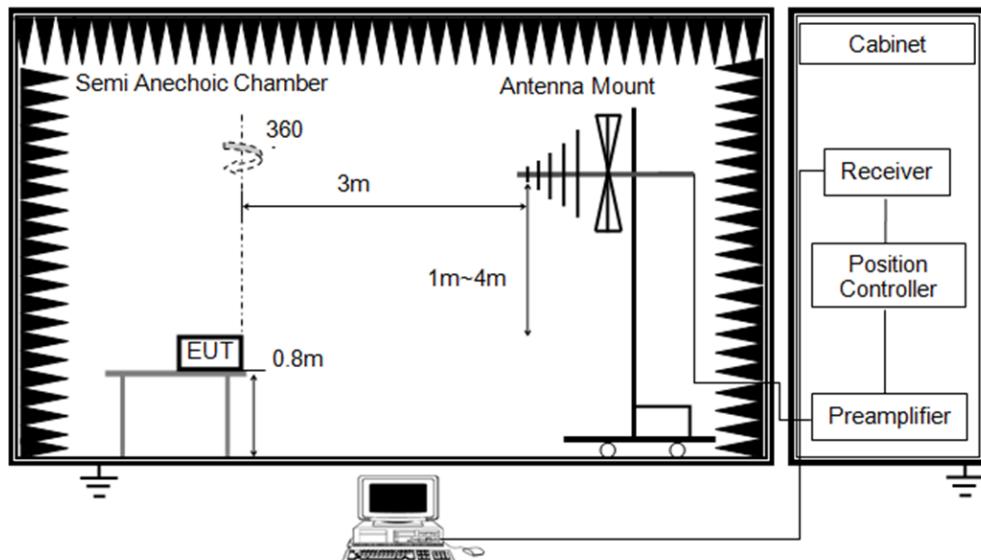

Above 1GHz

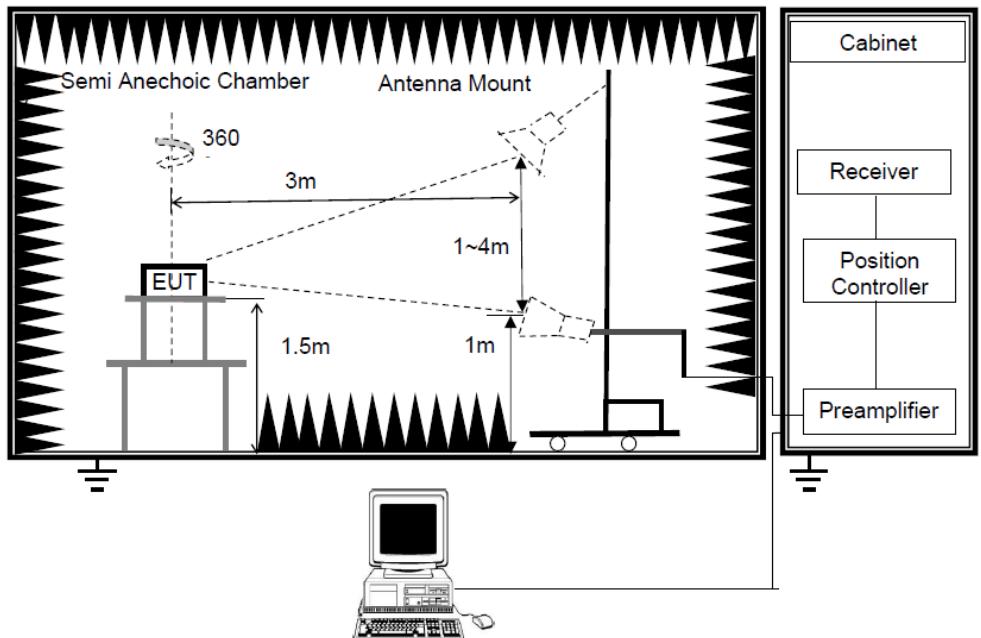

TEST ENVIRONMENT


Temperature	23°C	Relative Humidity	63%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V

TEST DATE / ENGINEER

Test Date	July 15, 2025	Test By	Leslie Xie
-----------	---------------	---------	------------

TEST RESULTS

8.1. RESTRICTED BANEDGE-ANT1 FPC EXTERNAL ANTENNA

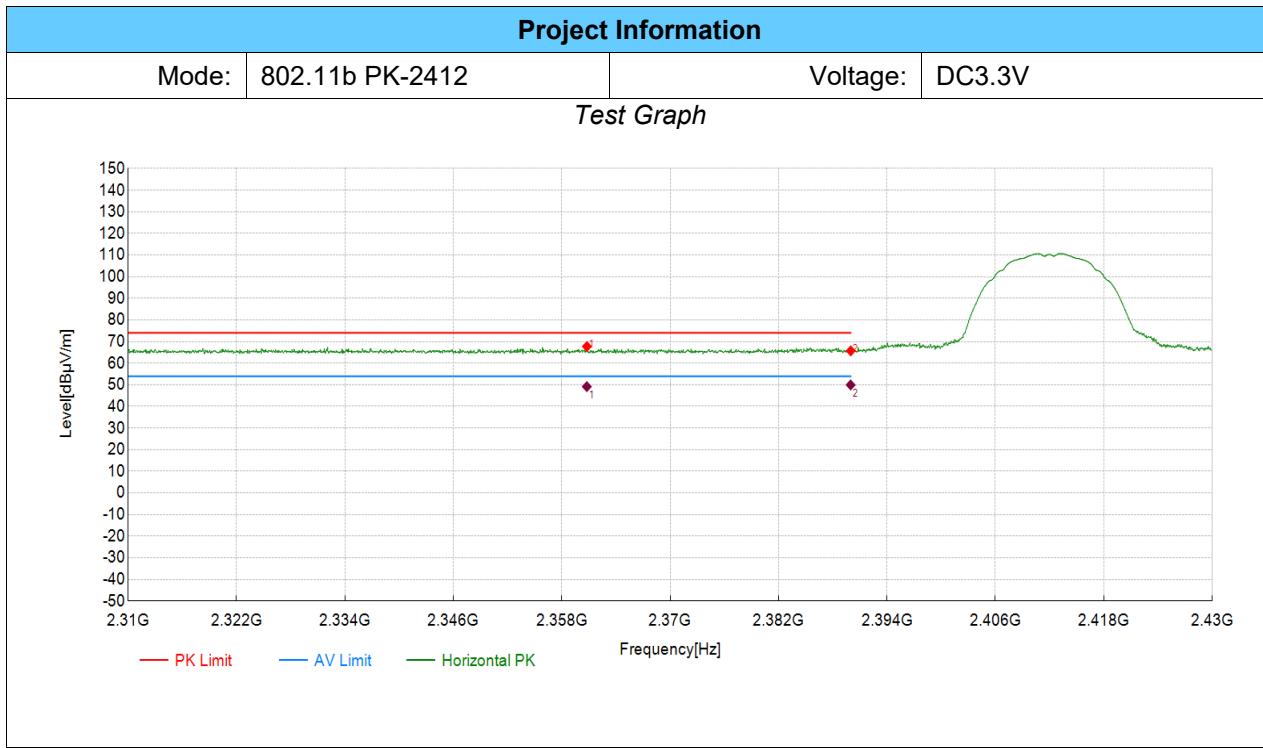

Suspected Data List


NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2360.79	31.98	67.74	35.76	74.00	6.26	PK	Horizontal	PASS
2	2390.00	29.95	65.71	35.76	74.00	8.29	PK	Horizontal	PASS

Final Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict
1	2360.78	35.76	13.42	49.18	54.00	4.82	Horizontal	PASS
2	2389.99	35.76	14.18	49.94	54.00	4.06	Horizontal	PASS

Note: (1)Level=Reading+Factor

(2)Margin=Limit-Level

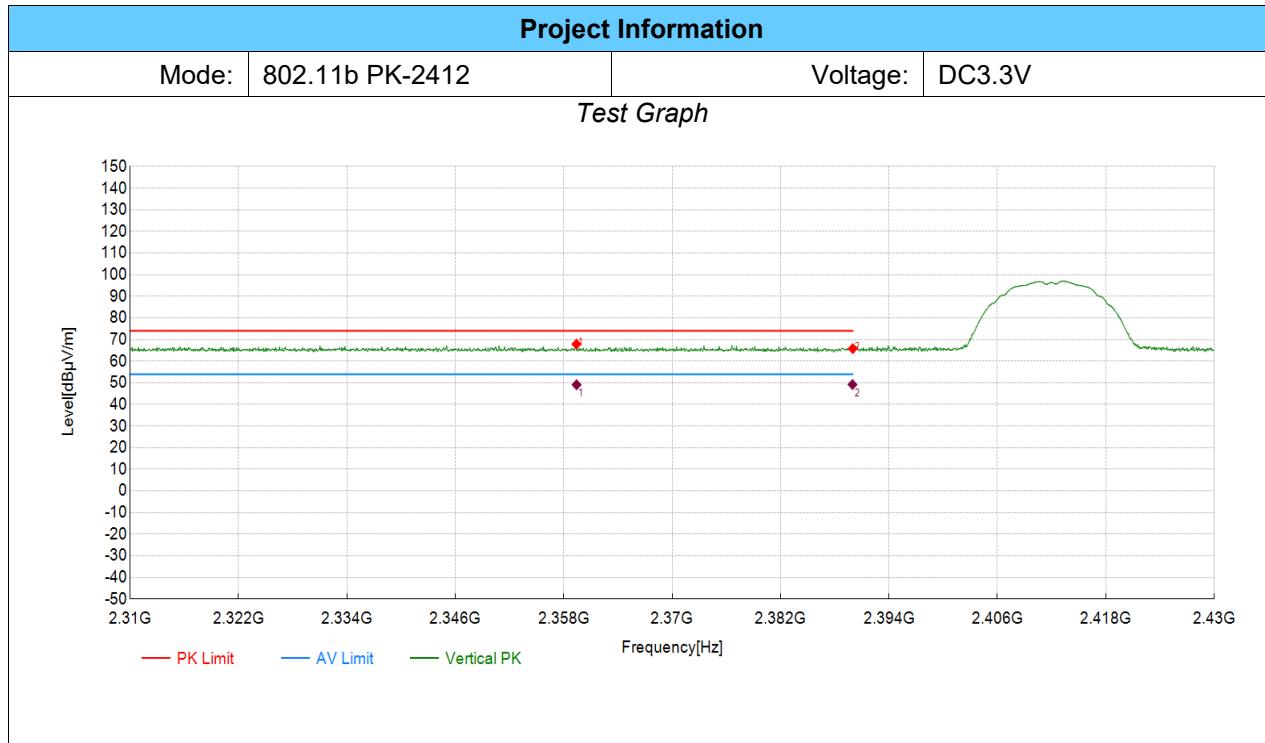


Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2359.40	32.18	67.93	35.75	74.00	6.07	PK	Vertical	PASS
2	2390.00	30.06	65.82	35.76	74.00	8.18	PK	Vertical	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict	
1	2359.43	35.75	13.37	49.12	54.00	4.88	Vertical	PASS	
2	2389.97	35.76	13.44	49.20	54.00	4.80	Vertical	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

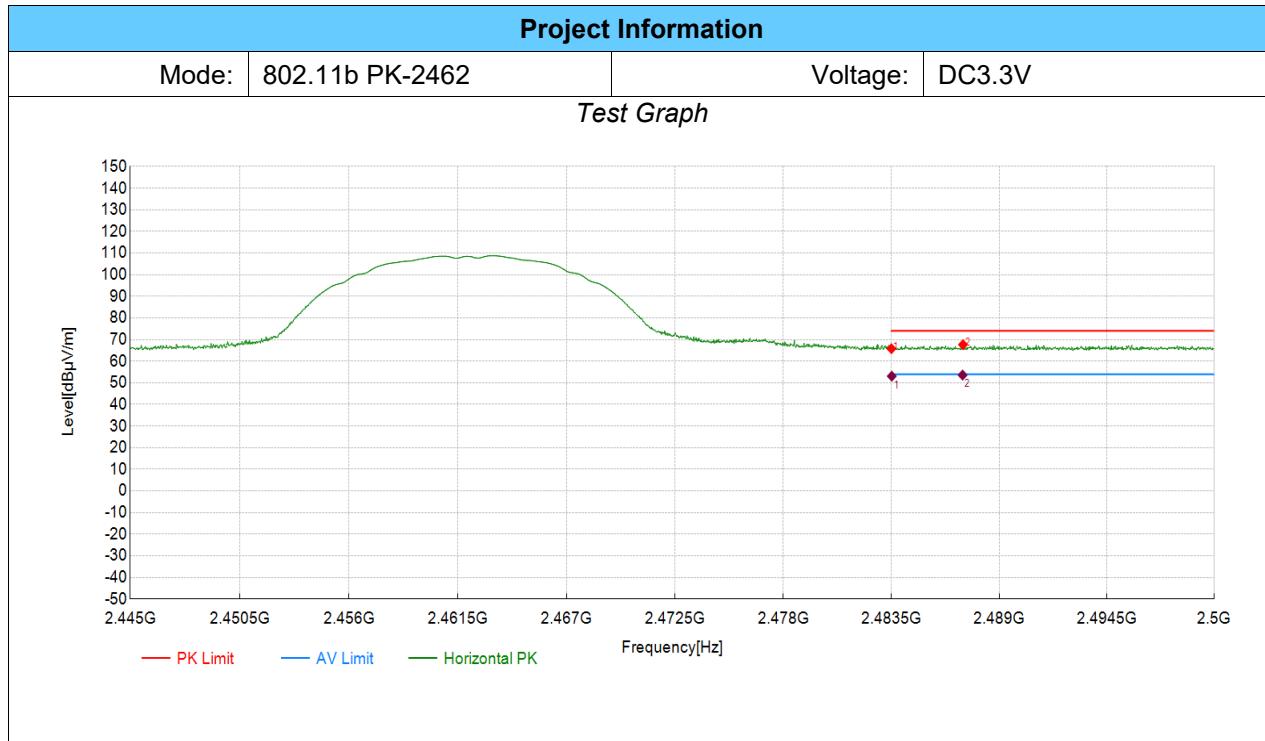


Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	29.80	65.77	35.97	74.00	8.23	PK	Horizontal	PASS
2	2487.15	31.67	67.65	35.98	74.00	6.35	PK	Horizontal	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict	
1	2483.52	36.42	16.64	53.06	54.00	0.94	Horizontal	PASS	
2	2487.13	36.42	17.16	53.58	54.00	0.42	Horizontal	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

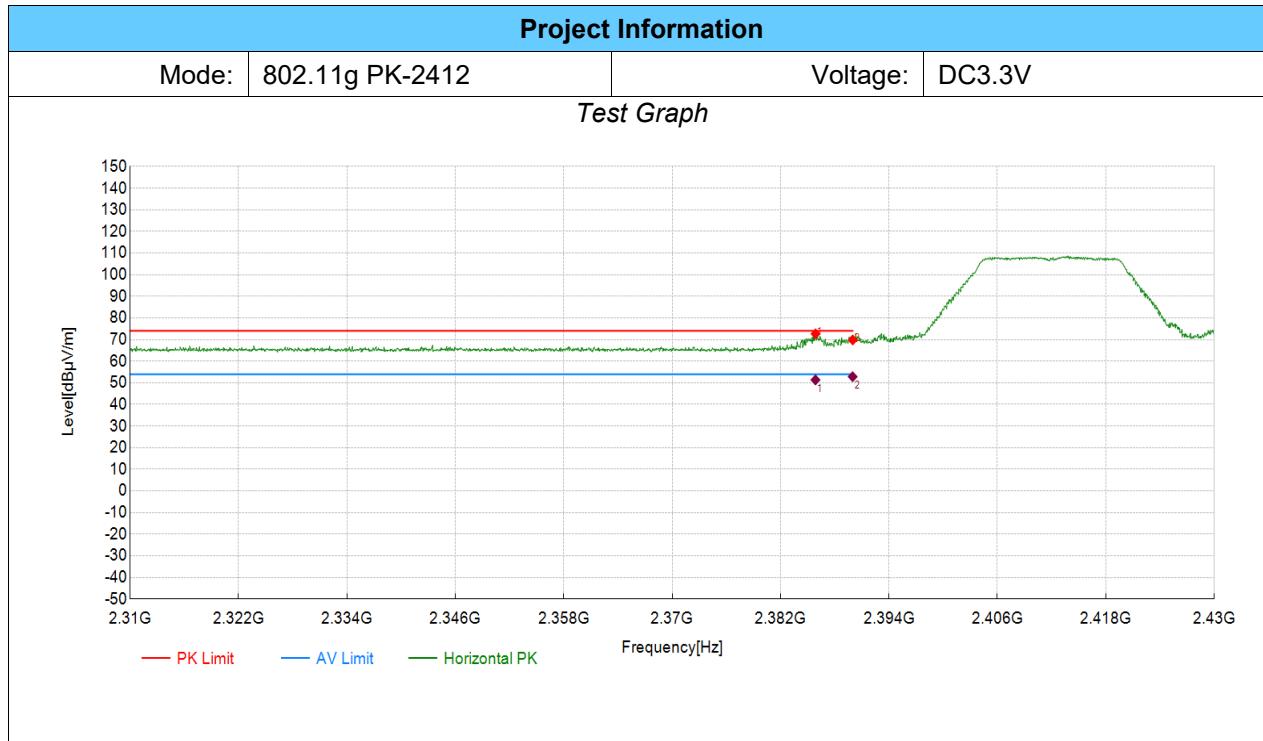


Suspected Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2385.88	36.91	72.67	35.76	74.00	1.33	PK	Horizontal	PASS
2	2390.00	34.08	69.84	35.76	74.00	4.16	PK	Horizontal	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict	
1	2385.88	35.76	15.59	51.35	54.00	2.65	Horizontal	PASS	
2	2389.99	35.76	17.08	52.84	54.00	1.16	Horizontal	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

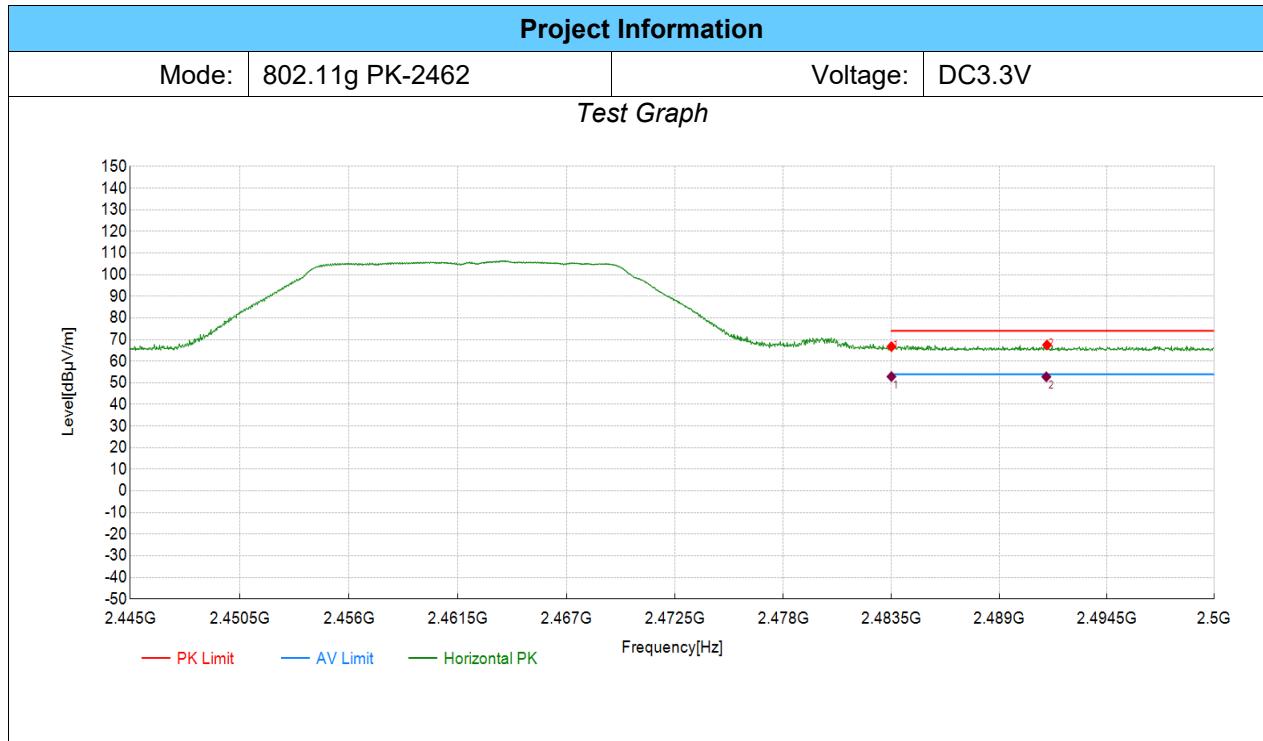


Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	30.78	66.75	35.97	74.00	7.25	PK	Horizontal	PASS
2	2491.44	31.53	67.52	35.99	74.00	6.48	PK	Horizontal	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict	
1	2483.50	36.42	16.45	52.87	54.00	1.13	Horizontal	PASS	
2	2491.41	36.44	16.33	52.77	54.00	1.23	Horizontal	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

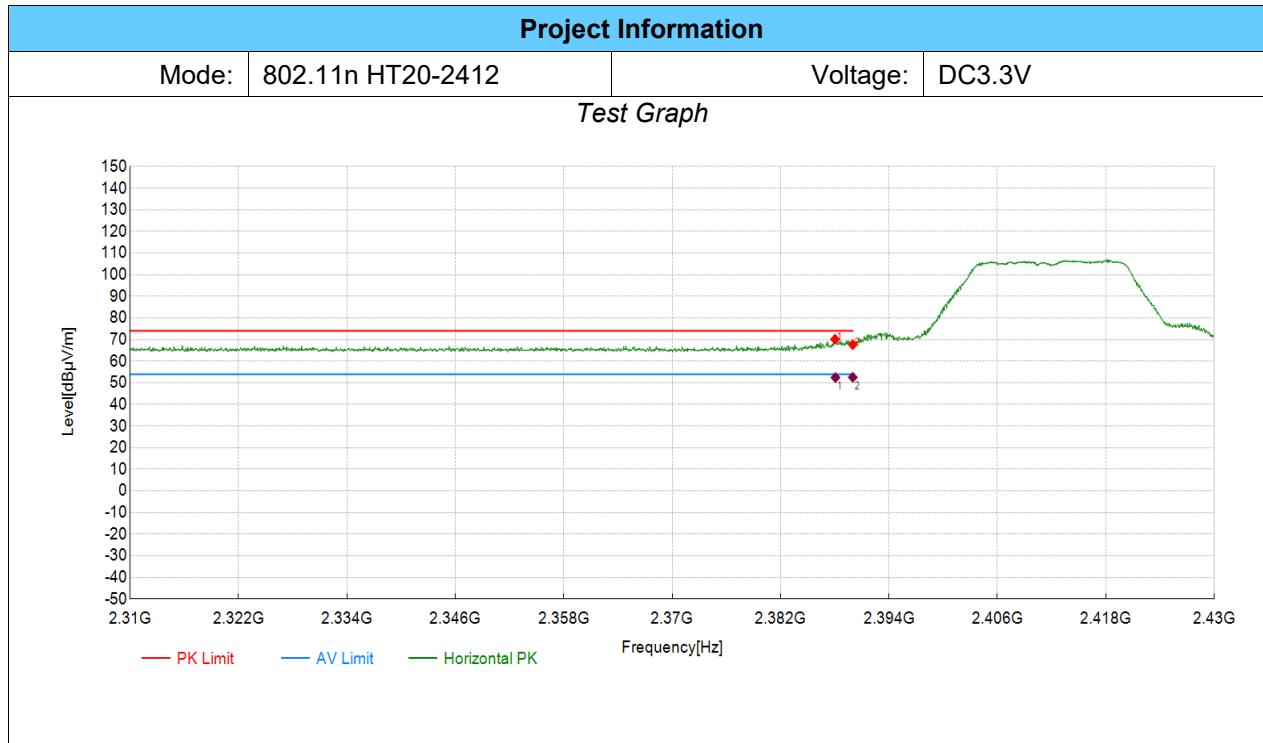


Suspected Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2388.04	34.39	70.14	35.75	74.00	3.86	PK	Horizontal	PASS
2	2390.00	31.90	67.66	35.76	74.00	6.34	PK	Horizontal	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict	
1	2388.09	35.75	16.67	52.42	54.00	1.58	Horizontal	PASS	
2	2390.01	35.76	16.78	52.54	53.90	1.36	Horizontal	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

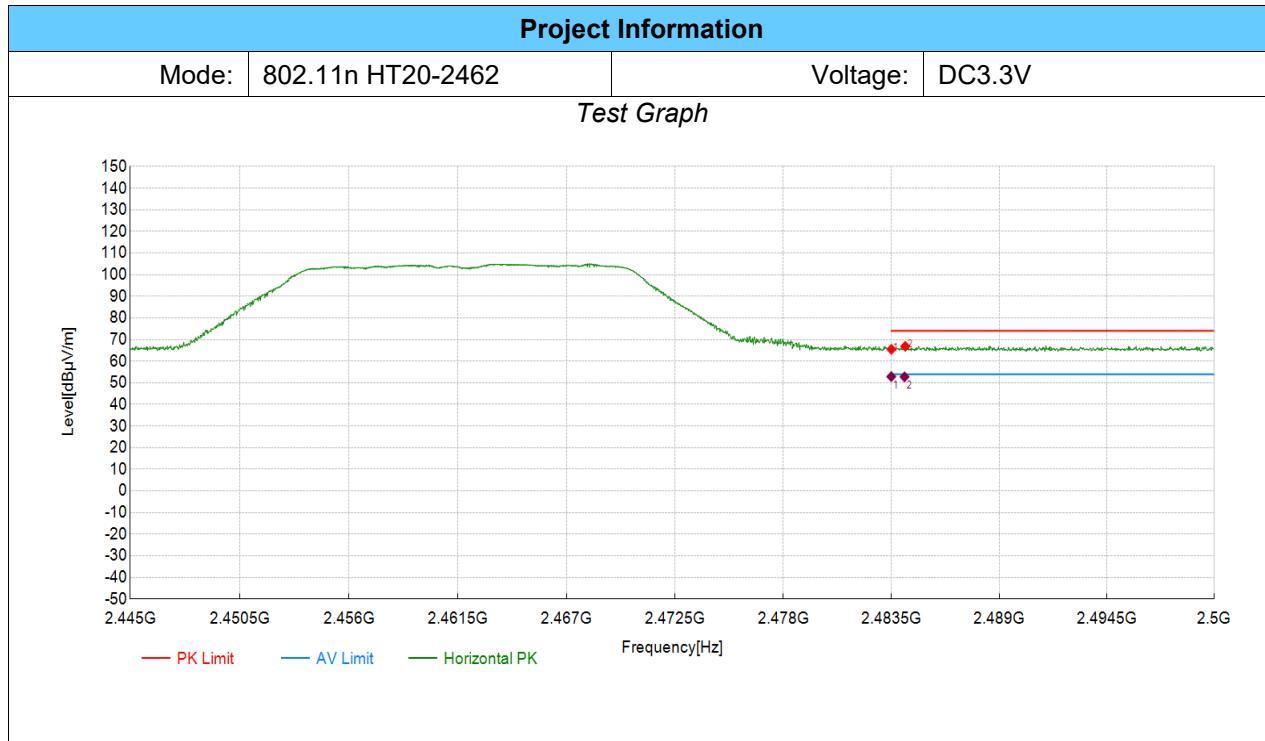


Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	29.53	65.50	35.97	74.00	8.50	PK	Horizontal	PASS
2	2484.21	30.93	66.90	35.97	74.00	7.10	PK	Horizontal	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict	
1	2483.49	36.42	16.46	52.88	54.00	1.12	Horizontal	PASS	
2	2484.17	36.42	16.33	52.75	54.00	1.25	Horizontal	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

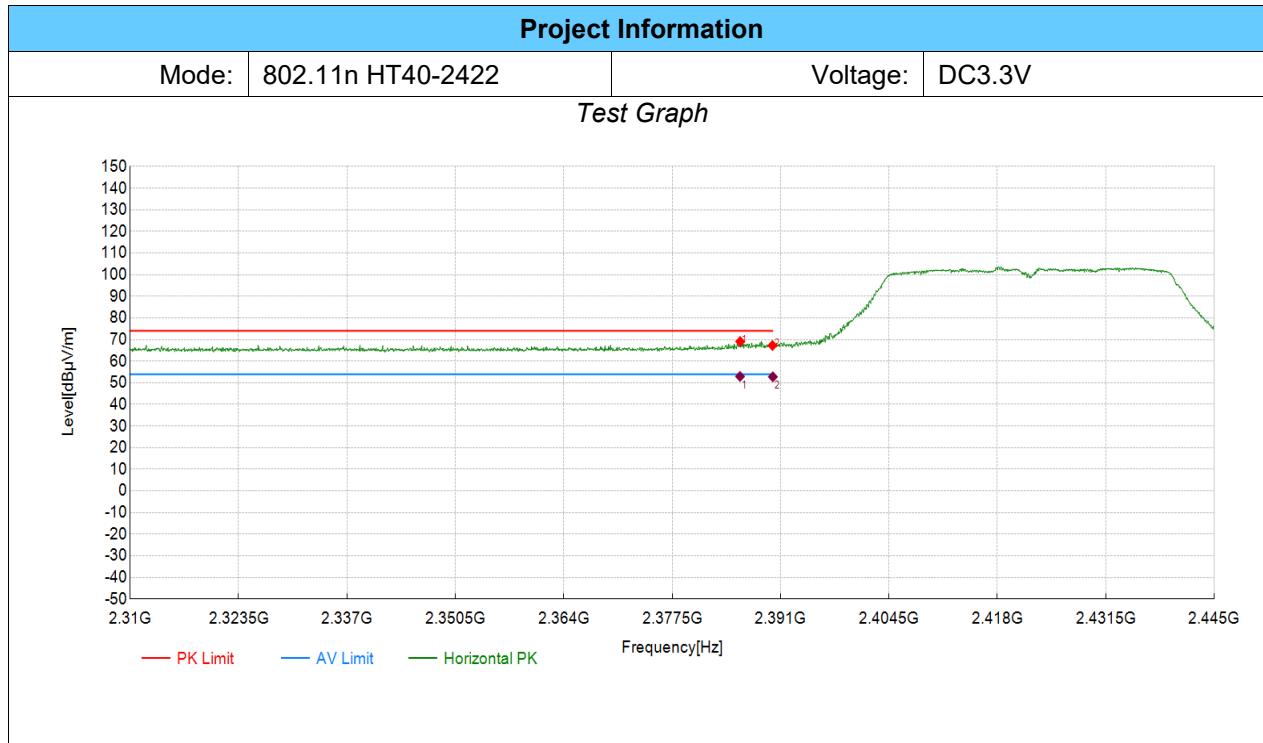


Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2385.98	33.35	69.11	35.76	74.00	4.89	PK	Horizontal	PASS
2	2390.00	31.50	67.26	35.76	74.00	6.74	PK	Horizontal	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict	
1	2385.96	35.76	17.20	52.96	54.00	1.04	Horizontal	PASS	
2	2390.05	35.76	17.01	52.77	53.90	1.13	Horizontal	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

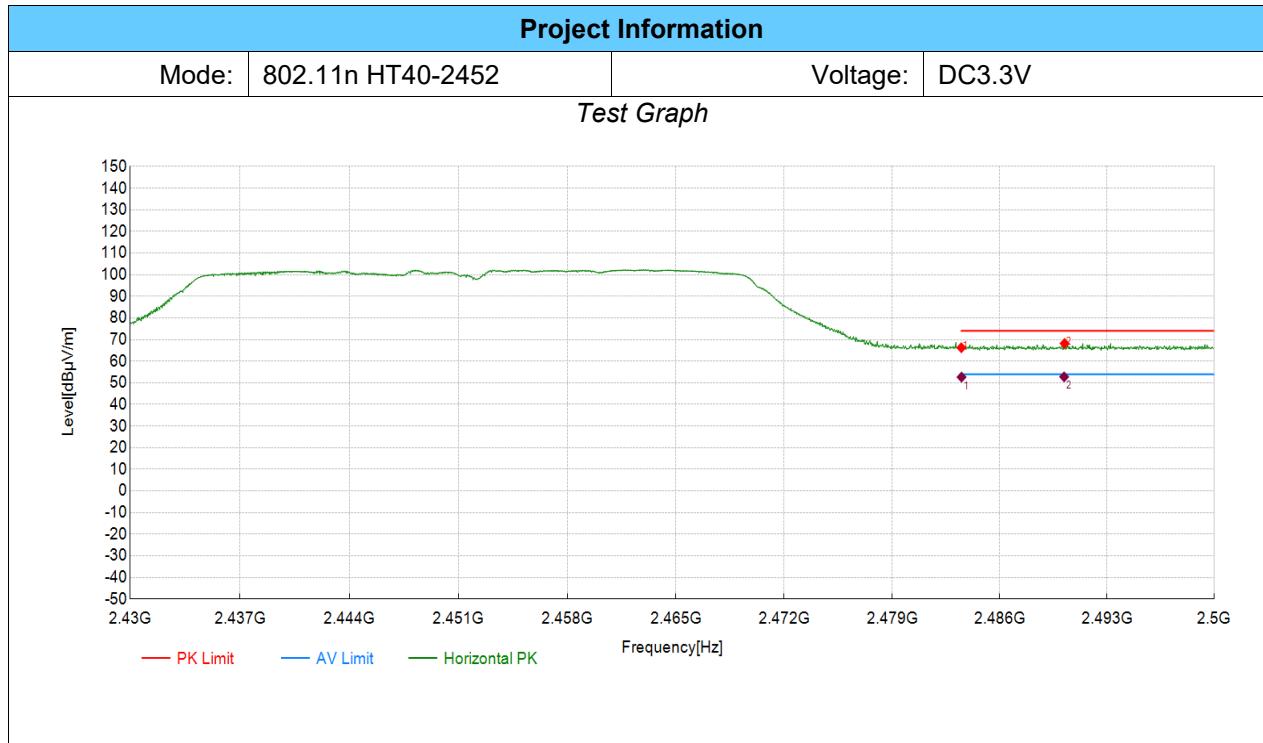


Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	29.80	66.22	36.42	74.00	7.78	PK	Horizontal	PASS
2	2490.23	31.79	68.23	36.44	74.00	5.77	PK	Horizontal	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict	
1	2483.51	36.42	16.23	52.65	54.00	1.35	Horizontal	PASS	
2	2490.20	36.44	16.31	52.75	54.00	1.25	Horizontal	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

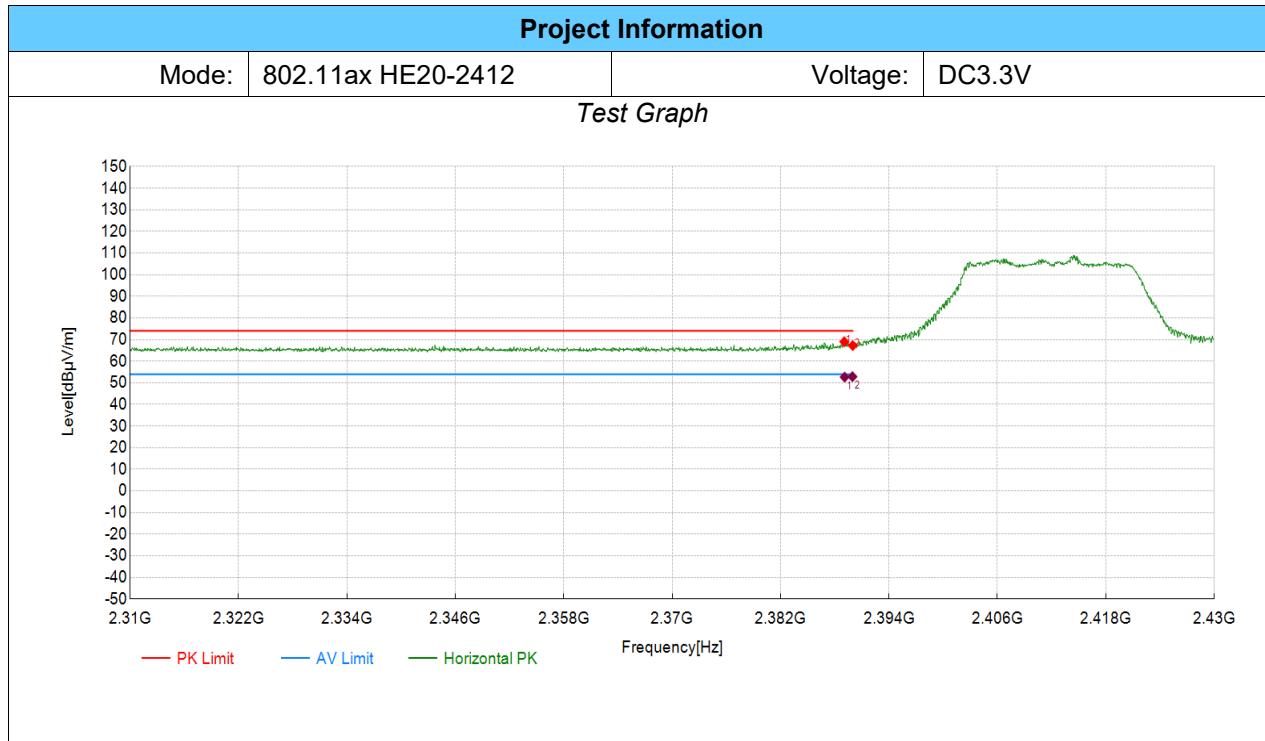


Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2389.06	33.27	69.02	35.75	74.00	4.98	PK	Horizontal	PASS
2	2390.00	31.47	67.23	35.76	74.00	6.77	PK	Horizontal	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict	
1	2389.10	35.75	16.88	52.63	54.00	1.37	Horizontal	PASS	
2	2389.97	35.76	17.08	52.84	54.00	1.16	Horizontal	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

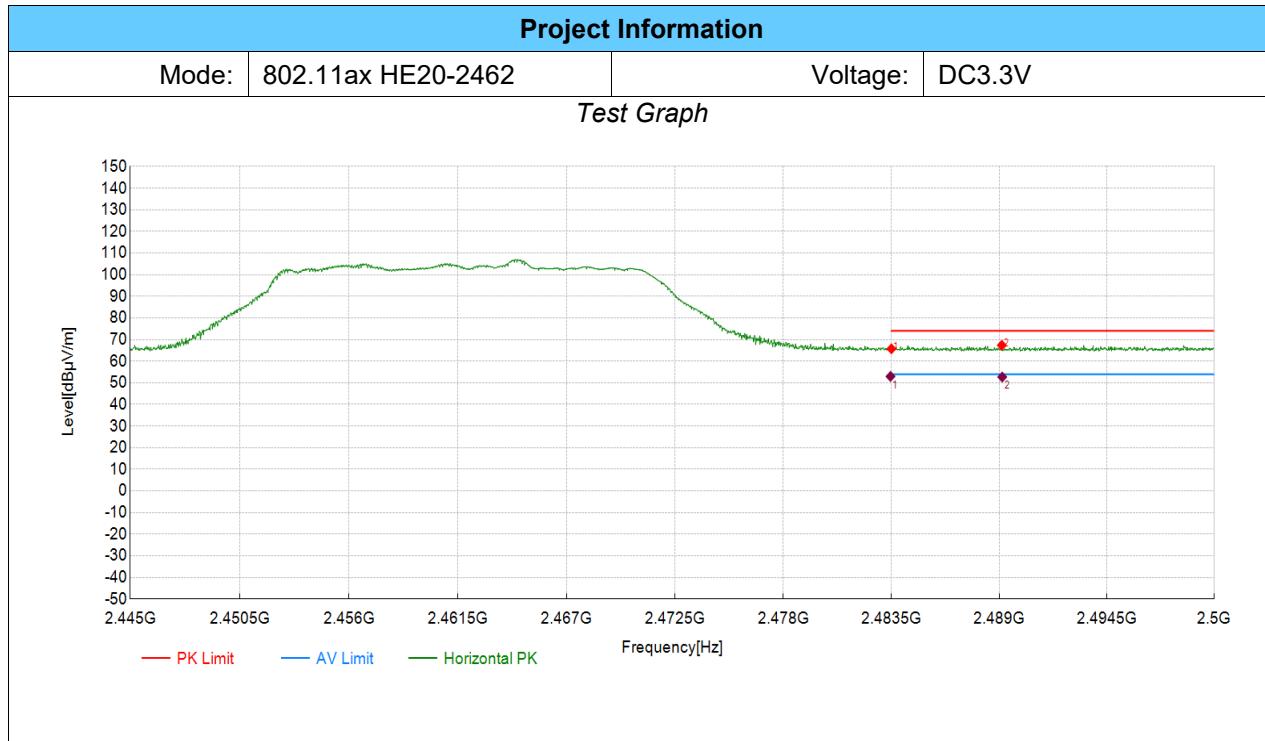


Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	29.75	65.72	35.97	74.00	8.28	PK	Horizontal	PASS
2	2489.13	31.38	67.36	35.98	74.00	6.64	PK	Horizontal	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict	
1	2483.45	36.42	16.54	52.96	54.00	1.04	Horizontal	PASS	
2	2489.15	36.43	16.26	52.69	54.00	1.31	Horizontal	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

8.2. RESTRICTED BANDEDGE-ANT2 FPC EXTERNAL ANTENNA

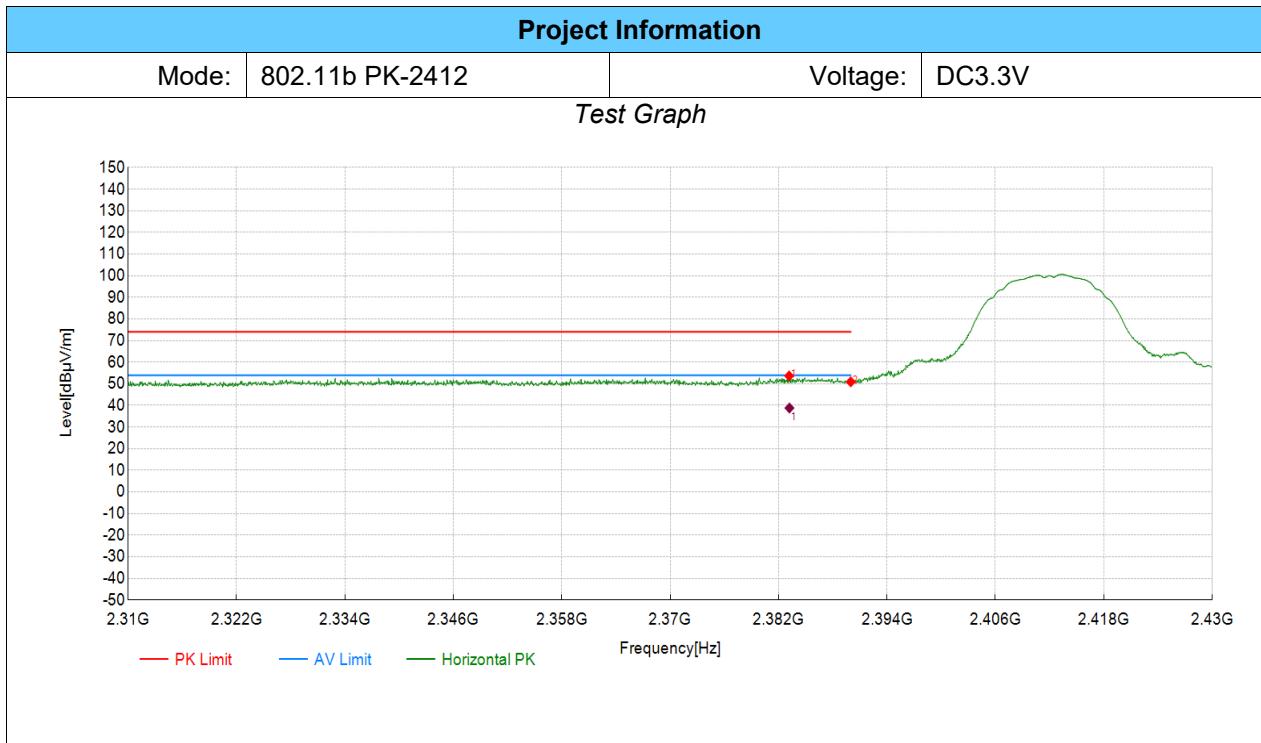


Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2383.18	34.59	53.65	19.06	74.00	20.35	PK	Horizontal	PASS
2	2390.00	31.84	50.92	19.08	74.00	23.08	PK	Horizontal	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict	
1	2383.21	19.06	19.75	38.81	54.00	15.19	Horizontal	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

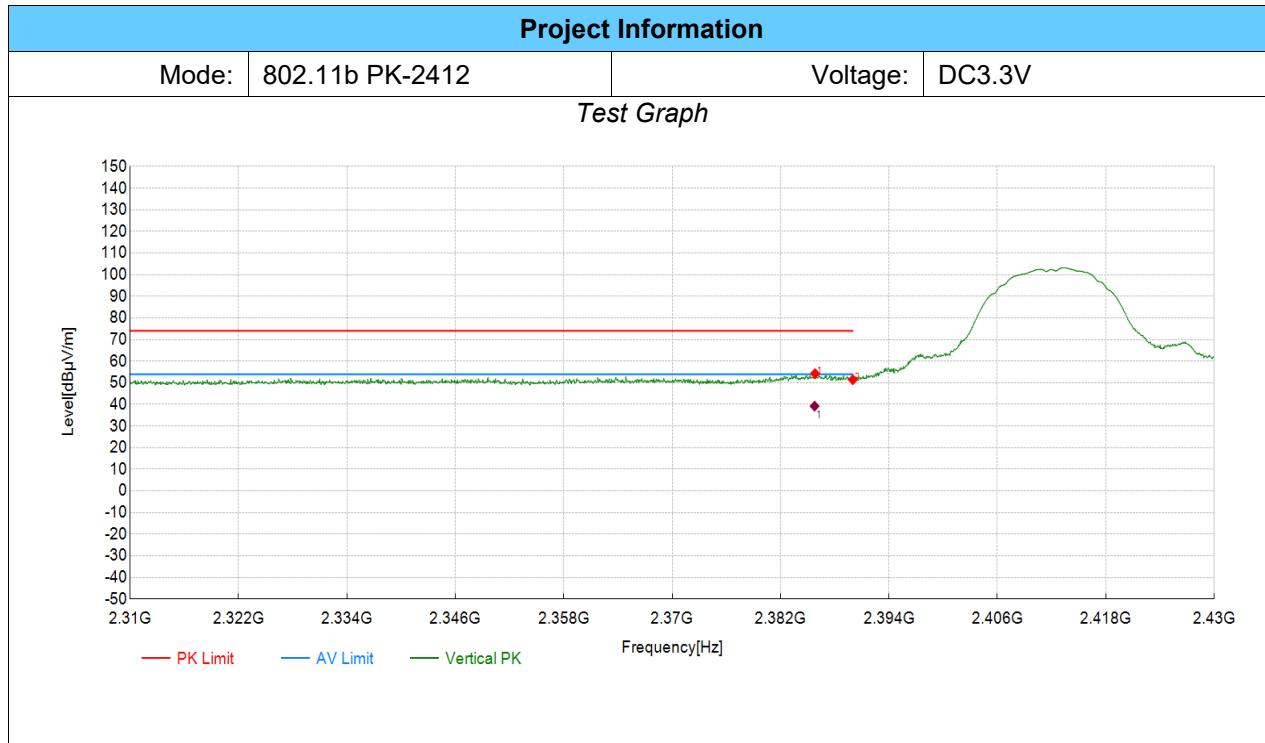


Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2385.82	35.23	54.29	19.06	74.00	19.71	PK	Vertical	PASS
2	2390.00	32.34	51.42	19.08	74.00	22.58	PK	Vertical	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict	
1	2385.77	19.06	20.16	39.22	54.00	14.78	Vertical	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

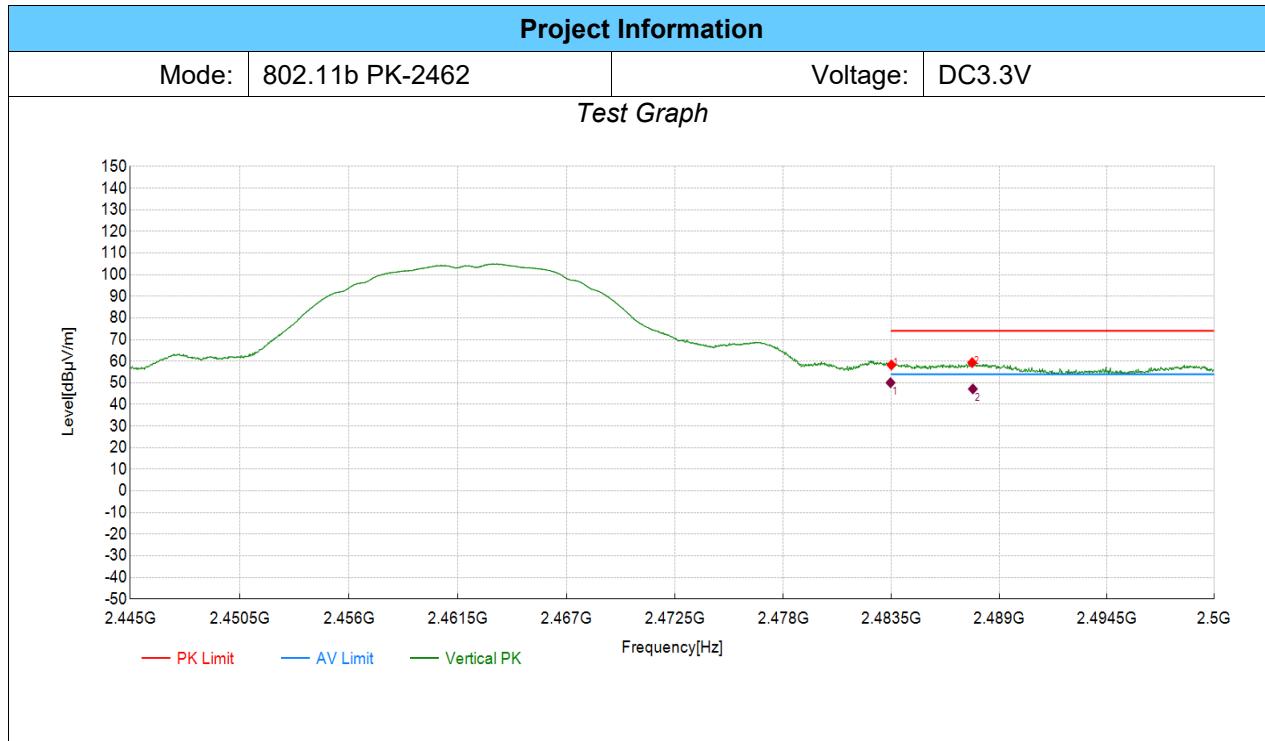


Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	38.57	58.25	19.68	74.00	15.75	PK	Vertical	PASS
2	2487.62	39.63	59.34	19.71	74.00	14.66	PK	Vertical	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict	
1	2483.46	19.68	30.37	50.05	54.00	3.95	Vertical	PASS	
2	2487.65	19.71	27.45	47.16	54.00	6.84	Vertical	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

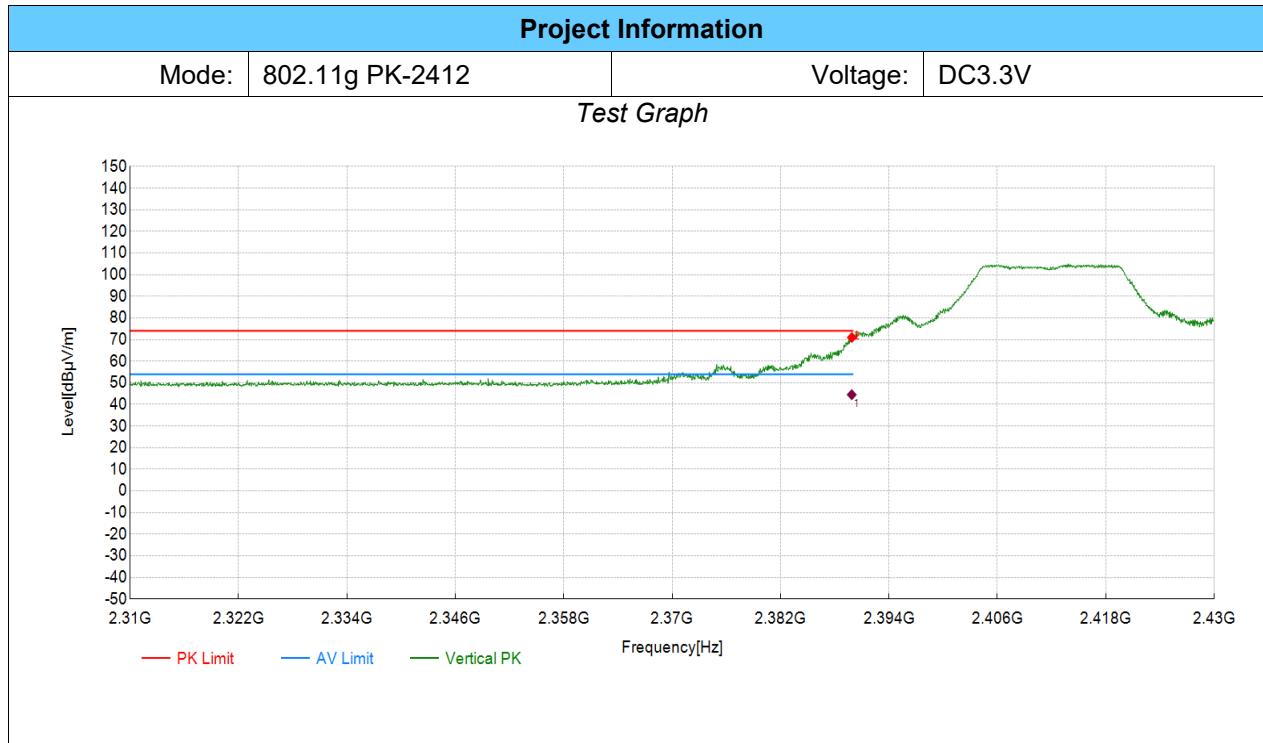


Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2389.90	51.90	70.98	19.08	74.00	3.02	PK	Vertical	PASS
2	2390.00	51.61	70.69	19.08	74.00	3.31	PK	Vertical	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict	
1	2389.89	19.08	25.44	44.52	54.00	9.48	Vertical	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

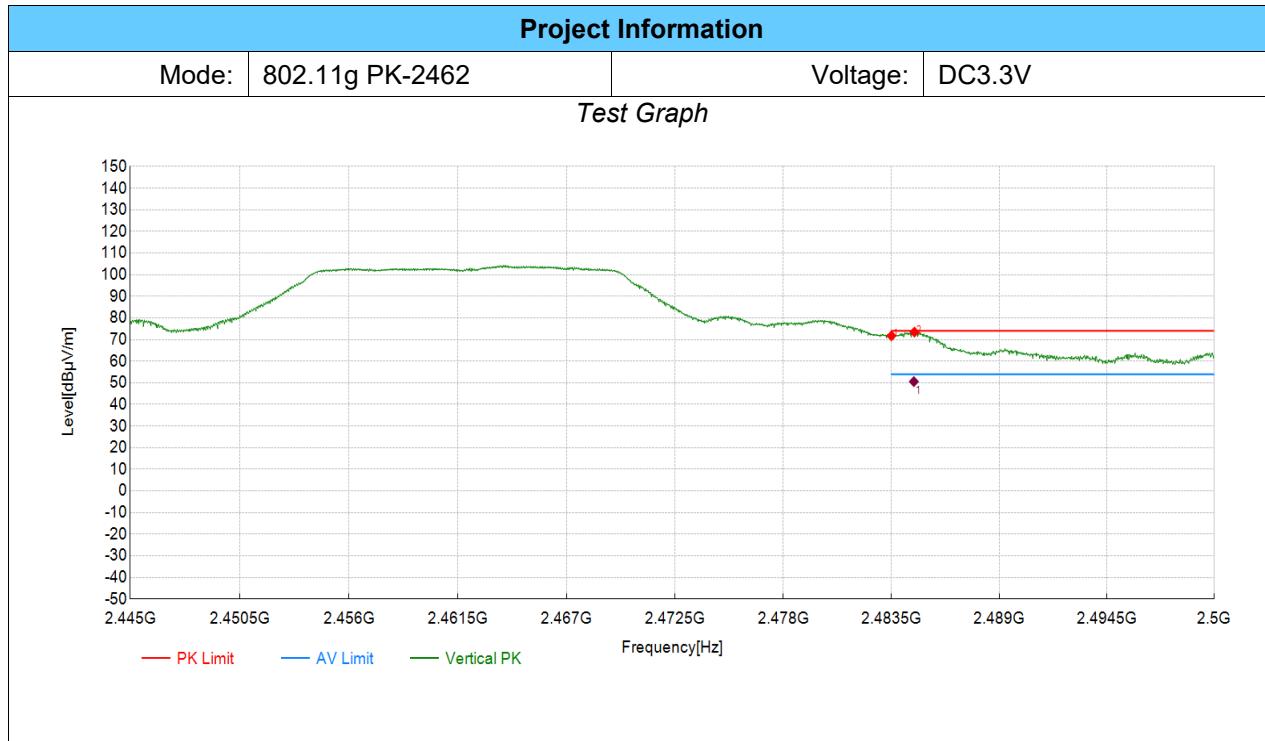


Suspected Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	52.05	71.73	19.68	74.00	2.27	PK	Vertical	PASS
2	2484.67	53.78	73.47	19.69	74.00	0.53	PK	Vertical	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict	
1	2484.64	19.69	30.88	50.57	54.00	3.43	Vertical	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

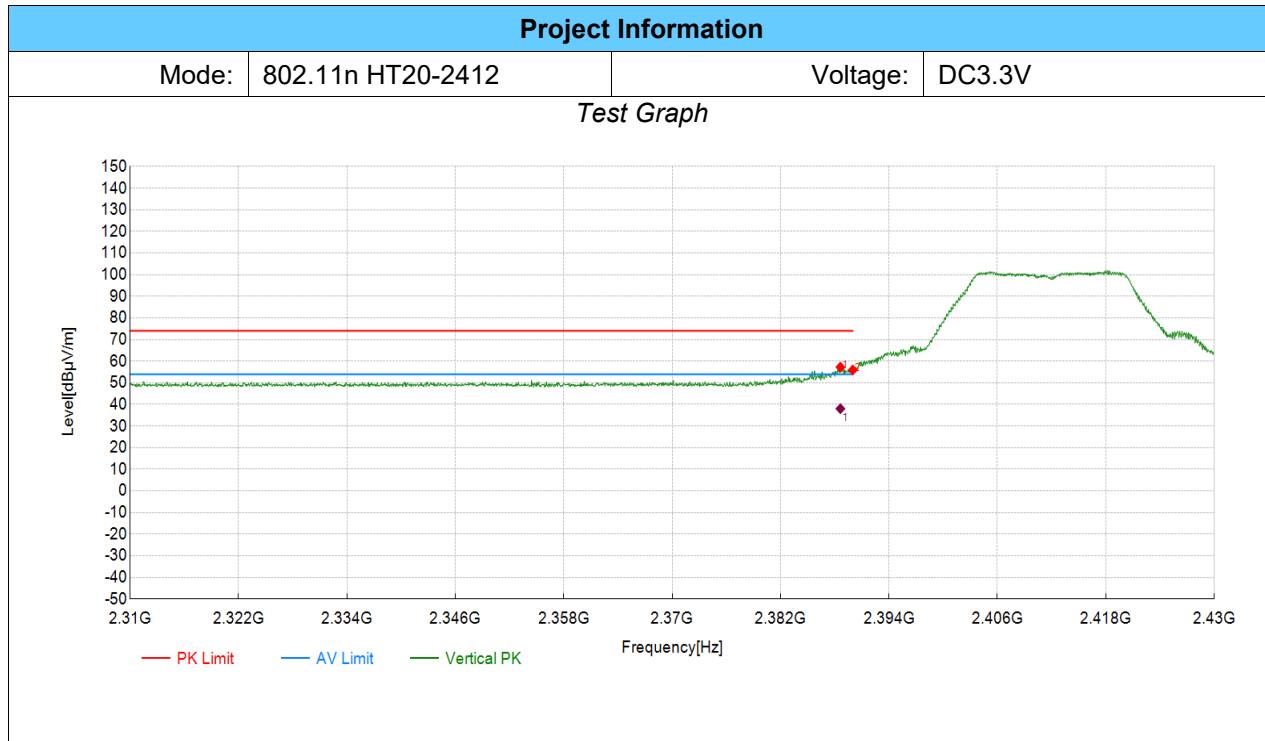


Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2388.64	38.20	57.26	19.06	74.00	16.74	PK	Vertical	PASS
2	2390.00	36.88	55.96	19.08	74.00	18.04	PK	Vertical	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict	
1	2388.63	19.06	18.96	38.02	54.00	15.98	Vertical	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

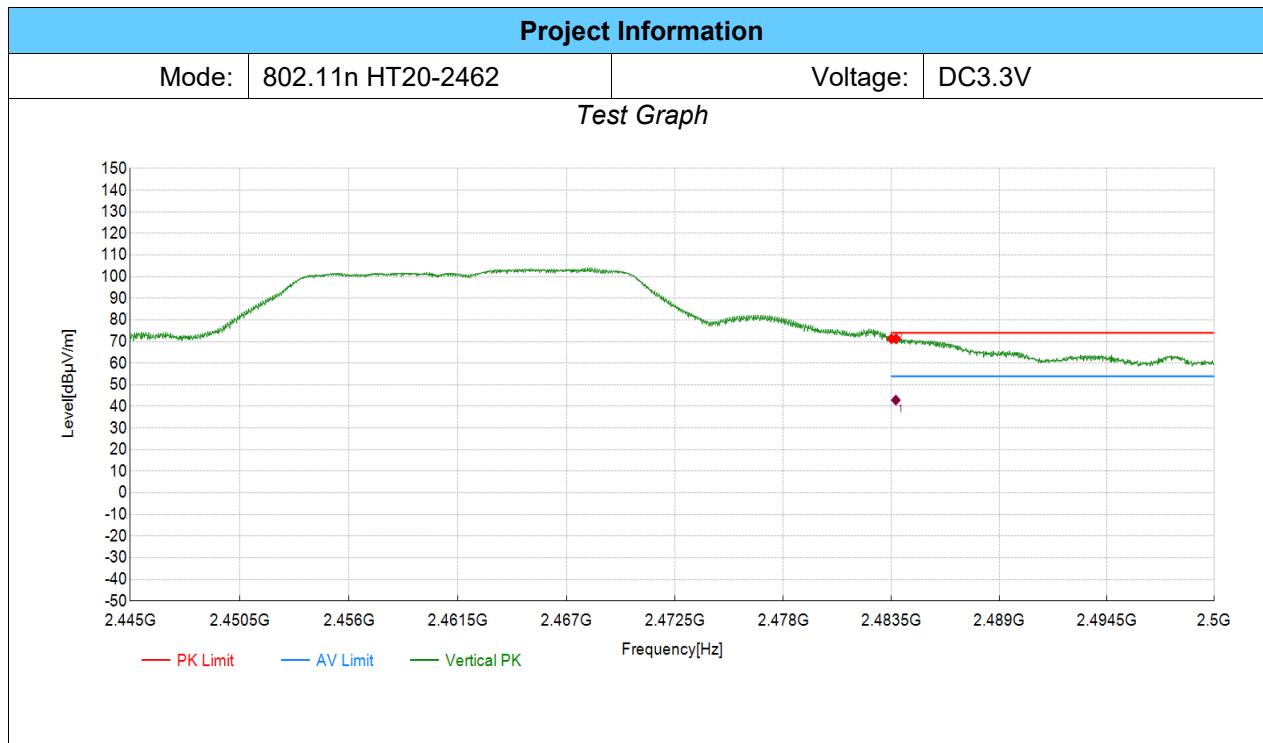


Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	51.59	71.27	19.68	74.00	2.73	PK	Vertical	PASS
2	2483.74	51.60	71.28	19.68	74.00	2.72	PK	Vertical	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict	
1	2483.73	19.68	23.24	42.92	54.00	11.08	Vertical	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

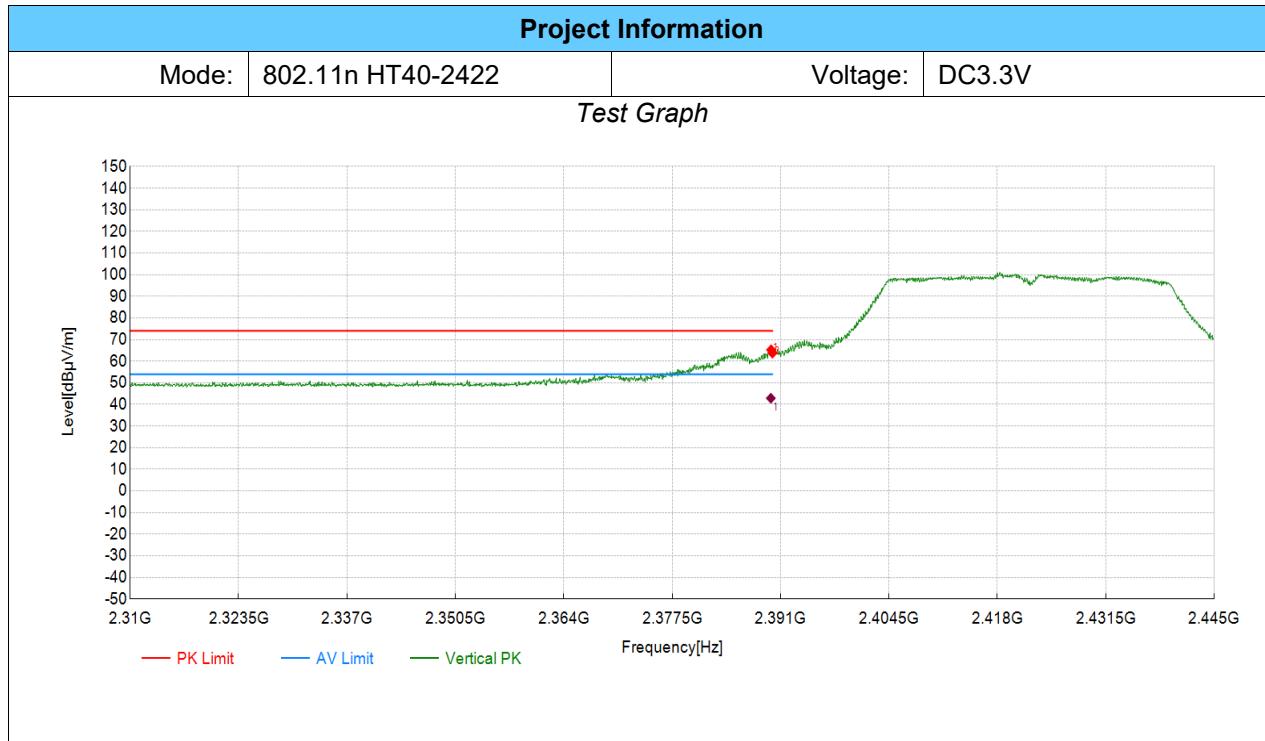


Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2389.82	46.18	65.26	19.08	74.00	8.74	PK	Vertical	PASS
2	2390.00	44.66	63.74	19.08	74.00	10.26	PK	Vertical	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict	
1	2389.80	19.08	23.80	42.88	54.00	11.12	Vertical	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

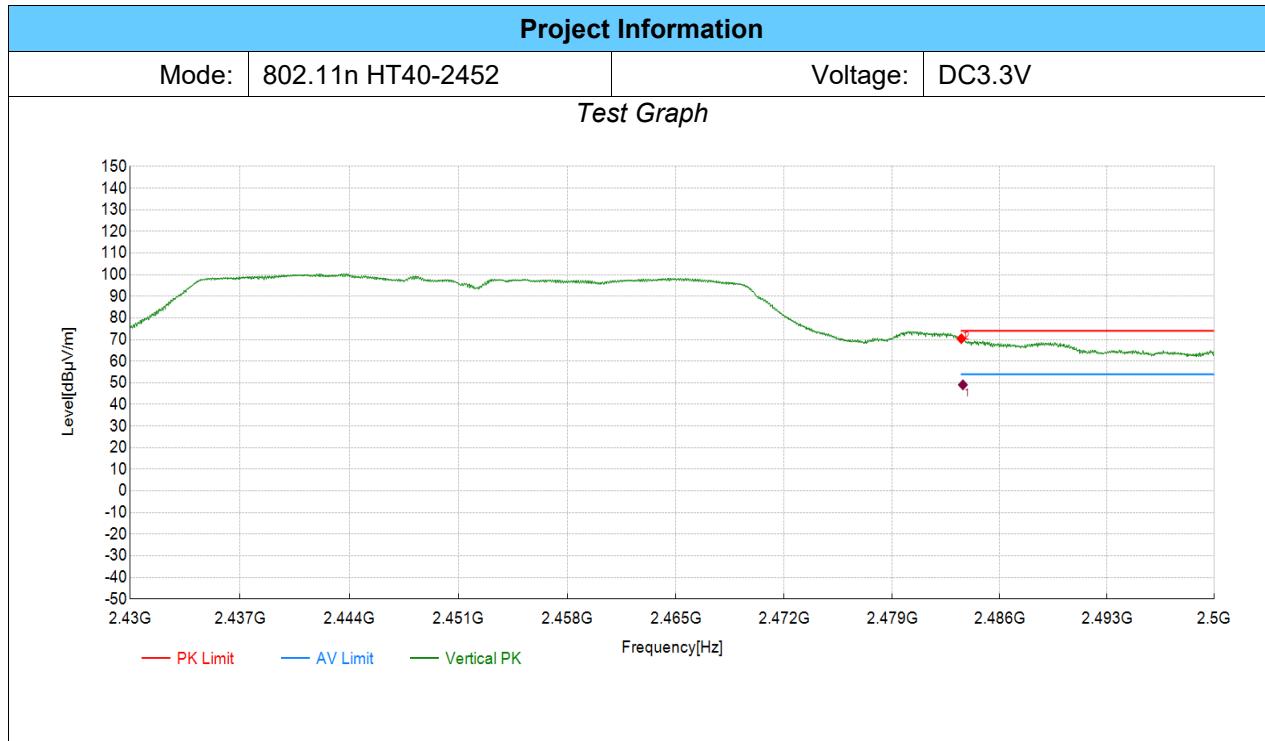


Suspected Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	50.73	70.41	19.68	74.00	3.59	PK	Vertical	PASS
2	2483.58	50.84	70.52	19.68	74.00	3.48	PK	Vertical	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict	
1	2483.60	19.68	29.38	49.06	54.00	4.94	Vertical	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

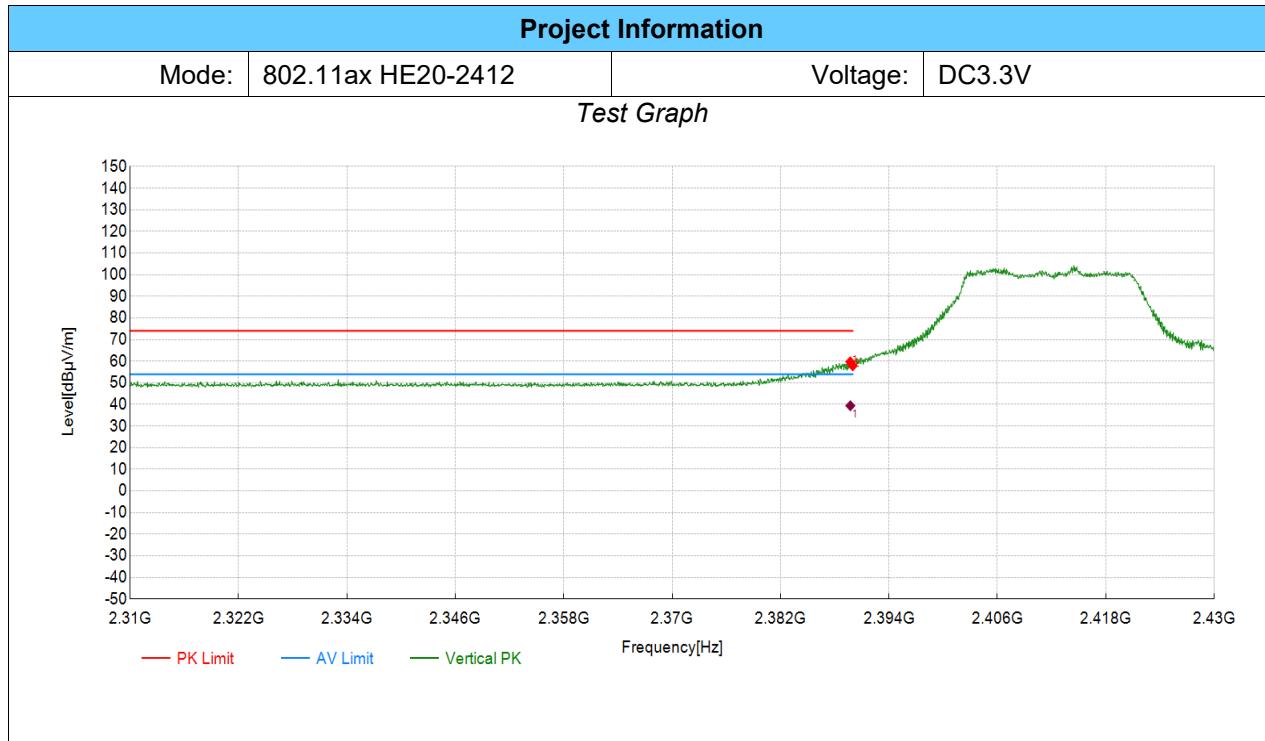


Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2389.72	40.64	59.72	19.08	74.00	14.28	PK	Vertical	PASS
2	2390.00	38.79	57.87	19.08	74.00	16.13	PK	Vertical	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict	
1	2389.74	19.08	20.32	39.40	54.00	14.60	Vertical	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

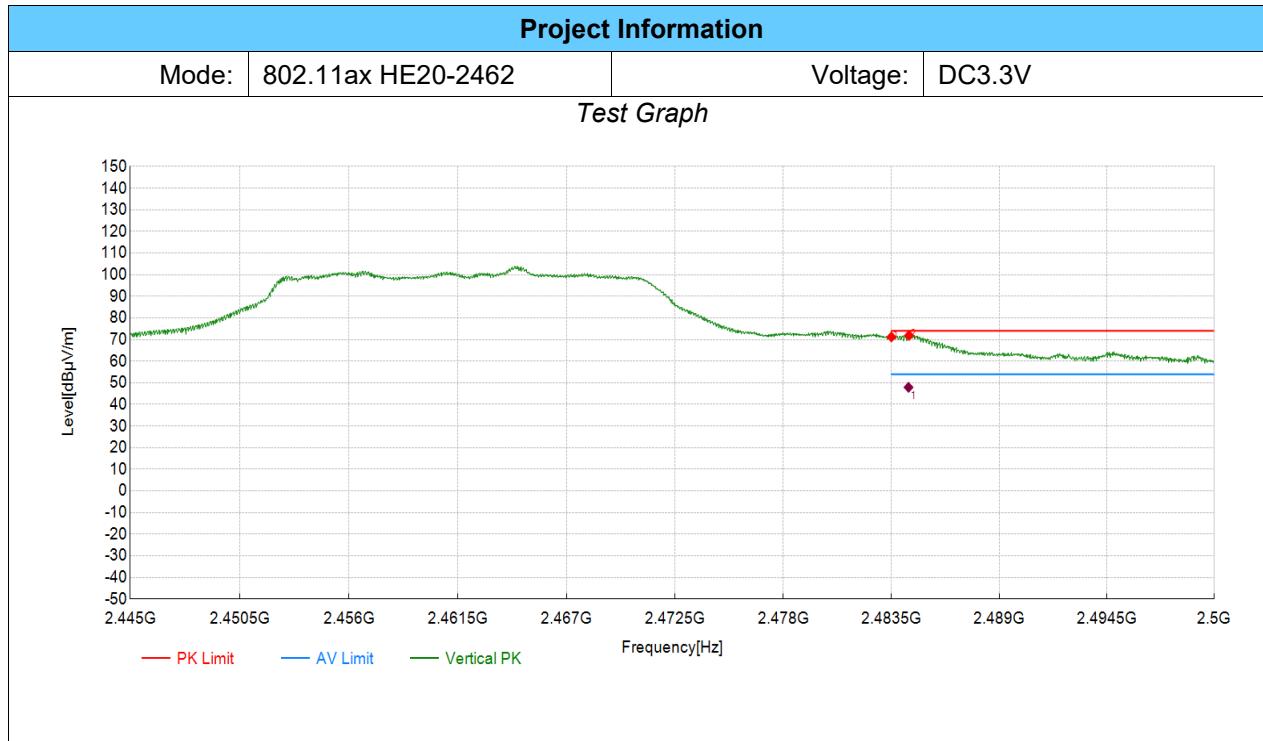


Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	51.54	71.22	19.68	74.00	2.78	PK	Vertical	PASS
2	2484.40	52.24	71.93	19.69	74.00	2.07	PK	Vertical	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict	
1	2484.37	19.69	28.23	47.92	54.00	6.08	Vertical	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

8.3. RESTRICTED BANDEDGE-ANT1 PCB ONBOARD ANTENNA

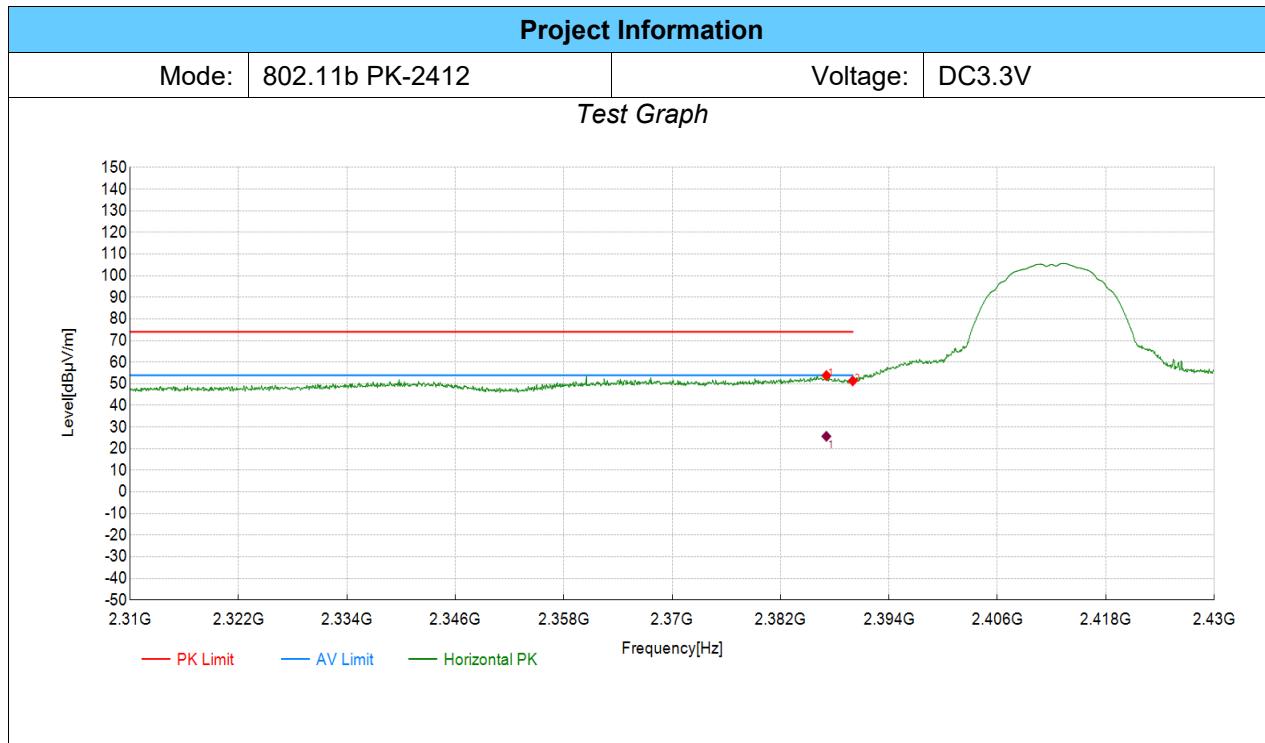


Suspected Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2387.08	49.22	53.83	4.61	74.00	20.17	PK	Horizontal	PASS
2	2390.00	46.75	51.35	4.60	74.00	22.65	PK	Horizontal	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict	
1	2387.08	4.61	21.10	25.71	54.00	28.29	Horizontal	PASS	

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

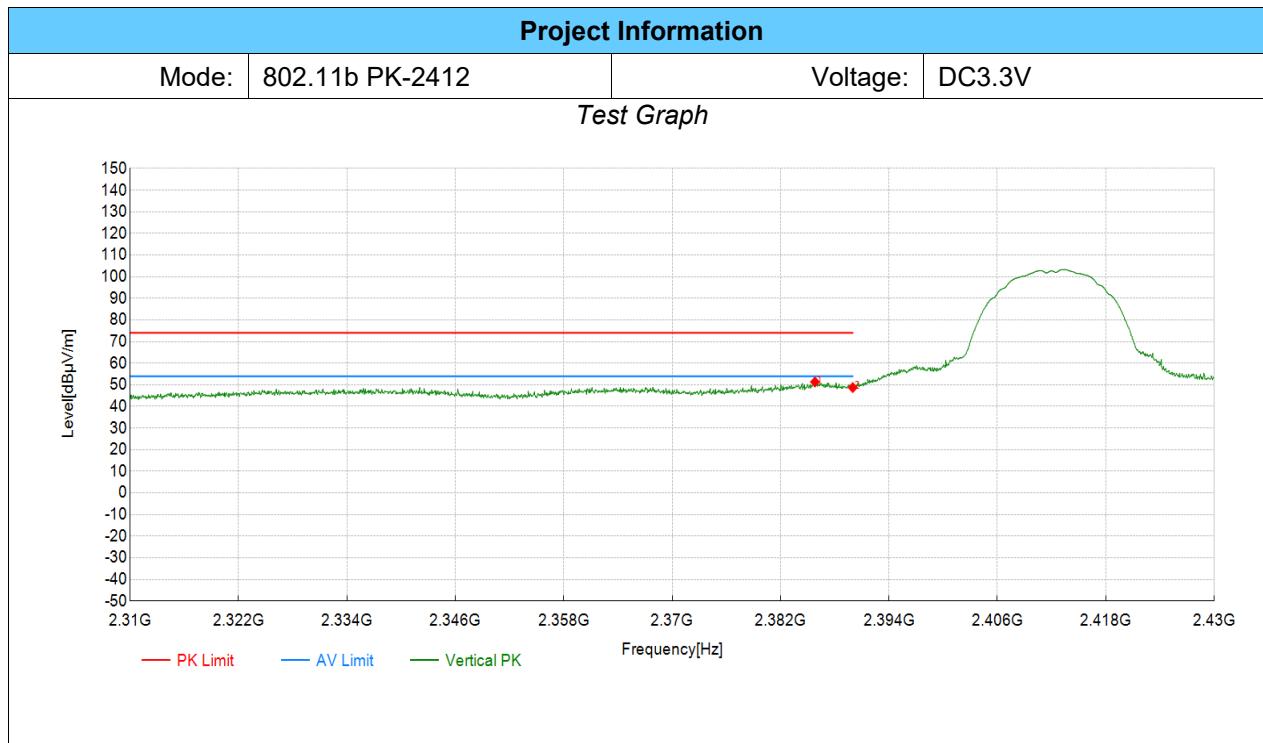

Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2385.82	46.71	51.32	4.61	74.00	22.68	PK	Vertical	PASS
2	2390.00	44.14	48.74	4.60	74.00	25.26	PK	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

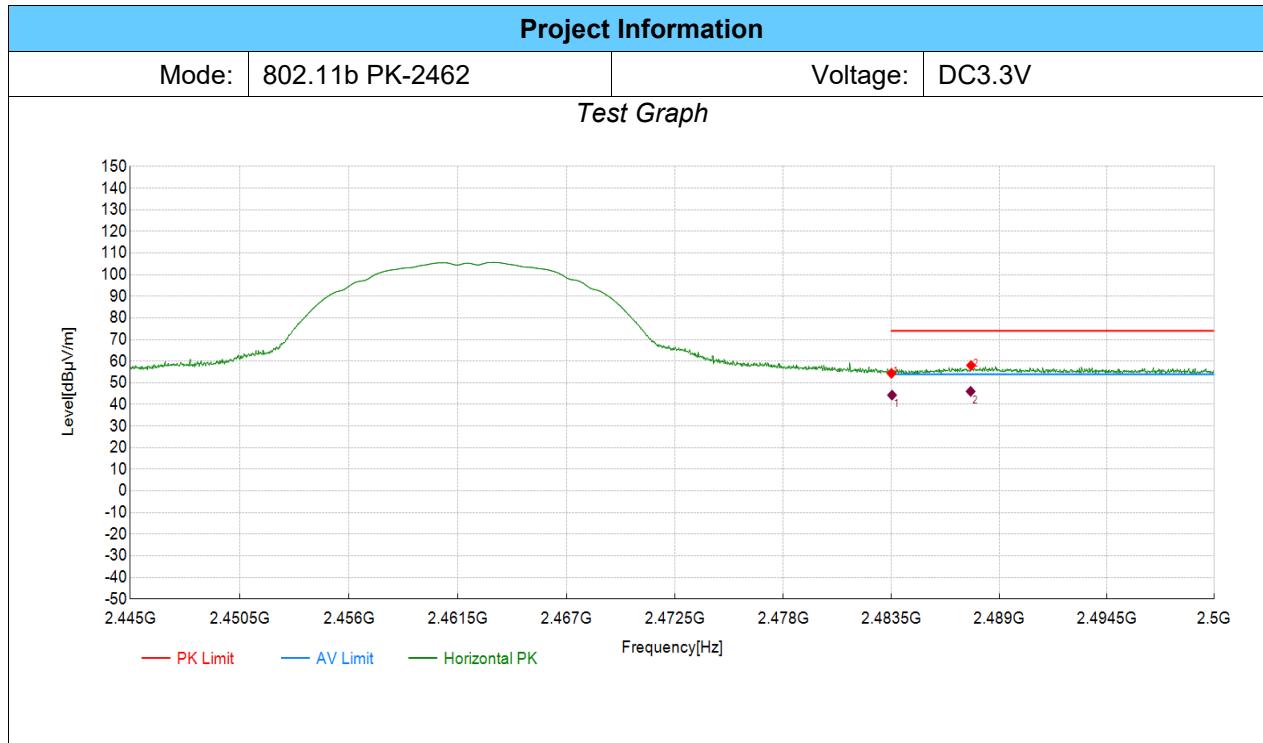


Suspected Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	49.79	54.37	4.58	74.00	19.63	PK	Horizontal	PASS
2	2487.56	53.37	58.05	4.68	74.00	15.95	PK	Horizontal	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict	
1	2483.53	4.58	39.73	44.31	54.00	9.69	Horizontal	PASS	
2	2487.54	4.68	41.36	46.04	54.00	7.96	Horizontal	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

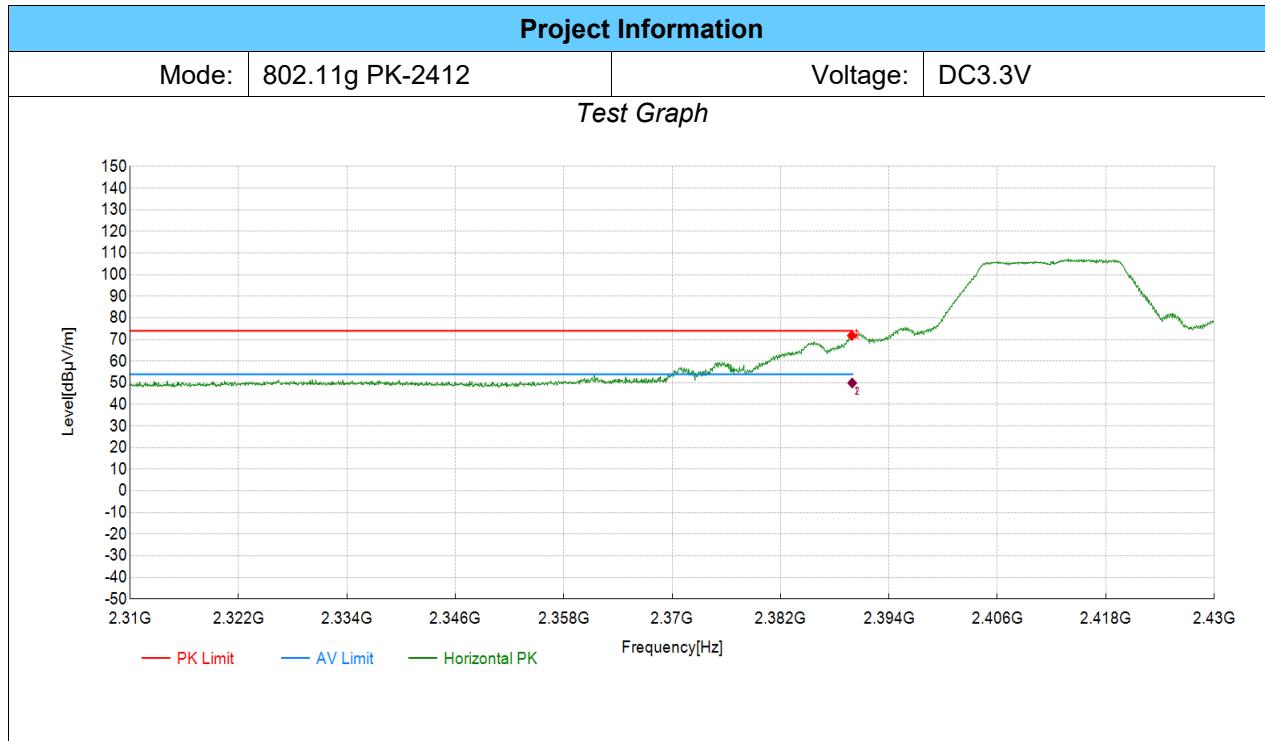


Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2389.90	67.27	71.87	4.60	74.00	2.13	PK	Horizontal	PASS
2	2390.00	66.52	71.12	4.60	74.00	2.88	PK	Horizontal	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict	
1	2389.94	4.60	45.32	49.92	54.00	4.08	Horizontal	PASS	
2	2390.03	4.60	45.41	50.01	53.90	3.89	Horizontal	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

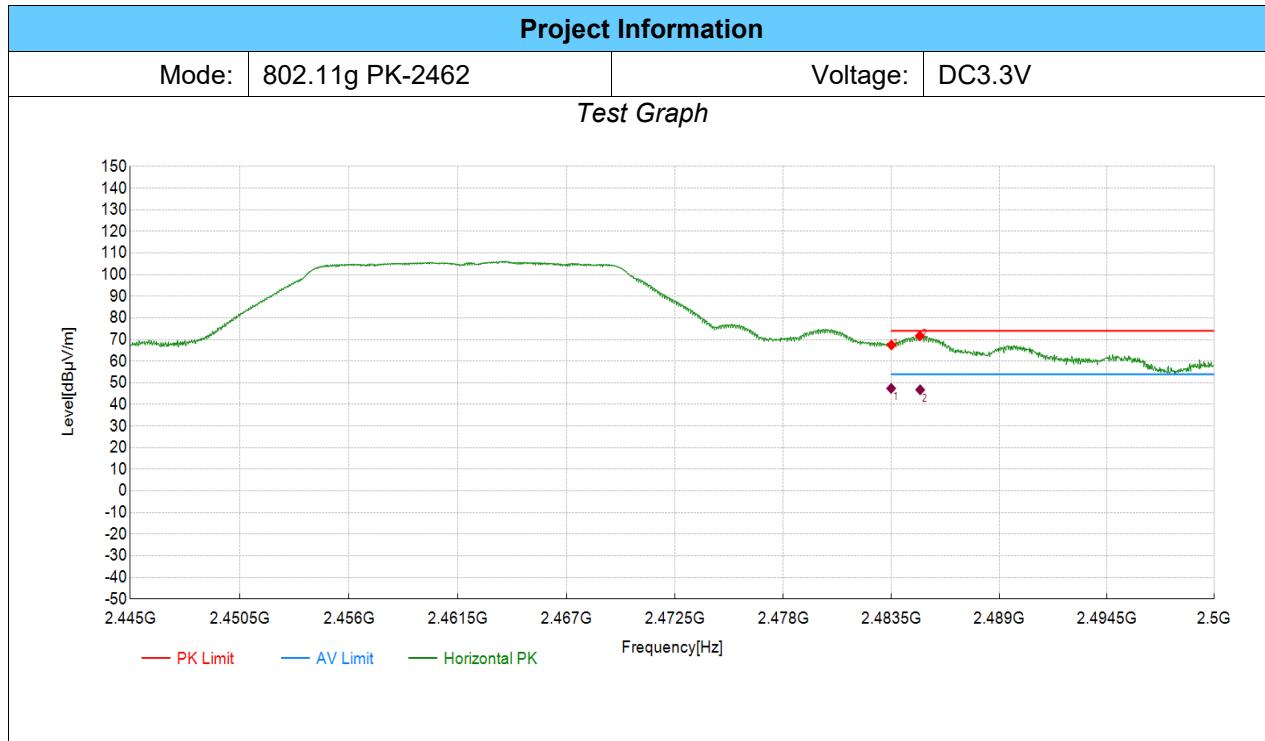


Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	62.93	67.51	4.58	74.00	6.49	PK	Horizontal	PASS
2	2484.95	67.09	71.70	4.61	74.00	2.30	PK	Horizontal	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict	
1	2483.49	4.58	42.83	47.41	54.00	6.59	Horizontal	PASS	
2	2484.97	4.61	42.17	46.78	54.00	7.22	Horizontal	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

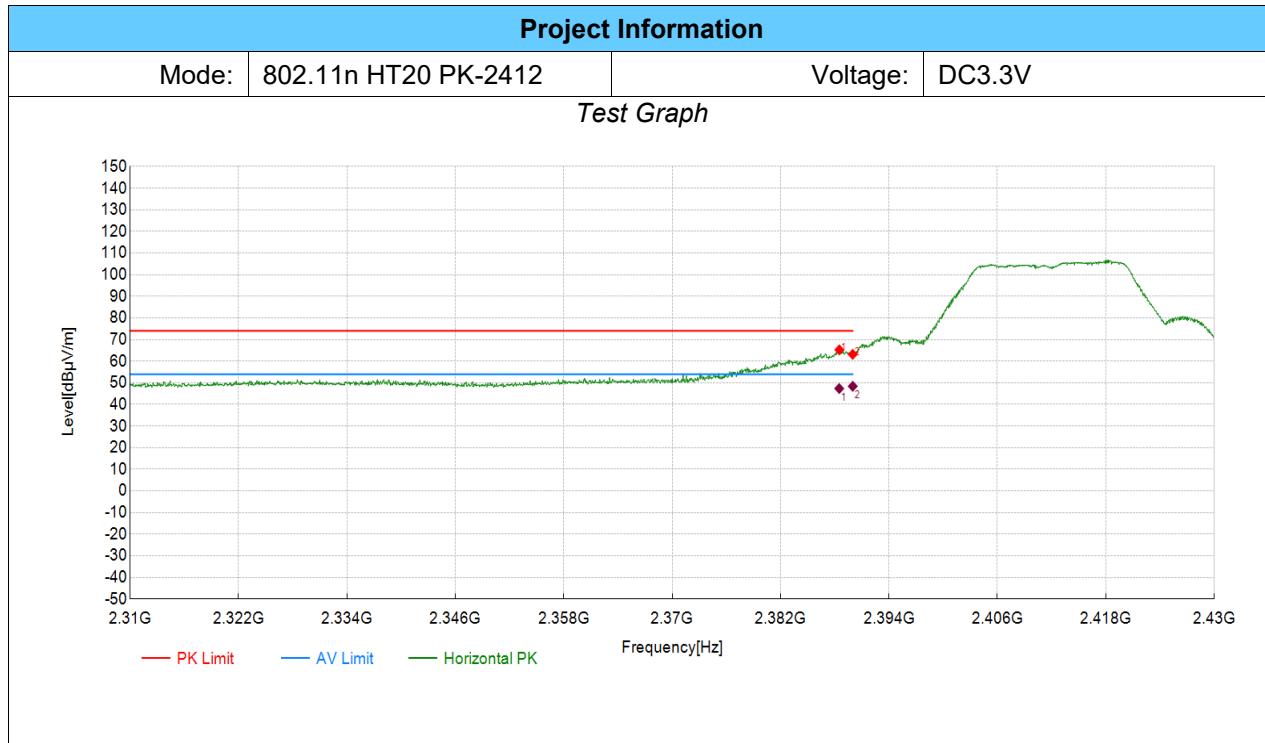


Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2388.52	60.65	65.24	4.59	74.00	8.76	PK	Horizontal	PASS
2	2390.00	58.57	63.17	4.60	74.00	10.83	PK	Horizontal	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict	
1	2388.50	4.59	42.76	47.35	54.00	6.65	Horizontal	PASS	
2	2390.00	4.60	43.79	48.39	54.00	5.61	Horizontal	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

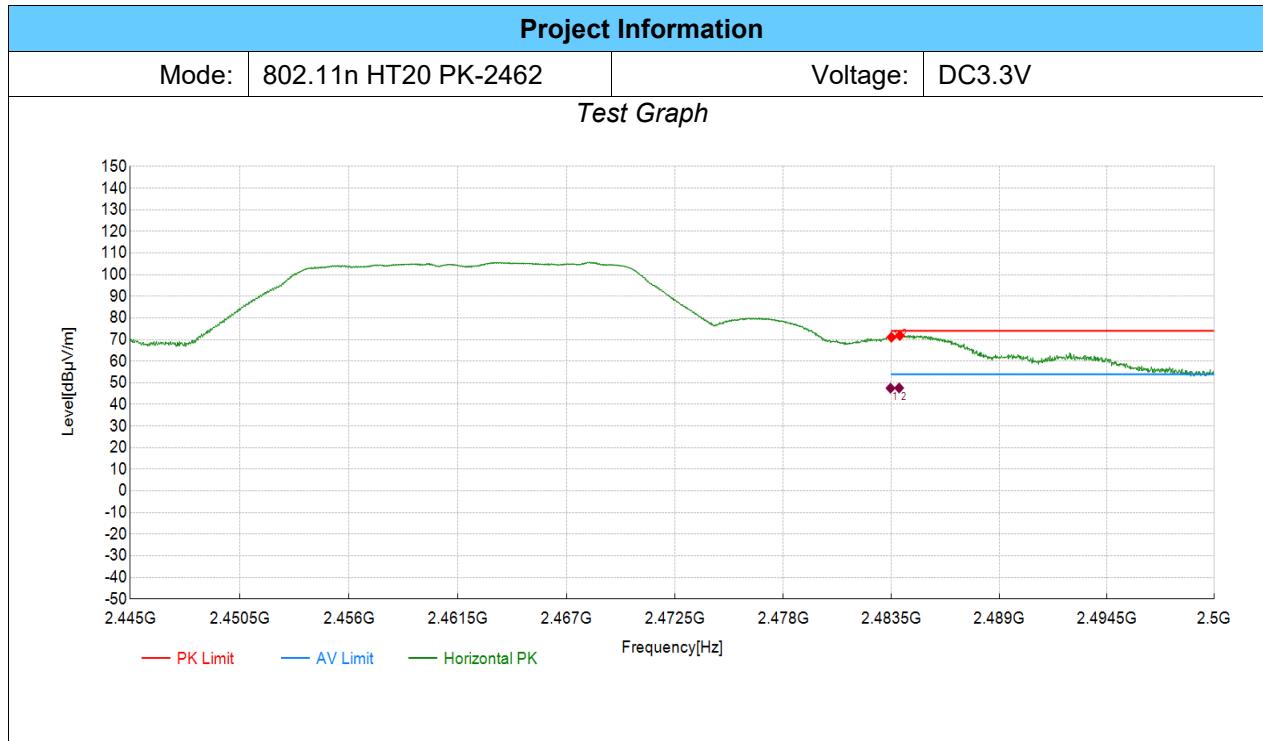


Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	66.51	71.09	4.58	74.00	2.91	PK	Horizontal	PASS
2	2483.93	67.28	71.87	4.59	74.00	2.13	PK	Horizontal	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict	
1	2483.45	4.58	42.93	47.51	54.00	6.49	Horizontal	PASS	
2	2483.90	4.59	43.03	47.62	54.00	6.38	Horizontal	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

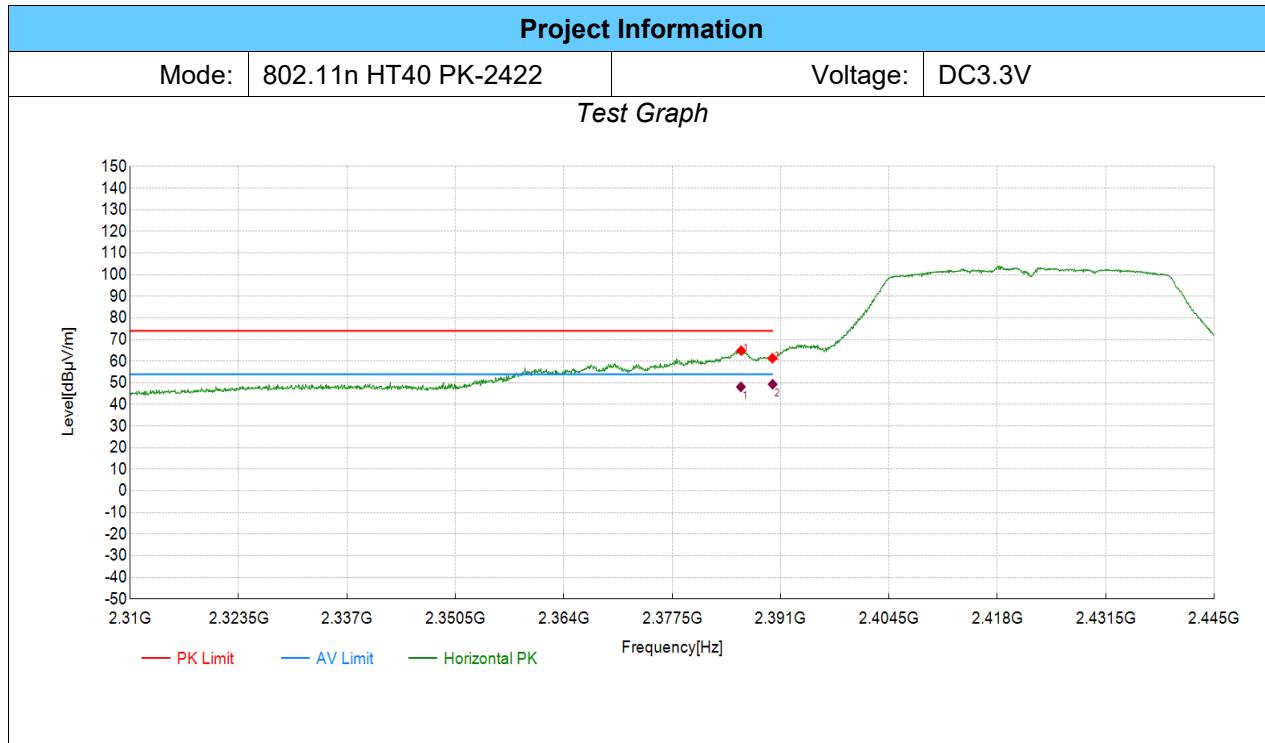


Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2386.11	60.27	64.88	4.61	74.00	9.12	PK	Horizontal	PASS
2	2390.00	56.77	61.37	4.60	74.00	12.63	PK	Horizontal	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict	
1	2386.07	4.61	43.50	48.11	54.00	5.89	Horizontal	PASS	
2	2390.02	4.60	44.71	49.31	53.90	4.59	Horizontal	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

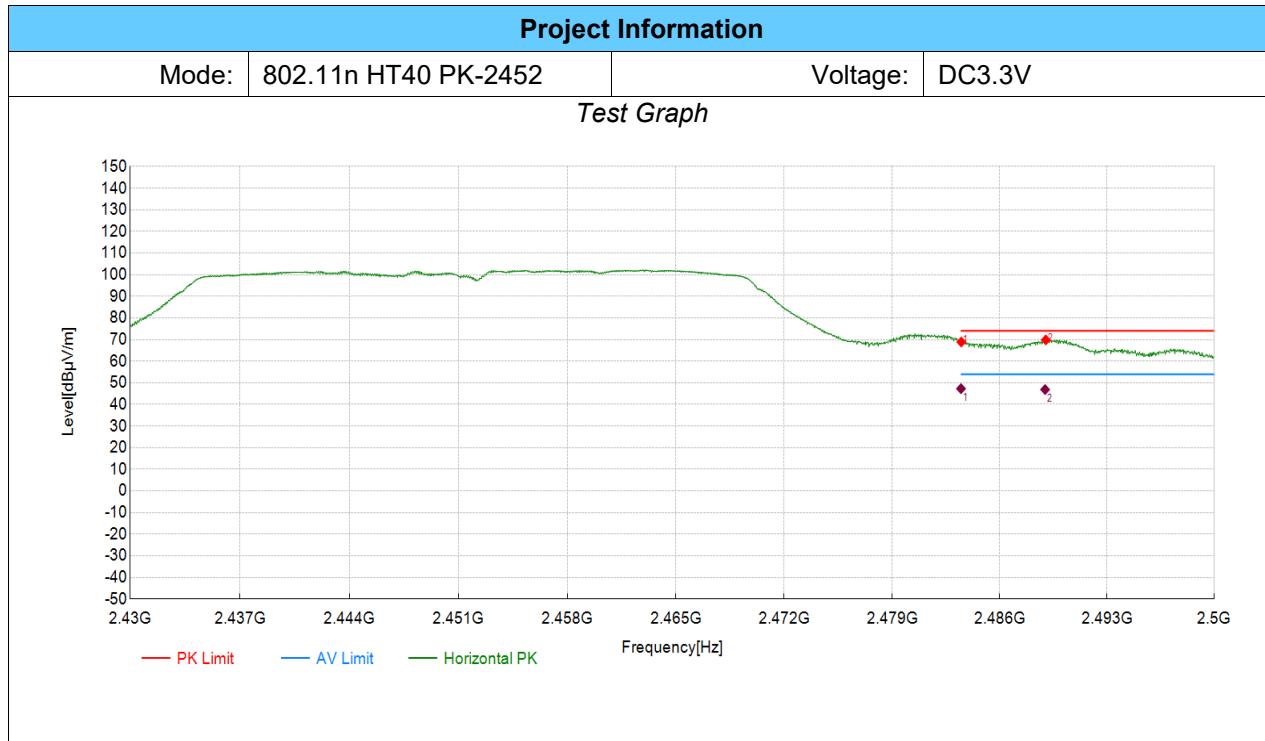


Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	64.32	68.90	4.58	74.00	5.10	PK	Horizontal	PASS
2	2489.00	65.14	69.85	4.71	74.00	4.15	PK	Horizontal	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict	
1	2483.48	4.58	42.71	47.29	54.00	6.71	Horizontal	PASS	
2	2488.96	4.71	42.17	46.88	54.00	7.12	Horizontal	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

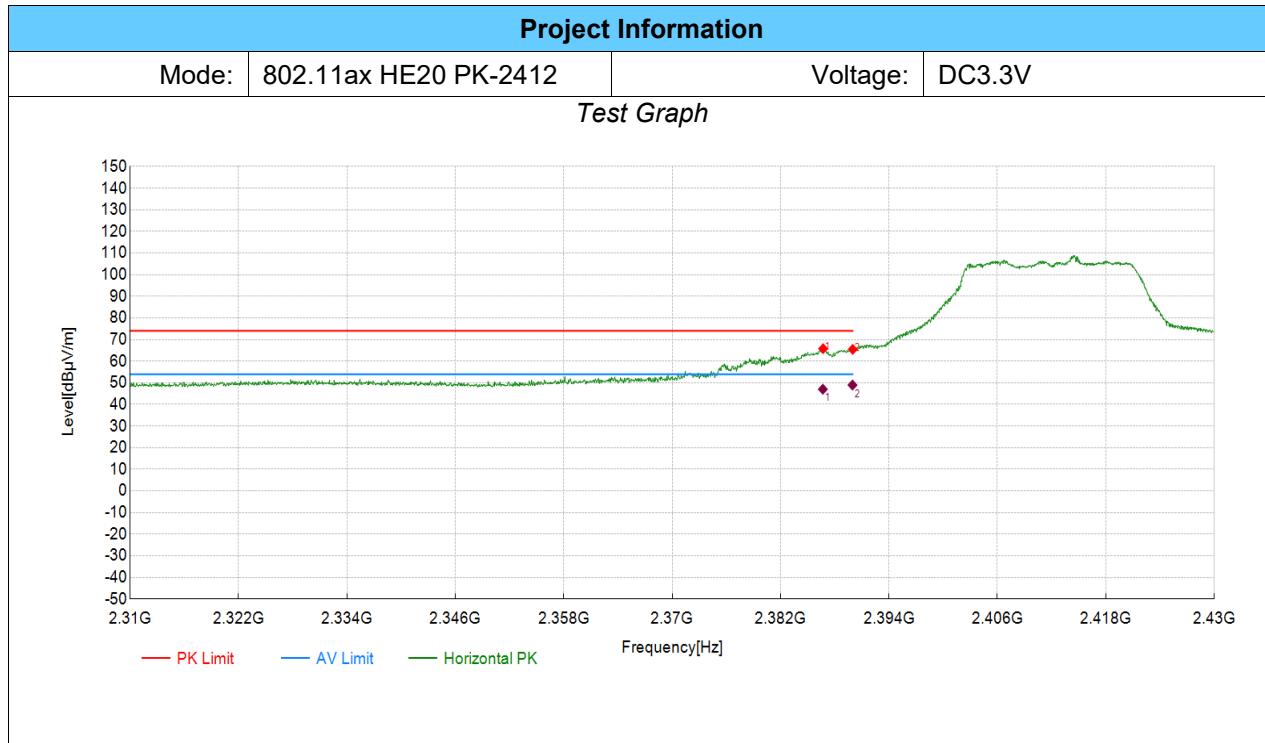


Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2386.72	61.19	65.80	4.61	74.00	8.20	PK	Horizontal	PASS
2	2390.00	60.87	65.47	4.60	74.00	8.53	PK	Horizontal	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict	
1	2386.69	4.61	42.43	47.04	54.00	6.96	Horizontal	PASS	
2	2389.98	4.60	44.36	48.96	54.00	5.04	Horizontal	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

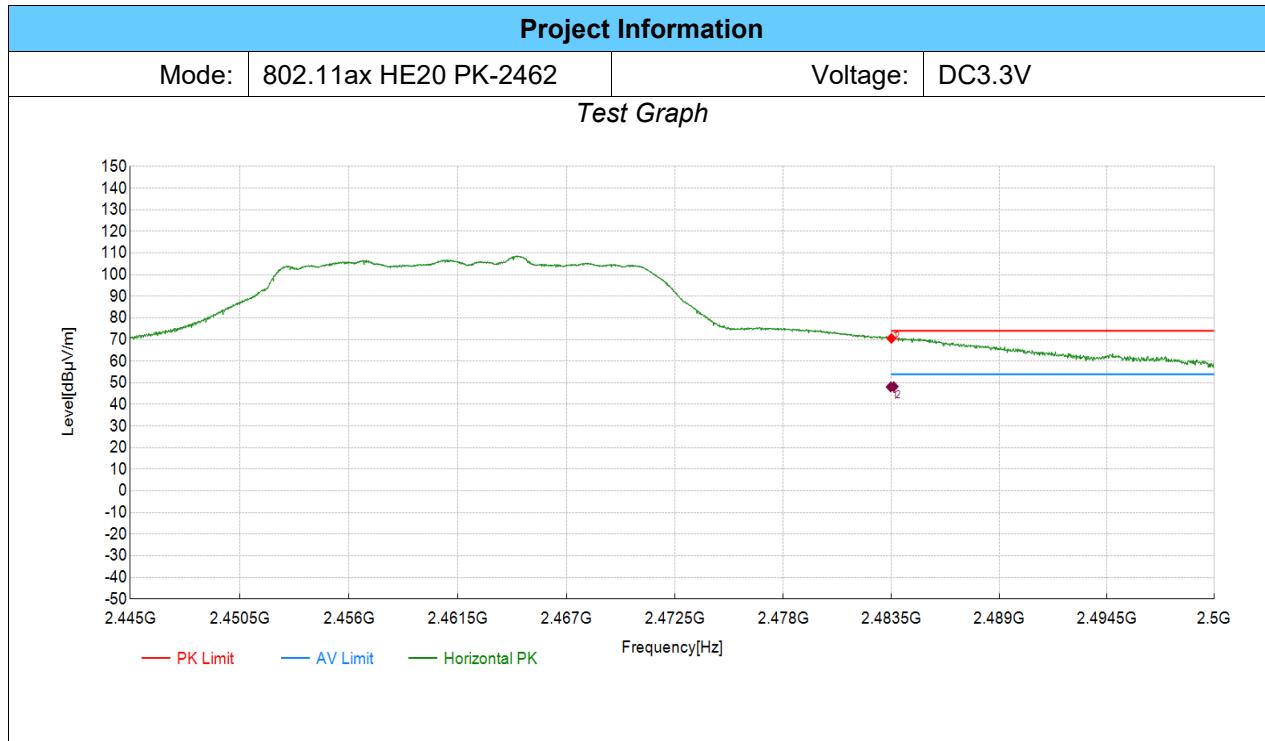


Suspected Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	65.96	70.54	4.58	74.00	3.46	PK	Horizontal	PASS
2	2483.57	66.12	70.71	4.59	74.00	3.29	PK	Horizontal	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict	
1	2483.47	4.58	43.50	48.08	54.00	5.92	Horizontal	PASS	
2	2483.62	4.59	43.66	48.25	54.00	5.75	Horizontal	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

8.4. RESTRICTED BANDEDGE-ANT2 FPC EXTERNAL ANTENNA(PD513)

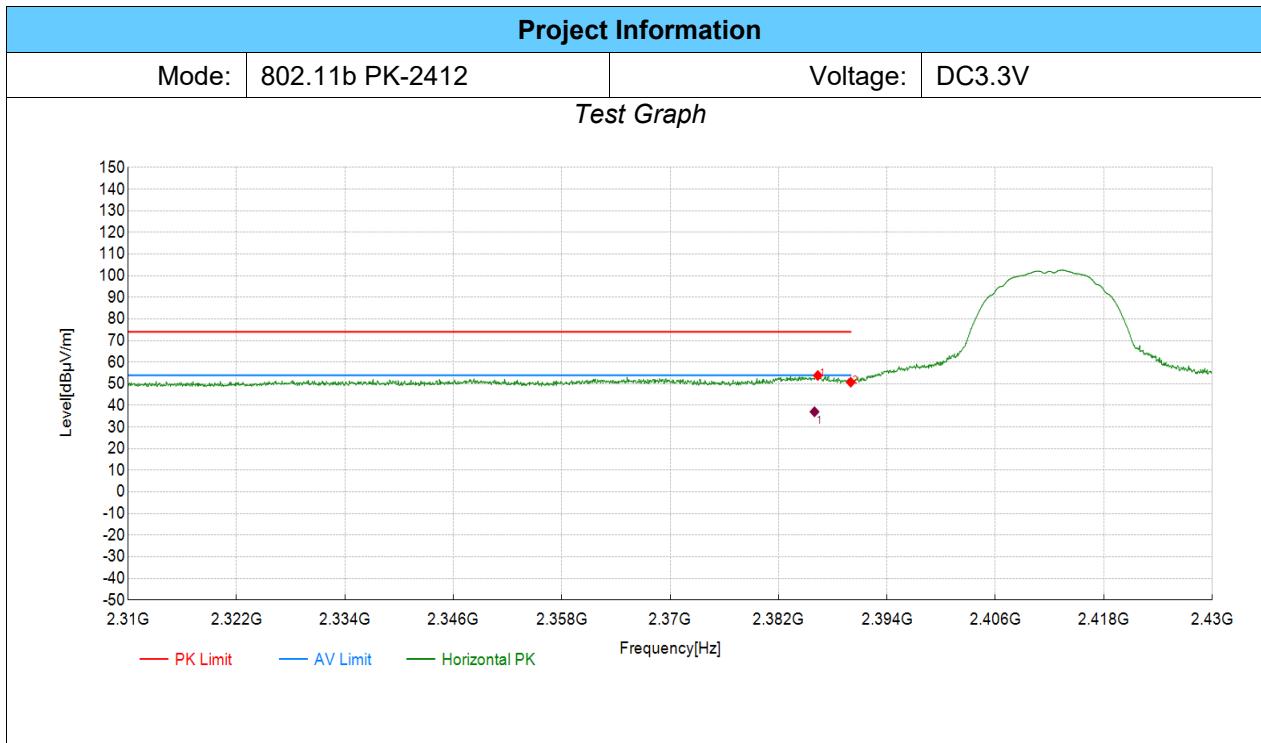


Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2386.36	34.79	53.85	19.06	74.00	20.15	PK	Horizontal	PASS
2	2390.00	31.67	50.75	19.08	74.00	23.25	PK	Horizontal	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict	
1	2385.99	19.06	18.01	37.07	54.00	16.93	Horizontal	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

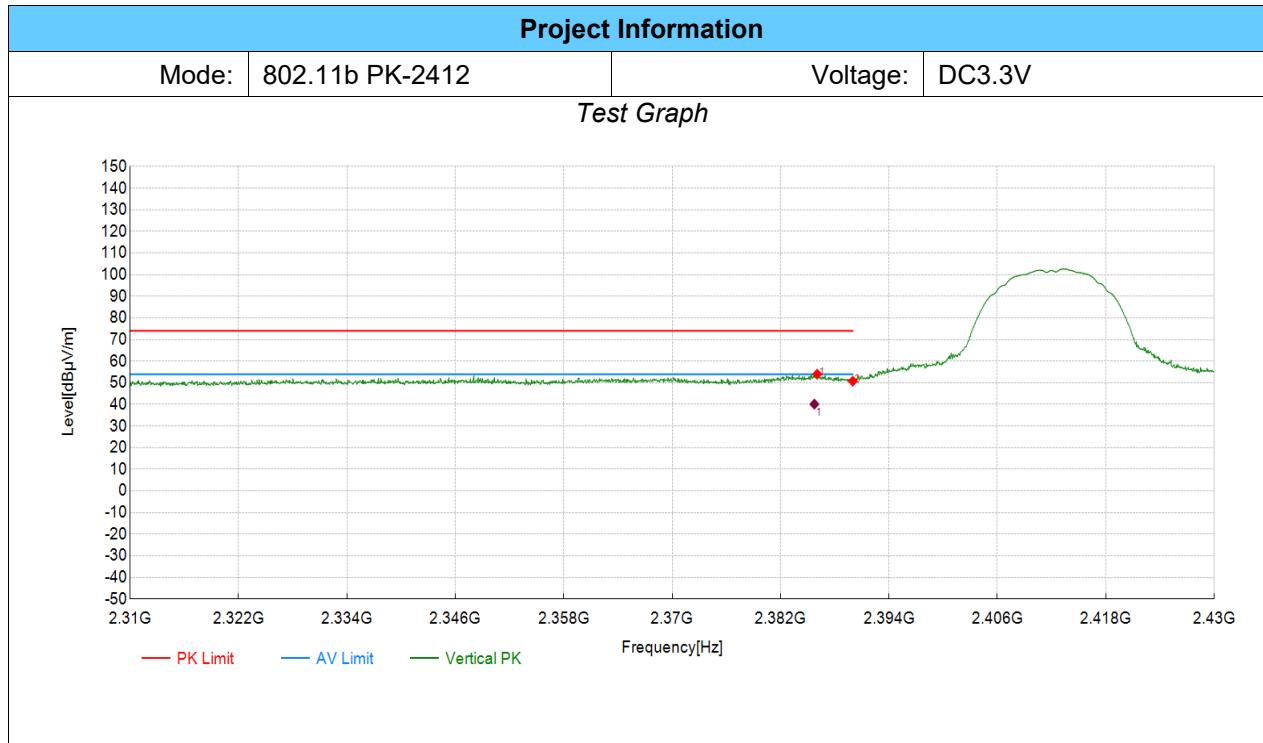


Suspected Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2386.06	34.95	54.01	19.06	74.00	19.99	PK	Vertical	PASS
2	2390.00	31.70	50.78	19.08	74.00	23.22	PK	Vertical	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict	
1	2385.75	19.06	21.07	40.13	54.00	13.87	Vertical	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

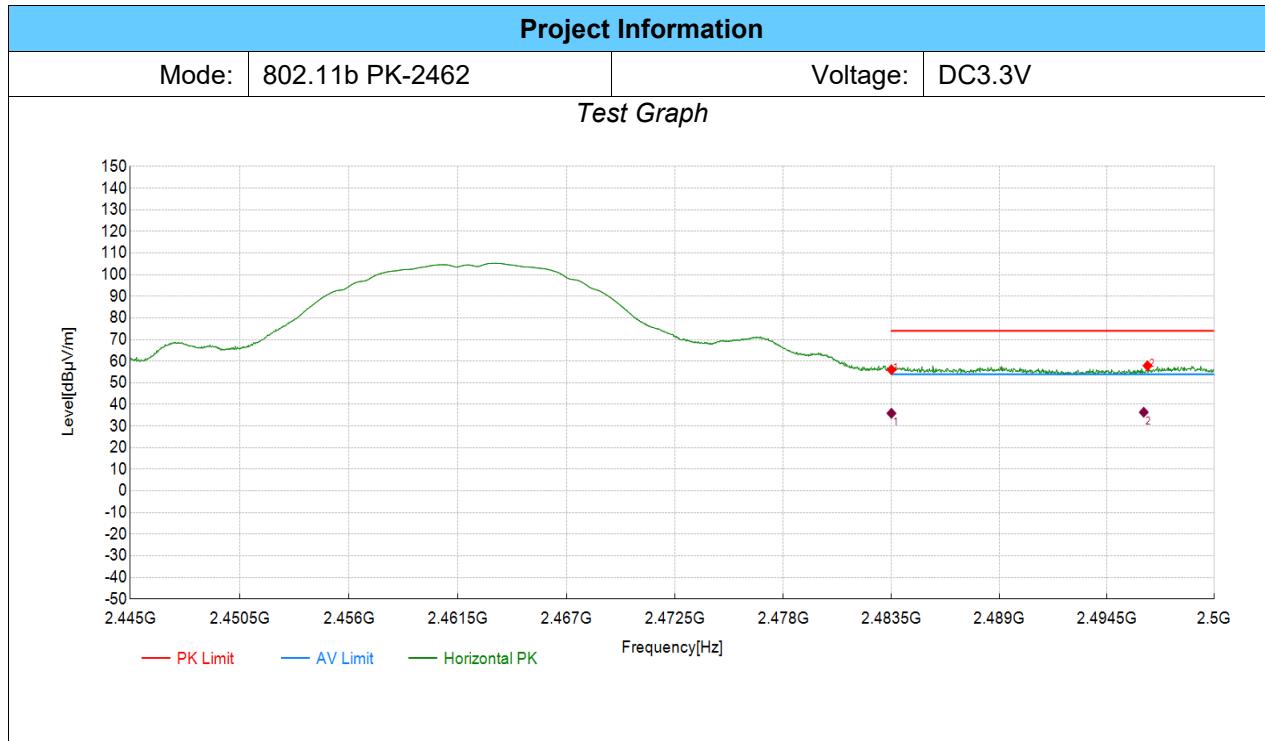


Suspected Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	36.36	56.04	19.68	74.00	17.96	PK	Horizontal	PASS
2	2496.59	38.12	57.90	19.78	74.00	16.10	PK	Horizontal	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict	
1	2483.50	19.68	16.22	35.90	54.00	18.10	Horizontal	PASS	
2	2496.40	19.78	16.62	36.40	54.00	17.60	Horizontal	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

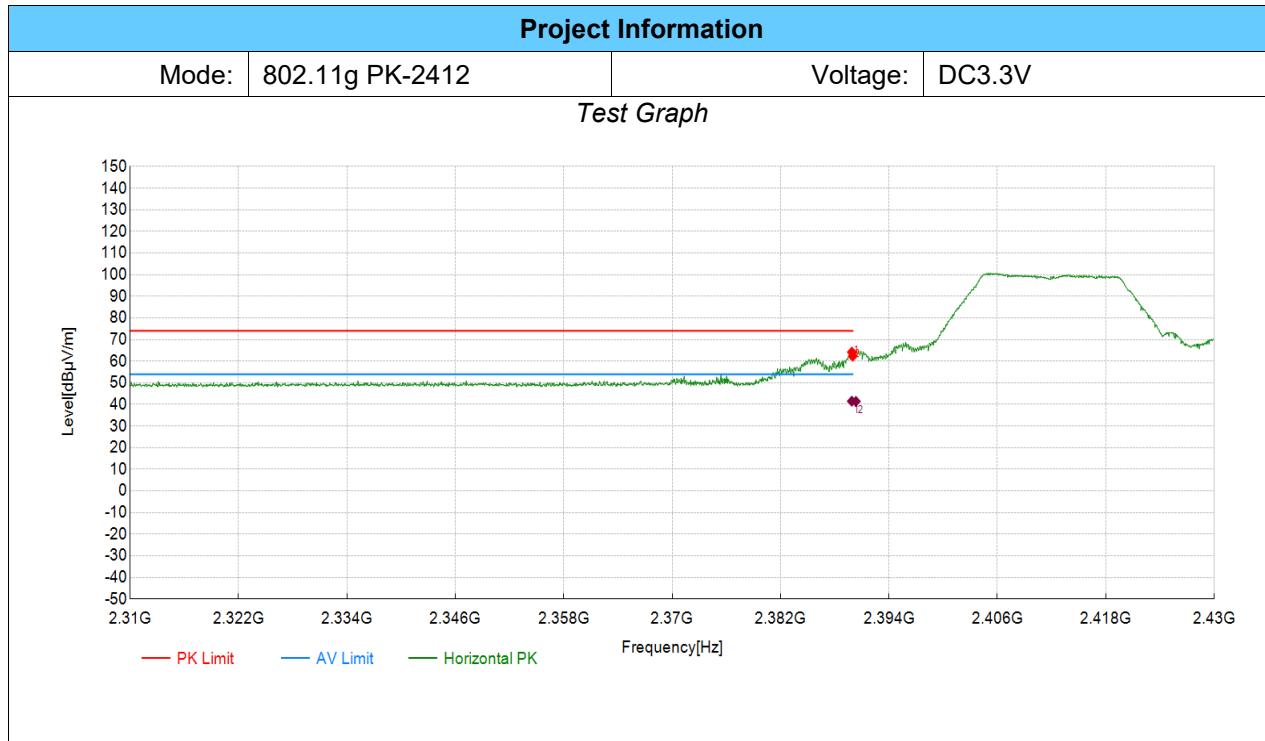


Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2389.90	45.13	64.21	19.08	74.00	9.79	PK	Horizontal	PASS
2	2390.00	43.25	62.33	19.08	74.00	11.67	PK	Horizontal	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict	
1	2389.90	19.08	22.43	41.51	54.00	12.49	Horizontal	PASS	
2	2390.35	19.08	22.34	41.42	53.90	12.48	Horizontal	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

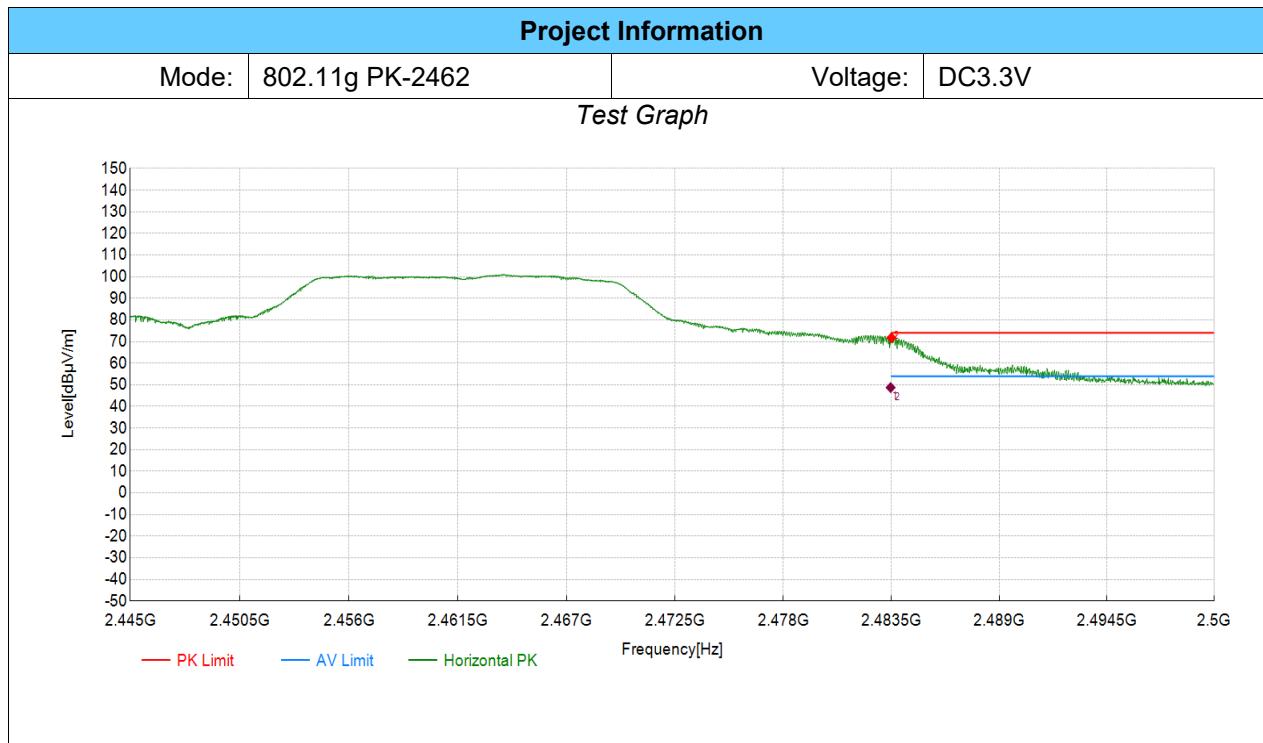


Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	52.08	71.76	19.68	74.00	2.24	PK	Horizontal	PASS
2	2483.55	52.11	71.79	19.68	74.00	2.21	PK	Horizontal	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict	
1	2483.46	19.68	29.06	48.74	54.00	5.26	Horizontal	PASS	
2	2483.55	19.68	28.82	48.50	54.00	5.50	Horizontal	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

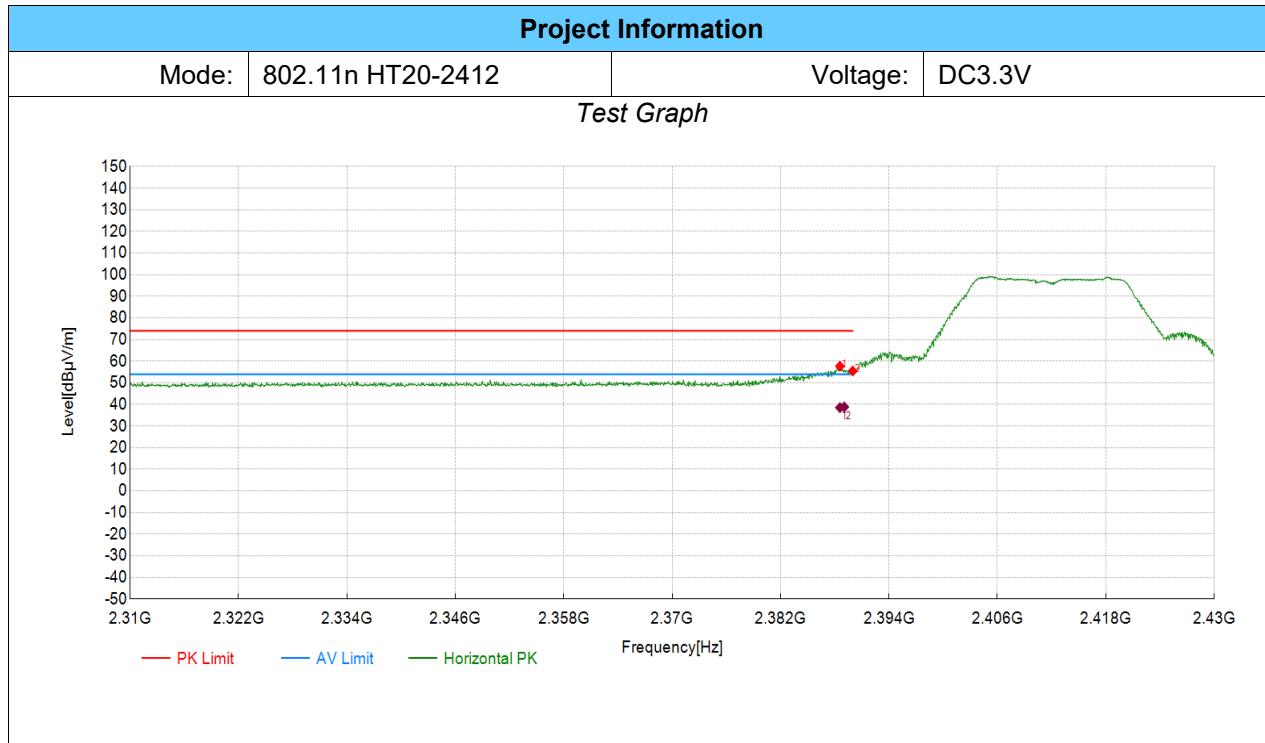


Suspected Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2388.58	38.61	57.67	19.06	74.00	16.33	PK	Horizontal	PASS
2	2390.00	36.39	55.47	19.08	74.00	18.53	PK	Horizontal	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict	
1	2388.58	19.06	19.48	38.54	54.00	15.46	Horizontal	PASS	
2	2389.06	19.06	19.78	38.84	54.00	15.16	Horizontal	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

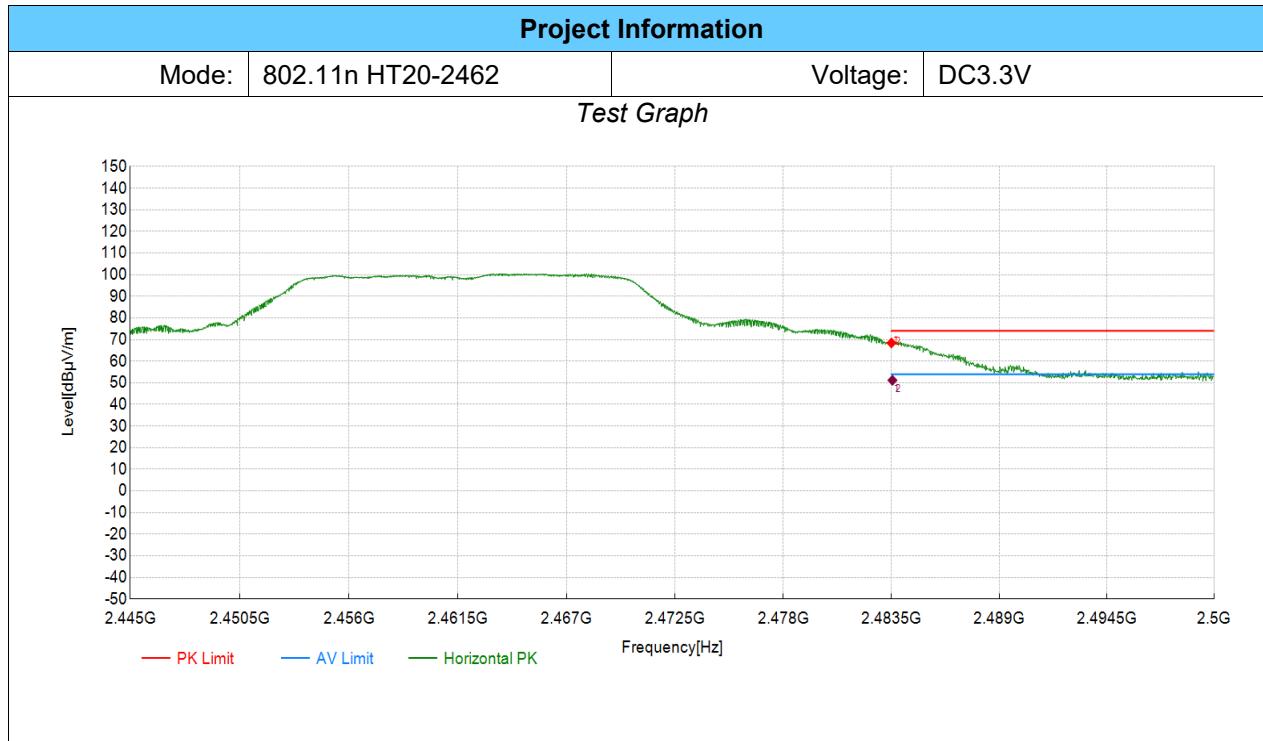


Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	48.75	68.43	19.68	74.00	5.57	PK	Horizontal	PASS
2	2483.60	48.31	67.99	19.68	74.00	6.01	PK	Horizontal	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict	
1	2483.55	19.68	31.49	51.17	54.00	2.83	Horizontal	PASS	
2	2483.60	19.68	31.59	51.27	54.00	2.73	Horizontal	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

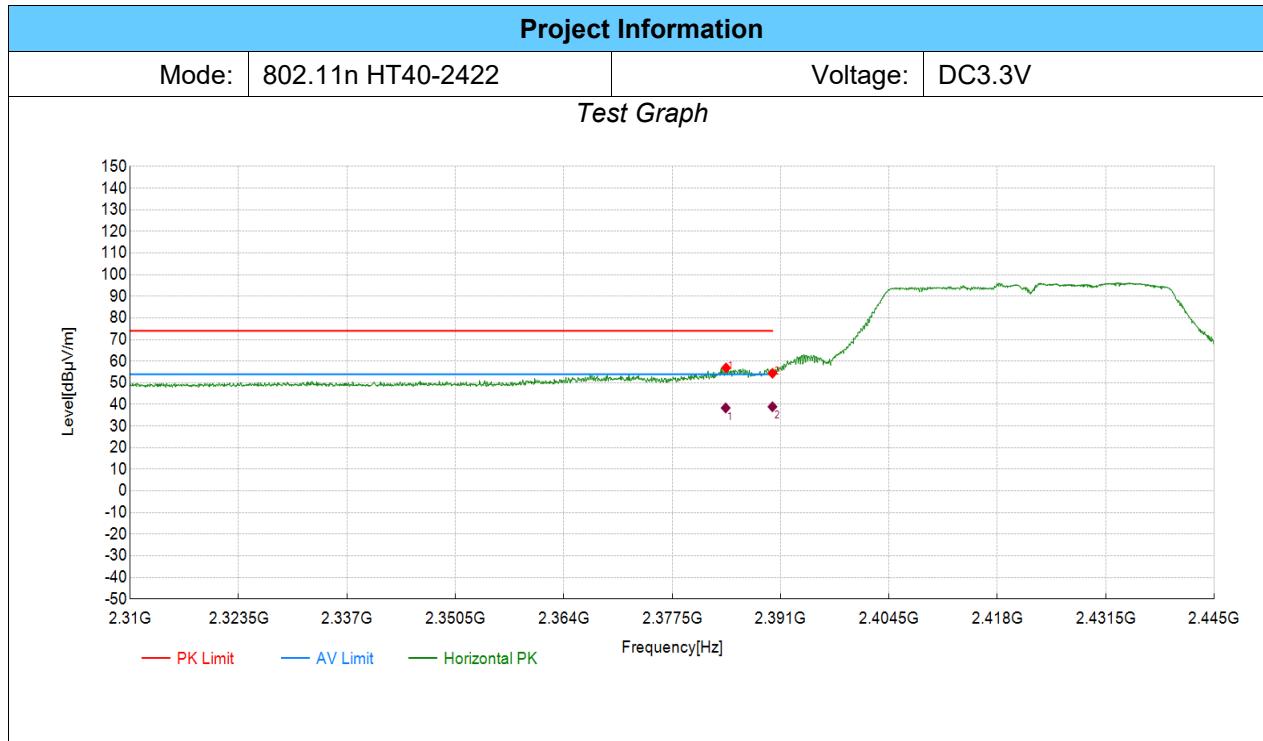


Suspected Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2384.22	37.83	56.89	19.06	74.00	17.11	PK	Horizontal	PASS
2	2390.00	35.33	54.41	19.08	74.00	19.59	PK	Horizontal	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict	
1	2384.18	19.06	19.33	38.39	54.00	15.61	Horizontal	PASS	
2	2390.00	19.08	19.85	38.93	54.00	15.07	Horizontal	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

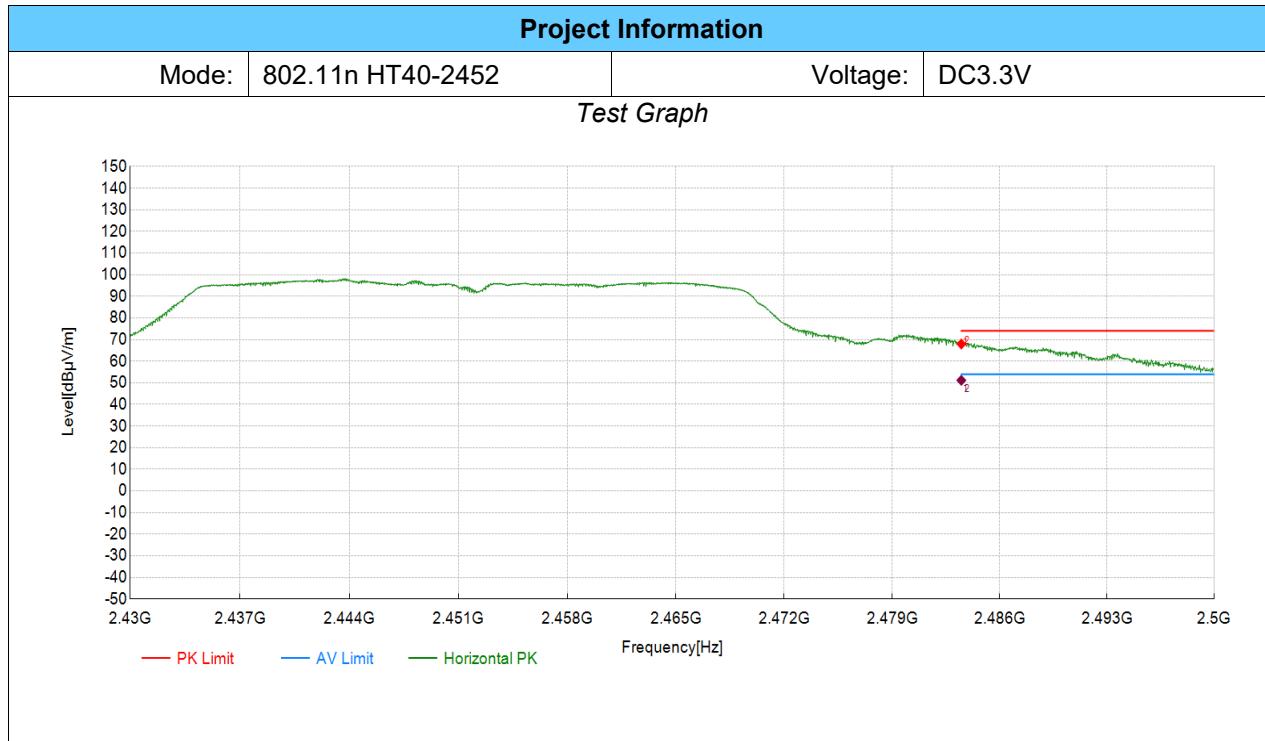


Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	48.27	67.95	19.68	74.00	6.05	PK	Horizontal	PASS
2	2483.58	48.89	68.57	19.68	74.00	5.43	PK	Horizontal	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict	
1	2483.50	19.68	31.48	51.16	54.00	2.84	Horizontal	PASS	
2	2483.57	19.68	31.44	51.12	54.00	2.88	Horizontal	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

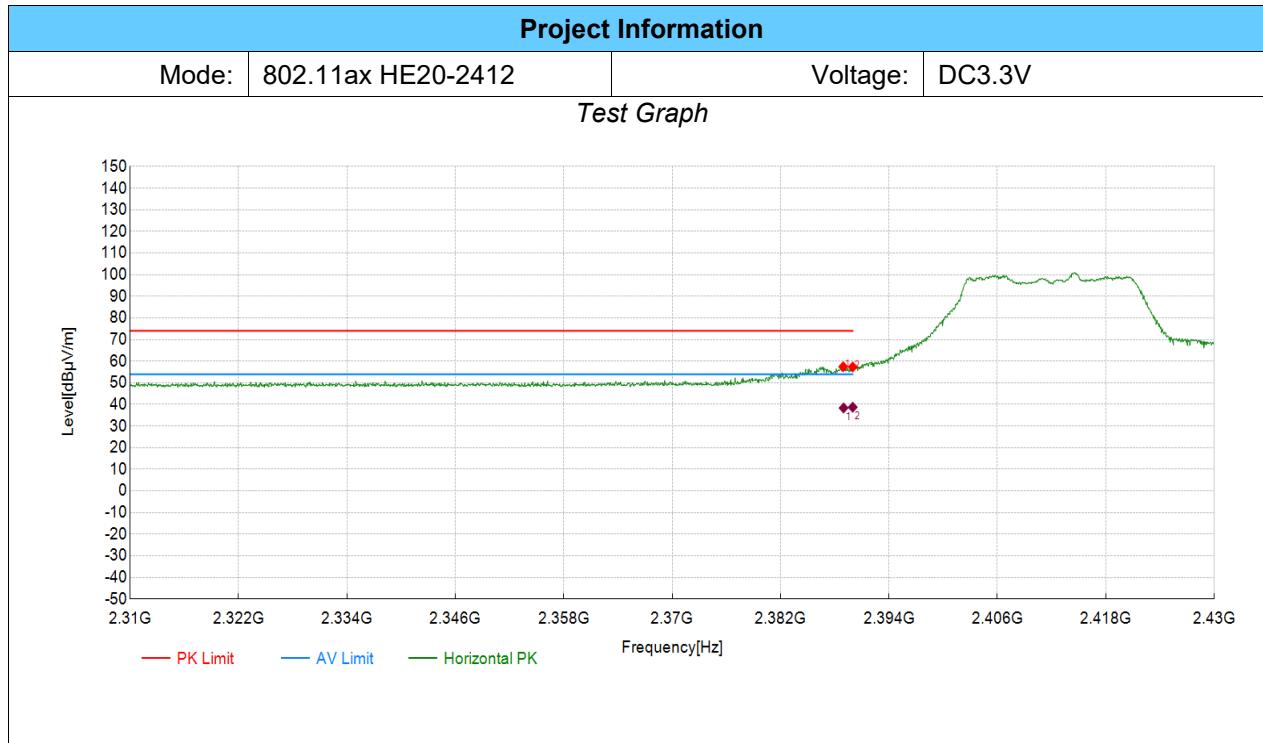


Suspected Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2388.94	38.40	57.46	19.06	74.00	16.54	PK	Horizontal	PASS
2	2390.00	38.25	57.33	19.08	74.00	16.67	PK	Horizontal	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict	
1	2388.98	19.06	19.31	38.37	54.00	15.63	Horizontal	PASS	
2	2390.00	19.08	19.64	38.72	54.00	15.28	Horizontal	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

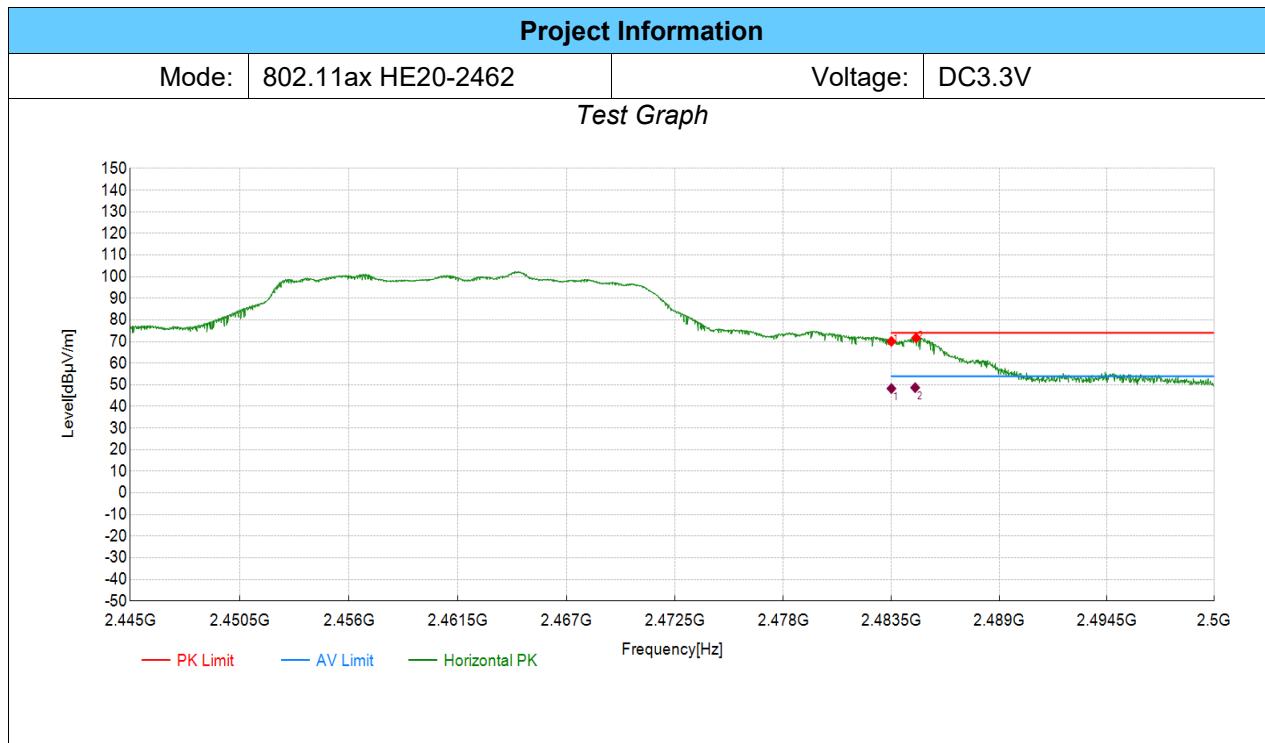


Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	50.39	70.07	19.68	74.00	3.93	PK	Horizontal	PASS
2	2484.76	52.01	71.70	19.69	74.00	2.30	PK	Horizontal	PASS

Final Data List									
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol	Verdict	
1	2483.50	19.68	28.59	48.27	54.00	5.73	Horizontal	PASS	
2	2484.71	19.69	29.00	48.69	54.00	5.31	Horizontal	PASS	

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


8.5. SPURIOUS EMISSIONS(1 GHZ~3 GHZ)-ANT1 FPC EXTERNAL ANTENNA

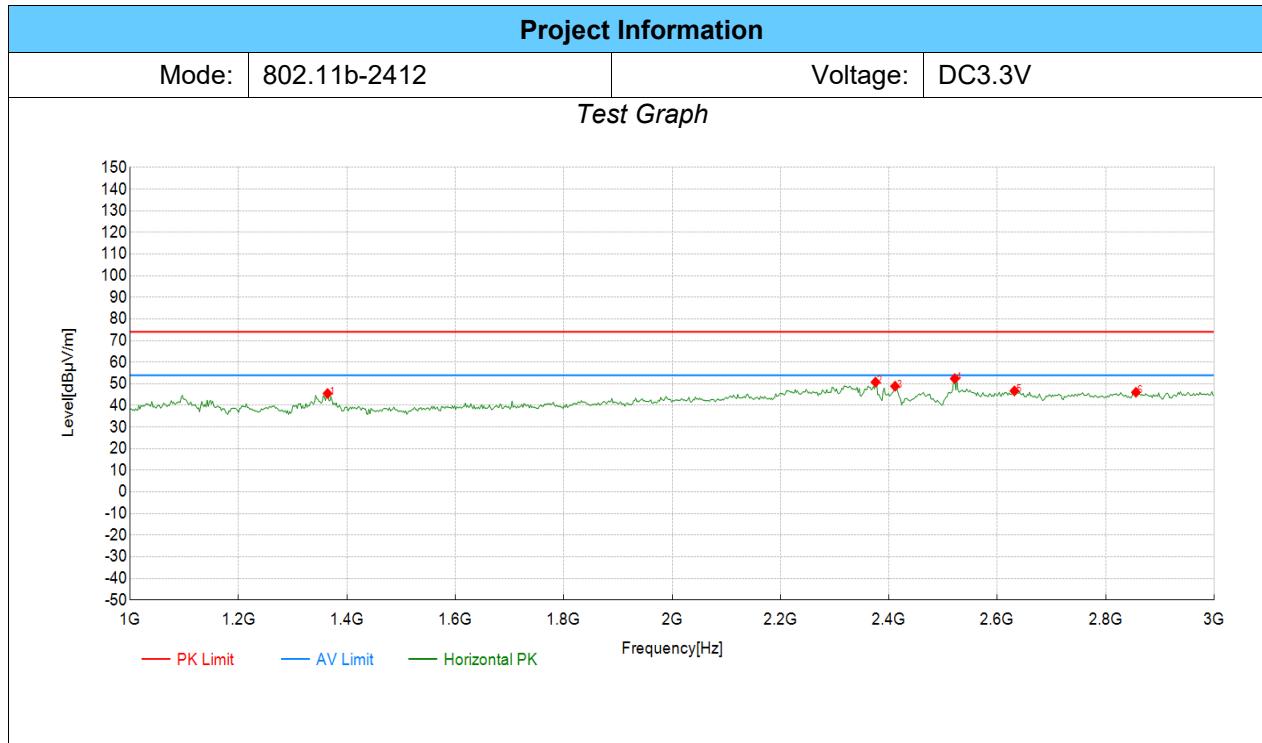

Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	1364.36	57.81	45.52	-12.29	74.00	28.48	PK	Horizontal	PASS
2	2375.38	57.26	50.77	-6.49	74.00	23.23	PK	Horizontal	PASS
3	2411.41	55.32	48.89	-6.43	74.00	25.11	PK	Horizontal	PASS
4	2521.52	58.66	52.40	-6.26	74.00	21.60	PK	Horizontal	PASS
5	2631.63	52.64	46.71	-5.93	74.00	27.29	PK	Horizontal	PASS
6	2855.86	51.36	46.07	-5.29	74.00	27.93	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

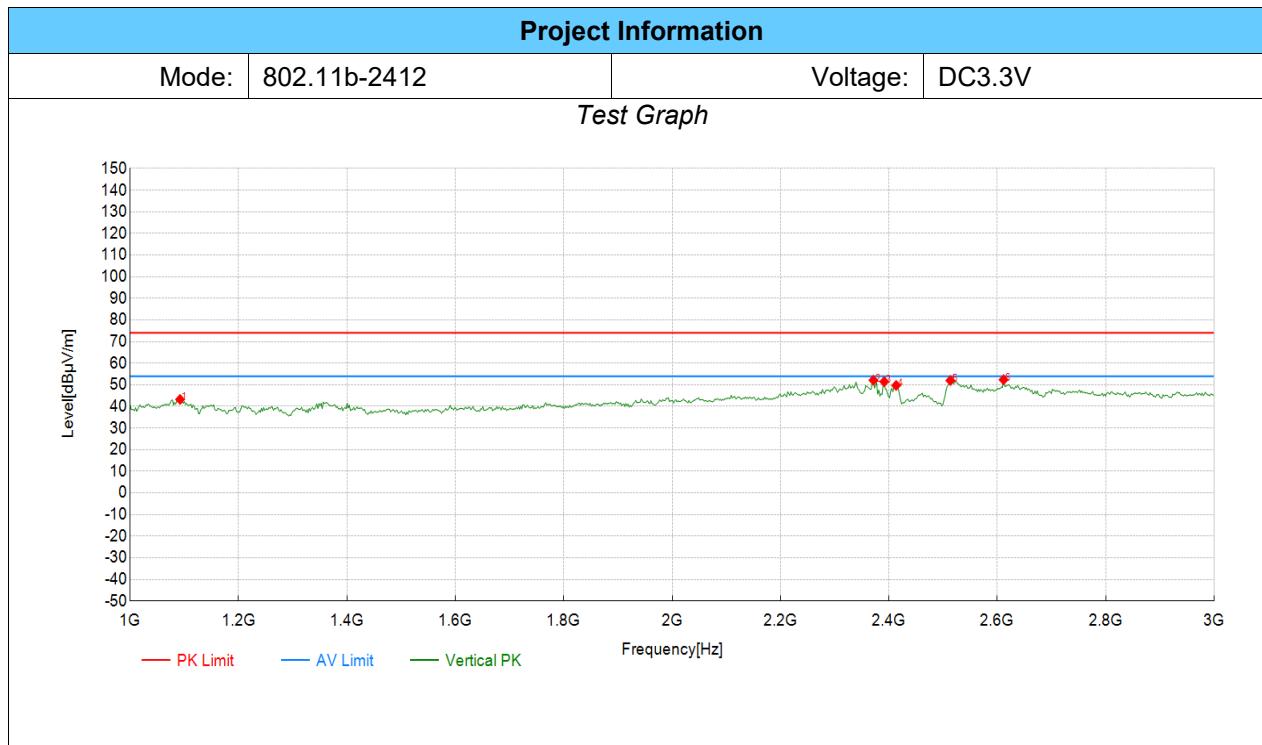

Suspected Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1092.09	55.13	43.24	-11.89	74.00	30.76	PK	Vertical	PASS
2	2371.37	58.64	52.14	-6.50	74.00	21.86	PK	Vertical	PASS
3	2391.39	57.95	51.48	-6.47	74.00	22.52	PK	Vertical	PASS
4	2413.41	56.15	49.71	-6.44	74.00	24.29	PK	Vertical	PASS
5	2513.51	58.30	52.01	-6.29	74.00	21.99	PK	Vertical	PASS
6	2611.61	58.36	52.37	-5.99	74.00	21.63	PK	Vertical	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

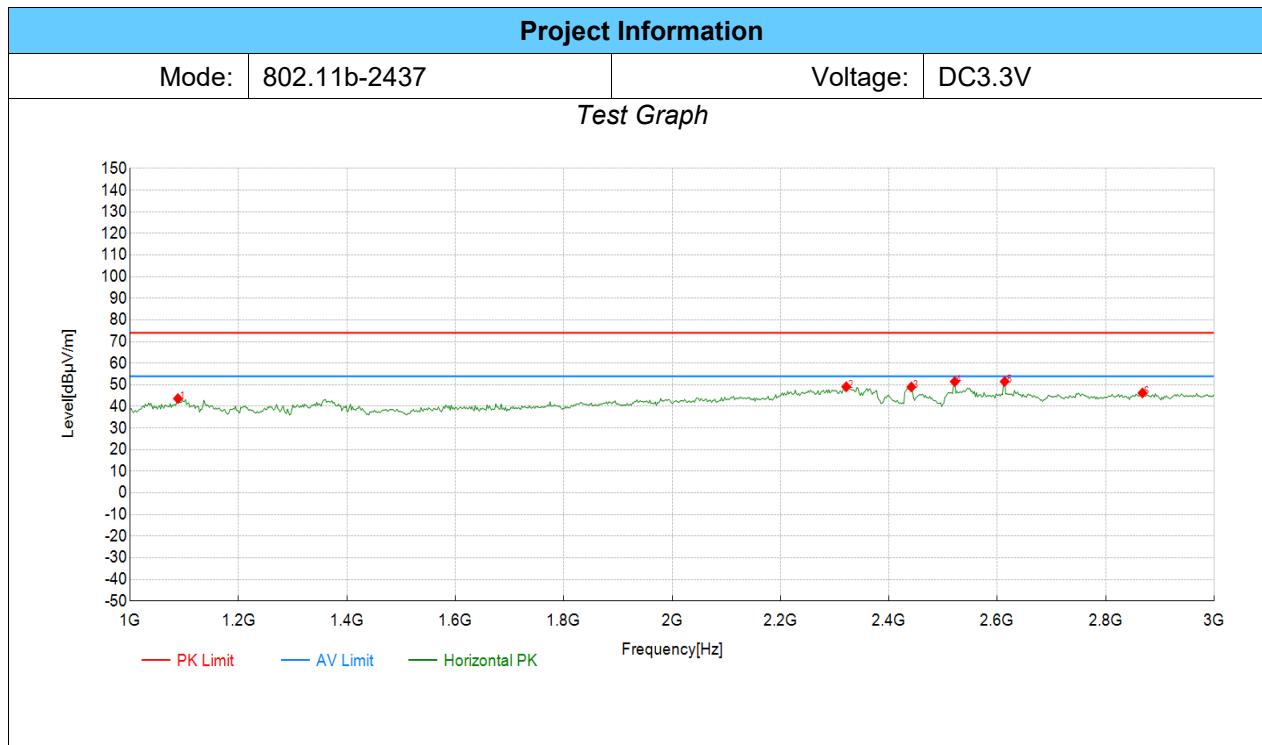

Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	1088.09	55.53	43.64	-11.89	74.00	30.36	PK	Horizontal	PASS
2	2321.32	55.67	49.09	-6.58	74.00	24.91	PK	Horizontal	PASS
3	2441.44	55.41	49.01	-6.40	74.00	24.99	PK	Horizontal	PASS
4	2521.52	57.73	51.47	-6.26	74.00	22.53	PK	Horizontal	PASS
5	2613.61	57.51	51.52	-5.99	74.00	22.48	PK	Horizontal	PASS
6	2867.87	51.50	46.22	-5.28	74.00	27.78	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

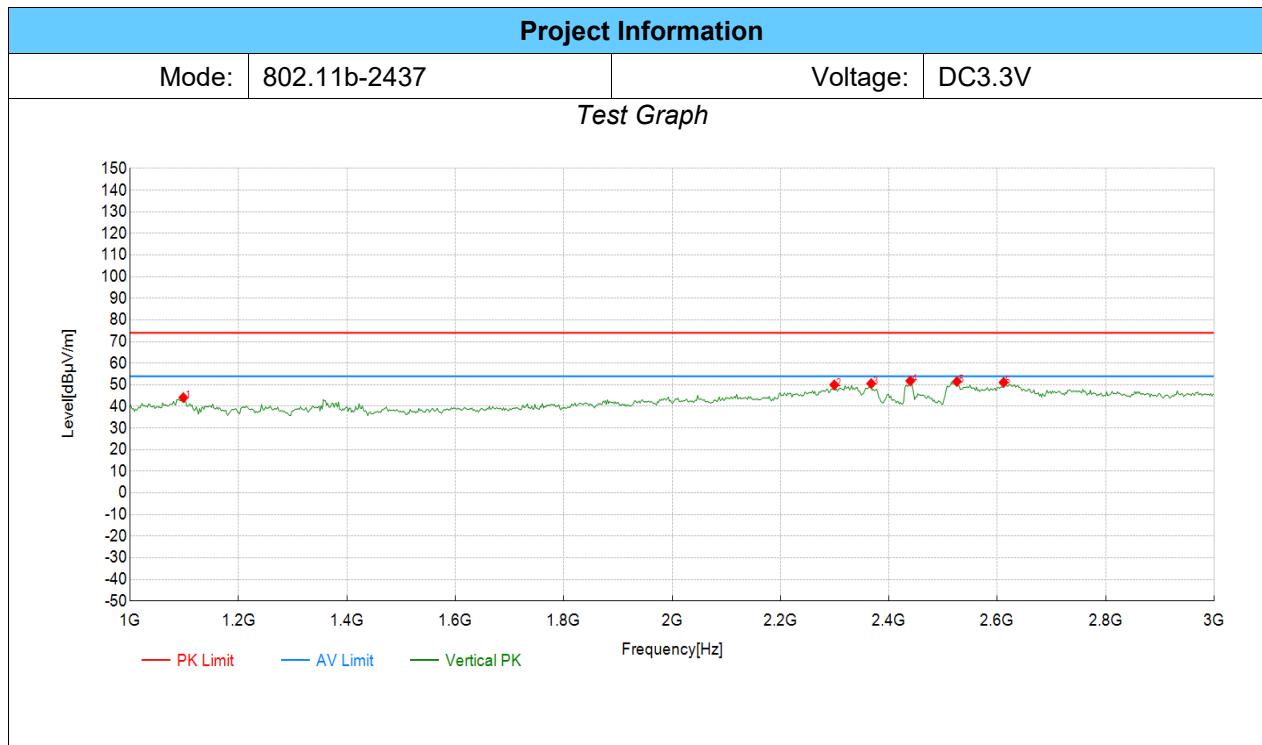

Suspected Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1098.10	55.97	44.08	-11.89	74.00	29.92	PK	Vertical	PASS
2	2299.30	56.60	49.98	-6.62	74.00	24.02	PK	Vertical	PASS
3	2367.37	57.07	50.56	-6.51	74.00	23.44	PK	Vertical	PASS
4	2439.44	58.17	51.77	-6.40	74.00	22.23	PK	Vertical	PASS
5	2525.53	57.73	51.49	-6.24	74.00	22.51	PK	Vertical	PASS
6	2611.61	57.09	51.10	-5.99	74.00	22.90	PK	Vertical	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

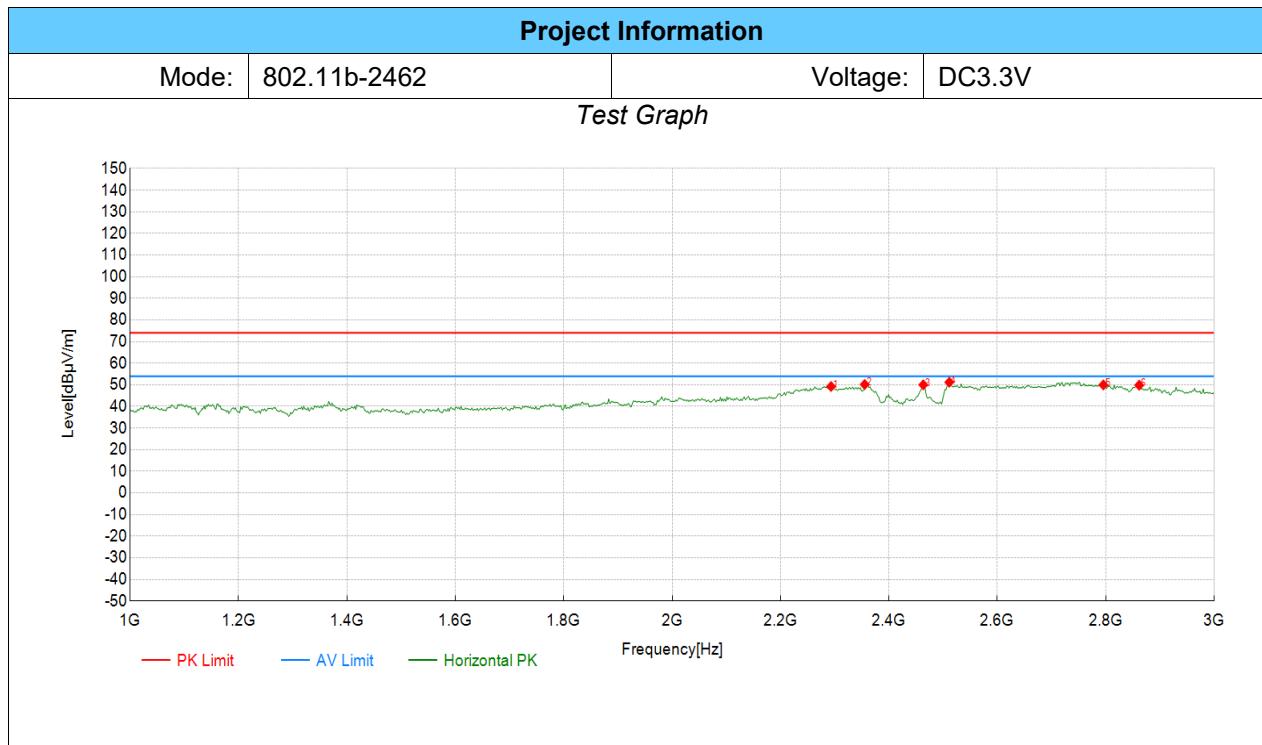

Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2293.29	55.87	49.24	-6.63	74.00	24.76	PK	Horizontal	PASS
2	2355.36	56.69	50.17	-6.52	74.00	23.83	PK	Horizontal	PASS
3	2463.46	56.38	50.01	-6.37	74.00	23.99	PK	Horizontal	PASS
4	2511.51	57.48	51.19	-6.29	74.00	22.81	PK	Horizontal	PASS
5	2795.80	55.38	49.96	-5.42	74.00	24.04	PK	Horizontal	PASS
6	2861.86	55.11	49.84	-5.27	74.00	24.16	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

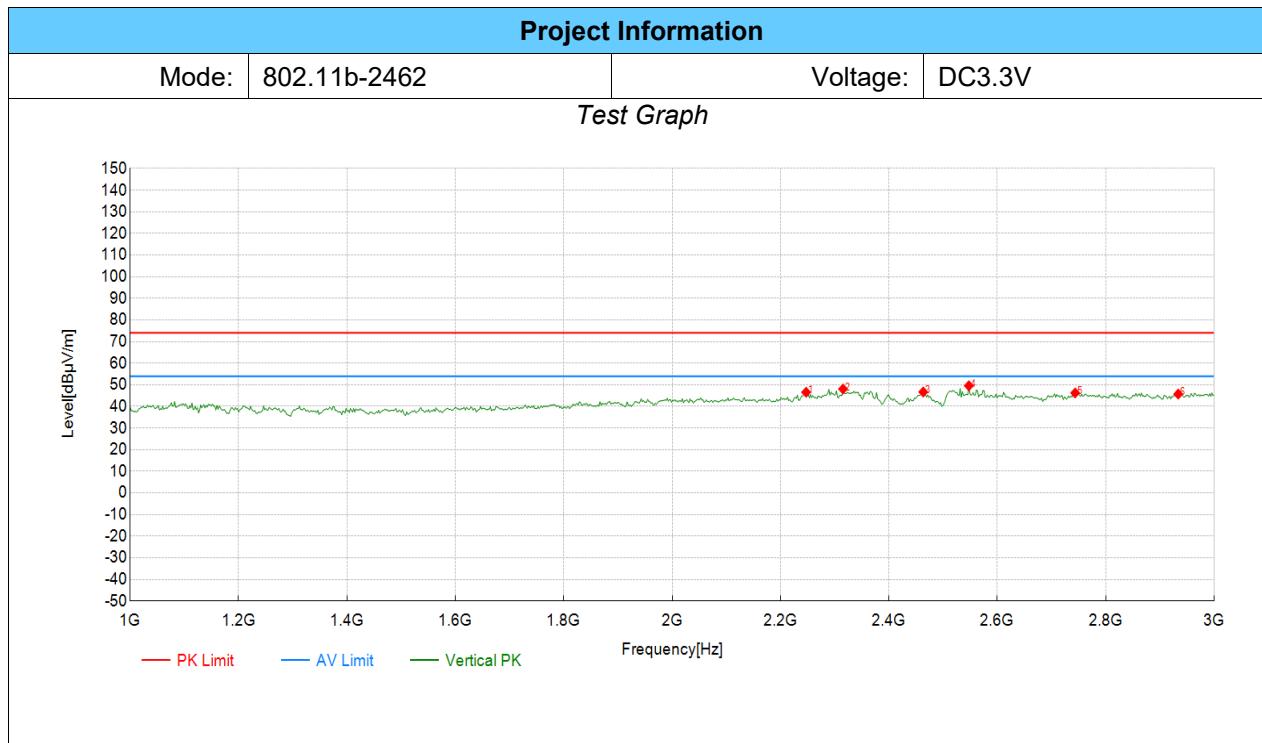


Suspected Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2247.25	53.29	46.59	-6.70	74.00	27.41	PK	Vertical	PASS
2	2315.32	54.67	48.07	-6.60	74.00	25.93	PK	Vertical	PASS
3	2463.46	53.05	46.68	-6.37	74.00	27.32	PK	Vertical	PASS
4	2547.55	55.75	49.56	-6.19	74.00	24.44	PK	Vertical	PASS
5	2743.74	51.83	46.24	-5.59	74.00	27.76	PK	Vertical	PASS
6	2933.93	50.85	45.72	-5.13	74.00	28.28	PK	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


8.6. SPURIOUS EMISSIONS(1 GHZ~3 GHZ)-ANT2 FPC EXTERNAL ANTENNA

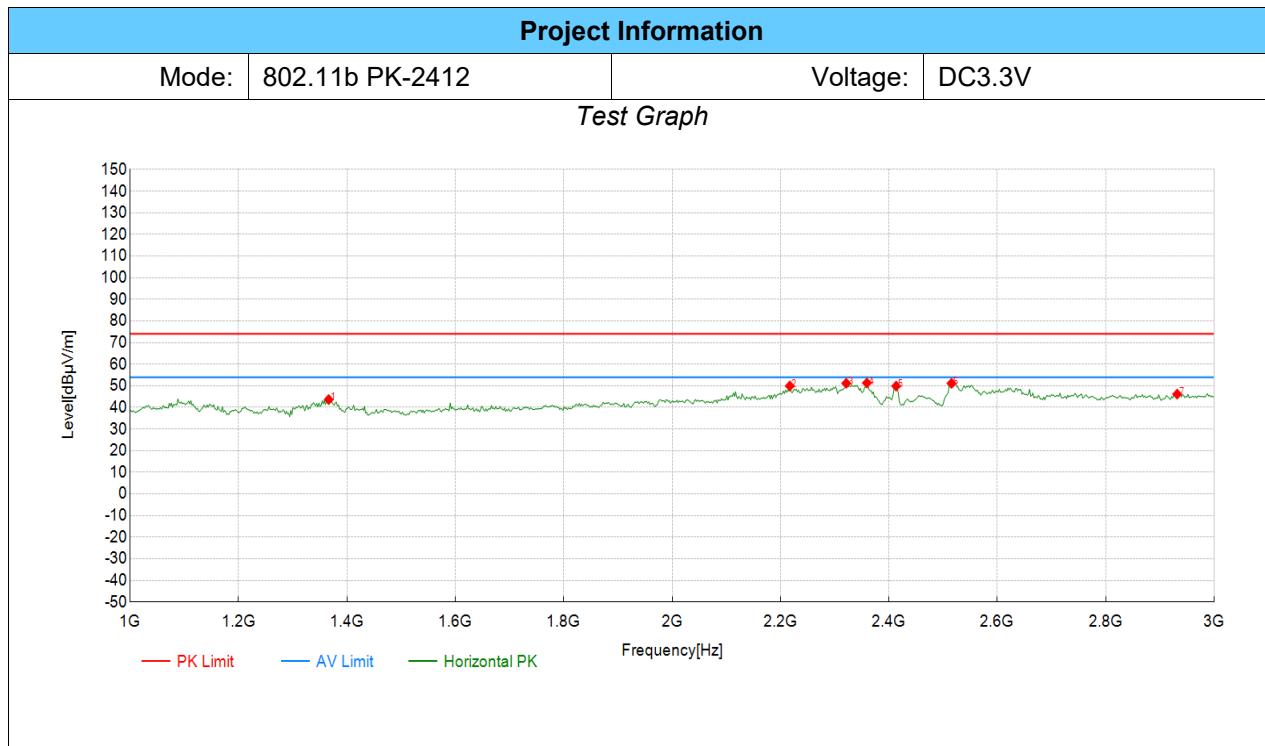

Suspected Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1366.37	55.96	43.66	-12.30	74.00	30.34	PK	Horizontal	PASS
2	2217.22	56.68	49.92	-6.76	74.00	24.08	PK	Horizontal	PASS
3	2321.32	57.76	51.18	-6.58	74.00	22.82	PK	Horizontal	PASS
4	2359.36	57.83	51.31	-6.52	74.00	22.69	PK	Horizontal	PASS
5	2413.41	56.32	49.88	-6.44	74.00	24.12	PK	Horizontal	PASS
6	2515.52	57.43	51.15	-6.28	74.00	22.85	PK	Horizontal	PASS
7	2931.93	51.30	46.17	-5.13	74.00	27.83	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

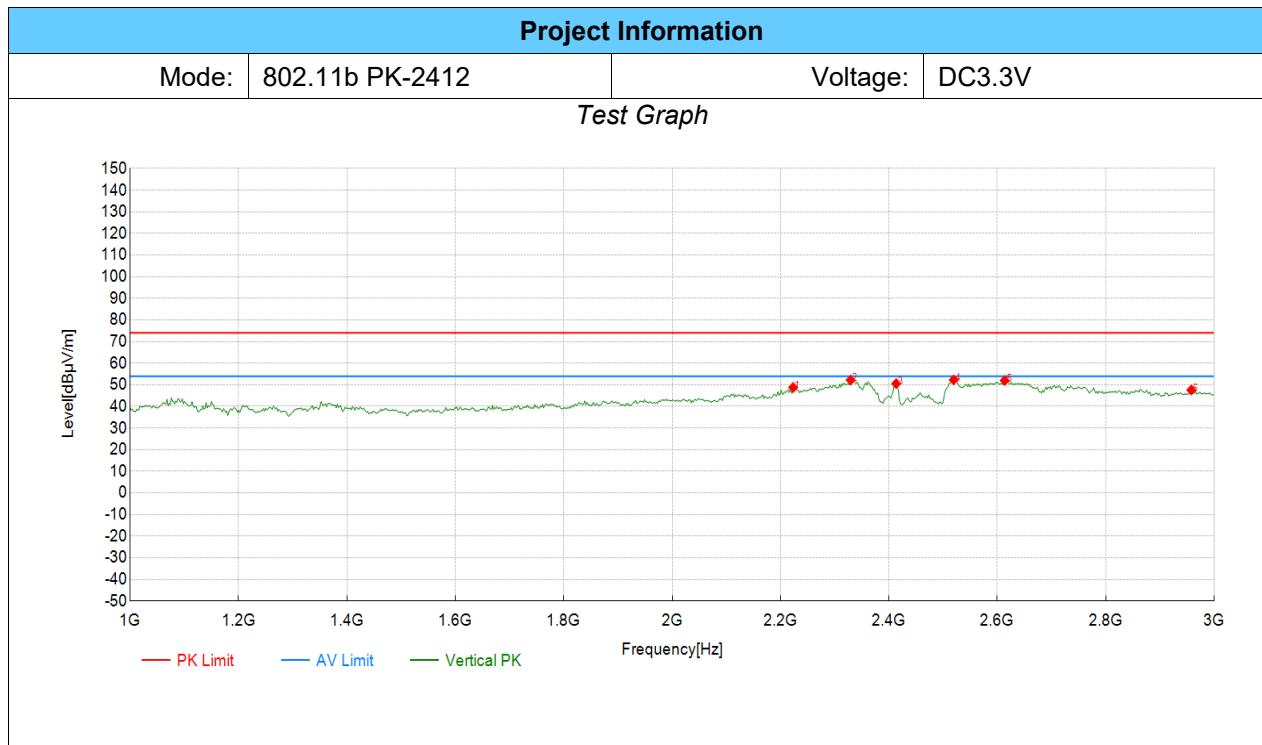

Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2223.22	55.52	48.78	-6.74	74.00	25.22	PK	Vertical	PASS
2	2329.33	58.78	52.21	-6.57	74.00	21.79	PK	Vertical	PASS
3	2413.41	57.01	50.57	-6.44	74.00	23.43	PK	Vertical	PASS
4	2519.52	58.53	52.27	-6.26	74.00	21.73	PK	Vertical	PASS
5	2613.61	58.01	52.02	-5.99	74.00	21.98	PK	Vertical	PASS
6	2957.96	52.68	47.59	-5.09	74.00	26.41	PK	Vertical	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

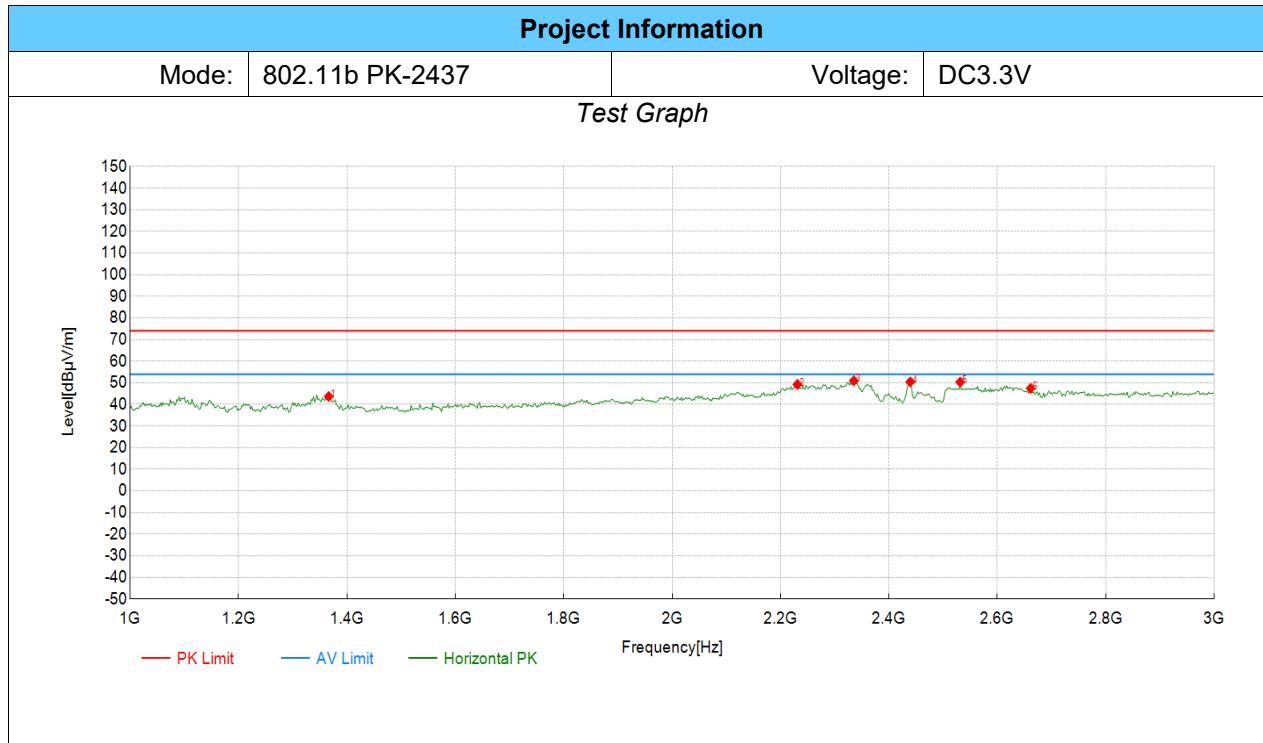

Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	1366.37	55.97	43.67	-12.30	74.00	30.33	PK	Horizontal	PASS
2	2231.23	55.99	49.26	-6.73	74.00	24.74	PK	Horizontal	PASS
3	2335.34	57.51	50.96	-6.55	74.00	23.04	PK	Horizontal	PASS
4	2439.44	56.83	50.43	-6.40	74.00	23.57	PK	Horizontal	PASS
5	2531.53	56.56	50.33	-6.23	74.00	23.67	PK	Horizontal	PASS
6	2661.66	53.26	47.42	-5.84	74.00	26.58	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

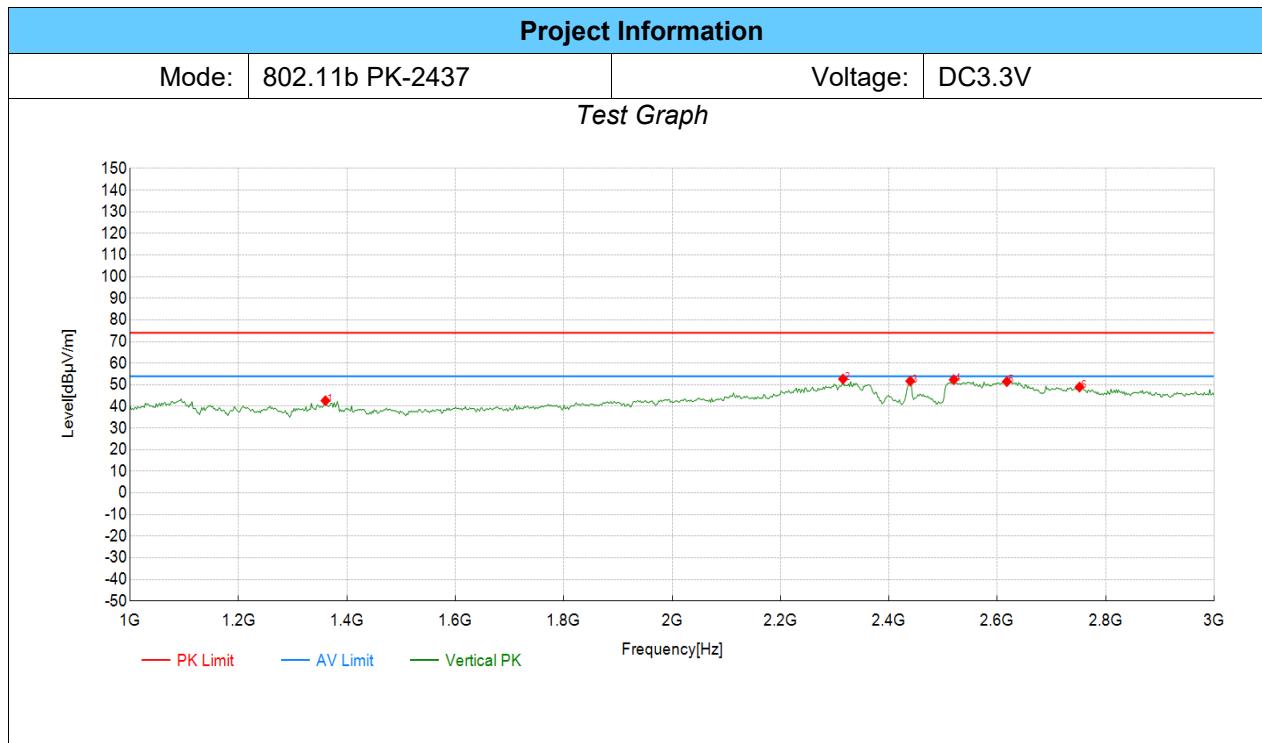

Suspected Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1360.36	54.95	42.67	-12.28	74.00	31.33	PK	Vertical	PASS
2	2315.32	59.27	52.67	-6.60	74.00	21.33	PK	Vertical	PASS
3	2439.44	58.12	51.72	-6.40	74.00	22.28	PK	Vertical	PASS
4	2519.52	58.64	52.38	-6.26	74.00	21.62	PK	Vertical	PASS
5	2617.62	57.47	51.49	-5.98	74.00	22.51	PK	Vertical	PASS
6	2751.75	54.51	48.96	-5.55	74.00	25.04	PK	Vertical	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

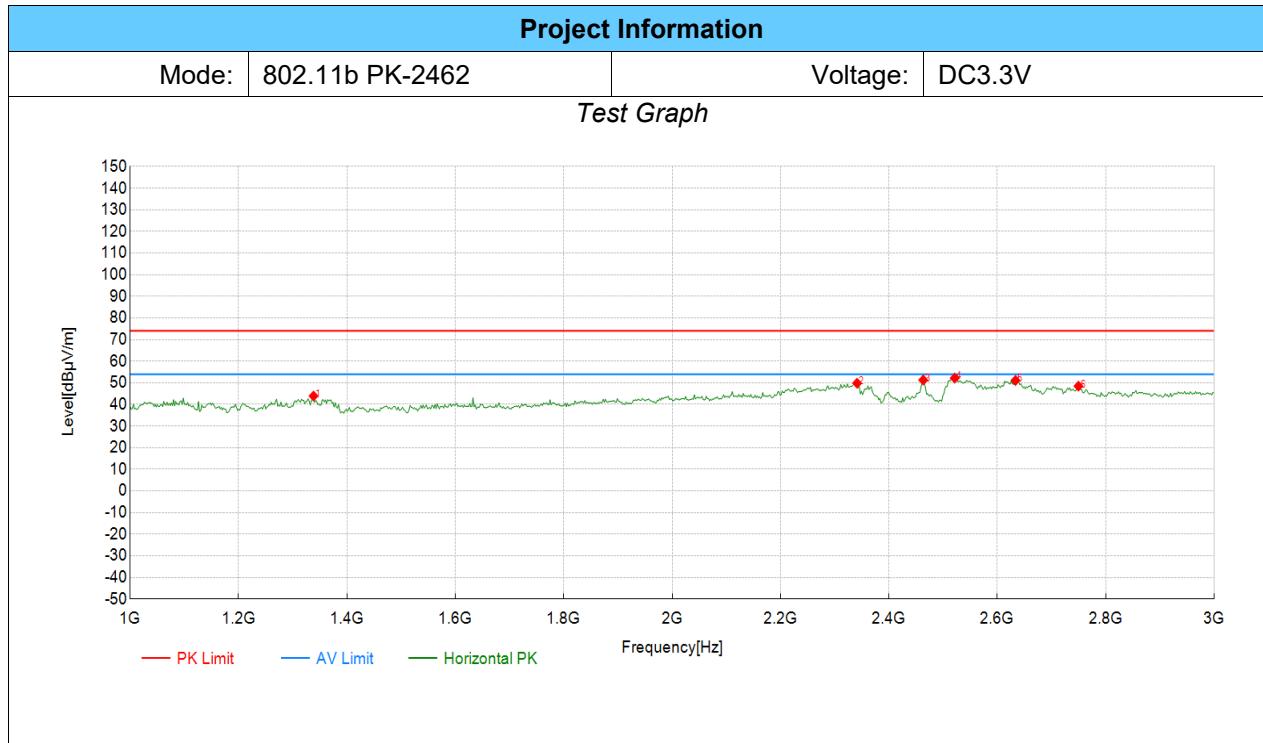

Suspected Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1338.34	56.12	43.89	-12.23	74.00	30.11	PK	Horizontal	PASS
2	2341.34	56.37	49.82	-6.55	74.00	24.18	PK	Horizontal	PASS
3	2463.46	57.67	51.30	-6.37	74.00	22.70	PK	Horizontal	PASS
4	2521.52	58.46	52.20	-6.26	74.00	21.80	PK	Horizontal	PASS
5	2633.63	57.02	51.10	-5.92	74.00	22.90	PK	Horizontal	PASS
6	2749.75	54.03	48.46	-5.57	74.00	25.54	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

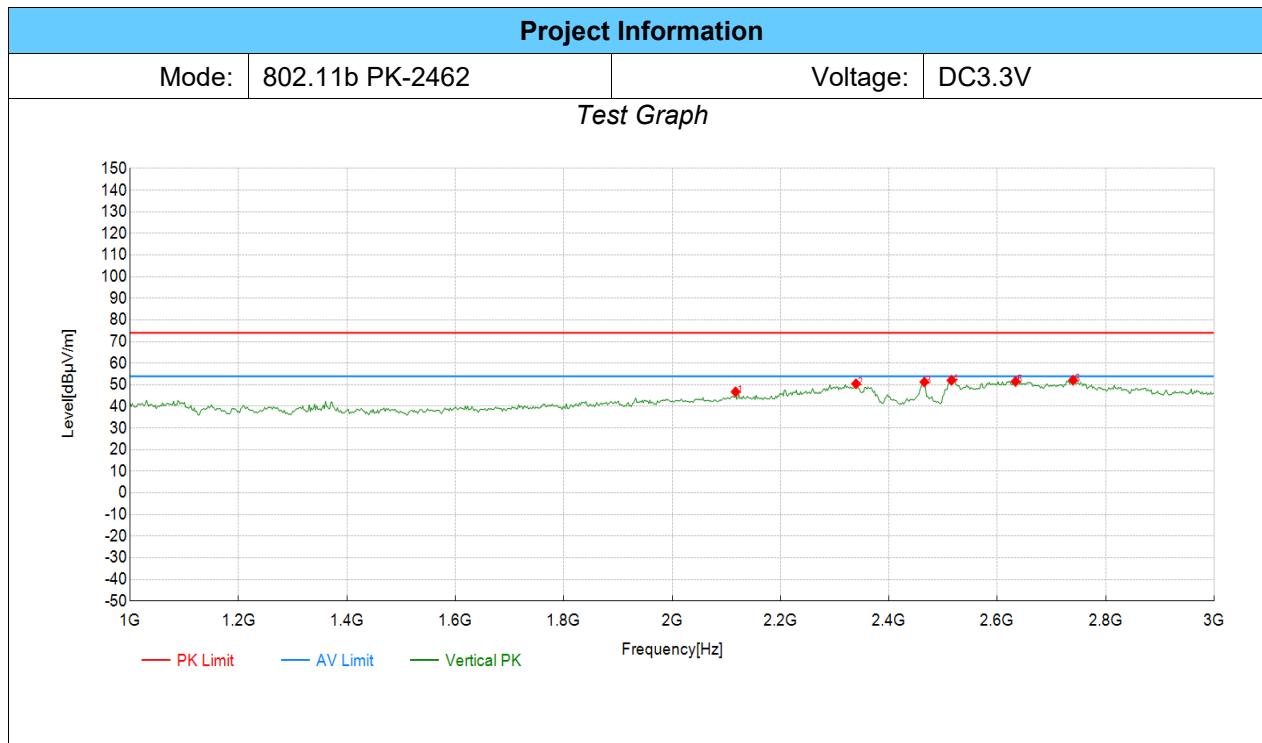


Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2117.12	53.82	46.77	-7.05	74.00	27.23	PK	Vertical	PASS
2	2339.34	57.02	50.47	-6.55	74.00	23.53	PK	Vertical	PASS
3	2465.47	57.65	51.28	-6.37	74.00	22.72	PK	Vertical	PASS
4	2515.52	58.33	52.05	-6.28	74.00	21.95	PK	Vertical	PASS
5	2633.63	57.47	51.55	-5.92	74.00	22.45	PK	Vertical	PASS
6	2739.74	57.73	52.13	-5.60	74.00	21.87	PK	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


8.7. SPURIOUS EMISSIONS(1 GHZ~3 GHZ)-ANT1 PCB ONBOARD ANTENNA

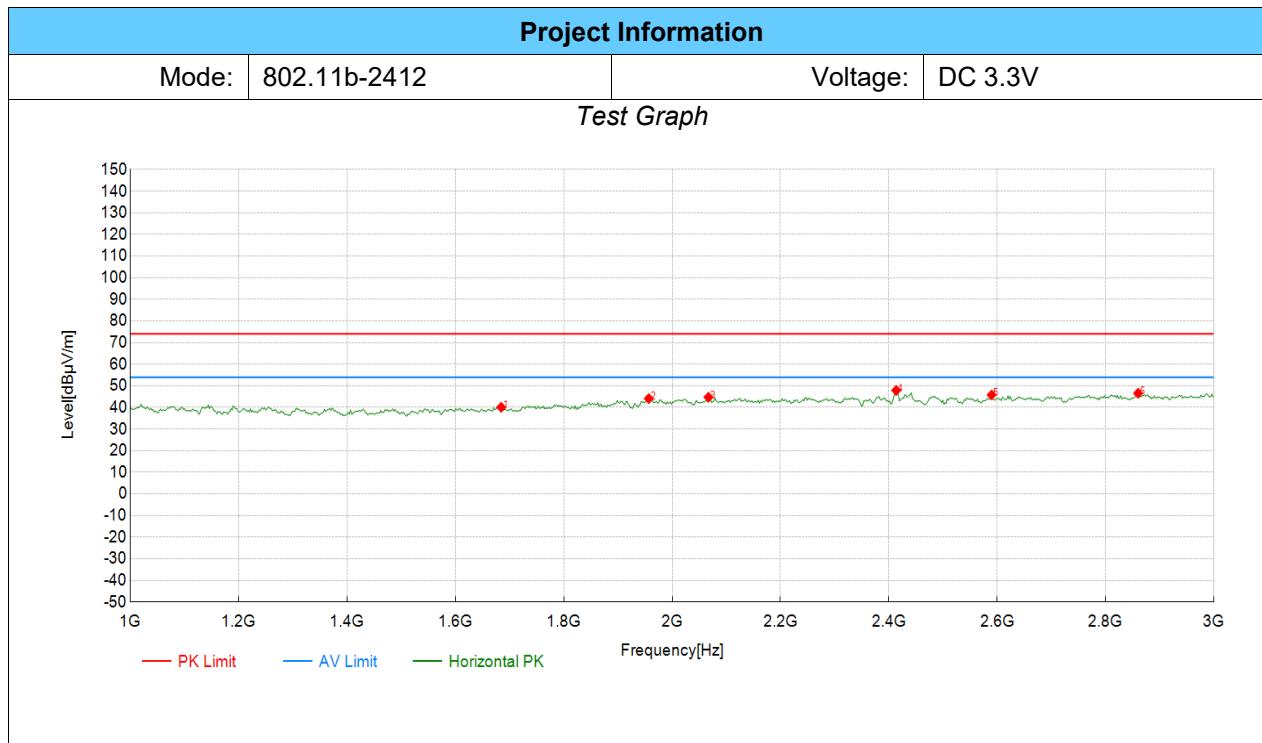

Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	1684.68	50.96	40.09	-10.87	74.00	33.91	PK	Horizontal	PASS
2	1956.96	52.02	44.10	-7.92	74.00	29.90	PK	Horizontal	PASS
3	2067.07	51.94	44.73	-7.21	74.00	29.27	PK	Horizontal	PASS
4	2413.41	54.30	47.86	-6.44	74.00	26.14	PK	Horizontal	PASS
5	2589.59	51.86	45.80	-6.06	74.00	28.20	PK	Horizontal	PASS
6	2859.86	51.82	46.54	-5.28	74.00	27.46	PK	Horizontal	PASS

Note: (1) Level=Reading+Factor


(2) Margin=Limit-Level

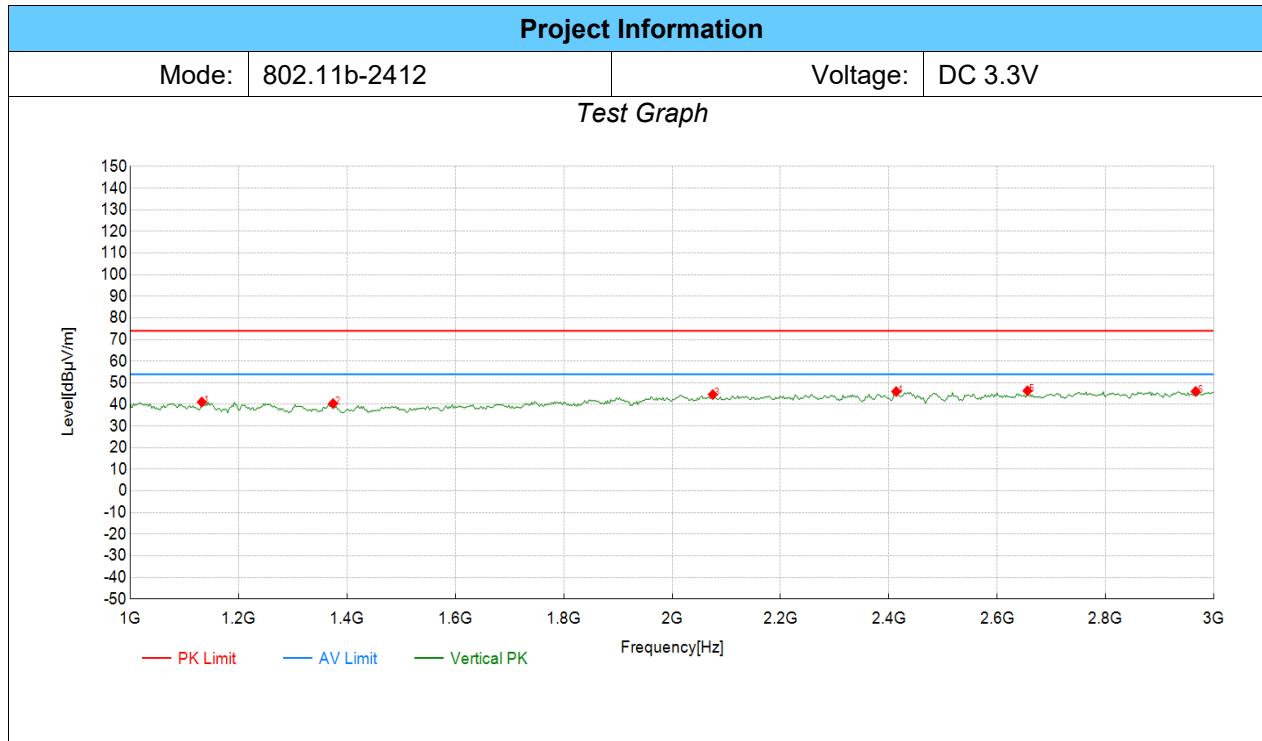

Suspected Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1132.13	53.01	41.11	-11.90	74.00	32.89	PK	Vertical	PASS
2	1374.37	52.70	40.39	-12.31	74.00	33.61	PK	Vertical	PASS
3	2075.08	51.74	44.57	-7.17	74.00	29.43	PK	Vertical	PASS
4	2413.41	52.39	45.95	-6.44	74.00	28.05	PK	Vertical	PASS
5	2655.66	52.15	46.30	-5.85	74.00	27.70	PK	Vertical	PASS
6	2965.97	51.06	45.99	-5.07	74.00	28.01	PK	Vertical	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

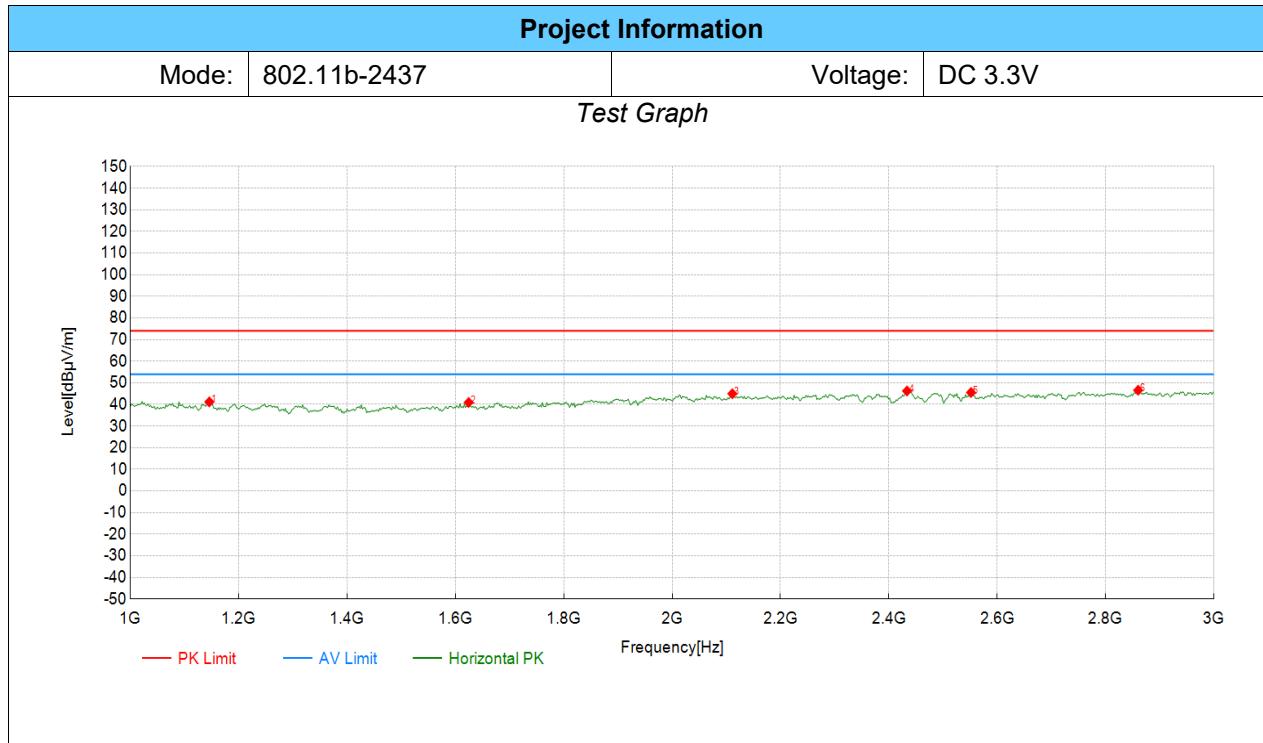

Suspected Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1146.15	53.10	41.19	-11.91	74.00	32.81	PK	Horizontal	PASS
2	1624.62	52.33	40.92	-11.41	74.00	33.08	PK	Horizontal	PASS
3	2111.11	52.01	44.96	-7.05	74.00	29.04	PK	Horizontal	PASS
4	2433.43	52.64	46.24	-6.40	74.00	27.76	PK	Horizontal	PASS
5	2551.55	51.70	45.53	-6.17	74.00	28.47	PK	Horizontal	PASS
6	2859.86	51.85	46.57	-5.28	74.00	27.43	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

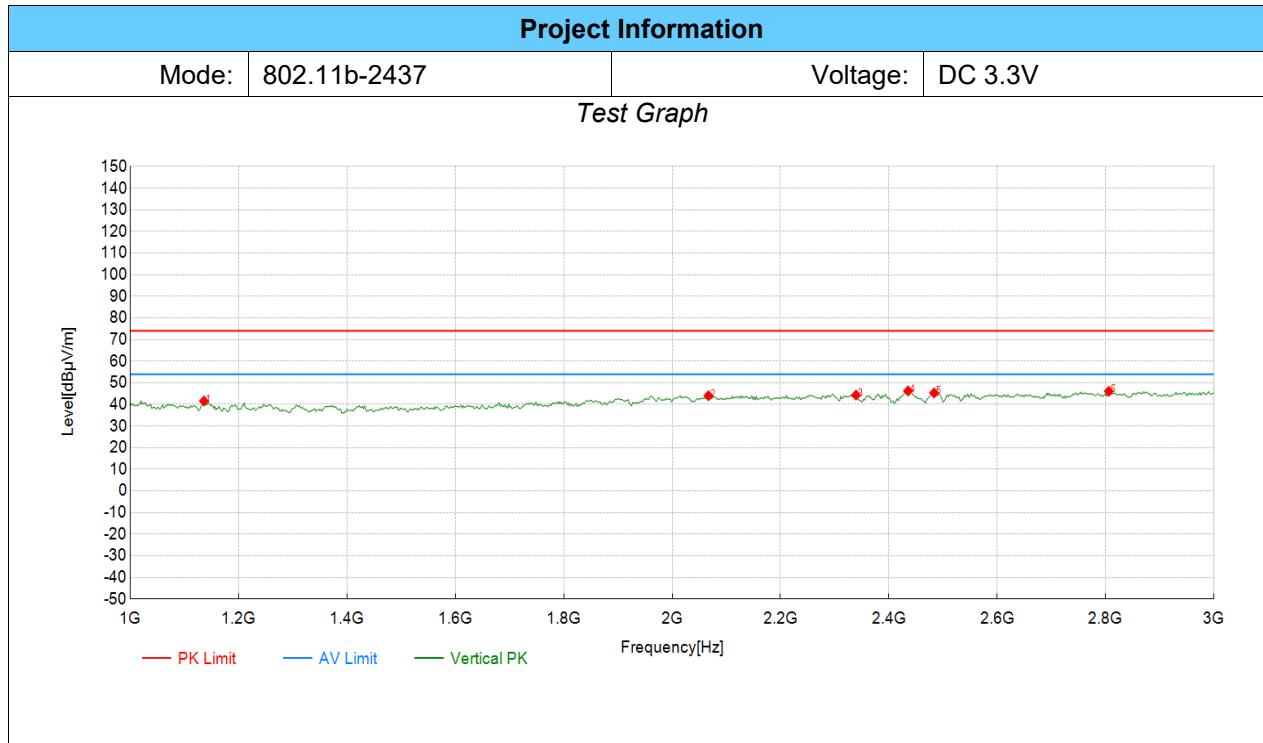

Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	1136.14	53.48	41.58	-11.90	74.00	32.42	PK	Vertical	PASS
2	2067.07	51.23	44.02	-7.21	74.00	29.98	PK	Vertical	PASS
3	2339.34	50.89	44.34	-6.55	74.00	29.66	PK	Vertical	PASS
4	2435.44	52.65	46.25	-6.40	74.00	27.75	PK	Vertical	PASS
5	2483.48	51.67	45.34	-6.33	74.00	28.66	PK	Vertical	PASS
6	2805.81	51.46	46.07	-5.39	74.00	27.93	PK	Vertical	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

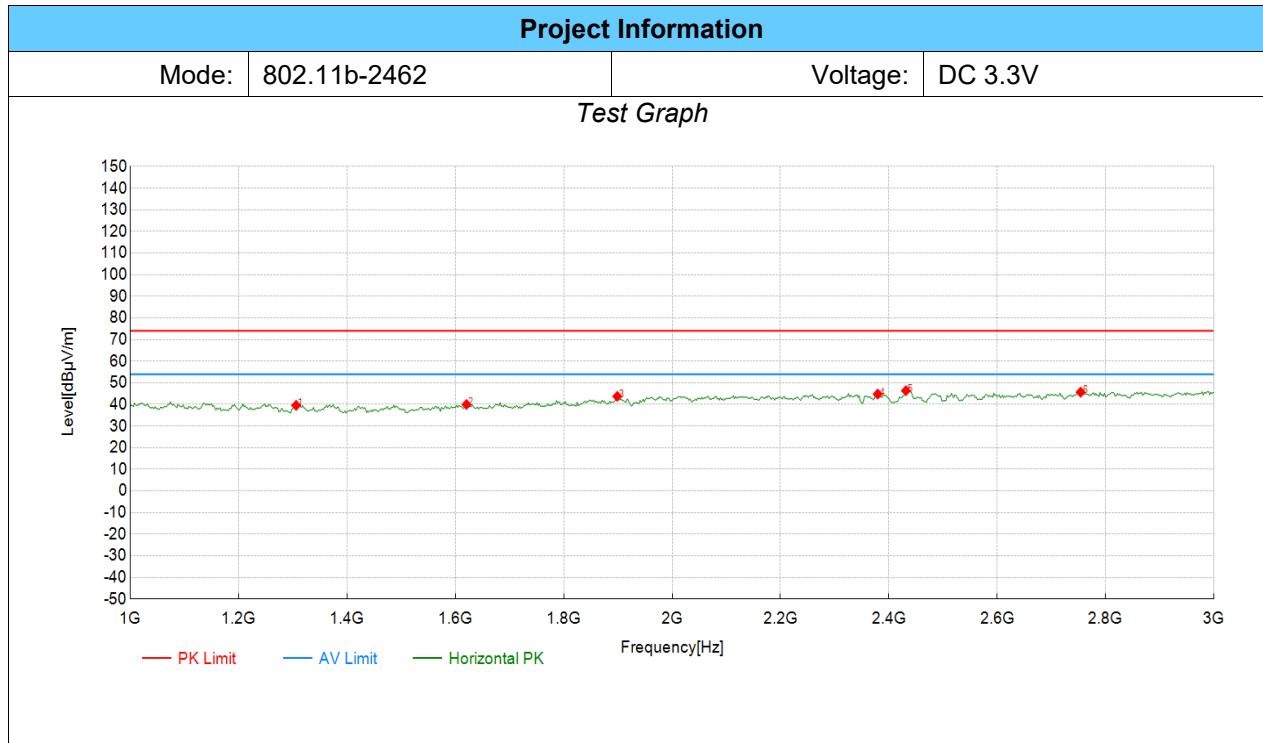

Suspected Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1306.31	51.74	39.58	-12.16	74.00	34.42	PK	Horizontal	PASS
2	1620.62	51.44	39.99	-11.45	74.00	34.01	PK	Horizontal	PASS
3	1898.90	52.36	43.73	-8.63	74.00	30.27	PK	Horizontal	PASS
4	2379.38	51.27	44.79	-6.48	74.00	29.21	PK	Horizontal	PASS
5	2431.43	52.77	46.36	-6.41	74.00	27.64	PK	Horizontal	PASS
6	2753.75	51.21	45.66	-5.55	74.00	28.34	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

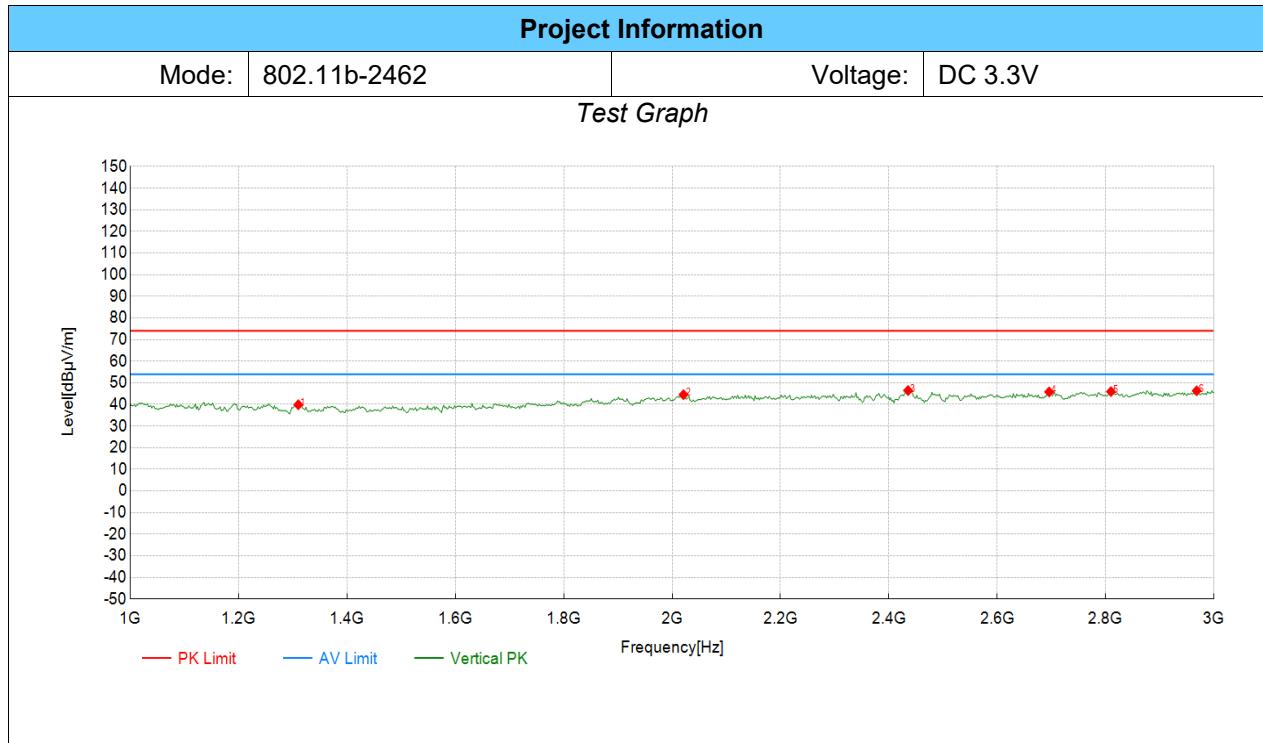


Suspected Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	1310.31	52.02	39.86	-12.16	74.00	34.14	PK	Vertical	PASS
2	2021.02	51.86	44.52	-7.34	74.00	29.48	PK	Vertical	PASS
3	2435.44	52.85	46.45	-6.40	74.00	27.55	PK	Vertical	PASS
4	2695.70	51.51	45.78	-5.73	74.00	28.22	PK	Vertical	PASS
5	2809.81	51.34	45.95	-5.39	74.00	28.05	PK	Vertical	PASS
6	2967.97	51.36	46.29	-5.07	74.00	27.71	PK	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


8.8. SPURIOUS EMISSIONS(1 GHZ~3 GHZ)-ANT2 FPC EXTERNAL ANTENNA(PD513)

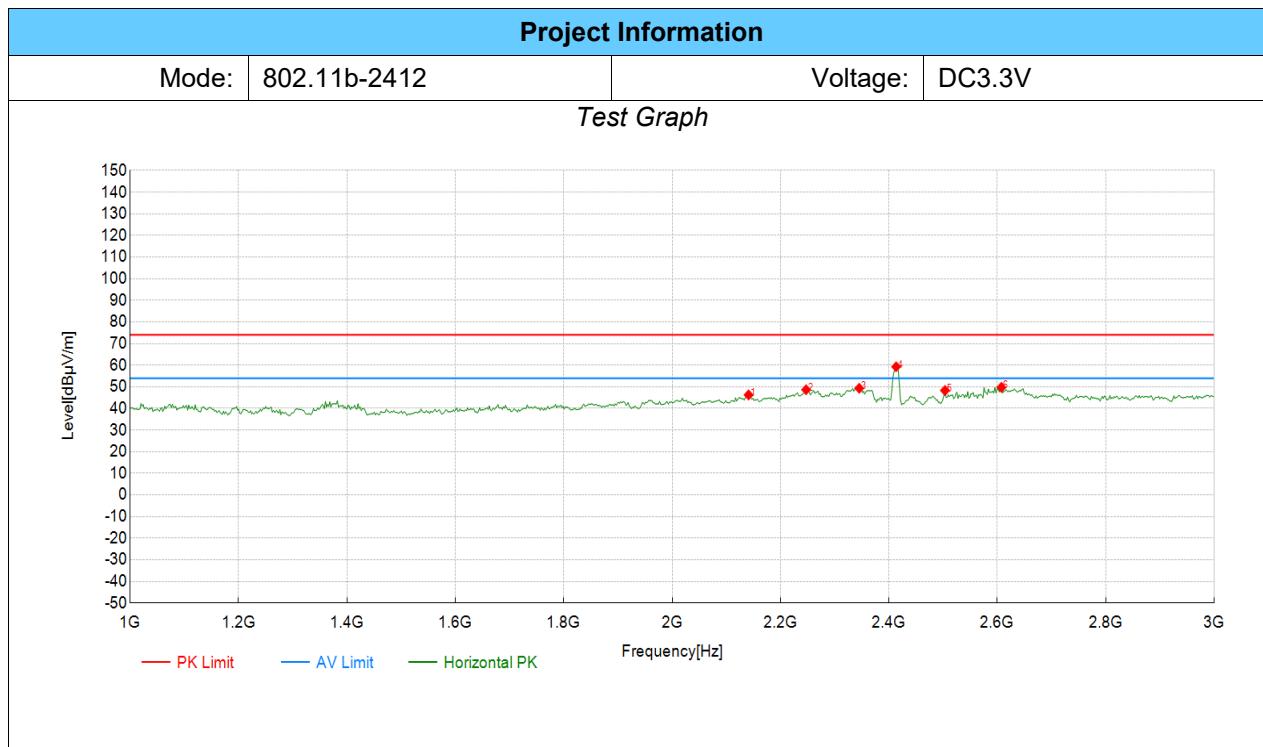

Suspected Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2141.14	53.21	46.24	-6.97	74.00	27.76	PK	Horizontal	PASS
2	2247.25	55.35	48.65	-6.70	74.00	25.35	PK	Horizontal	PASS
3	2345.35	55.88	49.33	-6.55	74.00	24.67	PK	Horizontal	PASS
4	2413.41	65.70	59.26	-6.44	74.00	14.74	PK	Horizontal	PASS
5	2503.50	54.61	48.30	-6.31	74.00	25.70	PK	Horizontal	PASS
6	2607.61	55.75	49.74	-6.01	74.00	24.26	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

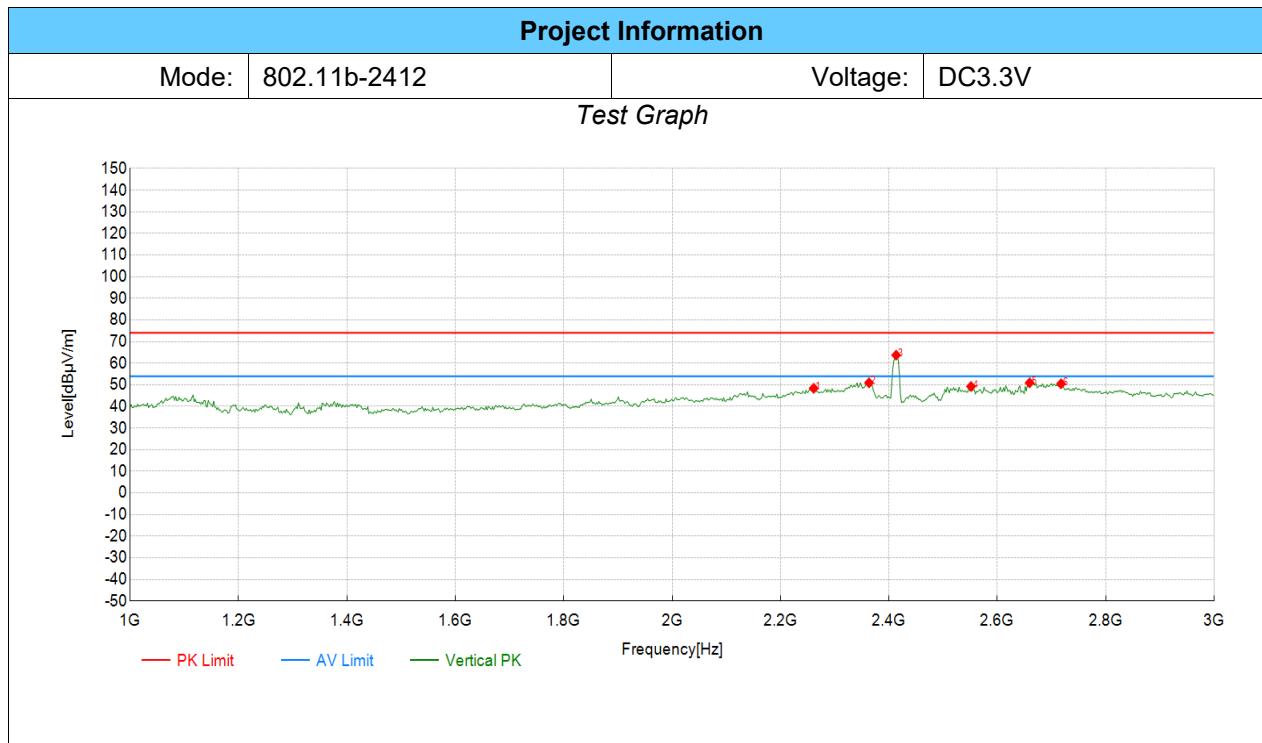

Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2261.26	55.06	48.39	-6.67	74.00	25.61	PK	Vertical	PASS
2	2363.36	57.45	50.94	-6.51	74.00	23.06	PK	Vertical	PASS
3	2413.41	70.17	63.73	-6.44	74.00	10.27	PK	Vertical	PASS
4	2551.55	55.41	49.24	-6.17	74.00	24.76	PK	Vertical	PASS
5	2659.66	56.75	50.91	-5.84	74.00	23.09	PK	Vertical	PASS
6	2717.72	56.15	50.48	-5.67	74.00	23.52	PK	Vertical	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

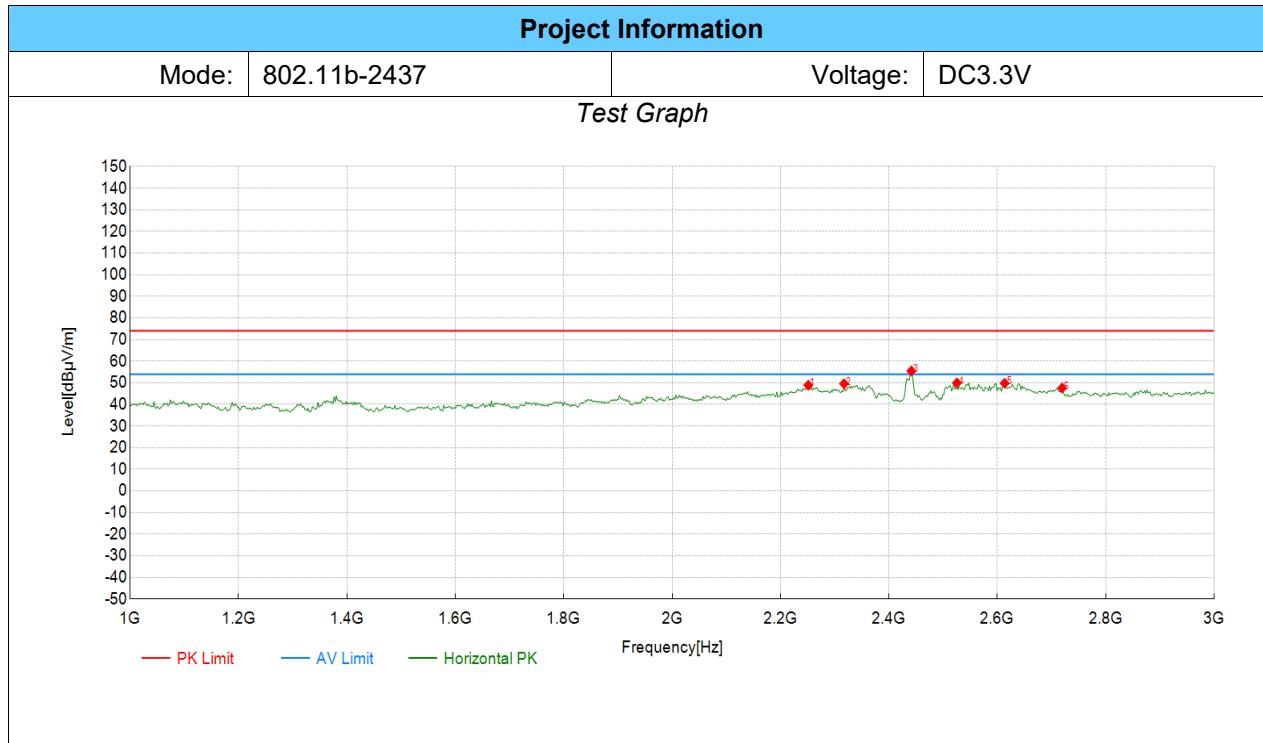

Suspected Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2251.25	55.61	48.91	-6.70	74.00	25.09	PK	Horizontal	PASS
2	2317.32	56.15	49.56	-6.59	74.00	24.44	PK	Horizontal	PASS
3	2441.44	61.90	55.50	-6.40	74.00	18.50	PK	Horizontal	PASS
4	2525.53	56.16	49.92	-6.24	74.00	24.08	PK	Horizontal	PASS
5	2613.61	55.78	49.79	-5.99	74.00	24.21	PK	Horizontal	PASS
6	2719.72	53.27	47.61	-5.66	74.00	26.39	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

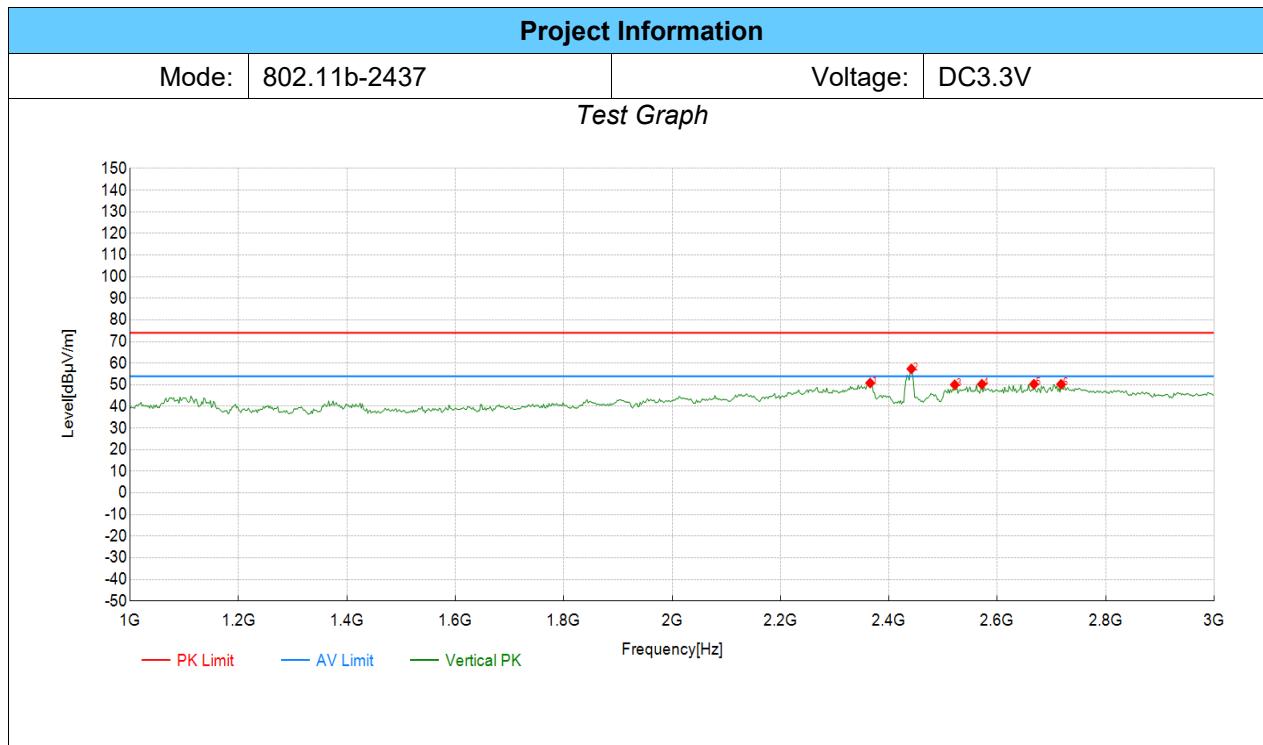

Suspected Data List									
NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol	Verdict
1	2365.37	57.34	50.83	-6.51	74.00	23.17	PK	Vertical	PASS
2	2441.44	63.78	57.38	-6.40	74.00	16.62	PK	Vertical	PASS
3	2521.52	56.28	50.02	-6.26	74.00	23.98	PK	Vertical	PASS
4	2571.57	56.40	50.28	-6.12	74.00	23.72	PK	Vertical	PASS
5	2667.67	56.12	50.29	-5.83	74.00	23.71	PK	Vertical	PASS
6	2717.72	55.91	50.24	-5.67	74.00	23.76	PK	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

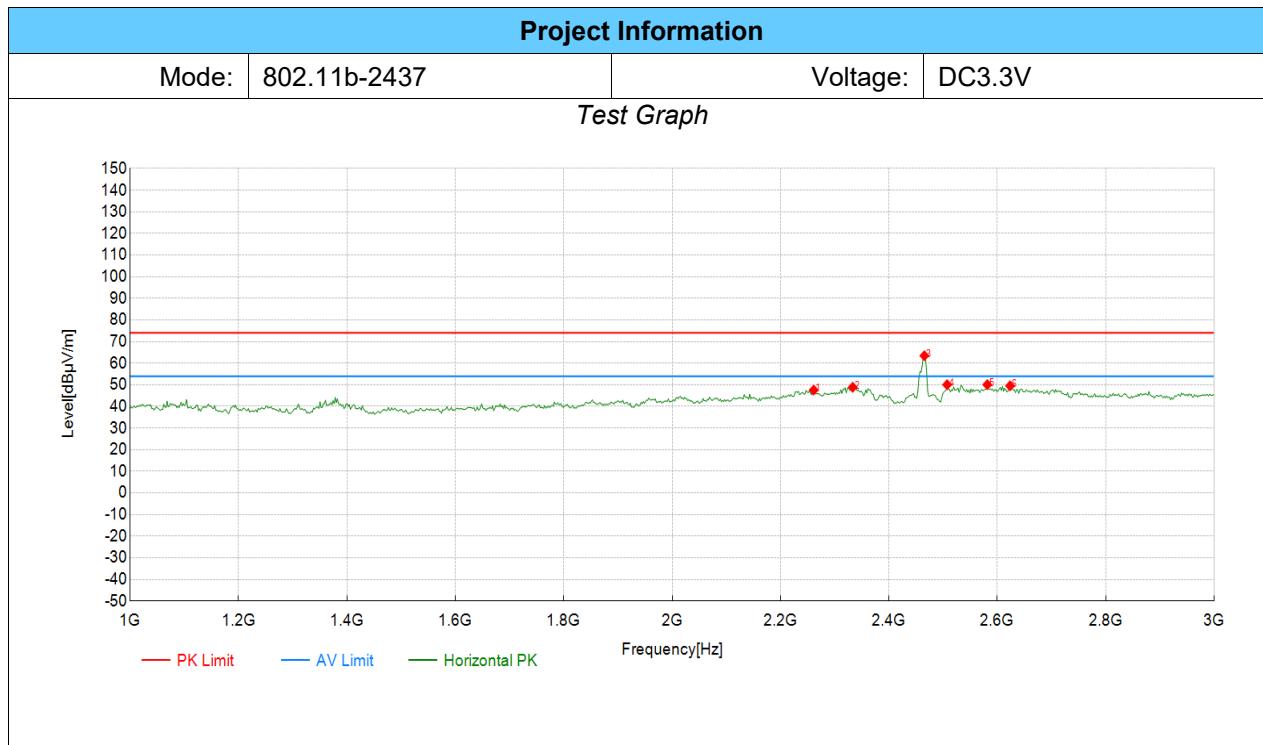

Suspected Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2261.26	54.23	47.56	-6.67	74.00	26.44	PK	Horizontal	PASS
2	2333.33	55.42	48.87	-6.55	74.00	25.13	PK	Horizontal	PASS
3	2465.47	69.83	63.46	-6.37	74.00	10.54	PK	Horizontal	PASS
4	2507.51	56.36	50.06	-6.30	74.00	23.94	PK	Horizontal	PASS
5	2581.58	56.16	50.07	-6.09	74.00	23.93	PK	Horizontal	PASS
6	2623.62	55.52	49.56	-5.96	74.00	24.44	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level