

## Owner's Manual

14 Channel FRS (Family Radio Service)

Model KF-101

WOOIL TELCOM CO., LTD.

Head Office/ R&D Lab. :

4F 241-3 SAU-DONG KIMPO-CITY KYUNGKI-DO KOREA

TEL: 82-341-982-6232~3 FAX: 82-341-982-6234

E-mail: [wooltelcom@netsgo.com](mailto:wooltelcom@netsgo.com)

WOOIL TELCOM CO., LTD.

FCC ID: OIZKF-101

EXHIBIT #: DA

## □ Contents □

1. Features
2. Specifications
3. Included with your FRS
4. Operation
5. Batteries
6. Care and Maintenance
7. Warranty Statement

WOOIL TELCOM CO., LTD.  
FCC ID: OIZKF-101  
EXHIBIT #: 10B

## 1. FEATURES

Wooil Telcom Two-Way Family Radio has the following features:

- ◆ No License Required !
- ◆ Clear Communications Up To About 2 Miles
- ◆ A Lightweight, Palm-Sized Radio
- ◆ 14 Channel ( Dip Switch Type Channel Selection )
- ◆ Transmit/ Battery Indicator
- ◆ Automatic Squelch
- ◆ Automatic Power Save

### Introduction

Wooil Telcom Personal FM Transceiver is a lightweight, palm-sized radio that you can carry almost anywhere. Use it at shopping malls, amusement parks, or sports events to contact family and friends, or in a neighborhood watch for vital communications. You can talk with another person who has an FRS radio set to the same frequency as your transceiver.

Your radio has auto-squelch, which means you won't hear anything on the channel unless someone is transmitting nearby on the same channel. But, you can turn off auto-squelch hear weaker, distant transmissions.

Also, if you do not transmit for over 8 seconds, the radio automatically switches to a power save mode and returns to full power when it receives a transmission or you press any key.

WOOIL TELCOM CO., LTD.

FCC ID: OIZKF-101

EXHIBIT #: 10C

## 2. SPECIFICATIONS

### 1) General Specification


Classifications	Spec.
Frequency Range	462.5625 ~ 467.7125 MHz
Impedance	50 ohm
Modulation Type	F3E
Channel	14
Channel Interval	12.5 KHz
Battery Voltage	DC 6V (AAA 1.5V × 4EA) or Charger
Operating Temperature	- 20 °C ~ 50 °C
Frequency Stability	2.5 PPM
Dimensions	50 mm (W) × 30 mm (D) × 100 mm (H)
Weight	105 g
Antenna	75 mm

### 2) Electrical Specification

#### -Transmitter

Classifications	Spec.
Transmitter Output Power	0.5 W
Frequency Stability	± 0.0025 PPM (-20 °C ~ 50 °C)
Modulation	FM
Oscillation	VCO
Max. Frequency Deviation	± 2.5 KHz
Spurious Output Strength	Less than -60 dB
TX Distortion	Less than 10 %
Consuming Current	Less than 400 mA

3) Channel and Channel Selection  
 -Using Dip Switch

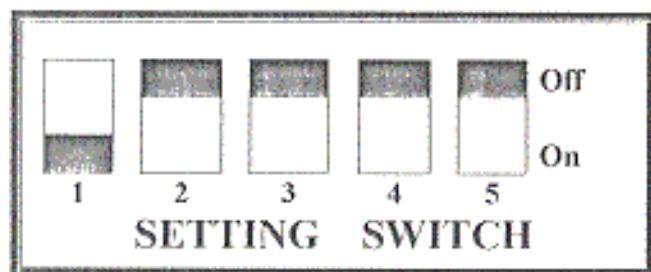

Channel	Selection Dip Switch					Frequency (MHz)
	1	2	3	4	5	
1	On	On	On	On	X	
	Off	Off	Off	Off	X	462.5625
	On	Off	Off	Off	X	
2	Off	On	On	On	X	462.5875
3	On	Off	On	On	X	462.6125
4	Off	Off	On	On	X	462.6375
5	On	On	Off	On	X	462.6625
6	Off	On	Off	On	X	462.6875
7	On	Off	Off	On	X	462.7125
8	Off	Off	Off	On	X	467.5625
9	On	On	On	Off	X	467.5875
10	Off	On	On	Off	X	467.6125
11	On	Off	On	Off	X	467.6375
12	Off	Off	On	Off	X	467.6625
13	On	On	Off	Off	X	467.6875
14	Off	On	Off	Off	X	467.7125

Cf. The 5<sup>th</sup> Switch has No Influence to channel selecting !

-Receiver Specification

Classification	Spec.
Receiving Type	Double Support Heterodyne
Receiving Sensitivity	0.2 $\mu$ V
Squelch Sensitivity	Less than 0.3 $\mu$ V
Max. Audio Output	0.3 W


### 3. INCLUDED WITH YOUR FRS

- ♦ Transceiver
- ♦ Owner's Manual
- ♦ Strap

### 4. OPERATION

#### 1) Name of Each Composition

WOOL TELCOM CO., LTD.  
FCC ID: OIZKF-101  
EXHIBIT #: 10F

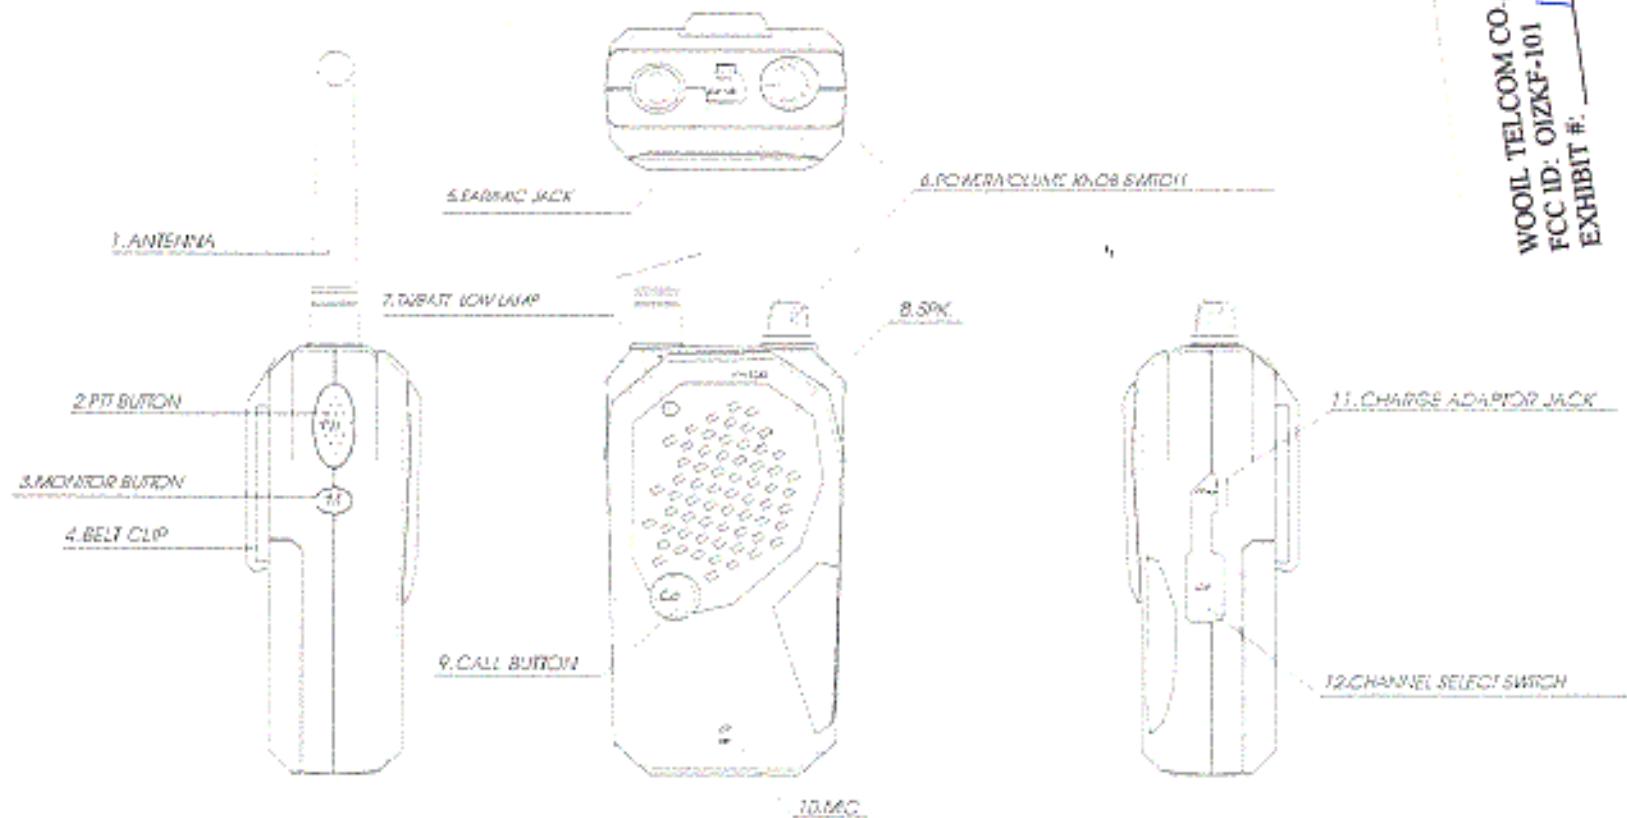

WOOL TELCOM CO., LTD.  
FCC ID: OMZKF-101  
EXHIBIT # 106

## 2) Using The Radio

To talk, hold down PTT (Push to Talk). Speak into the microphone when the TX indicator lights. When you finish speaking, release PTT.

Note: If the TX indicator lights when you are not holding down PTT, replace the batteries.

To hear everything happening on a channel, including weak transmissions, hold down MON. Release MON to turn auto-squelch back on.

To send a page to all radios tuned to same channel, press CALL.

Rotate the OFF/ VOLUME control to turn the transceiver on and off and adjust the volume.

The TX/ BATT lamp lights when you transmit a message or press CALL.

This device complies with Part 15 of the FCC Rules.  
Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Modifying or tampering with the radio's internal components can cause a malfunction and might invalidate the radio's warranty and void your FCC authorization to operate it.

## 5. BATTERIES

### Installing Batteries

Wooil Telcom radio uses four AAA batteries for power. We recommend alkaline batteries.

**Note:** You can also use rechargeable batteries in the radio.

Be sure the radio is off, then slide off the battery compartment cover in the direction of the arrow on the cover. Install the batteries, matching the polarity symbols (+ and -) inside the compartment. Then replace the cover.

**CAUTION:** Do not mix old and new batteries, different types of batteries (standard, alkaline, or rechargeable), or rechargeable batteries of different capacities. The radio's range decreases as the battery power decreases. To ensure maximum range, keep fresh batteries in the radio.

## 6. CARE AND MAINTENANCE

To enjoy your radio for a long time:

Handle it gently.

Keep it away from dust, moisture, and temperature extremes.

Clean it with a damp cloth. Do not use harsh chemicals.

## 7. Limited Warranty Statement

Wooil Telcom Co., Ltd warrants that its products will be free from defects in materials and workmanship under normal use for one (1) year from the date of purchase by the original end user, provided that the buyer has complied with the requirements stated herein.

If the product fails to function under normal use because of manufacturing defect(s) or workmanship during the one (1) year period following the date of purchase, it will be replaced or repaired at no charge when returned to the place of purchase. The defective unit must be accompanied by the proof of purchase date in the form of a sales receipt.

In the event of a product defect during the warranty period, Wooil Telcom will repair and replace the product. Replacement, at its option, may include a similar or higher-featured product. Repair may include the replacement of parts or boards with functionally equivalent reconditioned or new parts or boards. Repaired or replaced parts and products are warranted for the remainder of the original warranty period. All replaced parts or boards become the property of Wooil Telcom Co., Ltd. You will be charged for repair or replacement of the product made after the expiration of the warranty period.

This warranty does not cover damage and failure caused by or attributable to acts of God, abuse, accident, misuse, improper or abnormal usage, failure to follow instructions, improper installation or maintenance, alteration, lightning or other incidence of excess voltage or current. This warranty is void if the serial number is altered, defaced or removed. The purchaser shall provide for removal of the defective product and installation of its replacement.

WOUIL TELCOM CO., LTD.

FCC ID: OIZKF-101

EXHIBIT #: 103

THE EXPRESS WARRANTIES CONTAINED HEREIN ARE IN LIEU OF ALL OTHER WARRANTIES, EITHER EXPRESSED OR IMPLIED, OR STATUTORY, INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

FOR ANY PRODUCT THAT DOES NOT COMPLY WITH THE WARRANTY SPECIFIED, THE SOLE REMEDY WILL BE REPAIR OR REPLACEMENT. IN NO EVENT WILL WOOIL TELCOM CO., LTD. BE LIABLE TO THE BUYER FOR ANY DAMAGES, INCLUDING ANY SPECIAL, INCIDENTAL, INDIRECT OR CONSEQUENTIAL DAMAGES, OR THE LOSS OF USE OF, OR THE INABILITY TO USE THE PRODUCT.