

 <b>Bonso Group</b>	Document Number	ENG_TEL_A001
	Rev #	00
<b>Title : BS001 APPROVAL DOCUMENTS</b>		

# INSTRUCTION MANUAL

**[RF EXPOSURE STATEMENT : OVVBS001 / Bonso Electronics Ltd.]**

**- CAUTION! -**

**IMPORTANT SAFETY INFORMATION**

Your wireless hand-held portable transceiver contains a radio frequency transmitter. When the PTT button is pushed, the transmitter sends out RF signals. The device is authorized to operate at a transmit duty factor not exceeding 50% using alkaline "AAA" size batteries to comply with Federal Communications Commissions (FCC) RF exposure safety level guidelines for hand-held wireless devices.

For body-worn operation, this device has been tested for SAR (Specific Absorbtion Rate) and meets the FCC RF exposure guidelines when used with the accessories supplied or designated for this device by the manufacturer. Use of other accessories may not ensure compliance with FCC RF exposure guidelines. Use the manufacturer-supplied antenna only. Unauthorized antennas, modifications, or attachments could damage the transmitter and may violate FCC regulations. To maintain compliance with the FCC'S RF exposure guidelines, hold the transceiver at least 1 inch (2.5 centimeters) from your face and speak in a normal voice, with the antenna pointed up and away.

**GMRS License :**

Use of GRMS radios within the United States requires a FCC GMRS license. An individual of 18 years of age or older, who is not a representative of a foreign government is eligible to apply for a GMRS system license. You will need two forms from the FCC - FCC FORM 159 and FCC Form 605 Main Form and Schedule F.

You can find the forms online at <http://www.fcc.gov/formpage.html> or call 1-800-418-3676.

 <b>Bonso Group</b>	Document Number	ENG_TEL_A001
	Rev #	00
<b>Title : BS001 APPROVAL DOCUMENTS</b>		

# Owner's Manual

## For Model BS001 FRS/GMRS Radio

### FEATURES

- 22 Channels
- LCD Backlighting
- Squelch Tail Clearance
- Paging/Call
- Scan
- VOX
- Roger Beep
- Baby monitor
- Monitor
- Dual Watch
- Priority Channel Appointment
- Manner Mode
- Low Battery Indicator





### Use and Care

1. **Do not** use alcohol or cleaning solutions to clean the radio.
2. **Do not** immerse the radio in water.
3. Use a soft damp cloth to clean the radio
4. Dry the radio with dry lint-free cloth should it get wet.
5. **Turn off the radio and remove the batteries during long-term storage.**

### Introduction

The BS-001 represents the state-of-the-art in high-tech engineering. Designed for Family Radio Service operation, this compact package is big in performance. It is a quality piece of electronic equipment, skillfully constructed with the finest components. The circuitry is all solid-state and mounted on a rugged printed circuit board. The BS001 is designed for reliable and trouble-free performance.

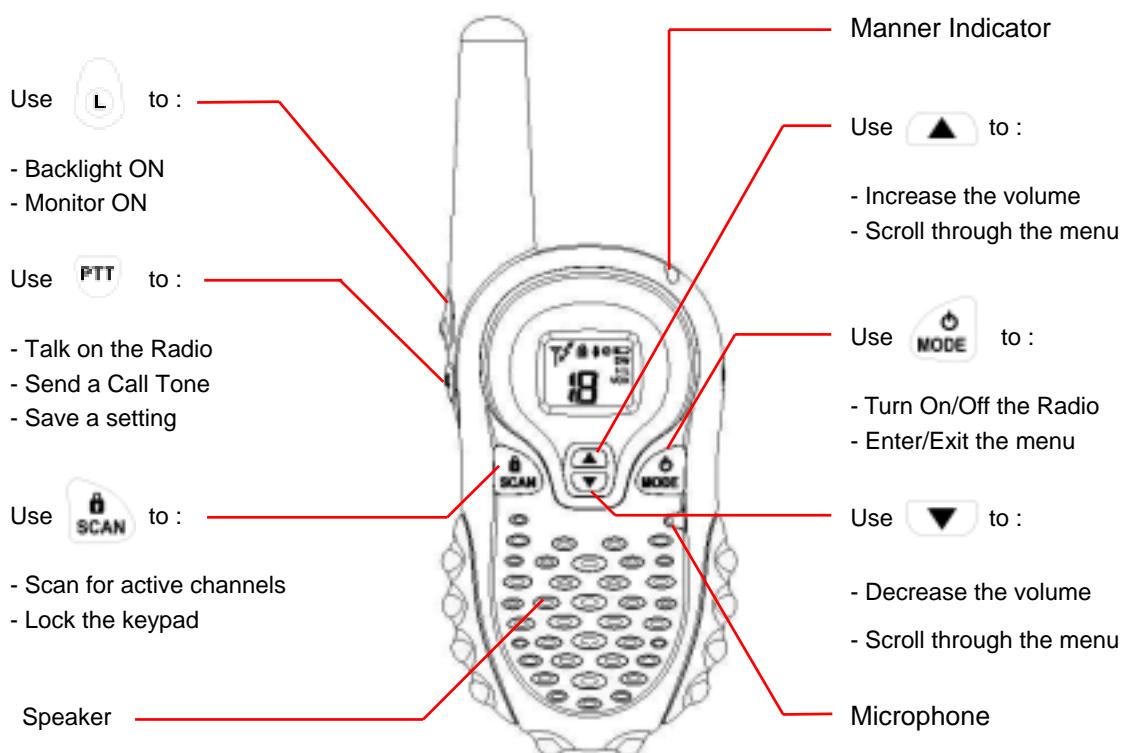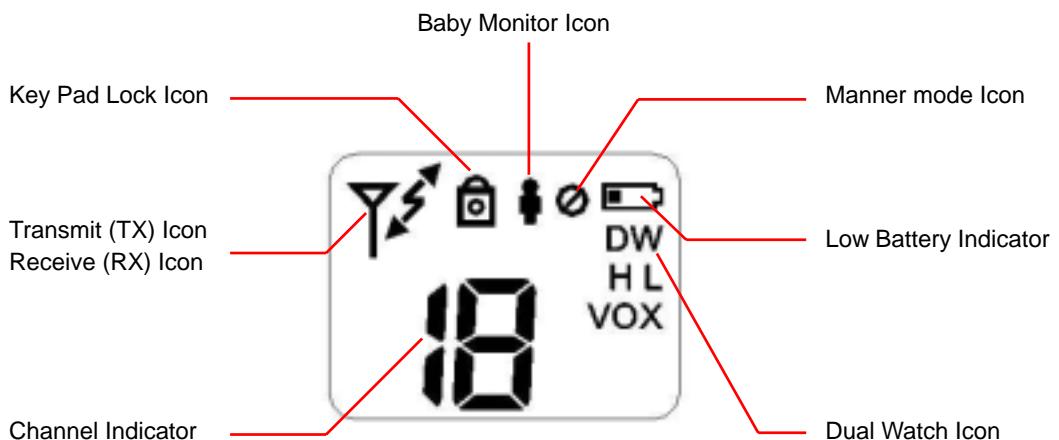**Title : BS001 APPROVAL DOCUMENTS****Control Buttons & Indicators****LCD Display**


 <b>Bonso Group</b>	Document Number	ENG_TEL_A001
	Rev #	00
<b>Title : BS001 APPROVAL DOCUMENTS</b>		

## Installing Batteries

The BS001 radio operates with either 4 AAA Alkaline Batteries or optional NiMH battery. The belt clip should be removed to ease installation or removal. To install the batteries:

1. With the back of the radio facing you, remove the Battery Cover by sliding it down from the unit.
2. Insert 4 AAA batteries observing the polarity as shown, or install the optional battery. Installing the batteries incorrectly will prevent the unit from operating or can damage the unit.
3. Return the Battery Cover by sliding it up from the unit.

**Note: Batteries are not included.**

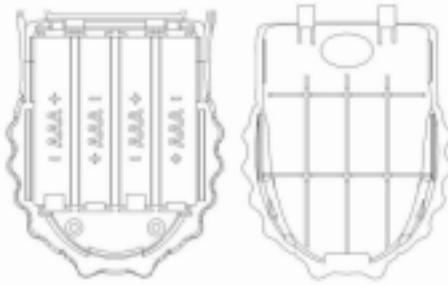

## Charging the batteries (Optional NiMH battery Only)

The BS001 is equipped to allow using a rechargeable NiMH battery, which can be recharged by a Adaptor (not included). Batteries must be charged when the low battery icon flashes on the display.

### **Note :**

1. Only use batteries indicated in the manual.
2. Do not attempt to charge Alkaline batteries or any battery pack other than the one indicated in the manual. This may cause leakage and damage the unit.
3. For long term storage of the radio, turn the unit OFF and remove the batteries from the radio.

## Operation

**Power On/Off :** 1. Press the  button for more than 2 second to turn the radio on.  
2. Press the  button for over 2 seconds to turn the radio off.

**Volume :** 1. Press the  button to increase the volume.  
2. Press the  button to decrease the volume during normal operation.

**Talking and Listening :** To communicate, all radios in your group must be set at the same channel.

1. For maximum clarity, hold the radio 2 to 3 inches from your mouth.

 <b>Bonso Group</b>	Document Number	ENG_TEL_A001
	Rev #	00
<b>Title : BS001 APPROVAL DOCUMENTS</b>		

2. Press and hold **PTT** button and speak in a normal voice into the microphone. The TX icon will appear continuously on the LCD Display when transmitting.
3. To receive messages, release the **PTT** button. The RX icon will appear on the display when your radio is receiving a transmission.

**Call Tone** : The BS001 can transmit a call tone for a fixed length of time. To send a call tone, press the **PTT** twice rapidly. The TX icon will appear during transmitting a call tone and tone can be heard on the speaker for confirmation.

**SCAN** : The BS001 can scan all of the 22 channels to observe for any activity.

To enter the scan mode ;

1. Press the  button for one second.
2. Press the  button again to exit the scan mode.

Your radio will rapidly scan each of the 22 channels and stop on any active channel. When you press the **PTT** button to transmit on an active channel, the scanning function will stop.

To resume scanning, press and hold the  button for one second.


**Keypad Lock** : To avoid accidentally changing the radio operation ;

Press the  button for 2 seconds. The  icon will appear on the display. When the  is on the menu function the  and  button will be disabled. When locked, you will be able to turn the radio off and on, monitor, transmit/receive, and send a call tone.

To unlock, press the  for 2 seconds.

## User Interface

To access the advanced features of the BS-001, your radio has the following menu functions:

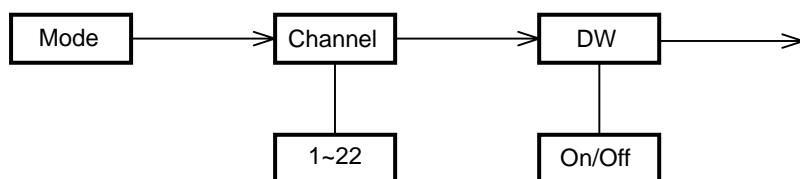

**Note : The unit will automatically go to normal mode after 10 seconds of no button activity during menu setting.**

**Channel Selection** : The BS001 has 22 channels available. To change channels:

1. Press the  button until the current channel segment flashes in radio on.
2. Use the  or  buttons to change the channel.
3. Press the **PTT** button to save the new channel.

 <b>Bonso Group</b>	Document Number	ENG_TEL_A001
	Rev #	00
<b>Title : BS001 APPROVAL DOCUMENTS</b>		

**Roger Beep Tone :** Whenever you release the **PTT** button, a “Roger Beep” tone may be transmitted to let your friends know you are finished talking. To enable the Roger Beep ;

1. Press the  button repeatedly until the “rb” appears on the display.
2. Press the  and  to set the Roger Beep tone on or off. An “on” or “oF” will appear on the display during setting.
3. To exit the Menu, press **PTT** button.

**VOX (Voice Operated Transmission) :** The BS001 communicator is equipped with a user adjustable Voice Operated Transmitter (VOX) that can be used for automatic voice transmission. In this convenient mode, transmission is automatically initiated by speaking into the microphone. There is no need to push the **PTT** button. To enable the VOX ;

1. Press the  button repeatedly until the “VOX” appears on the display
2. Press the  and  buttons to set the VOX on or off. An “on” or “oF” will appear on the display during setting.
3. To exit the Menu, press **PTT** button.

**Dual Watch :** The BS001 can select the main channel and assistant channel, then these two channels can take turns the receipt. To select the DW mode ;

1. Press the  button repeatedly until the “DW” appears on the display.
2. Press the  and  buttons to set the assistant channel.
3. Press the **PTT** button to save the assistant channel.

**Manner Mode :** In the silent place, if the call receipt is O.K, it can be sent out short beep and LED will do blinking. To enable the Manner mode,

1. Press the  button repeatedly until the “o” appears on the display.
2. Press the  and  buttons to set the Manner mode on or off. An “on” or “oF” will appear on the display during setting.
3. To exit the Menu, press **PTT** button.

**Priority Channel Appointment :** The BS001 can set the channel user want to use. To select the Priority Channel Appointment function;

1. Press the  button repeatedly until the “P” appears on the display.
2. Press the  and  buttons to set the priority channel.
3. Press the **PTT** button to save the priority channel.

**Baby Monitor Mode :** The BS-001 is able to monitoring the baby. To enable the Baby monitor ;

1. Press the  button repeatedly until the “b” appears on the display.

**Title : BS001 APPROVAL DOCUMENTS**


2. Press the and buttons to set the Baby monitor on or off. An “oF”, “1” or “2” will appear on the display during setting. The “1” is master (TX /Baby side), “2” is slaver (RX).
3. To exit the Menu, press **PTT** button.

**Monitor Mode :** To enable the monitor mode, press the button for 2 seconds. To exit this mode , press PTT button or press the button for 2 seconds..

**Backlight Display :** The BS001's LCD backlight display automatically lights up for 5 seconds with the press the button.

**Belt Clip :****To install the belt clip:**

Slide the clip up into the slot on the back of the radio until the latching mechanism clicks.

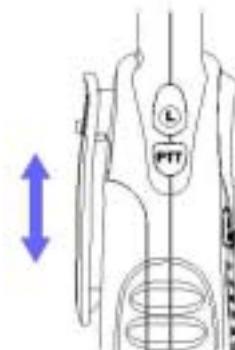**To remove the belt clip:**

Pull the latching tab outward, then gently slide the belt clip down toward the bottom of the radio.

**TROUBLESHOOTING**

Problems	Solution
No Power	- Check the battery installation and/or replace batteries
Cannot Receive Messages	- Confirm the radios have the same channel settings. - Make sure that you are with in range of the other transceivers. - Buildings and other obstructions may interfere with your communication.
Radio is not responding to button presses	- Make sure key lock is not on. See “Keypad Lock”. (Page 12) - Radio might need to be reset. Turn power off then on.
Display is dim	- Reposition or replace batteries.
Charger not functioning	- Contacts on the bottom of the radio may require cleaning. - Ensure the outlet the charger is plugged into is functioning properly. - Check that the batteries are installed in the radio properly.

 <b>Bonso Group</b>	Document Number	ENG_TEL_A001
	Rev #	00
<b>Title : BS001 APPROVAL DOCUMENTS</b>		

## Technical Specification

### **A. Specification**

Channels : 22 Channels  
 Operating Frequency : UHF 462.5625 ~ 467.7125 MHz  
 Power Source : 4 AAA Alkaline or rechargeable Ni-MH Batteries  
 Output Power : Typically 0.5 Watts

### **B. Current Drain :**

Receive : 145 mA max  
 Transmit : 400 mA max  
 Standby : Average 13 mA

### **C. Operating Time : Based on 900mAH (Alkaline battery) capacity**

Talk Time : 2~2.5 hours  
 Receive Time : 12 hours  
 Standby Time : 69 hours  
 Combined (5-5-90 duty) Time : 23 hours

## Channel Frequency Chart

CH. No	CH. Freq. (MHz)	CH. No	CH. Freq. (MHz)
1	462.5625	12	467.6625
2	462.5875	13	467.6875
3	462.6125	14	467.7125
4	462.6375	15	462.5500
5	462.6625	16	462.5750
6	462.6875	17	462.6000
7	462.7125	18	462.6250
8	467.5625	19	462.6500
9	467.5875	20	462.6750
10	467.6125	21	462.7000
11	467.6375	22	462.7250

**Note**

- 1. Channels 1 thru 14 transmit on FRS frequencies.**
- 2. Channels 15 thru 22 transmit on GMRS frequencies.**

 <b>Bonso Group</b>	Document Number	ENG_TEL_A001
	Rev #	00
<b>Title : BS001 APPROVAL DOCUMENTS</b>		

## FCC NOTICE

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES.  
 OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS:  
 (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND  
 (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED,  
 INCLUDING INTERFERENCE THAT MAY CAUSE UNDERSIRED OPERATION.

**This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures :**

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit difference from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.


**NOTE :** The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

 <b>Bonso Group</b>	Document Number	ENG_TEL_A001
	Rev #	00
<b>Title : BS001 APPROVAL DOCUMENTS</b>		

## GENERAL INFORMATION

<b>(BONSO) Bonso Group</b>	Document Number	ENG_TEL_A001
	Rev #	00
<b>Title : BS001 APPROVAL DOCUMENTS</b>		

### **LABEL FORMAT & LOCATION**

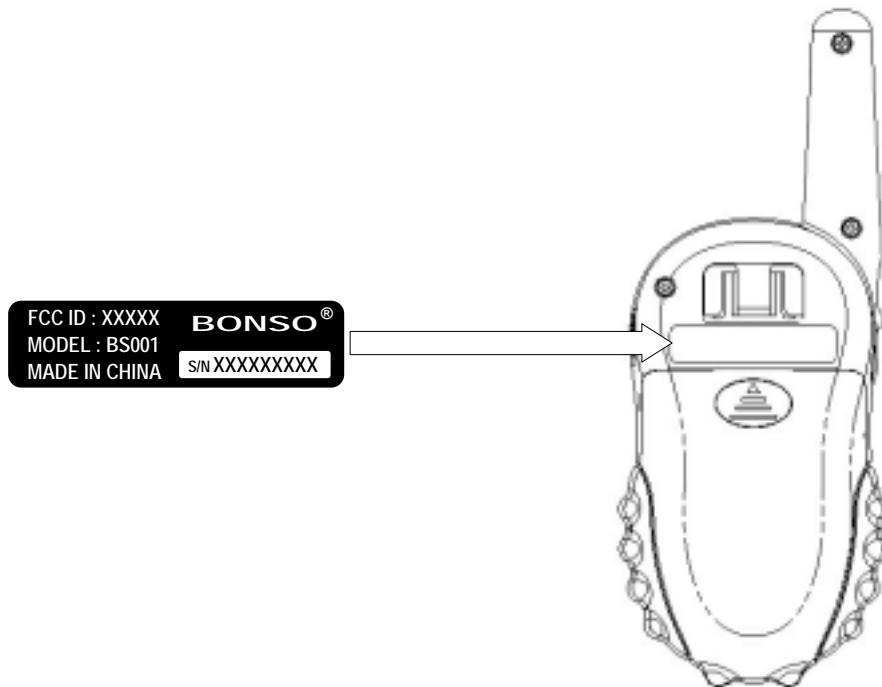

### **CHECK LIST (FCC)**

1. Testings required for FCC and SAR.
2. FRN :
3. FCC ID :
4. Model Number : BS001
5. Trade Name : BONSO
6. Model Description : 22Channels FRS/GMRS
7. Applicant  
 Company Name : BONSO ELECTRONICS LTD.  
 Address : Unit 1106-1110, 11/F., Star House, 3 Salisbury Road, Tsimshatsui, Kowloon, HongKong.  
 Mr. Harry J Lee / Director R/D & Engineering  
 Telephone : +852 2605 5822, +86 755 2731 1888 Ext 228  
 Fax. : +852 2691 1724, +86 755 2731 1999  
 E-mail : [harrylee@bonso.com](mailto:harrylee@bonso.com)
8. Manufacturer  
 Company Name : BONSO ELECTRONICS (SHENZHEN) CO., LTD.  
 Address : 59 Da Yang Road, Da Yang Synthetical Develop District, Fu Yong, ShenZhen, China  
 Postcode : 518103