

Bridgewood Small Cell

Model: SCE4103C-BV

Quick Installation Guide



Manufacture By:

Sercomm Corporation

8F, No. 3-1, YuanQu Street, Nankang,
Taipei 115, Taiwan, R.O.C.

Table of Contents

CHAPTER 1 INTRODUCTION	1
Package Contents	1
Key Feature	1
LEDs	2
Front & Rear Panel	3
CHAPTER 2 INITIAL INSTALLATION	4
CHAPTER 3 SPECIFICATIONS	5
General Specification	5
RF Characteristics	5
Safety Information	7
Device Surface Cleaning	9
Accessories	10

Chapter 1

Introduction



Bridgewood is an indoor, self-configuring small cell device that will be used to public network and LTE coverage at the customer premises.

Package Contents

Package will include following items:

- 1 x Bridgewood SCE4103C-BV Device
- 1 x AC/DC Power Supply Adapter

If any of the above items are damaged or missing, please contact your dealer immediately.

Key Feature

- Designed for indoor/Small Office Retention
- LTE Femto Cell Access up to 16 LTE active users
- 2T2R LTE with OMNI antenna for easy installation
- Support 4G FD-LTE Band 66/4, 13 for Femto Cell access
- Support Ethernet for LTE Backhaul
- 1 x LED status display and Info Button
- Internal LTE antennas

LEDs

Bridgewood has 1 LED indicators. Table below describes the definition of LED:



Installation Mode	Boot	Booting Up	LED - Solid: Green	
	WAN	Connecting to Internet	LED - Blinking: Green	
	SM	1PPS Synchronizing	LED - Fast Blink: Green	
	Initial VPN	Establishing IPSec Tunnel to Initial Security GW	LED - Blink: Yellow	
	Initial HeMS	Establishing TR069 Connection to Initial HeMS	LED - Fast Blinking: Yellow	
	Serving VPN	Establishing IPSec Tunnel to Serving Security GW	LED - Fast Blink: Blue	
	Serving HeMS	Establishing TR069 Connection to Serving HeMS	LED - Blinking: Blue	
	MME	Establishing S1 connection	LED - Blinking: Purple	
Regular usage mode	X2	4G cell ready and establishing X2 connection to 5G	LED - Solid: Blue	
	In Service	NSA mode is enabled	LED - Solid: White	
	Error	Critical alarm happens	LED - Blinking: Red	
	FW Update / Reset	2 Seconds before rebooting	LED - Fast Blink: White	

Front & Rear Panel

Front Panel



Interface Panel




Power	Input: 12 Vdc, 2A, Power Jack to Power Adaptor
1PPS	External 1PPS signal input connector
X2	LAN port input or 5G DUT configuration
WAN	WAN port for backhaul connect
Reset	Factory reset button

Chapter 2

Initial Installation

2

SCE4103C-BV is designed for Plug-n-Play(PnP) and self-configure which not require any software installation to use. When device power on the device, it will start to connect to back-haul eNB and begin the device Plug PnP and provision processes. The PnP and provision process will take approximate 6~7 min. to bring up and activate the device service.

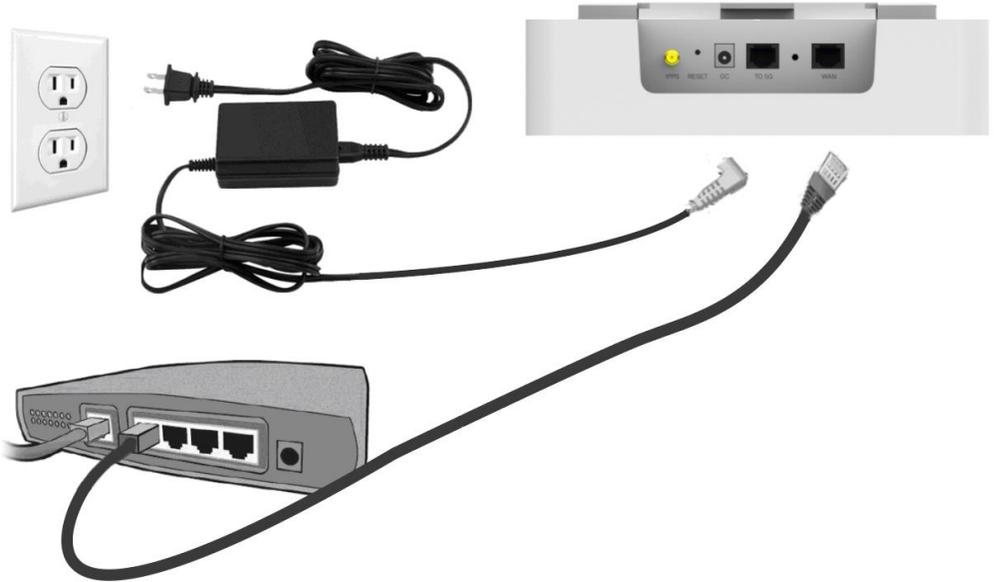

1. Small cell device provides mobile network SON (Self-Organizing Network) , it is plug& play which can auto configuration to install.
2. Install the Ethernet cable into device WAN port.
3. Another Ethernet cable connector connects to router.
4. Install the Power Adapter DC port into device power jack.
5. When LED steady to flash to green, the device can be used. If the LED indicates different the LED status, please call your agent.

Chapter 3

Specifications



General Specification

Connectivity	<ul style="list-style-type: none"> - 3 x Internal Antennas - Ethernet wired connection
Power Supply	External Power Adapter: Input: AC100~240V, 50Hz/60Hz, 0.7A Max. Output: 12 Vdc, 2A
Operating Requirement	Operating Temp. 0°C to 40°C Storage Temp. -5°C to 45°C Operating Humidity 5% to 90% Non-Condensing Storage Humidity 5% to 95% Non-Condensing
Reset button	Reset & Info Button
LED	1 LED for Status.
Housing	220mm(W)x 220mm(D)x 63mm(H)

RF Characteristics

LTE Access RF	Transceiver	QCA FTR8930
	Working LTE frequency	B66/4, 13
	Technology	2T2R MIMO,
	Tx Power(B48)	17dBm Max per chain (Conduced)
	Listening bands	B66/4, 13
	Bandwidth	5, 10, 15, 20 Mhz

FCC Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Note: The country code selection is for non-US model only and is not available to all US model. Per FCC regulation, all WiFi product marketed in US must fixed to US operation channels only.

Safety Information

All instructions, warning and caution statements that accompany this equipment must be strictly followed at all times to ensure its safe use. Observe all warning and caution symbols that are fixed to this equipment. This electrical equipment is designed with the utmost care for the safety of those who install and use it. However, when using this device, basic safety precautions should always be followed to reduce the risk of fire and injury to persons, and the dangers of electric shock and static electricity. Do not cover the device or block the airflow to the device with any other objects. This product was qualified under test conditions that included the use of the supplied cables between system components. To be in compliance with regulations, the user must use the cables supplied with the unit and install them properly. This includes the power adapter that is provided. Place the unit to allow for easy access when disconnecting the power adapter from the mains wall outlet. Operate this product only with the type of power source indicated on the marking label. If you are not sure of the type of power supplied to your home, consult your dealer or local electricity company. Do not use this product near water, for example a swimming pool or a bathroom. Keep the device away from excessive heat and humidity and keep the device free from vibration and dust. Wipe the unit with a clean, dry cloth. Never use cleaning fluid or similar chemicals. Do not spray cleaners directly on the unit or use forced air to remove dust. Avoid installing or using this product during an electrical storm. There may be remote risk of electric shock from lightning. During a lightning storm for added protection please unplug it from the wall outlet and disconnect all cables. This will prevent damage due to lightning and power surges. For safety reasons, only authorized service technicians should open the device. If the device is opened the warranty will become void. The device may affect medical equipment and so please take account of any technology restrictions with this equipment. This device, like other radio devices, emits radio frequency electromagnetic energy, but operates within the guidelines found in radio frequency safety standards and recommendations. It is recommended that the minimum operating distance from the installed Access Point to persons is 25cm.

General Hazard Statement

Safety notes are marked with symbols. Ignoring the safety notes may lead to personal injury, damage to the instrument and malfunctions.

Signal Words identify the hazard severity level as follow:

Signal word	Meaning
DANGER	Indicates an extremely hazardous situation which, if not avoided, will result in death or serious injury.
WARNING	Indicates a hazardous situation which, if not avoided, could result in death or serious injury.
CAUTION	Indicates a hazardous situation which, if not avoided, could result in minor or moderate injury.
NOTICE	Indicates a hazardous situation not related to personal injury.



Contact with energized parts can cause serious injury.

At least one other trained person must be in attendance, who can immediately and safely disconnect the system if necessary.

This second person must be trained in first aid for emergency purposes



Some parts of all electrical installations are energized. Failure to follow safe work Practices and the safety warnings may lead to bodily injury and property damage.

For this reason, only trained and qualified personnel (electrical workers as defined in IEC 60215 or EN 60215 + A1 or in the National Electrical Code or in ANSI/NFPA No. 10) may install or service the installation.



Risk of electric shock

- a) Do not open the AC adaptor housing. Make sure that the AC adapter does not come in contact with liquids.
- b) Use Only the 3-pin power cord with equipment grounding conductor which was supplied with your instrument and only on 3-pin grounded outlet must be used.



The Cooling vents at the right & left of the enclosure can become obstructed, preventing ventilation of the enclosure.

Make sure that the air vent is not obstructed and remains clear at all times.

Device Surface Cleaning

You may clean the device case using a cloth dampened with mild liquid detergent (such as Dawn) and water.



WARNING

Electric-shock hazard

Always unplug/disconnect power before apply any cleaning to Device.

Warning Do not submerge the Device or its accessories in water or allow water to enter into the case; this may lead to electrical shock and/or damage

Accessories

Item	Description	P/N
 A small, rectangular, light-colored AC/DC adapter with a power cord and a DC output cable.	AC/DC Adapter (without power core) AC100~240V~0.7A, 50Hz/60Hz auto switching, 12 V DC, 2A	910202125LD