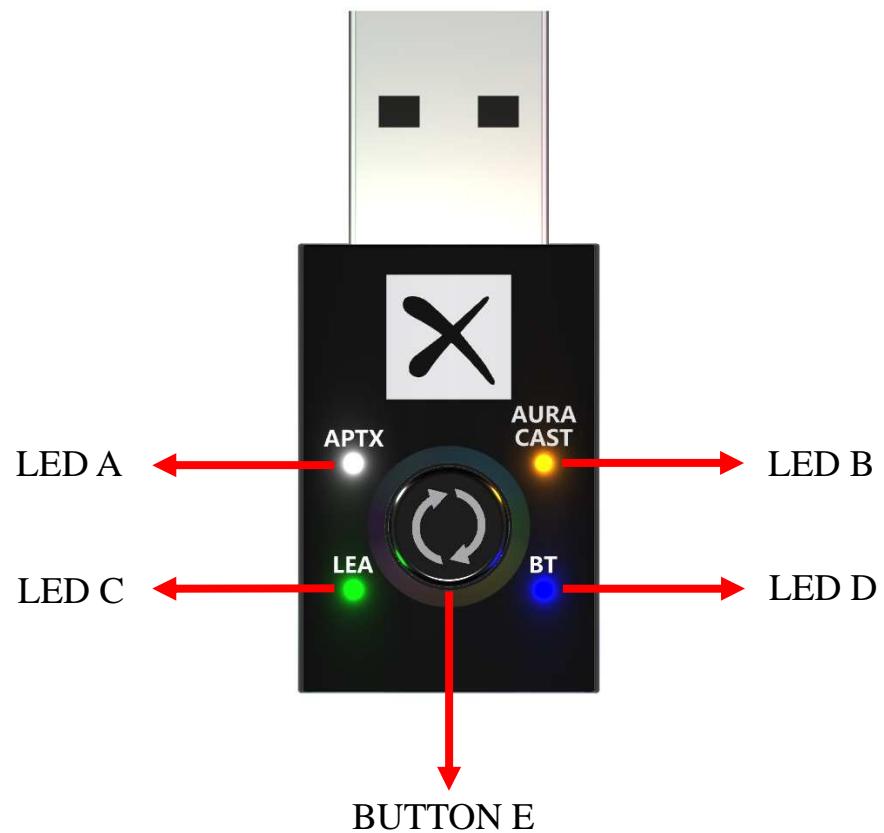

BT5.4 APTX LE Audio Dongle

BA-25T

USER'S GUIDE

Overview



Instructions

| Scenarios | Button | LED | Description |
|-----------------------|--------------------|--|---|
| Idle | N/A | N/A | Pairing failed or Disconnected |
| Pairing | (E) Double Click | (D) Flash steady | Enter Pairing Mode |
| Transport mode toggle | (E) Triple Click | (B) On | LE and Broadcasting mode |
| | | (B) Off | BR/EDR mode |
| Connecting | N/A | (D) Flash rapidly | Try to connect with device |
| SBC Connected | N/A | (D) Flash 1 time every 2 seconds | SBC audio codec connection successful |
| aptX Connected | N/A | (A) On (D) Flash 1 time every 2 seconds | aptX audio codec connection successful |
| LC3 Connected | N/A | (C) On (D) Flash 1 time every 2 seconds | LC3 audio codec connection successful |
| Factory Reset | (E) Hold 6 seconds | (D) Light up for 1 second | After completion, it will reboot and enter pairing mode |

Notices

1. During pairing, you should check the transport mode of the device to be paired, whether it is BR/EDR or LE, and use the button-E(Triple Click) to switch the BA-25T to the corresponding mode.

If the device is LE, switch BA-25T to LE mode during pairing, LED B will light up.

If the device is BR/EDR, switch BA-25T to BR/EDR mode during pairing, LED B will turn off.

The factory default setting is BR/EDR mode.

2. Please make sure there is only one pairing device around BA-25T.
BA-25T attempts to connect to the device with the highest RSSI value. device below the RSSI threshold are rejected. If the top two device are too close in RSSI, then neither device is selected to avoid ambiguity.
3. BA-25T supports memory for 8 devices, and these 8 devices must be in the same transport mode; otherwise, there is a possibility of authentication failure with the devices.
4. The LE connection and Auracast coexist, meaning that during 'LE and Broadcasting mode' BA-25T can broadcast while establishing an LE connection.

- This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
 - (1) this device may not cause harmful interference, and
 - (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

- Any changes or modifications not expressly approved by the party responsible for compliance could void the authority to operate equipment.

FCC RF Radiation Exposure Statement:

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment.

