

IEEE802.11n/a/b/g Wireless LAN Access Point Board FXE2000-DG Setup Guide CONTEC CO.,LTD.

The FXE2000-DG is a wireless LAN board that conforms to IEEE 802.11n/a/b/g standards of various countries and features a wide input power supply (5 to 30 VDC) and can be configured either as an access point or station.

Packing List

- Main unit (FXE2000-DG)...1
- Setup Guide...1

How to Obtain Service


For replacement or repair, return the device freight prepaid, with a copy of the original invoice. Please obtain a Return Merchandise Authorization number (RMA) from the CONTEC group office where you purchased before returning any product. *No product will be accepted by CONTEC group without the RMA number. This device sold for OEM vendor only.

Default setting

This product is set up via a network using a Web browser. Connect this product to the PC with a LAN cable using the wired LAN connection and then access the default IP address in a web browser. This product's default settings are shown in the table to the right.

Setting Item	Default setting
IP Address	192.168.0.1
Subnet Mask	255.255.255.0
ESSID	LocalGroup
Security	Disable
Username	admin
Password	pass

Component Locations

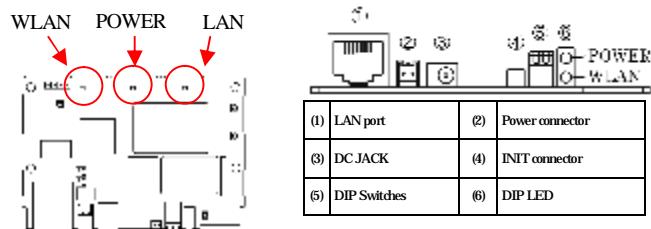

LED display

LED name	Status	Indicator
POWER	ON	Indicates that the device is operating.
	Flashing	Indicates that the device is being started (This device turned on)
	OFF	Indicates that the device is power off.
LAN	ON	Indicates that a wired LAN has been connected.
	Flashing	Indicates that the product is transmitting/receiving data to/from the connected terminal through wired LAN.
	OFF	Indicates that a wired LAN not logged-in.
WLAN	ON	Indicates that the device has been connected.
	Flashing	Indicates data is being transmitted to or received from the device connected through wireless LAN.
	OFF	Indicates that the device has been no connected.
POWER/LAN/WLAN	Flashing(simultaneously)	Indicates that firmware has been reprogrammed. * 1</td
POWER/LAN	Blinking twice / On	DHCP error

*1 Not include LogFile

DIP switches

No.	Name	Operation / function
1	INIT	Turning on this switch flashes the POWER, WLAN LEDs. If the switch is turned off before the LEDs change their status from flashing to ON (about 3 seconds), all the settings are restored to the default settings after the product is started next time. Reboot the product after the LEDs stop flashing. *1
2		-

Pin header (JP2)

No.	Name	Operation / function
1	LAN port 4pin	The INIT (initialization) signal can be connected to via pin 4 on the LAN port by shorting pin 1 and pin 2.
2	INIT	-
3	LAN port 5pin	The GND can be connected to via pin 5 on the LAN port by shorting pin 3 and pin 4.
4	GND	-
5	LAN port 7pin	The power supply line can be connected to via pin 7 on the LAN port by shorting pin 5 and pin 6.
6	24VDC	-
7	LAN port 8pin	The GND can be connected to via pin 8 on the LAN port by shorting pin 7 and pin 8.
8	GND	-

*1 Usable when JP2 No. 1 and No. 2 are connected. When initializing the product by turning the INIT signal on and off, the LEDs will continue flashing for a short time after the signal is turned off. This indicates the internal memory files are being deleted. If the power is turned off while the LEDs are flashing, the internal memory files may be damaged and the product may no longer be able to start properly. Always restart the product

after the LEDs stop flashing. For PoE wire route only in the same building.

CAUTION

When supplying power via the LAN connector, do not use a combination of power supplied from the power connector and the AC adapter.

Power Supply

Using the DC JACK

The power plug to be used must conform to EIAJ voltage classification 2.

CAUTION

When supplying power via the LAN connector, do not use a combination of power supplied from the power connector and the AC adapter.



Figure 1


Power connector			
Housing JST S02B-PASK-2(LF)(SN)		Cable: AWG28-16(equivalent to it)	
Pin No.	Name	Operation / function	
1	Vi+	5-30VDC(±5%)	
2	Vi-	GND	

Using the Power connector

The power connector in Figure 1 can be used to supply power from an external source. Use the following power cable or its equivalent.

CAUTION

When supplying power from the power connector, do not use a combination of power supplied via the LAN connector and the AC adapter.



When supplying the LAN cable power

CAUTION

- Create the power cable correctly as specified. Using the power cable with the housing pins assigned wrong numbers may result in device faults or accidents.
- The input voltage range of this product is from 5 to 24 VDC ±5%. Supply power outside that range may result in device faults or accidents.
- Use the power supply whose supply voltage rises to at least 4.75VDC within the input voltage range within 10ms. Using a power supply which does not satisfy this condition may result in device faults or accidents.
- Input voltage range: 5 to 30 VDC ± 5%. Use a power supply that rises to 4.75 VDC or higher in the input voltage range within 10ms. There is a risk of damage to the device or accident if a power supply outside this range is used.

Installation

Read and understand the following precautions before installation :

- Leaving a metal object in the vicinity of 30mm from the antenna board affects the antenna characteristics. Do not place metal objects near the antenna as possible.
- This product has a protrusion of up to 14mm on the front surface and a protrusion of up to 3mm on the rear surface. Allow clearance around this product and use it within the range of ambient temperatures satisfying the environment conditions for installation.
- Figure 2 shows the locations the mounting holes for installing this product and external dimensions.
- Use M3 screws for the mounting holes (ø2.3 mm).
- The lower right mounting hole is the FGND (grounding) hole. Connect it to FGND (ground).
- * 1 Always reboot the product after the flashing stops. The flashing continues for a little while after the product is switched off during initialization by switching on and off the INIT switch. This indicates internal memory files are being deleted. The internal memory files may be damaged and the product may not start up properly if the power is switched off before the flashing stops.

Connecting to This Product Using Web Browser

Start up a Web browser and enter the IP address of this product after "http://" in the address bar. If connecting for the first time, enter the default IP address. When the default setting IP address is 192.168.0.1, enter as follows.

http://192.168.0.1/

Connecting to this product displays the "Wireless LAN Manager" login screen. If the login screen is not displayed, the IP address setting for PC, browser settings, or the URL entered in the address bar of the browser may be incorrect.



Enter a password on the login screen and then click "Login" to log in.

When connecting for the first time, Default setting is Username="admin" & Password="pass" and just click "OK". If the login is successful, the following setup screen will be displayed after a little while.

Setup Using Web Browser

Select the desired setting items from the opened menu (1).

Information such as setting items will be displayed in the right-hand frame.

For more information about a setting item, please refer to "help" (2).

Click "Submit" (3) after changing settings on each page to temporarily save the settings in this product.

The settings become enabled when the product is restarted after all the setup procedure is completed and the settings are stored. Click "Save & Reboot" (4) on the left-hand menu.

There will be no problem if you just save the settings now but reboot the product later when necessary. In this case, saving the settings does not actually change the settings of the product. Therefore, make sure to reboot the product later.

CAUTION

It takes approximately 5 - 10 seconds to save settings (writing to internal flash memory). During that period, the LEDs for POWER, LAN and WLAN at the front part of the main unit blink simultaneously. Do not reboot or turn off the product until the screen indicates the completion of the saving process. The setup file data and firmware data may be damaged and the product may not operate properly if it is rebooted or switched off during the saving process.



Specifications

Name	Specification
Wired LAN	
Ethernet standard	IEEE802.3(10BASE-T), IEEE802.3u(100BASE-TX)
Port Speed	10/100Mbps/Half Duplex, Full Duplex/1
Wireless LAN	
Transmission format	IEEE802.11n, IEEE802.11a, IEEE802.11b, IEEE802.11g
Channel ¹	
IEEE802.11n	Access Point/Repeater: 9d36, 40, 44, 48d1[W52], 149, 153, 157, 161, 165d1[W58] IEEE802.11a: 24d36, 40, 44, 48d1[W52], 52, 56, 60, 64d1[W53], 100, 104, 108, 112, 116, 132, 136, 140d1[W56], 149, 153, 157, 161, 165d1[W58]
IEEE802.11n in IEEE802.11g	2.4GHz: 11d1(1-11)
IEEE802.11b	
IEEE802.11n	Data transmission speed *2: 300 - 6.5Mbps[MSC0 - 15, Short/Long GI] (Fixed/Auto)
IEEE802.11a	Data transmission speed *2: 54, 48, 36, 24, 18, 12, 9, 6Mbps (Fixed/Auto)
IEEE802.11b	Data transmission speed *2: 11, 5.5, 2, 1Mbps (Fixed/Auto)
IEEE802.11g	Data transmission speed *2: 54, 48, 36, 24, 18, 12, 9, 6Mbps (Fixed/Auto)
Security	
IEEE802.11n	WPA(AES), WPA2(AES), WPA-PSK(AES), WPA2-PSK(AES), WSL(combination mentioned above are possible)
IEEE802.11ab/g	WEP(open/ Shared Key/Auto), WPA(AES, TKIP), WPA-PSK(AESTKIP), WPA2(AES, TKIP), WPA2-PSK(AESTKIP), IEEE802.1X(EAP-TLS, PEAP), WSL(combination mentioned above are possible)
Antenna	chip-antenna x2 MIMO
External dimension (mm)	61.0(W) x 89.2(D) x 17.5(H)
Weight	50g

*1 Varies depending on the country in which the product is used

*2 These are theoretical values based on their respective wireless LAN standards; they do not indicate actual data transfer rates.

Environmental Specifications

Name	Specification
Input voltage range	5VDC±5% (DC Jack), 5 - 30VDC±5% (power connector), 24VDC±10% (PoE)
Rating input current	1.05A (5VDC input), 0.19A (30VDC input) (Max), 0.24A (PoE input 24V)
Operating ambient temperature	0 - 50°C
Operating ambient humidity	10 - 90%RH (No condensation)
Floating dust particles	Not extreme
Corrosive gases	None

External Dimensions

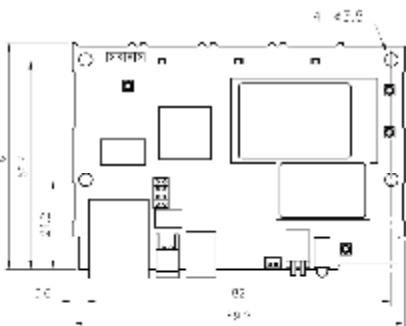


Figure 2

Safety Information

This document provides safety information using the following symbols to prevent accidents resulting in injury or death and the destruction of equipment and resources. Understand the meanings of these labels to operate the equipment safely.

⚠ DANGER

DANGER indicates an imminently hazardous situation which, if not avoided, will result in death or serious injury.

⚠ CAUTION

CAUTION indicates a potentially hazardous situation which, if not avoided, may result in minor or moderate injury or in property damage.

Precaution on use

It is prohibited to modify the inside of this product. The product cannot be used in any country other than those authorized for use.

Security Precautions

Wireless LAN uses radio waves instead of LAN cables to send and receive data between a computer and a wireless access point, making it possible to freely establish a LAN connection within a range of the radio waves. However, radio waves can be received through obstacles, such as walls, within the range. Therefore, if security settings are not made, the following problems may occur. Unauthorized viewing of data: An unauthorized third party can intercept the radio waves and view e-mail messages and personal information, such as user ID and password or your credit card information. Unauthorized access: An unauthorized third party can access a personal or corporate network and cause the following damage:

- Intercepting personal information and confidential information (information leak)
- Using a false identity to communicate and disclose information illegally (identity theft)
- Changing and transmitting intercepted data (tampering)
- Damaging data and systems by spreading a computer virus (destruction)

The wireless LAN card and wireless access point have security features to counter these problems. Using the security settings of the wireless LAN equipment can help prevent these problems from occurring. The security settings of the wireless LAN equipment are not configured at the time of purchase.

To reduce security problems, configure all security settings of the wireless LAN equipment according to the manual before using the wireless LAN card and wireless access point. Please be aware that the security settings do not provide complete security protection due

to wireless LAN specifications. If you are unable to configure the security settings yourself, please contact your local authorized dealer. The customer is responsible for configuring the security settings and understanding the risks inherent in using the product without the security settings configured.

Notes on Radio Interface

The 2.4 GHz band used by this product covers the operating frequencies of mobile-identification local radio stations (requiring the license), specific low-power radio stations (requiring no license) and amateur wireless stations (requiring the license) as well as industrial, scientific, and medical equipment such as microwave ovens.

1. Before using this product, make sure that there is no mobile-identification local radio station, specific low-power radio station, and amateur wireless station operating near the product.
2. If the product should cause radio interface with any mobile-identification local radio station or specific low-power radio station, immediately change the operating frequency to avoid the radio interface.
3. Placing wireless terminals near each other may slows down their data rate because of their mutual interference. You should allow a minimum clearance of about 1m between stations, 3m between access point and station, and 3m between access points.
4. Contact your local retailer or CONTEC if the product has trouble such as recurrent radio interface with mobile-identification local radio stations or specific low-power radio stations.

About the speed mark

The link speed shown for the transmission rate in this manual, the setup screens, and elsewhere is the theoretical maximum value based on the wireless LAN standard and does not represent the actual data transfer rate.

Usage limitation

This product has not been developed or manufactured to be used in systems including the equipment which is directly related to human lives *1 or the equipment which involves human safety and may significantly affect the maintenance of public functions *2. Therefore, do not use the product for such purposes. In addition, do not use the product within 20cm from a human body on a regular basis.

*1: Medical devices such as life-support equipment and devices used in an operating theater.

*2: Main control systems at nuclear power stations, safety maintenance systems at nuclear facilities, other important safety-related systems, operation control systems within group transport systems, air-traffic control systems, etc.

If using the IEEE802.11a standard, ensure that you comply with all relevant laws in the country of use. Outdoor use of IEEE802.11a is prohibited in some countries. It is not possible to use it by limiting Radio Law in Japan.

Handling Precautions

⚠ DANGER

Do not use the product where it is exposed to flammable or corrosive gas. Doing so may result in an explosion, fire, electric shock, or failure.

⚠ CAUTION

- This product contains precision electronic elements and must not be used in locations subject to physical shock or strong vibration. Otherwise, the board may malfunction, overheat, or cause a failure.
- Do not use or store this device in high temperature or low temperature surroundings, or do not expose it to extreme temperature changes. Otherwise, the board may malfunction, overheat, or cause a failure.
- Do not use or store this device where it is exposed to direct sunlight or near stoves or other sources of heat. Otherwise, the board may malfunction, overheat, or cause a failure.
- Do not use or store this device near strong magnetic fields or devices emitting electromagnetic radiation. Otherwise, the board may malfunction, overheat, or cause a failure.
- If an unusual smell or overheat is noticed, unplug the power cable immediately. In the event of an abnormal condition or malfunction, please contact your retailer.
- The specifications of this product are subject to change without notice for enhancement and quality improvement. Even when using the product continuously, be sure to read the manual and understand the contents.
- Do not attempt to modify this device. The manufacturer will bear no responsibility whatsoever for the device if it has been modified.
- The product must always be associated with the instruction manual.
- Regardless of the foregoing statements, CONTEC is not liable for any damages whatsoever (including damages for loss of business profits) arising out of the use or inability to use this CONTEC product or the information contained herein.

Federal Communications Commission

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radiofrequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Radiation Exposure Statement: This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

This device is intended only for OEM integrators under the following conditions:

- The antenna must be installed such that 20 cm is maintained between the antenna and users, and
- The transmitter module may not be co-located with any other transmitter or antenna.

As long as 2 conditions above are met, further transmitter test will not be required. However, the OEM integrators is still responsible for testing their end-product for any additional compliance requirements required with this module installed.

IMPORTANT NOTE: In the event that these conditions can not be met (for example certain laptop configurations or co-location with another transmitter), then the FCC authorization is no longer considered valid and the FCC ID can not be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC authorization.

End Product Labeling: this transmitter module is authorized only for use in device where the antenna may be installed such that 20 cm may be maintained between the antenna and users. The final end product must be labeled in a visible area with the following: "Contains FCC ID: PQRXE2000-DG". The grantee's FCC ID can be used only when all FCC compliance requirements are met.

Manual Information to the End User: the OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module. The end user manual shall include all required regulatory information/warning as show in this manual.

Copyright 2012 CONTEC CO., LTD. All Rights Reserved.

CONTEC CO.,LTD.

3-9-31, Himesato, Nishiyodogawa-ku, Osaka 555-0025, Japan

Japanese <http://www.contec.co.jp/> English <http://www.contec.com/>

February 2014 Edition

NA03126 (LYR5D51)

[07052012]

No part of this document may be copied or reproduced in any form by any means without prior written consent of CONTEC CO., LTD.