




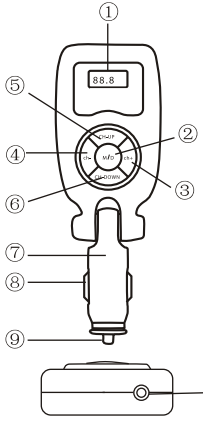




<div>FCC WARNINGS</div> <div> <p><b>FCC WARNING:</b> This equipment may generate or use radio frequency energy. Changes or modifications to this equipment may cause harmful interference unless the modifications are expressly approved in the instruction manual. The user could lose the authority to operate this equipment if an unauthorized change or modification is made.</p> <p><b>INFORMATION:</b> This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:</p> <ul style="list-style-type: none"> <li>• Reorient or relocate the receiving antenna.</li> <li>• Increase the separation between the equipment and receiver.</li> <li>• Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.</li> <li>• Consult the dealer or an experienced radio/TV technician for help.</li> </ul> </div> <div>-1-</div>	<div>Specifications</div> <div> <p>Frequency range: 88.1MHz-107.9MHz</p> <p>Frequency adjustment: 0.1MHz per step</p> <p>Transmitting range:&gt;30 feet(9M)</p> <p>Input voltage: DC 12V</p> <p>Input current: 20mA</p> <p>Audio input frequency bandwidth: 100 ~15000Hz</p> <p>Dimension (inch): 2.17 (W) x 6 (H) x 0.87 (D)</p> </div> <div>-10-</div>
--	--

<div>Operation</div> <div>  <p>⑦ If one position is deleted, this position is empty and won't be displayed during operation. Next time if you want to save frequency, the frequency will be saved to this position automatically.</p> </div> <div>-9-</div>	<div>Preface</div> <div> <p>This machine is a full band FM stereo transmitter with total 199 selectable frequencies from 88.1MHz to 107.9MHz. This machine has channels saving function which can save up to 10 frequently used channels into memory. It's very convenient for users to use and is full of personality.</p> <p>This unit has power-off memory function which can memorize the last channel when the power is turned off.</p> </div> <div>-2-</div>
--	--

<div>Main Features</div> <div> <p>1. LCD display</p> <p>2. Plug this unit to the car cigarette socket and play. Swivel design for easy operation.</p> <p>3. Built-in digital stereo FM Transmitter can transmit MP3 music to car FM radio wirelessly.</p> <p>4. Full band PLL digital FM mode with as more as 199 channels. UP and DOWN buttons are very convenient for adjusting the channels fast. Interference free.</p> </div> <div>-3-</div>	<div>Operation</div> <div>  <p>⑤ To use the saved channels, press ch+/ch- button. The LCD will display the position first, after 1 second then display the frequency. Press ch+ to move channel UP and ch- to move channel down.</p>  <p>⑥ To delete preset frequencies, first press ch+/ch- to choose the channel that you want to delete. Then press M/D button for at least 2 seconds, the preset frequency will be deleted. Transmitter will skip to the next channel automatically. In future use the deleted position will be not displayed.</p> </div> <div>-8-</div>
---	--

<div>Operation</div> <div>  <p>③ Turn on car radio and adjust the channel to the same frequency of FM transmitter by hand. Or use AUTO SCAN to lock the channel automatically . Press CH-UP/CH-DOWN gently to adjust the frequency. Frequency separation is 0.1MHz. Press down CH-UP/CH-DOWN for long time, the channels will be adjusted fast.</p>  <p>④ To save frequently used channels, first adjust the frequency to the frequency you want to save by CH-UP/CH-DOWN buttons. Then press M/D down for two seconds, the frequency will be saved. And the LCD will display the position of the frequency. If ten positions are fully occupied, LCD will display FFF. No channels will be saved any more.</p> </div> <div>-7-</div>	<div>Main Features</div> <div> <p>5. With channels saving function. Can save up to 10 frequently used channels.</p> <p>6. With 3.5mm audio input socket.</p> <p>7. With power-off memory function.</p> </div> <div>-4-</div>
---	--

<div>Parts Description</div> <div>  <p>① LCD display</p> <p>② CH memory/delete ( M-memory satisfactory frequencies) (D-delete saved frequencies)</p> <p>③ Memoried Channel UP(1-2-3...10)</p> <p>④ Memoried Channel DOWN(10-9-8...1)</p> <p>⑤ Channel UP</p> <p>⑥ Channel DOWN</p> <p>⑦ Power Plug</p> <p>⑧ Power "-"</p> <p>⑨ power "+"</p> <p>⑩ 3.5mm audio input</p> </div> <div>-5-</div>	<div>Operation</div> <div>  <p>① Plug the FM Transmitter into car cigarette socket. LCD will illuminate and display the present frequencyAdjust the FM transmitter for easy operation.</p>  <p>② Use attached 3.5mm cable to connect Mp3, CD, portable DVD, IPOD, ipod mini and ipod shuffle to FM transmitter.</p> </div> <div>-6-</div>
--	--

<div>LIMITED WARRANTY</div> <div> <p>Craig warrants this product to be free from manufacturing defects in material and workmanship under normal use for a period of 90 days from date of purchase. If service is required, please return the product to the store where it was purchased for exchange; or, pack the unit in the original packing material with all accessories if applicable, a copy of your sales receipt and a Cashier's check or Money Order for \$7.00 (to cover shipping and handling costs) payable to Craig Electronics International Ltd. Ship your product freight pre-paid. Your unit will be repaired, replaced or a refund will be forwarded to you within four weeks of receipt of your unit. Please ship your unit to:</p> <p>Craig Electronics International Ltd. 1160 NW 163 Drive Miami, FI 33169</p> <p>This warranty is void if the product has been: a) Used in a commercial application or rental. b) Damaged through misuse, negligence, or abuse. c) Modified or repaired by anyone other than an authorized Craig service center. d) Damaged because it is improperly connected to any other equipment. Note: This warranty does not cover: a) Ordinary adjustments as outlined in the Owner's Manual which can be performed by the customer. b) Damage to equipment not properly connected to the product. c) Any cost incurred in shipping the product for repair. d) Damage to the product not used in the USA.</p> <p>This warranty is not transferable and only applies to the original purchase. Any implied warranties, including the warranty of merchantability, are limited in duration to the period of this expressed warranty and no warranty whether expressed or implied shall apply to the product thereafter.</p> <p>Under no circumstance shall Craig be liable for any loss or consequential damage arising out of the use of this product. This warranty gives specific legal rights. However, you may have other rights which may vary from state to state. Some states do not allow limitations on implied warranties or exclusion of consequential damage. Therefore, these restrictions may not apply to you.</p> <p>To Obtain Service on your Product Please call: 1-866-321-7191 OR e-mail:service@craigelectronics.com</p> </div> <div>Printed in China</div> <div>-11-</div> <div>CF2028F_18_E0BU2</div>	<div>CRAIG®</div> <div>10 Floating Channel FM Transmitter With LCD Display</div> <div>Owner's Manual</div> <div>PLEASE READ BEFORE OPERATING THIS EQUIPMEN</div> <div>Model: CF2028F</div>
--	--