

TEST REPORT

Applicant: Shenzhen ZO Video Technology Co., Ltd.

Address of Applicant: 2c, 2 / F, building 6, Longbi Industrial Zone, 27 Dafa Road, Longgang District, Shenzhen

Manufacturer/Factory: Shenzhen ZO Video Technology Co., Ltd.

Address of Manufacturer/Factory: 2c, 2 / F, building 6, Longbi Industrial Zone, 27 Dafa Road, Longgang District, Shenzhen

Equipment Under Test (EUT)

Product Name: ZOlink wireless video system

Model No.: ZO600S TX,ZO500 TX ,Matrix 600s TX,Matrix 600 TX

Trade Mark: Shimbol ,Moman

FCC ID: 2AZRJ-ZO600STX

Applicable standards: FCC CFR Title 47 Part 15 Subpart E Section 15.407

Date of sample receipt: July 21,2021

Date of Test: July 25,2021-August 16,2021

Date of report issued: August 16,2021

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Luo


Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	August 16,2021	Original

Prepared By:




Project Engineer

Date:

August 16,2021

Check By:



Reviewer

Date:

August 16,2021

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	7
5.3 DESCRIPTION OF SUPPORT UNITS	7
5.4 DEVIATION FROM STANDARDS	7
5.5 ABNORMALITIES FROM STANDARD CONDITIONS	7
5.6 TEST FACILITY	8
5.7 TEST LOCATION	8
6 TEST INSTRUMENTS LIST	9
7 TEST RESULTS AND MEASUREMENT DATA	11
7.1 ANTENNA REQUIREMENT	11
7.2 CONDUCTED EMISSIONS	12
7.3 CONDUCTED PEAK OUTPUT POWER	15
7.4 CHANNEL BANDWIDTH	19
7.5 POWER SPECTRAL DENSITY	24
7.6 BAND EDGE	27
7.6.1 Radiated Emission Method	27
7.7 SPURIOUS EMISSION	37
7.7.1 Radiated Emission Method	37
7.8 FREQUENCY STABILITY	69
8 TEST SETUP PHOTO	71
9 EUT CONSTRUCTIONAL DETAILS	71

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.407(a)(3)	Pass
Channel Bandwidth	15.407(e)	Pass
Power Spectral Density	15.407(a)(3)	Pass
Band Edge	15.407(b)(4)	Pass
Spurious Emission	15.205/15.209/15.407(b)(4)	Pass
Frequency Stability	15.407(g)	Pass

Remarks:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Test according to ANSI C63.10:2013.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	ZOlink wireless video system
Model No.:	ZO600S TX,ZO500 TX ,Matrix 600s TX,Matrix 600 TX
Serial No.:	N/A
Hardware Version:	R1.7
Software Version:	R1.0
Test sample(s) ID:	GTSL202108000028-1
Sample(s) Status:	Engineer sample
Operation Frequency:	802.11a/802.11n(HT20): 5745MHz ~ 5825MHz
Channel numbers:	802.11a/802.11n(HT20): 5
Channel bandwidth:	802.11a/802.11n(HT20): 20MHz
Modulation technology:	802.11a/802.11n(H20): OFDM(BPSK/QPSK/16QAM/64QAM) MIMO: 802.11n SISO: 802.11a
Antenna Type:	internal Antenna
Antenna gain:	Antenna number: 2 ANTA:2.5dBi ANTB:2.5dBi MIMO technology Directional gain=5.51dBi
Power supply:	DC 5V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
149	5745MHz	151	/	153	5765MHz	155	/
157	5785MHz	159	/	161	5805MHz	163	/
165	5825MHz						

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)		
	802.11 a/n		
Lowest channel	5745		
Middle channel	/		
Highest channel	5825		

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
<i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:	
Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.	
Mode	Data rate
802.11a (SISI mode)	6 Mbps
802.11n(HT20) (SISI mode)	MCS 0
802.11n(HT20) (MIMO mode)	MCS 8

5.3 Description of Support Units

None.

5.4 Deviation from Standards

None.

5.5 Abnormalities from Standard Conditions

None.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC—Registration No.: 381383**

Designation Number: CN5029

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files.

- **IC —Registration No.: 9079A**

CAB identifier: CN0091

The 3m Semi-

anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

- **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).

5.7 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone,
Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 02 2020	July. 01 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 24 2021	June. 23 2022
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 24 2021	June. 23 2022
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 24 2021	June. 23 2022
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 24 2021	June. 23 2022
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 24 2021	June. 23 2022
9	Coaxial Cable	GTS	N/A	GTS211	June. 24 2021	June. 23 2022
10	Coaxial cable	GTS	N/A	GTS210	June. 24 2021	June. 23 2022
11	Coaxial Cable	GTS	N/A	GTS212	June. 24 2021	June. 23 2022
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 24 2021	June. 23 2022
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 24 2021	June. 23 2022
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 24 2021	June. 23 2022
15	Band filter	Amindeon	82346	GTS219	June. 24 2021	June. 23 2022
16	Power Meter	Anritsu	ML2495A	GTS540	June. 24 2021	June. 23 2022
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 24 2021	June. 23 2022
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 24 2021	June. 23 2022
19	Splitter	Agilent	11636B	GTS237	June. 24 2021	June. 23 2022
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 24 2021	June. 23 2022
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 18 2020	Oct. 17 2021
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 18 2020	Oct. 17 2021
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 18 2020	Oct. 17 2021
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 24 2021	June. 23 2022

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.15 2019	May.14 2022
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 24 2021	June. 23 2022
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 24 2021	June. 23 2022
4	ENV216 2-L-V-NETZNACHB.DE	ROHDE&SCHWARZ	ENV216	GTS226	June. 24 2021	June. 23 2022
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 24 2021	June. 23 2022
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	June. 24 2021	June. 23 2022
9	ISN	SCHWARZBECK	NTFM 8158	GTS565	June. 24 2021	June. 23 2022
10	High voltage probe	SCHWARZBECK	TK9420	GTS537	July. 09 2021	July. 08 2022

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 24 2021	June. 23 2022
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 24 2021	June. 23 2022
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 24 2021	June. 23 2022
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 24 2021	June. 23 2022
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 24 2021	June. 23 2022
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 24 2021	June. 23 2022
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 24 2021	June. 23 2022
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 24 2021	June. 23 2022

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 24 2021	June. 23 2022
2	Barometer	ChangChun	DYM3	GTS255	June. 24 2021	June. 23 2022

7 Test results and Measurement Data

7.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203
<i>15.203 requirement:</i> <i>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i>	
E.U.T Antenna:	
<i>The antennas are internal antenna, the best case gain of the antennas are 2.5dBi, reference to the appendix II for details</i>	

7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207						
Test Method:	ANSI C63.10:2013						
Test Frequency Range:	150KHz to 30MHz						
Class / Severity:	Class B						
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto						
Limit:	Frequency range (MHz)		Limit (dBuV)				
			Quasi-peak		Average		
	0.15-0.5		66 to 56*		56 to 46*		
	0.5-5		56		46		
	5-30		60		50		
* Decreases with the logarithm of the frequency.							
Test setup:	Reference Plane LISN AUX Equipment E.U.T Test table/Insulation plane 40cm 80cm LISN Filter AC power EMI Receiver Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m						
Test procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.						
Test Instruments:	Refer to section 6.0 for details						
Test mode:	Refer to section 5.2 for details						
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar	
Test voltage:	AC 120V, 60Hz						
Test results:	Pass						


Remark: Both high and low voltages have been tested to show only the worst low voltage test data.

Measurement data

Line:

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

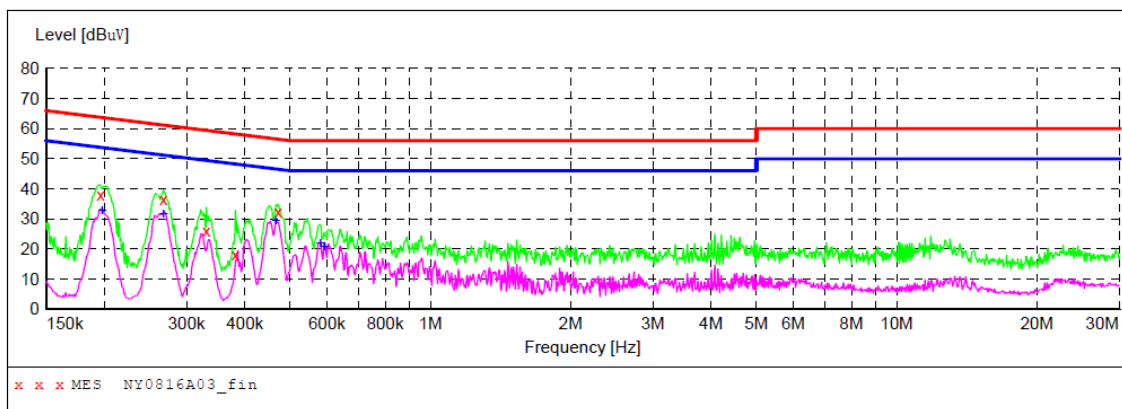

MEASUREMENT RESULT: "NY0816A03_fin"

2021-8-16 8:24

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.195997	38.10	10.1	64	25.7	QP	L1	GND
0.267596	36.40	10.2	61	24.8	QP	L1	GND
0.330648	26.10	10.3	59	33.3	QP	L1	GND
0.381751	18.30	10.3	58	39.9	QP	L1	GND
0.471701	32.40	10.4	57	24.1	QP	L1	GND

MEASUREMENT RESULT: "NY0816A03_fin2"


2021-8-16 8:24

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.197568	32.70	10.1	54	21.0	AV	L1	GND
0.267596	31.80	10.2	51	19.4	AV	L1	GND
0.466086	29.30	10.4	47	17.3	AV	L1	GND
0.580524	22.00	10.4	46	24.0	AV	L1	GND
0.592227	20.70	10.4	46	25.3	AV	L1	GND

Neutral:

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

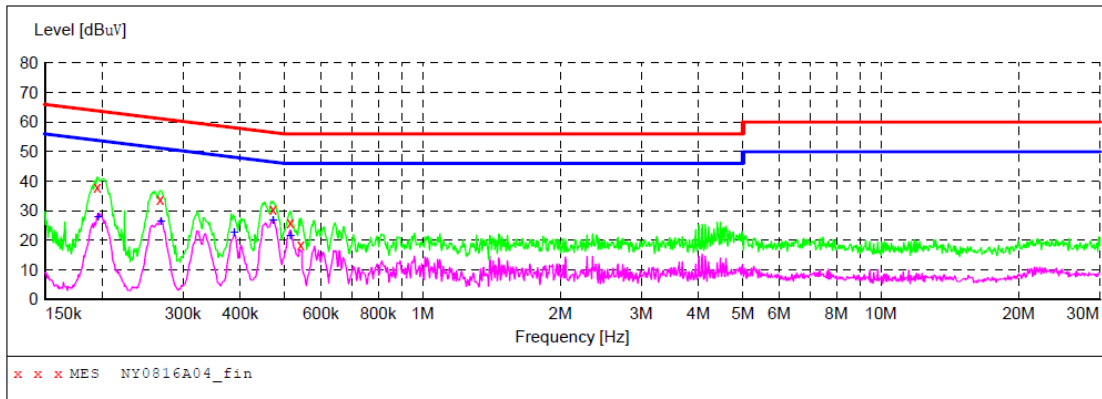

MEASUREMENT RESULT: "NY0816A04_fin"

2021-8-16 8:29

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.195216	38.20	10.1	64	25.6	QP	N	GND
0.267596	33.90	10.2	61	27.3	QP	N	GND
0.471701	30.60	10.4	57	25.9	QP	N	GND
0.515002	26.10	10.4	56	29.9	QP	N	GND
0.542434	18.40	10.4	56	37.6	QP	N	GND

MEASUREMENT RESULT: "NY0816A04_fin2"


2021-8-16 8:29

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.195997	27.90	10.1	54	25.9	AV	N	GND
0.268666	26.60	10.2	51	24.6	AV	N	GND
0.387896	22.70	10.3	48	25.4	AV	N	GND
0.471701	26.80	10.4	47	19.7	AV	N	GND
0.515002	21.70	10.4	46	24.3	AV	N	GND

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

7.3 Conducted Peak Output Power

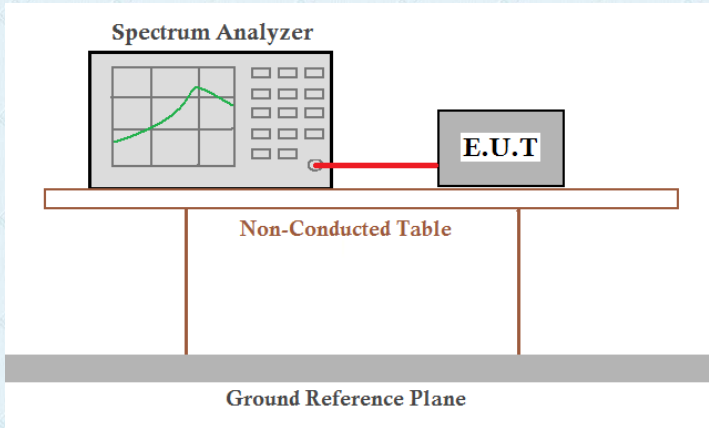Test Requirement:	FCC Part15 E Section 15.407(a)(3)
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01
Limit:	30dBm
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

Modulation	Frequency (MHz)	Duty cycle		Duty Factor	
		ANTENNA-A	ANTENNA-B	ANTENNA-A	ANTENNA-B
802.11a	5745	99.23	99.23	0.03	0.03
	5825	99.23	99.23	0.03	0.03
802.11n(HT20)	5745	99.23	99.22	0.03	0.03
	5825	99.44	99.23	0.03	0.03

802.11a mode										
CH No.	Frequency (MHz)	Measured Power (dBm)			Duty Factor	Output Power (dBm)			Limit (dBm)	Result
		ANT A	ANT B	ANT A+B		ANT A	ANT B	ANT A+B		
36	5745	12.04	11.93	--	0.03	12.07	11.96	--	30	Pass
48	5825	11.47	11.67	--	0.03	11.50	11.70	--		
802.11n(HT20) mode										
CH No.	Frequency (MHz)	Measured Power (dBm)			Duty Factor	Output Power (dBm)			Limit (dBm)	Result
		ANT A	ANT B	ANT A+B		ANT A	ANT B	ANT A+B		
36	5745	11.98	11.78	14.90	0.03	12.01	11.81	14.93	30	Pass
48	5825	11.44	11.52	14.49	0.03	11.47	11.55	14.52		


Note: Output Power = Measured Power + Duty Factor

Duty Factor = 10 log (1/Duty Cycle)

Remark: "---" is not applicable


Test plot as follows:



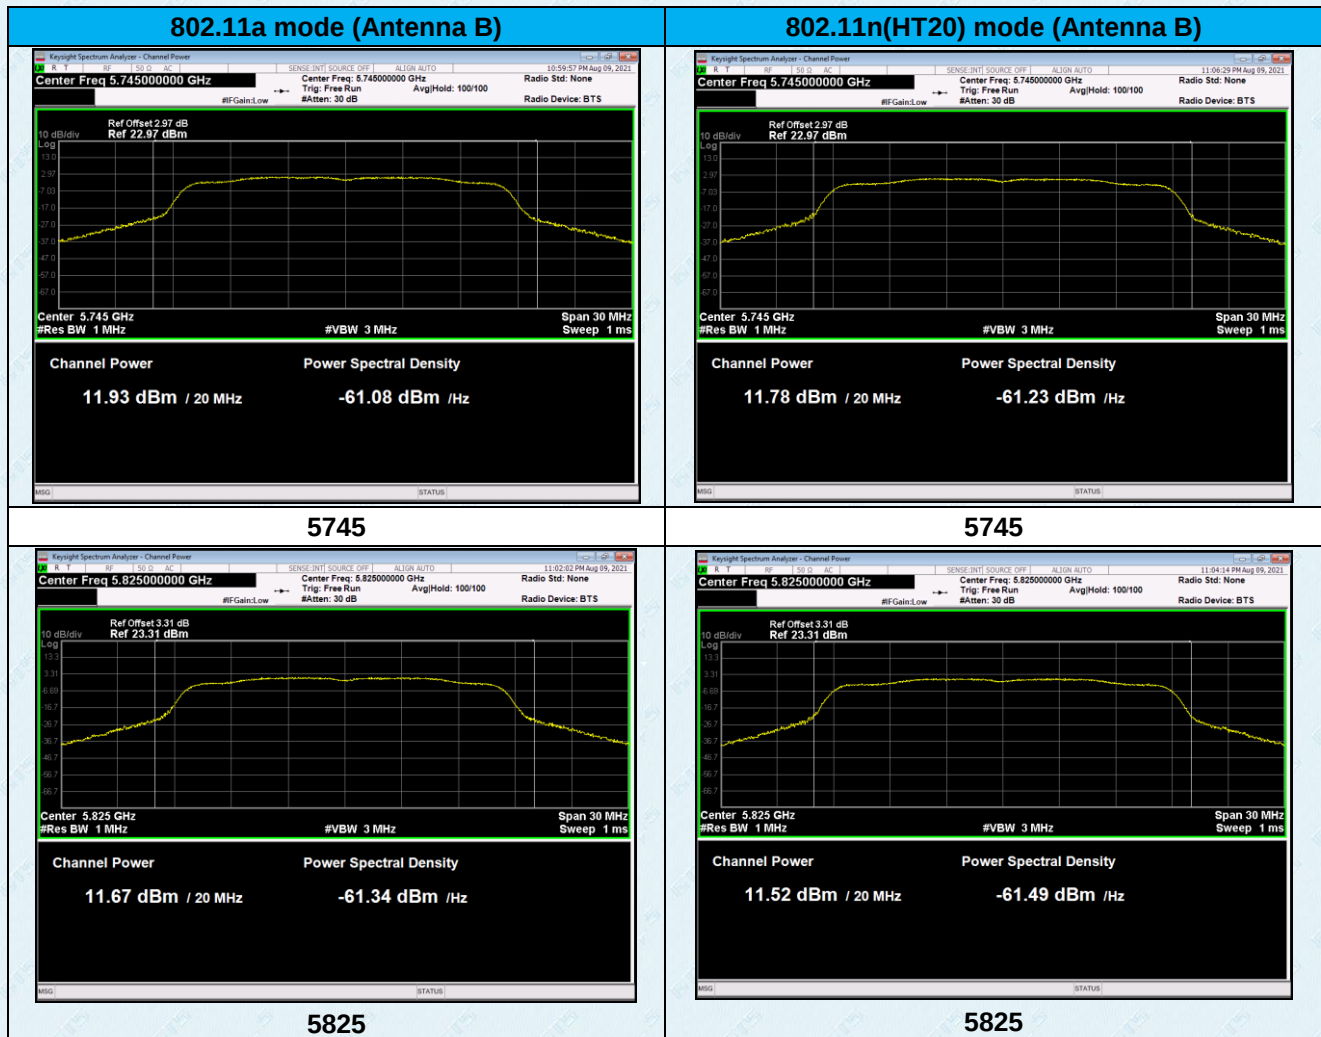

Note: We tested 802.11a/n mode the all data rate and recorded the worst case data for this channel to be 6Mbps for 802.11a mode and MCS0 for 802.11n mode.

7.4 Channel Bandwidth

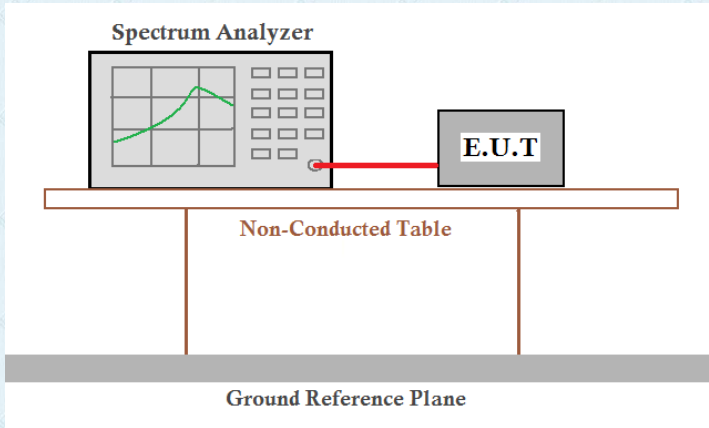Test Requirement:	FCC Part15 E Section 15.407(e)
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01
Limit:	>500KHz
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data


CH. No.	Frequency (MHz)	99% Occupied Bandwidth (MHz)				6dB Occupied Bandwidth (MHz)				
		802.11a		802.11n(HT20)		802.11a		802.11n(HT20)		Limit (MHz)
		ANT-A	ANT-B	ANT-A	ANT-B	ANT-A	ANT-B	ANT-A	ANT-B	> 0.5MHz
36	5745	18.425	16.456	18.690	17.617	15.04	15.08	13.14	13.98	> 0.5MHz
48	5825	18.173	16.406	18.738	17.604	14.45	14.99	15.03	15.05	> 0.5MHz

Remark: “---”is not applicable

Test plot as follows:


99% Occupied Bandwidth (MHz)




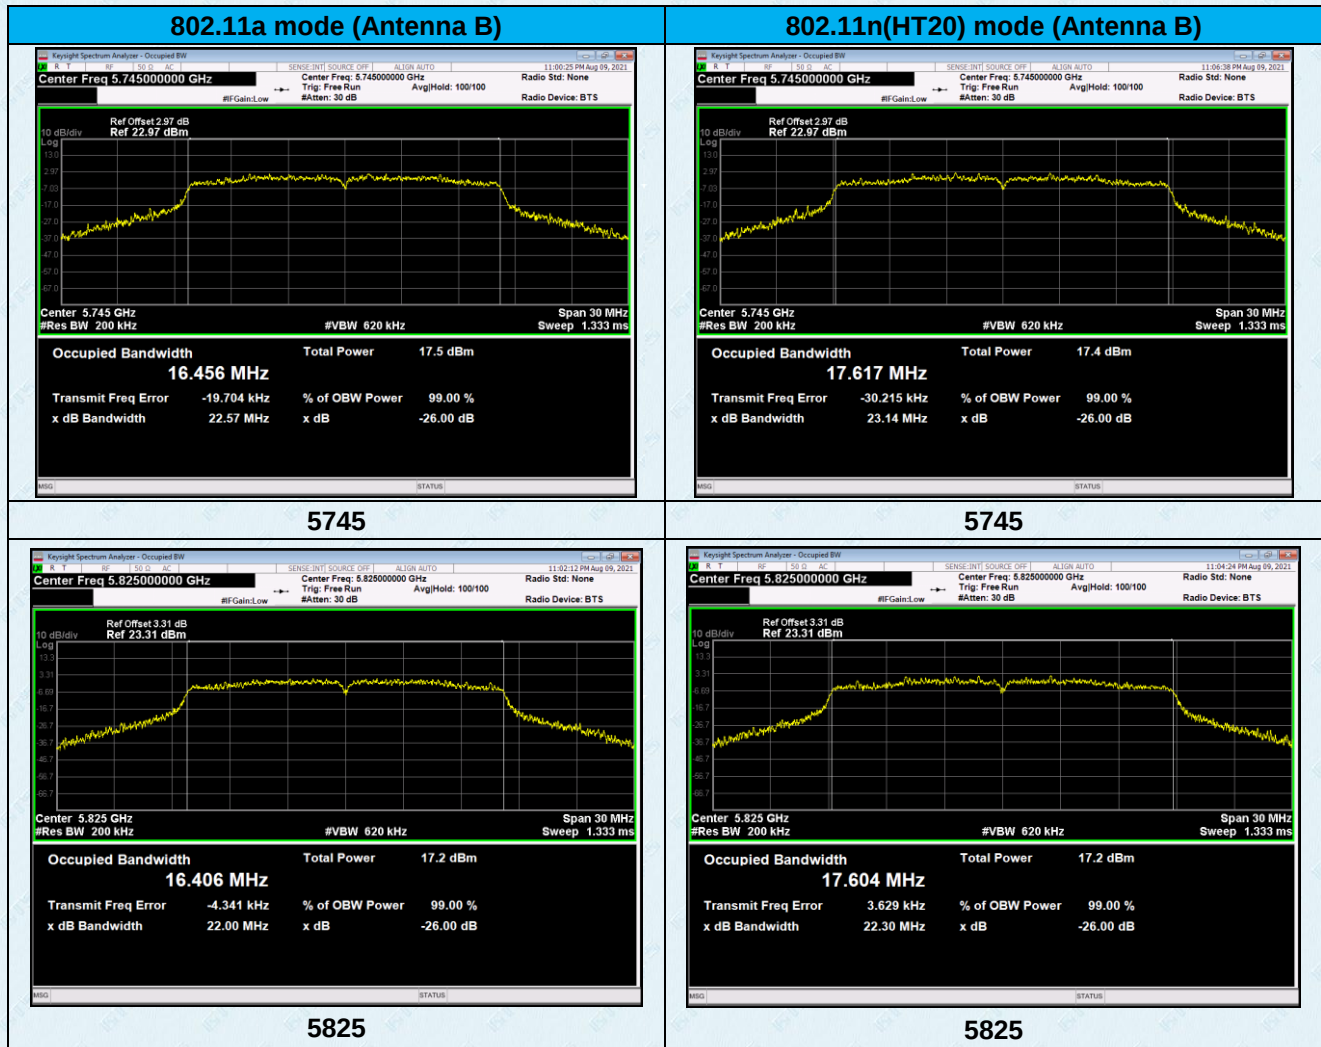

Note: We tested 802.11a/n mode the all data rate and recorded the worst case data for this channel to be 6Mbps for 802.11a mode and MCS0 for 802.11n mode.


6dB Occupied Bandwidth (MHz)

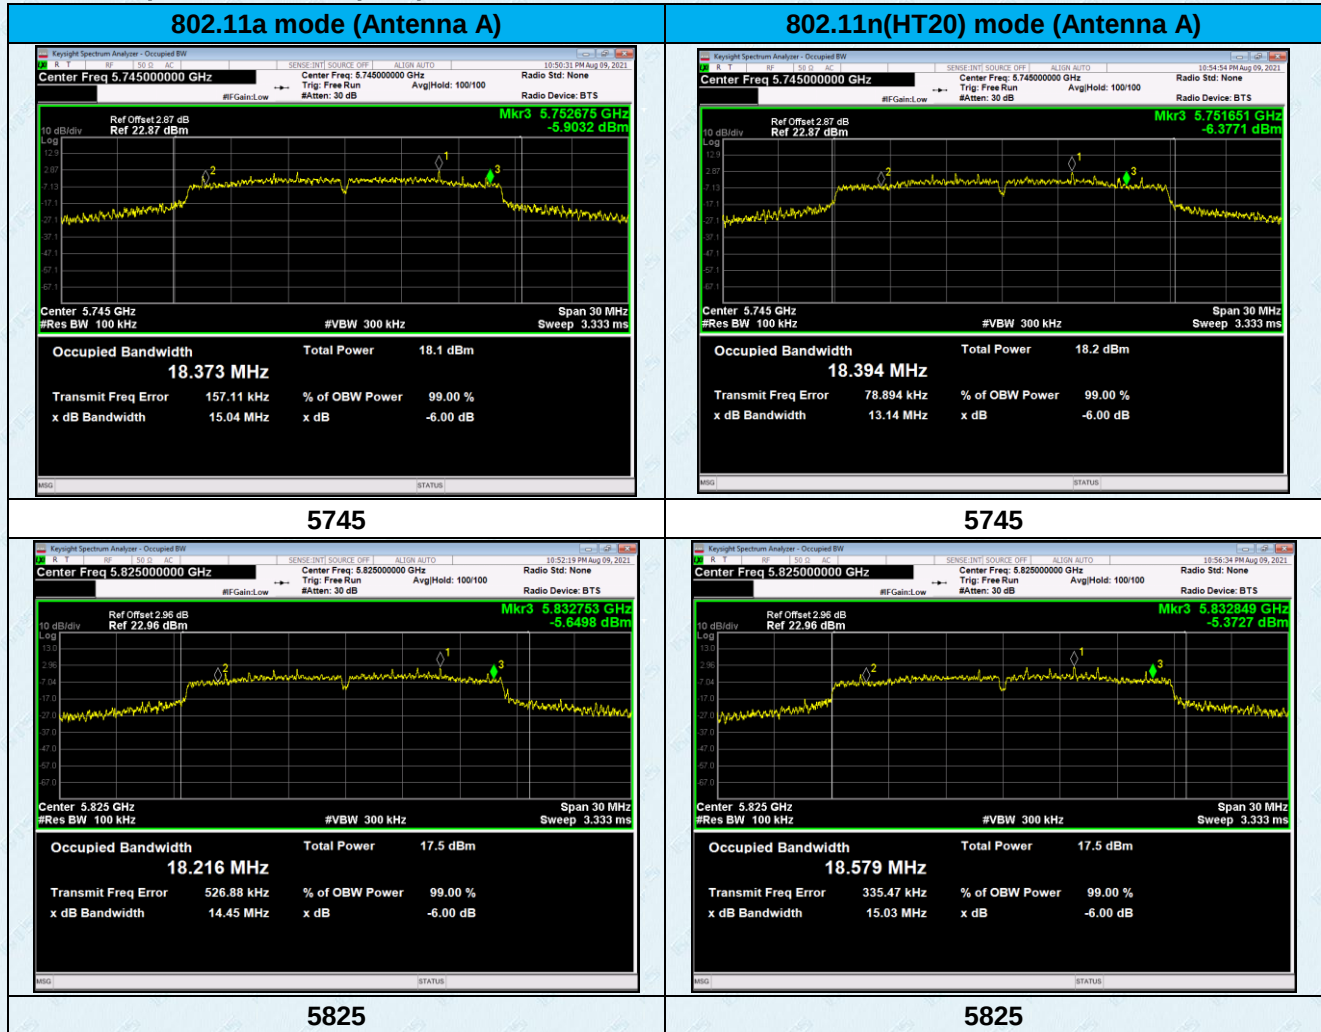

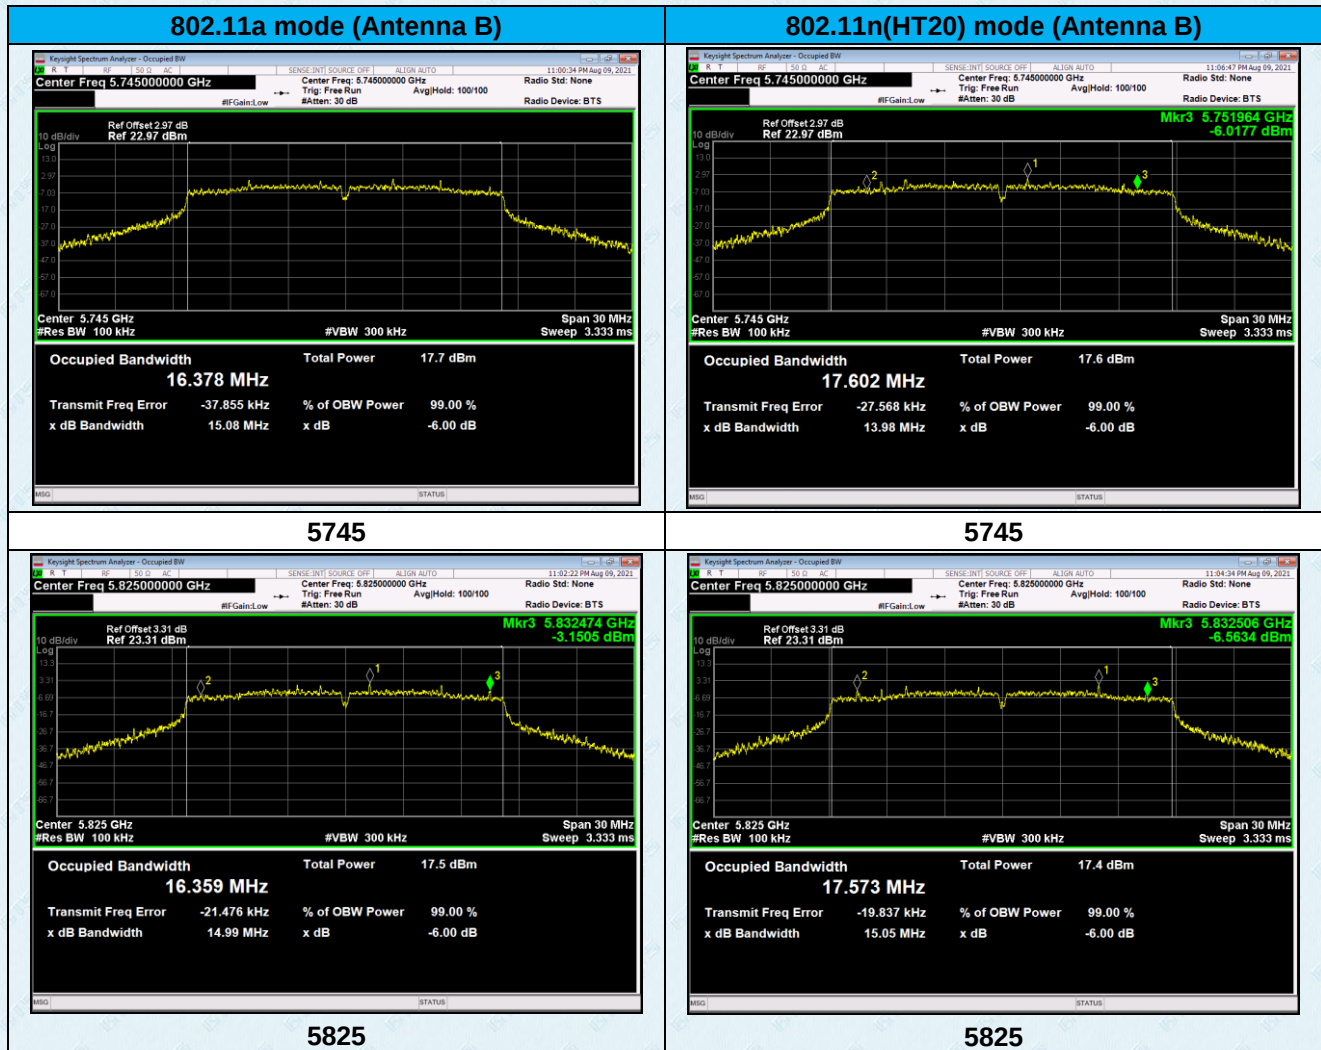

Note: We tested 802.11a/n mode the all data rate and recorded the worst case data for this channel to be 6Mbps for 802.11a mode and MCS0 for 802.11n mode.

7.5 Power Spectral Density

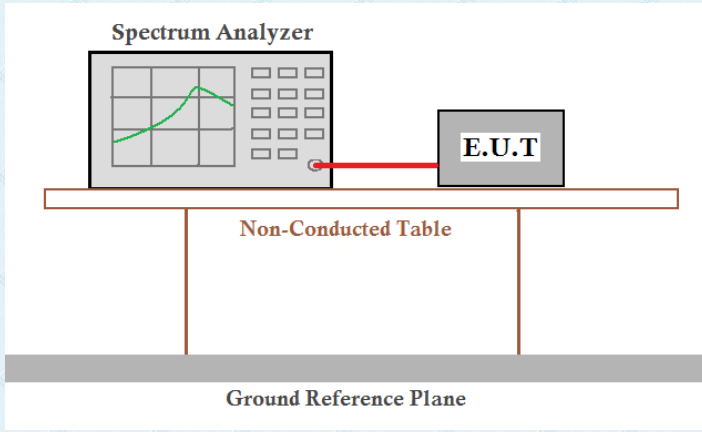
Test Requirement:	FCC Part15 E Section 15.407(a)(3)
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01
Limit:	30dBm/500kHz
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data

Test CH	Power Spectral Density (dBm)						Limit (dBm/500k Hz)	Result
	802.11a			802.11n(HT40)				
	ANT A	ANT B	ANT A+B	ANT A	ANT B	ANT A+B		
5745	-0.737	-1.198	---	-0.482	-0.795	2.375	30.00	Pass
5825	-1.429	-0.987	---	-1.023	-0.790	2.105		

Remark: "---"is not applicable

Test plot as follows:

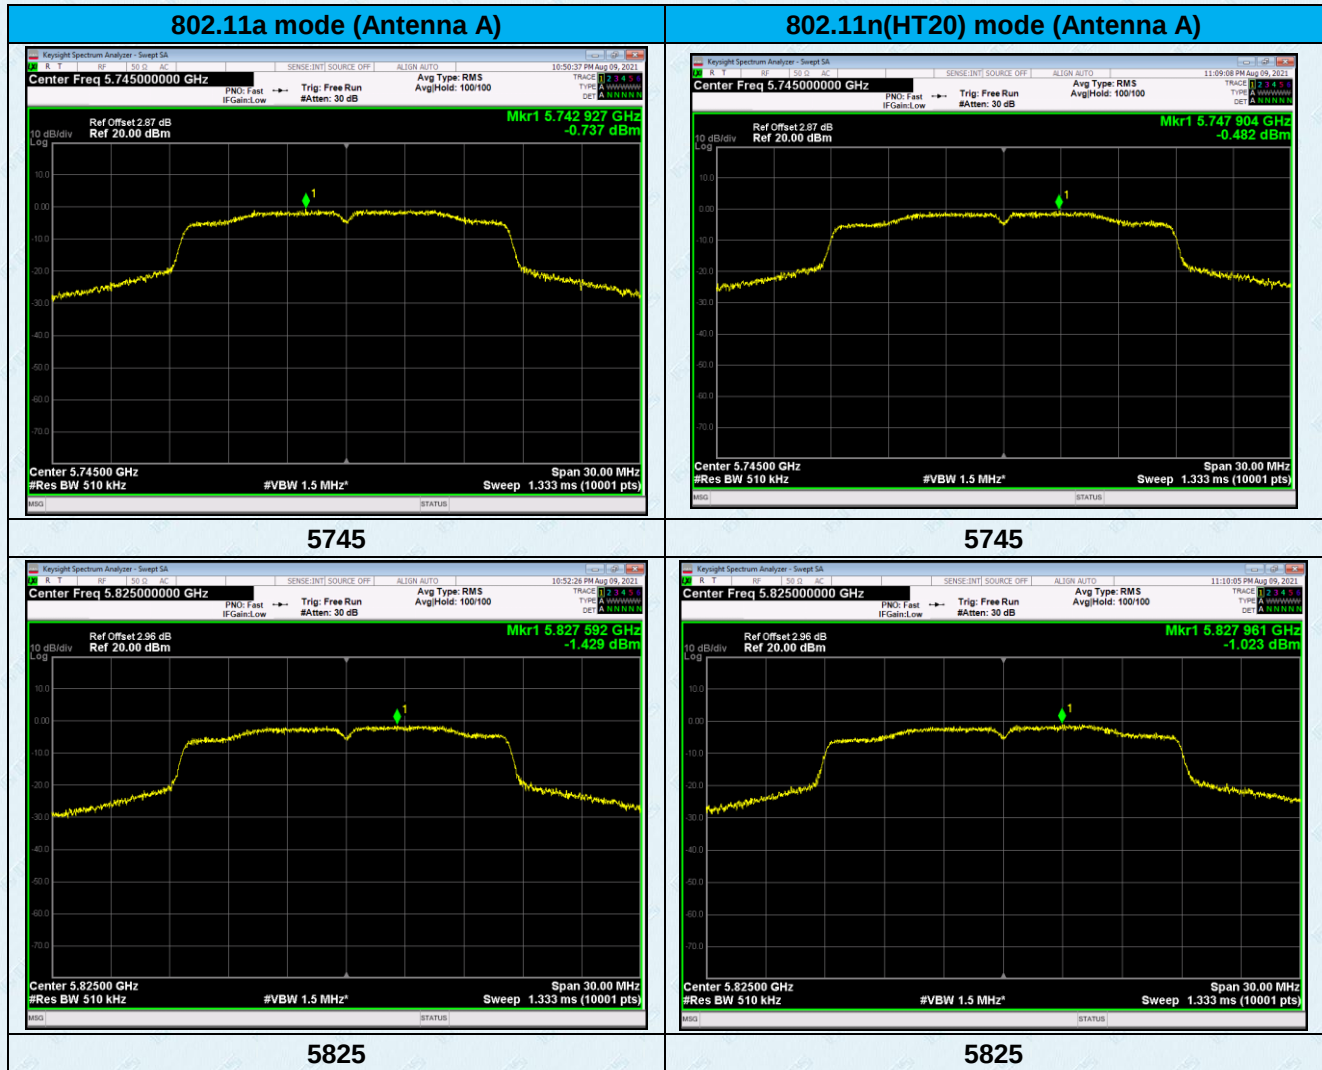


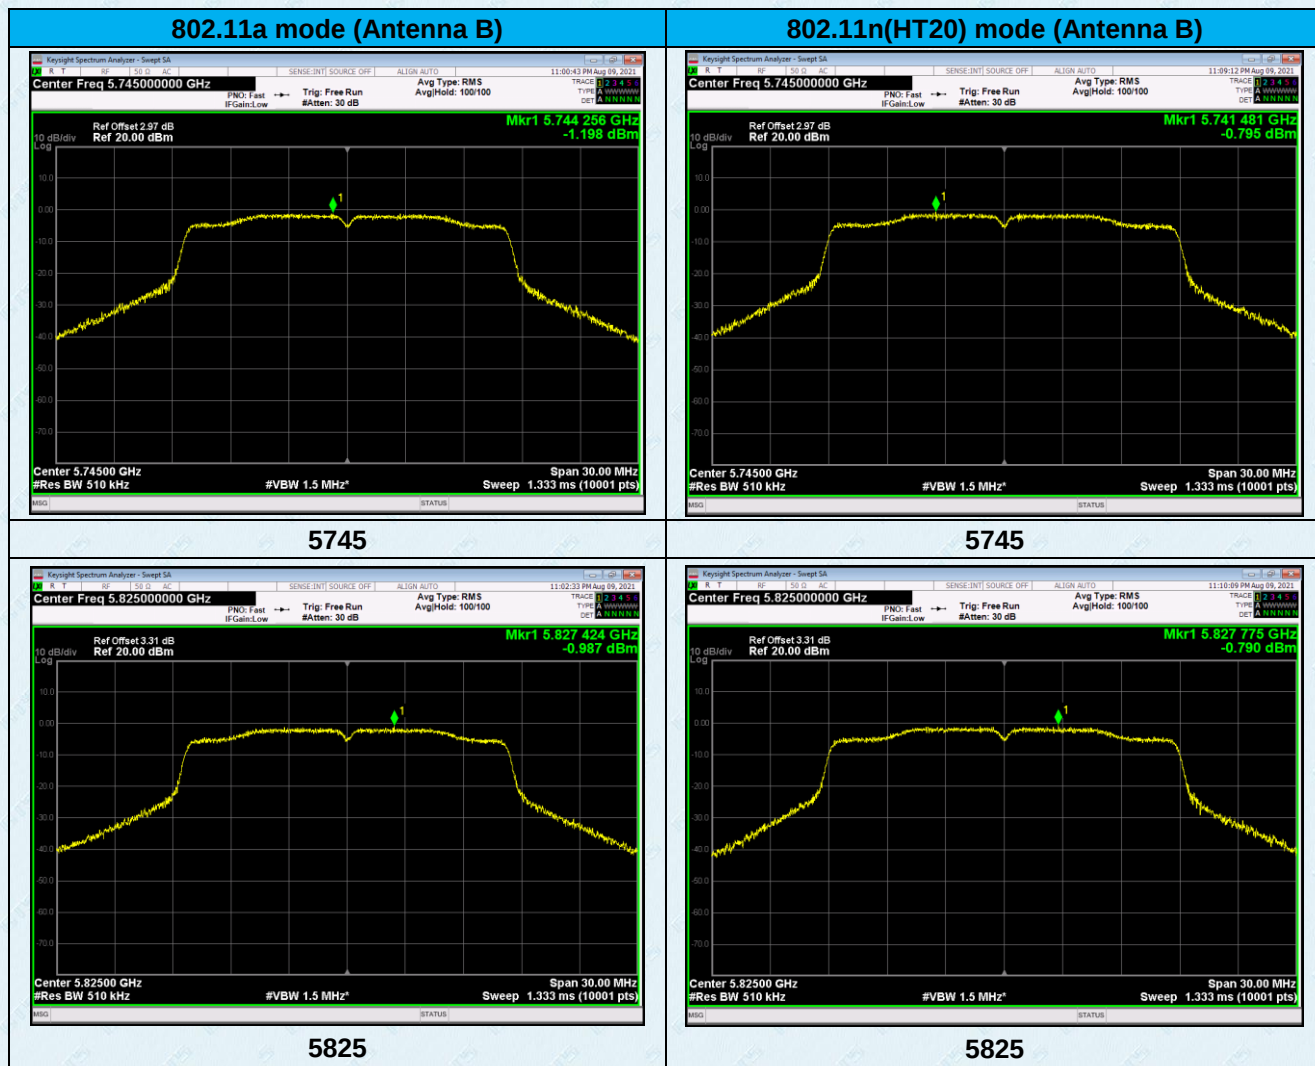

Note: We tested 802.11a/n mode the all data rate and recorded the worst case data for this channel to be 6Mbps for 802.11a mode and MCS0 for 802.11n mode.

7.6 Band edge

7.6.1 Radiated Emission Method

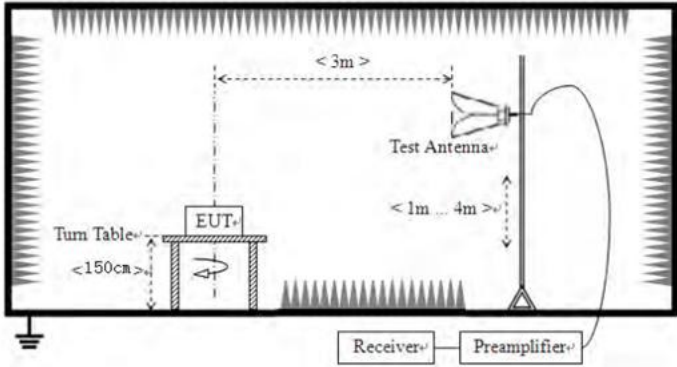Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	9kHz to 40GHz, only worse case is reported				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		RMS	1MHz	3MHz	RMS
Limit:	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.				
Test setup:					
Test Procedure:	1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 7. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.				

Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.
4. According to KDB 789033 D02v02r01 section G) 1) d), for measurements above 1000 MHz @3m distance, the limit of field strength is computed as follows:
 $E[dBuV/m] = EIRP[dBm] + 95.2;$
 $E[dBuV/m] = -27 + 95.2 = 68.2dBuV/m.$
 $E[dBuV/m] = 10 + 95.2 = 105.2dBuV/m.$
 $E[dBuV/m] = 15.6 + 95.2 = 110.8dBuV/m.$
 $E[dBuV/m] = 27 + 95.2 = 122.2dBuV/m$


Measurement data:

Radiated Band Edge Result


Horizontal: 802.11a (TX 5745MHz)

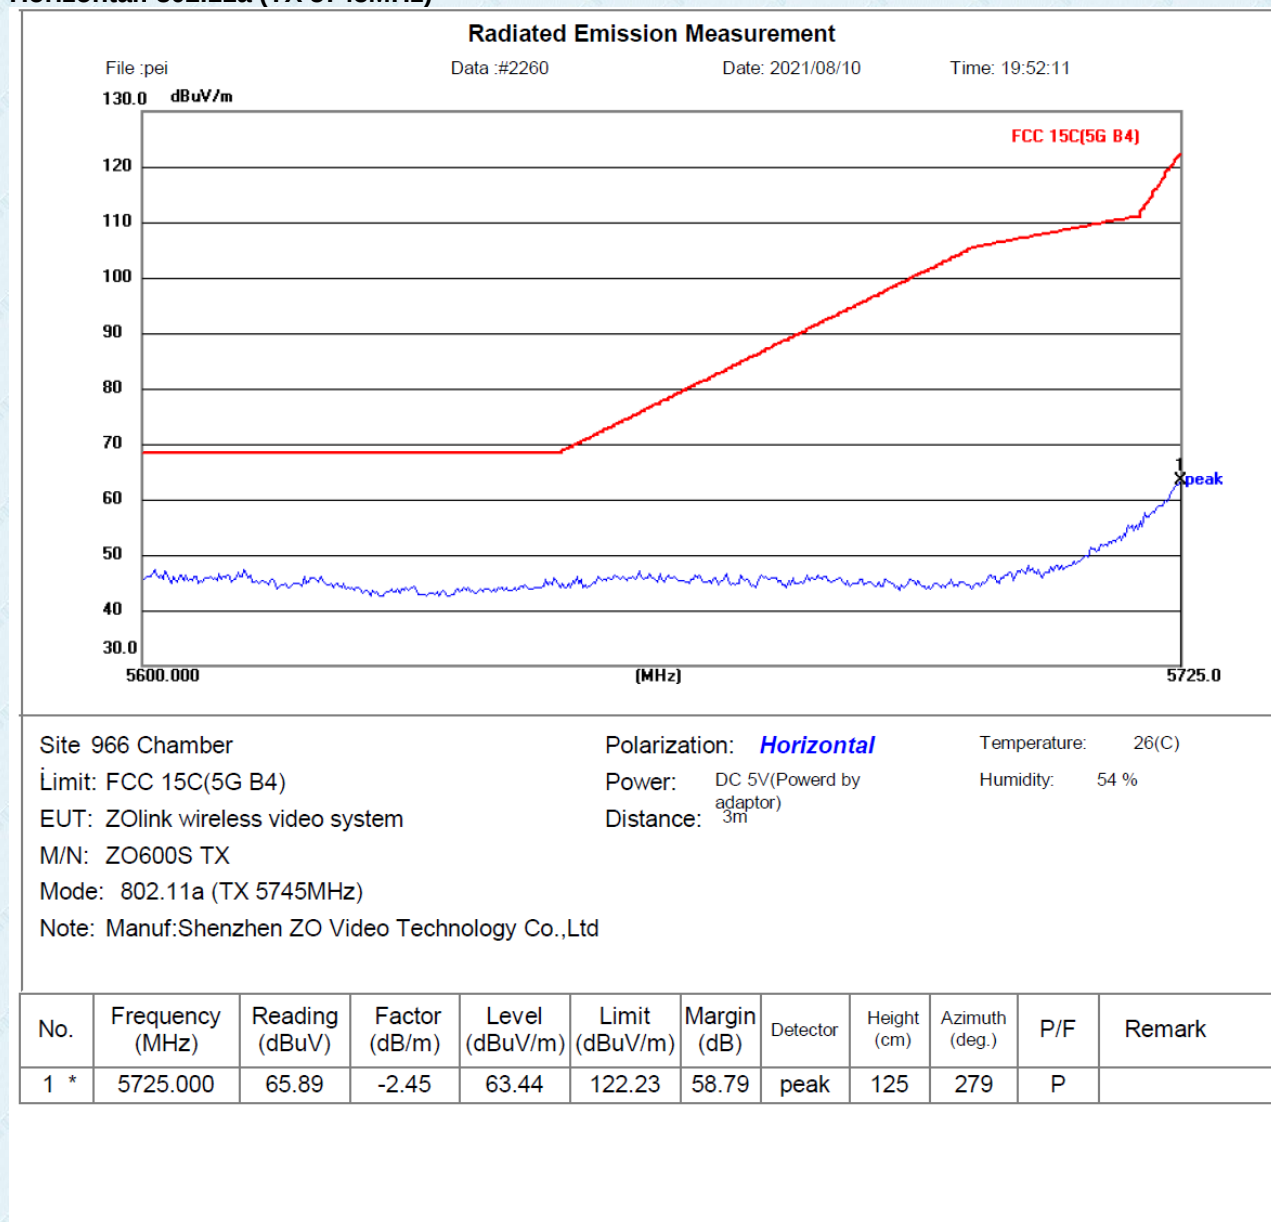


Vertical: 802.11a (TX 5745MHz)

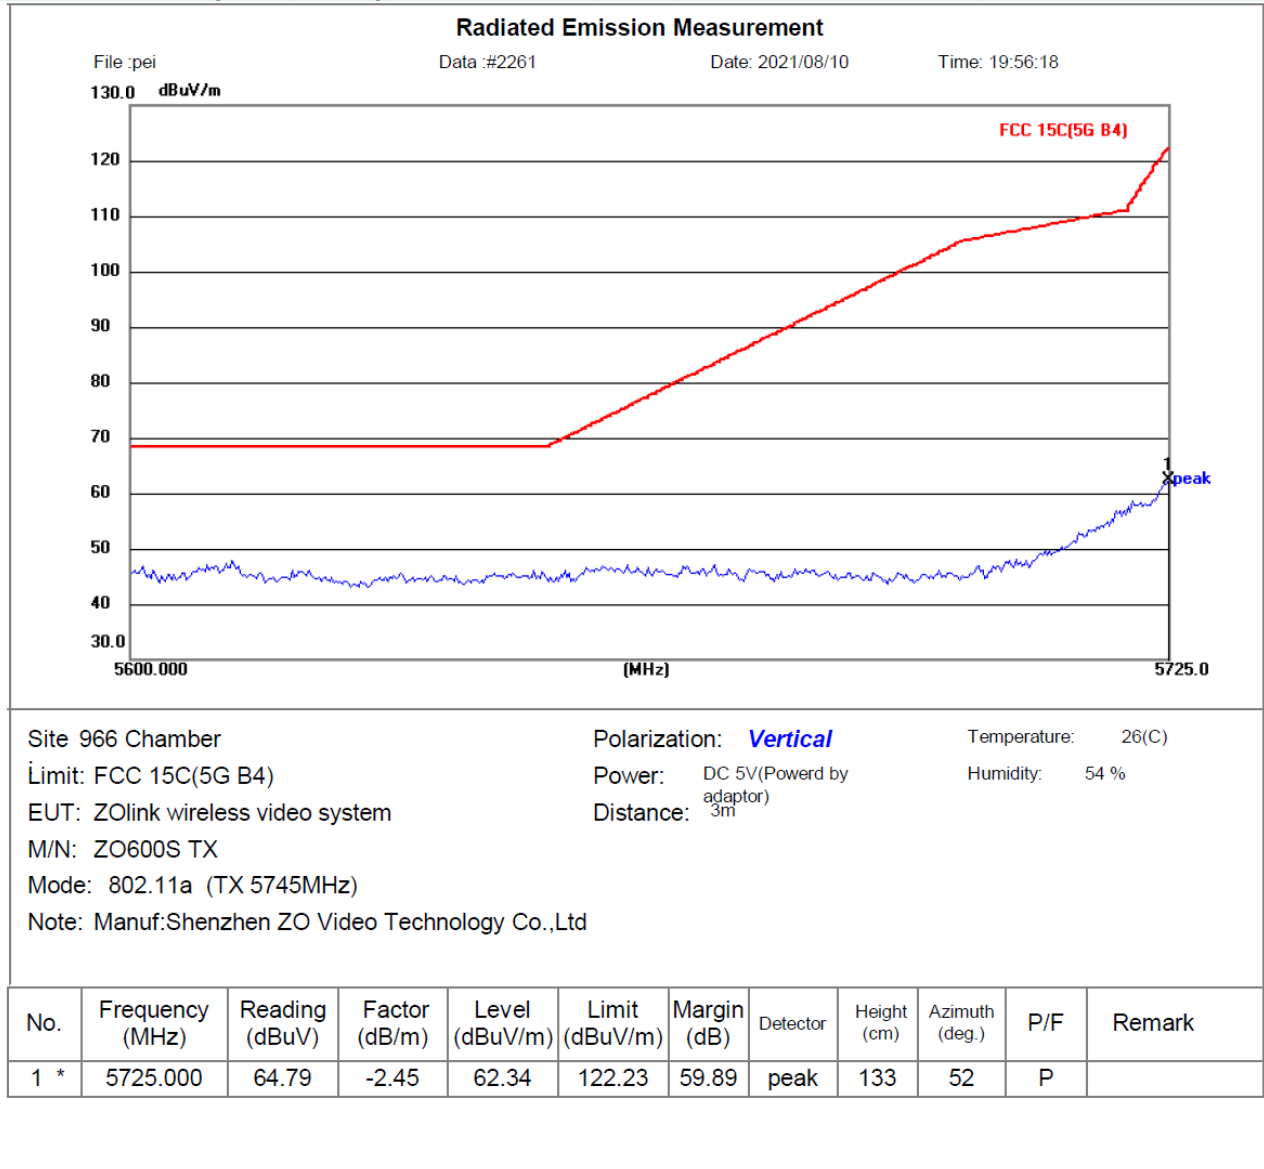


Horizontal: 802.11a (TX 5825MHz)

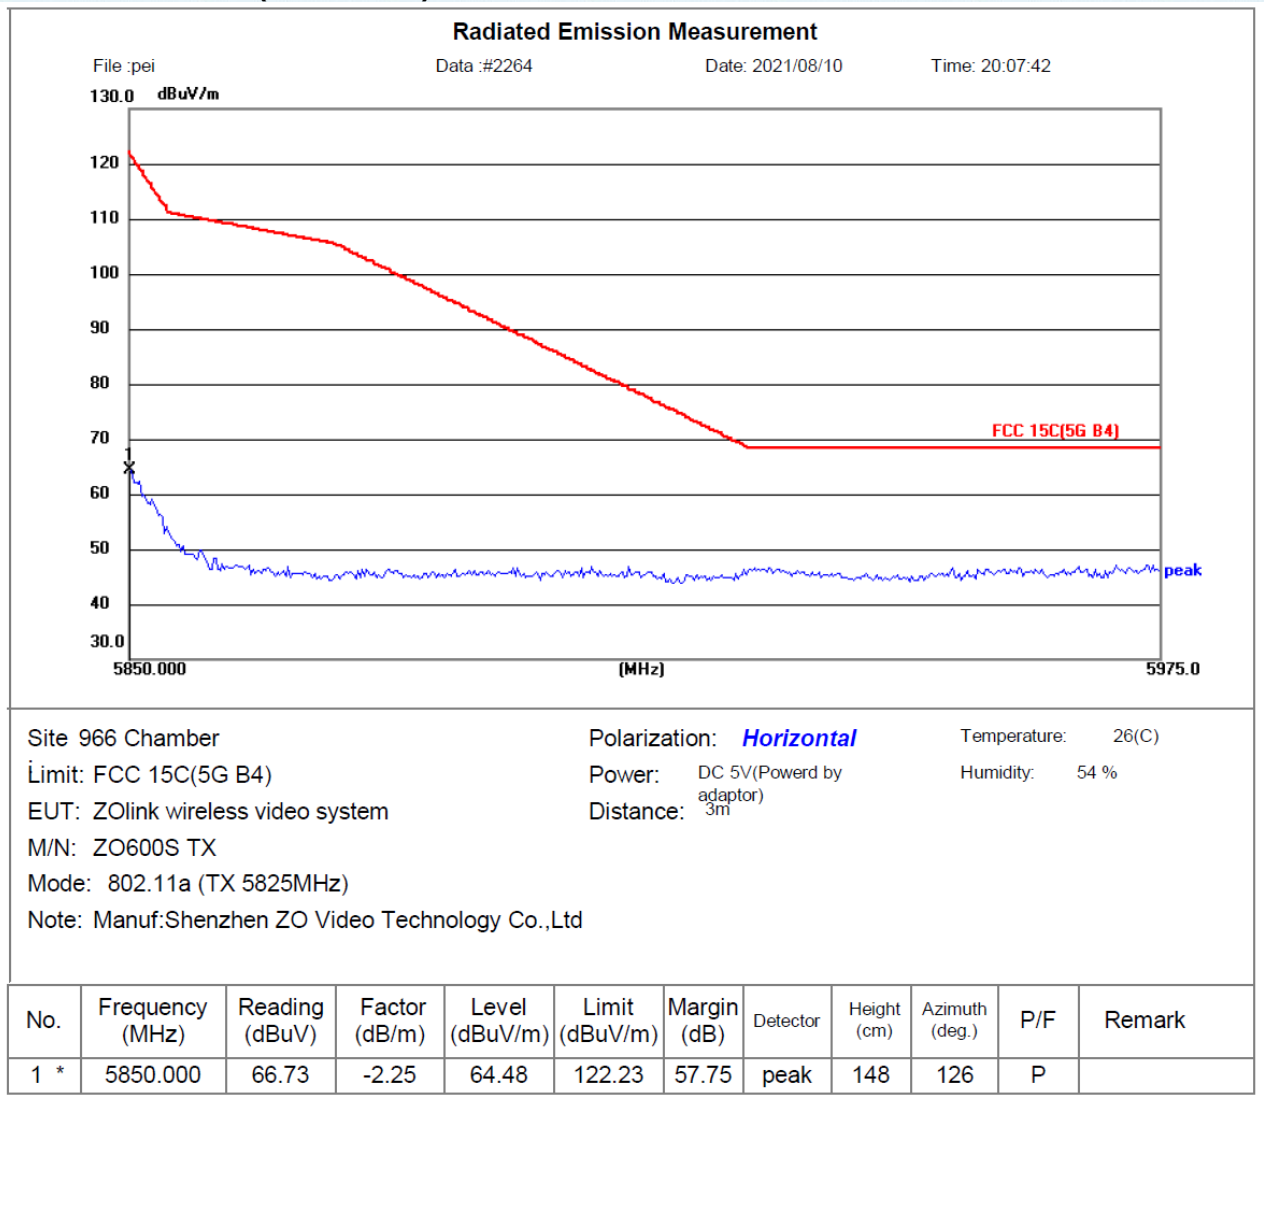


Vertical: 802.11a (TX 5825MHz)

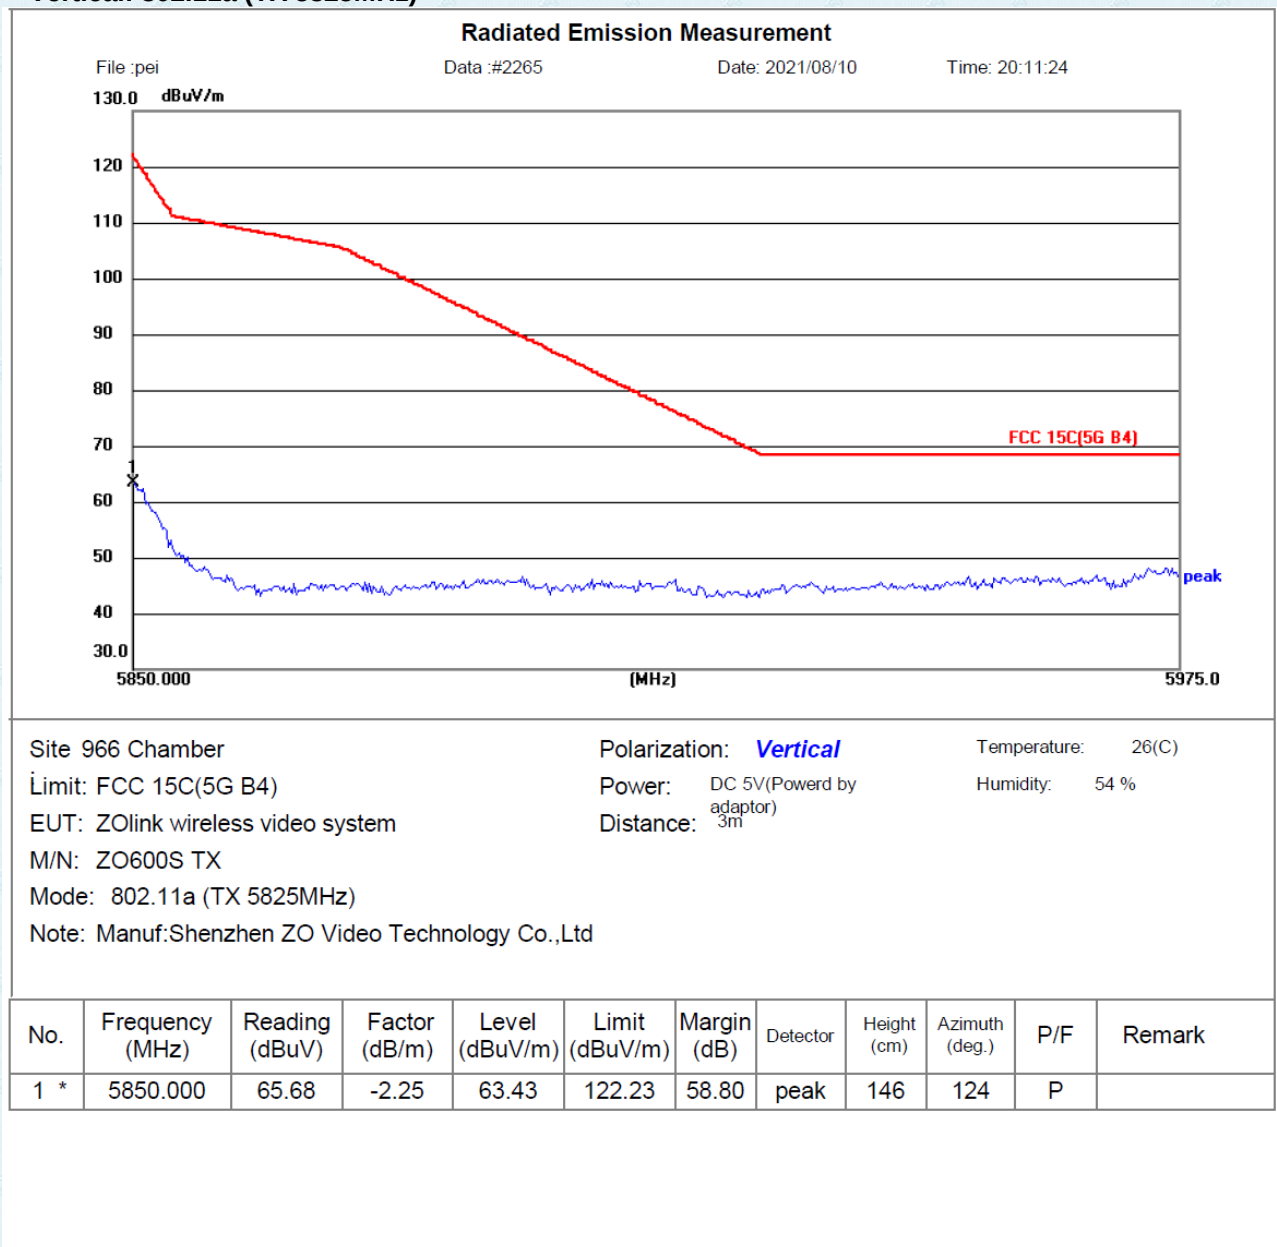


Horizontal: 802.11n (HT20) (TX 5745MHz)

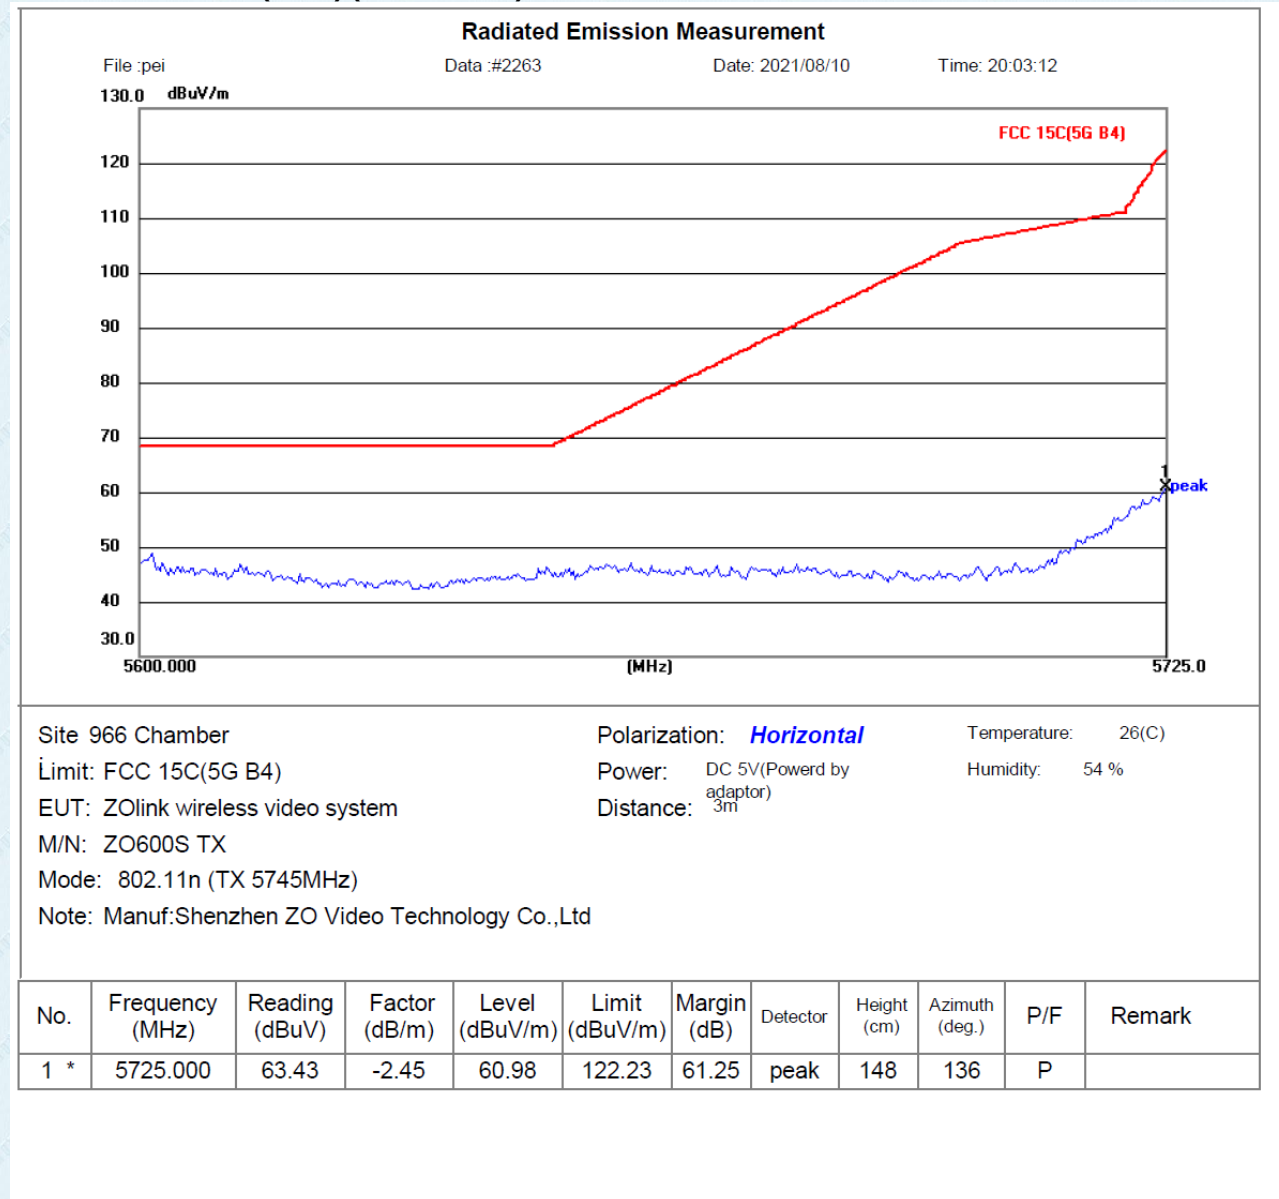


Vertical: 802.11n (HT20) (TX 5745MHz)

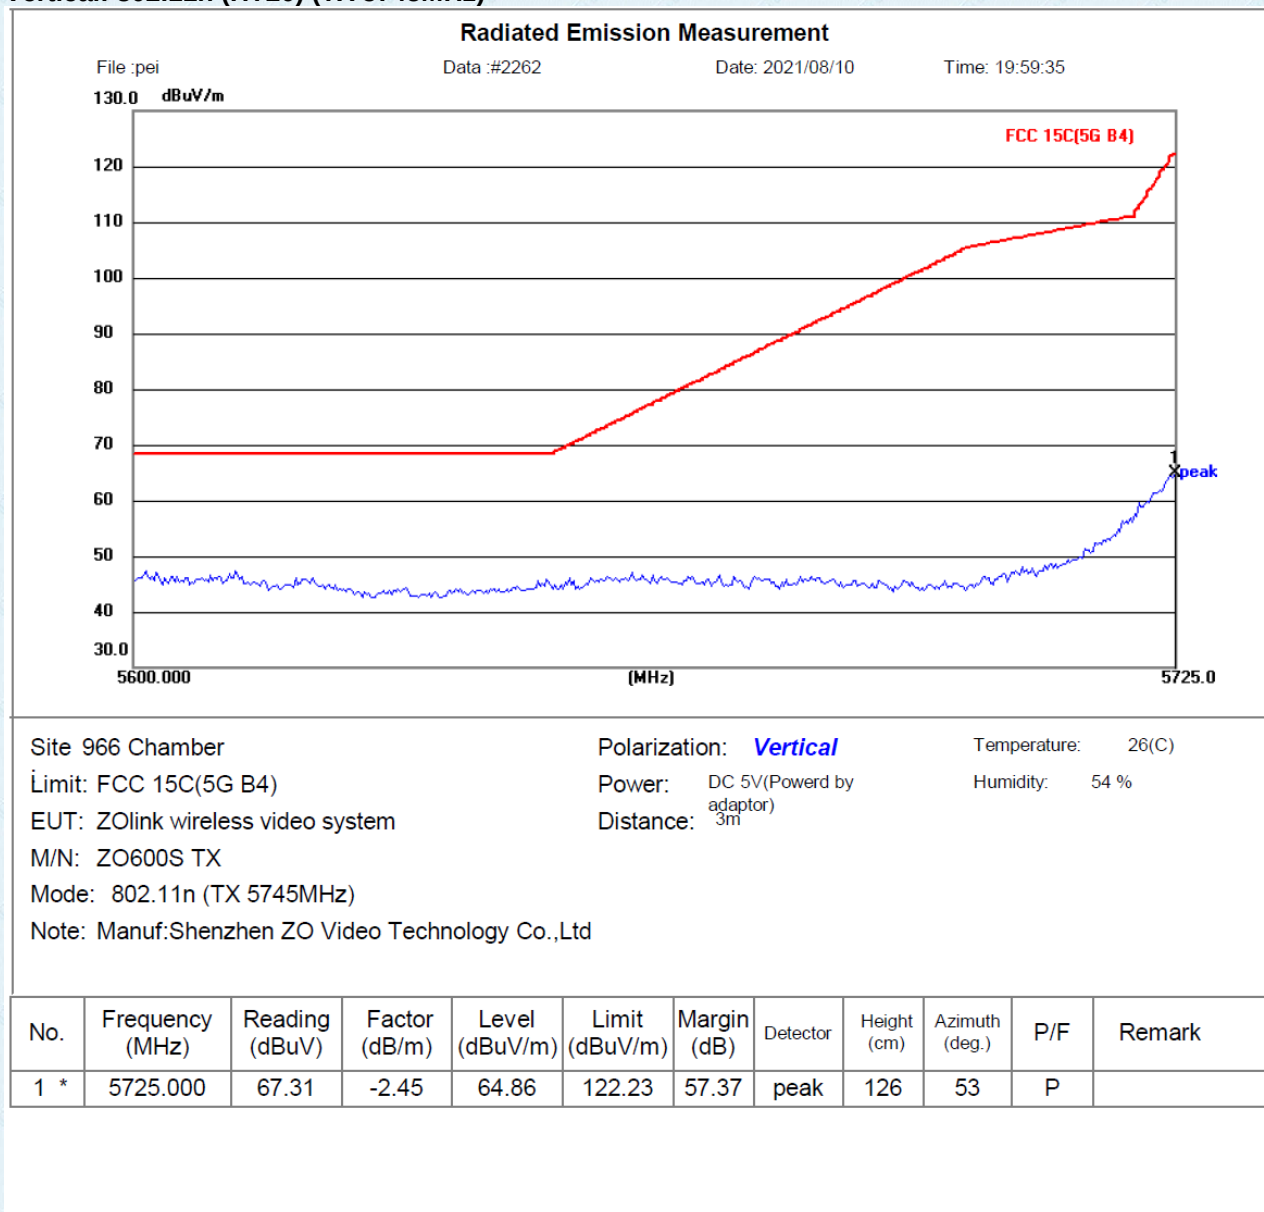

Horizontal: 802.11n (HT20) (TX 5825MHz)

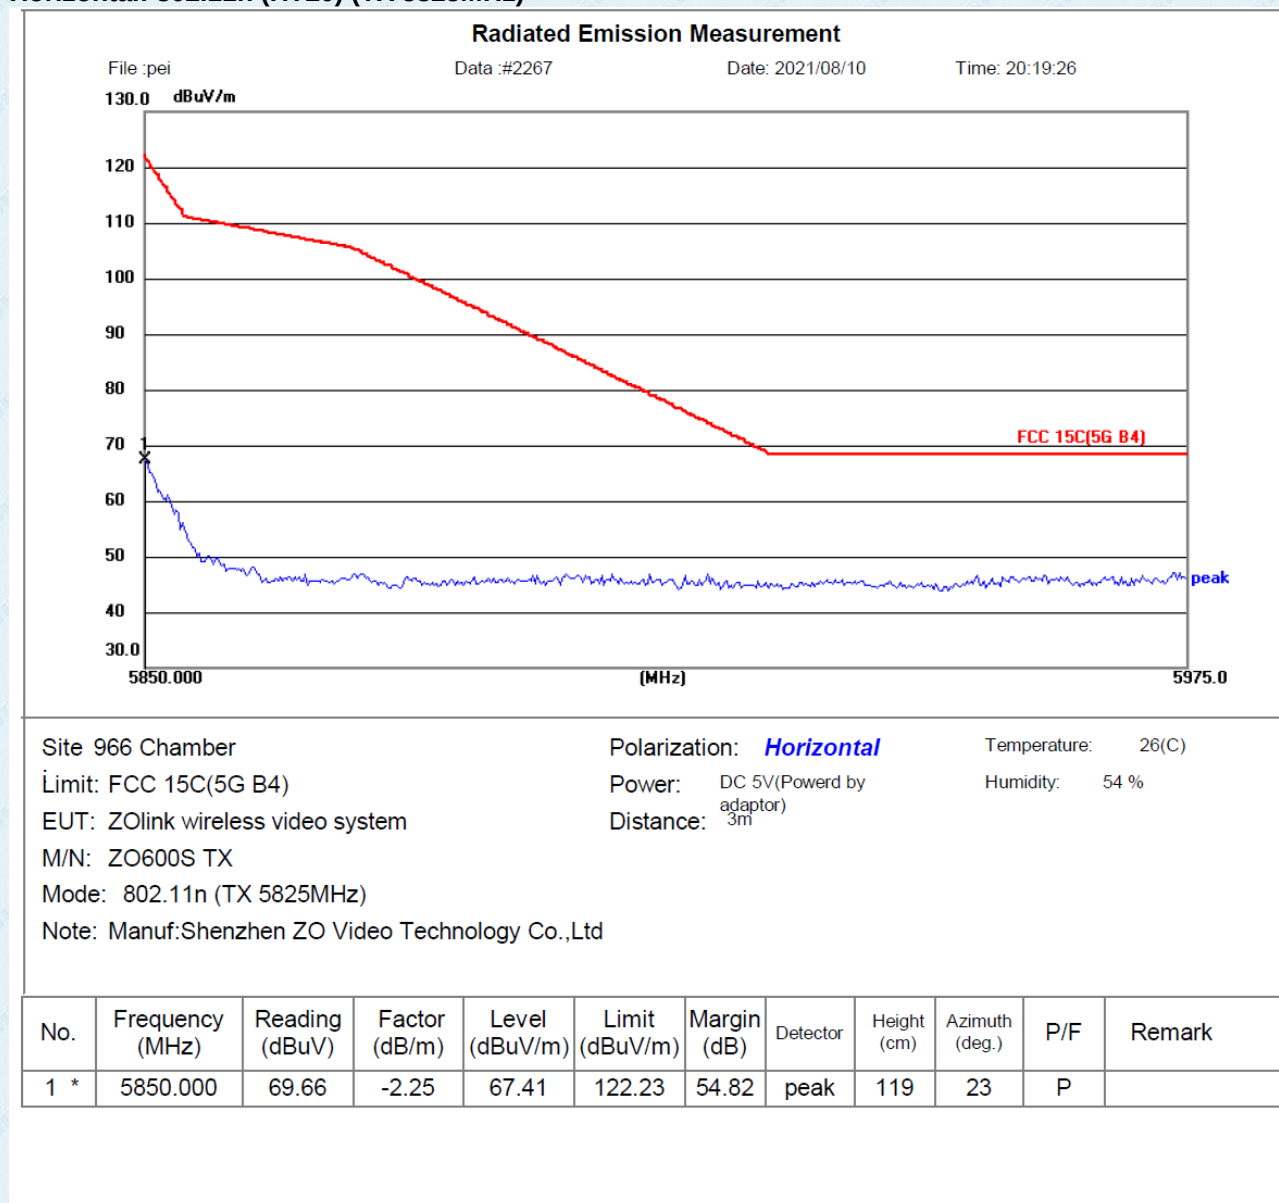


Vertical: 802.11n (HT20) (TX 5825MHz)


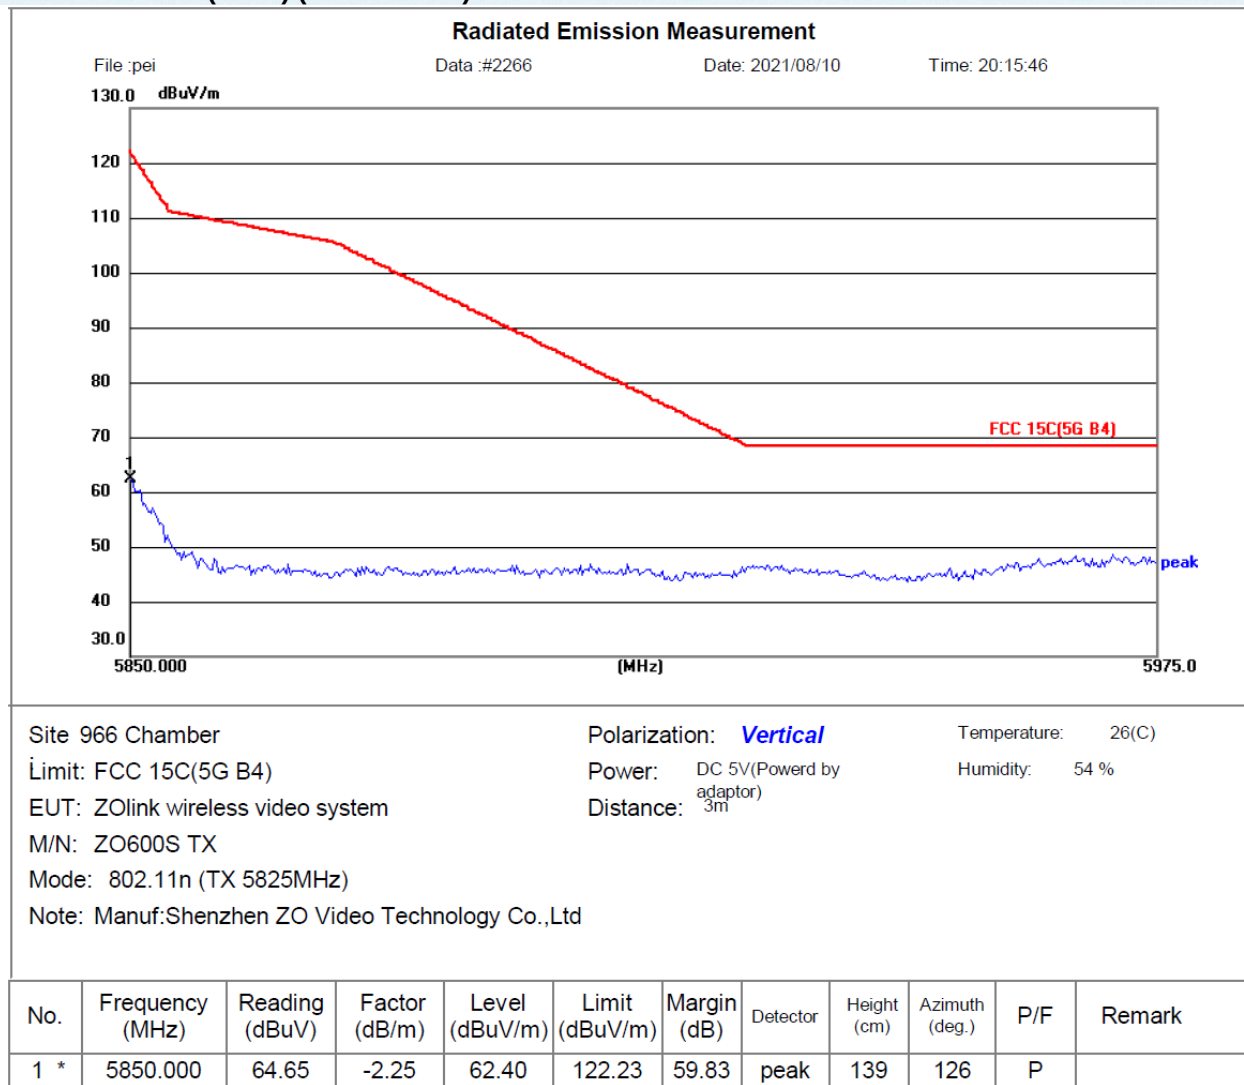


Note: We tested 802.11a/n mode the all data rate and recorded the worst case data for this channel to be 6Mbps for 802.11a mode and MCS0 for 802.11n mode.

7.7 Spurious Emission

7.7.1 Radiated Emission Method

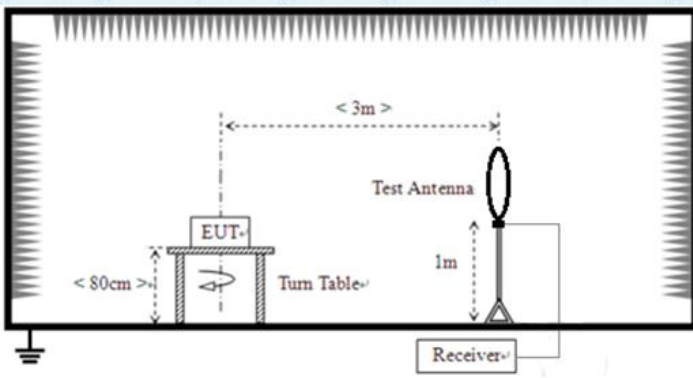Test Requirement:	FCC Part15 C Section 15.209, Part 15E Section 15.407(b)(4)				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 40GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9kHz-150KHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		AV	1MHz	3MHz	Average Value
Limit:	Frequency		Limit (uV/m)	Value	Measurement Distance
	0.009MHz-0.490MHz		2400/F(KHz)	QP	300m
	0.490MHz-1.705MHz		24000/F(KHz)	QP	300m
	1.705MHz-30MHz		30	QP	30m
	30MHz-88MHz		100	QP	3m
	88MHz-216MHz		150	QP	
	216MHz-960MHz		200	QP	
	960MHz-1GHz		500	QP	
	Frequency		Limit (dBm/MHz)		Remark
	Above 1GHz		-27.0		Peak Value
Test setup:	For radiated emissions from 9kHz to 30MHz				
					
	For radiated emissions from 30MHz to1GHz				

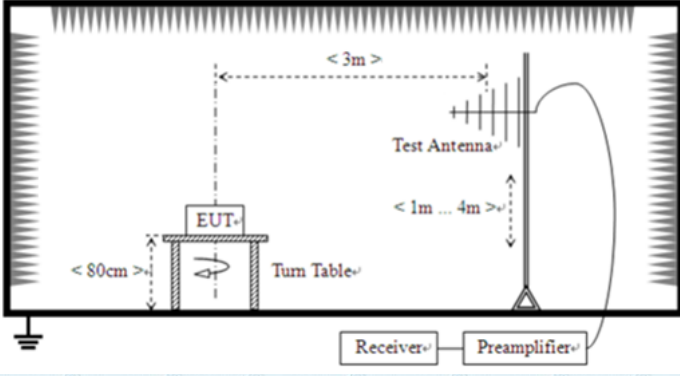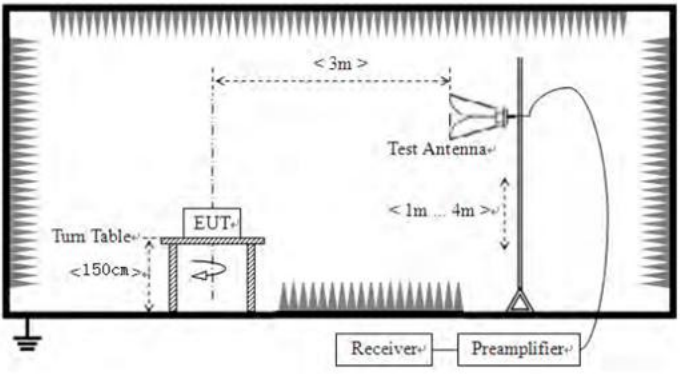	 For radiated emissions above 1GHz 
Test Procedure:	1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 7. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test

	worst case mode is recorded in the report.					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

Remarks:

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

Measurement Data:

9 kHz ~ 30 MHz


The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

30MHz~ 1GHz


Pre-scan all test modes, found worst case at 802.11a, and so only show the test result of 802.11a

30MHz~ 1GHz


Horizontal: 802.11a (TX 5745MHz)

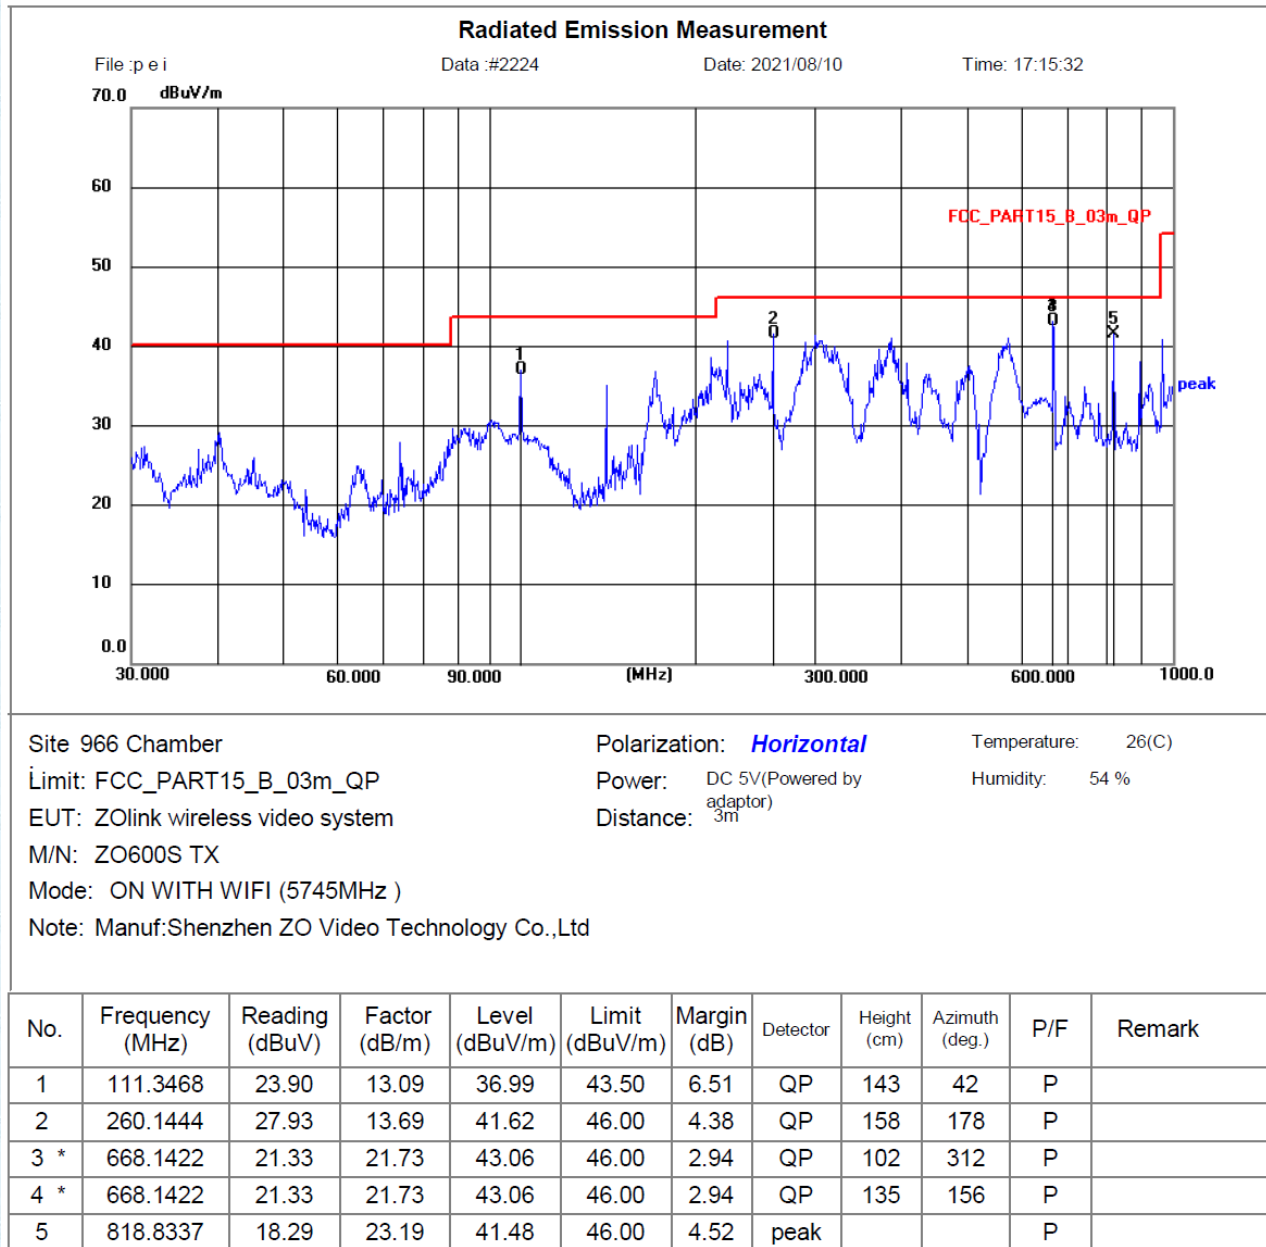


Vertical: 802.11a (TX 5745MHz)

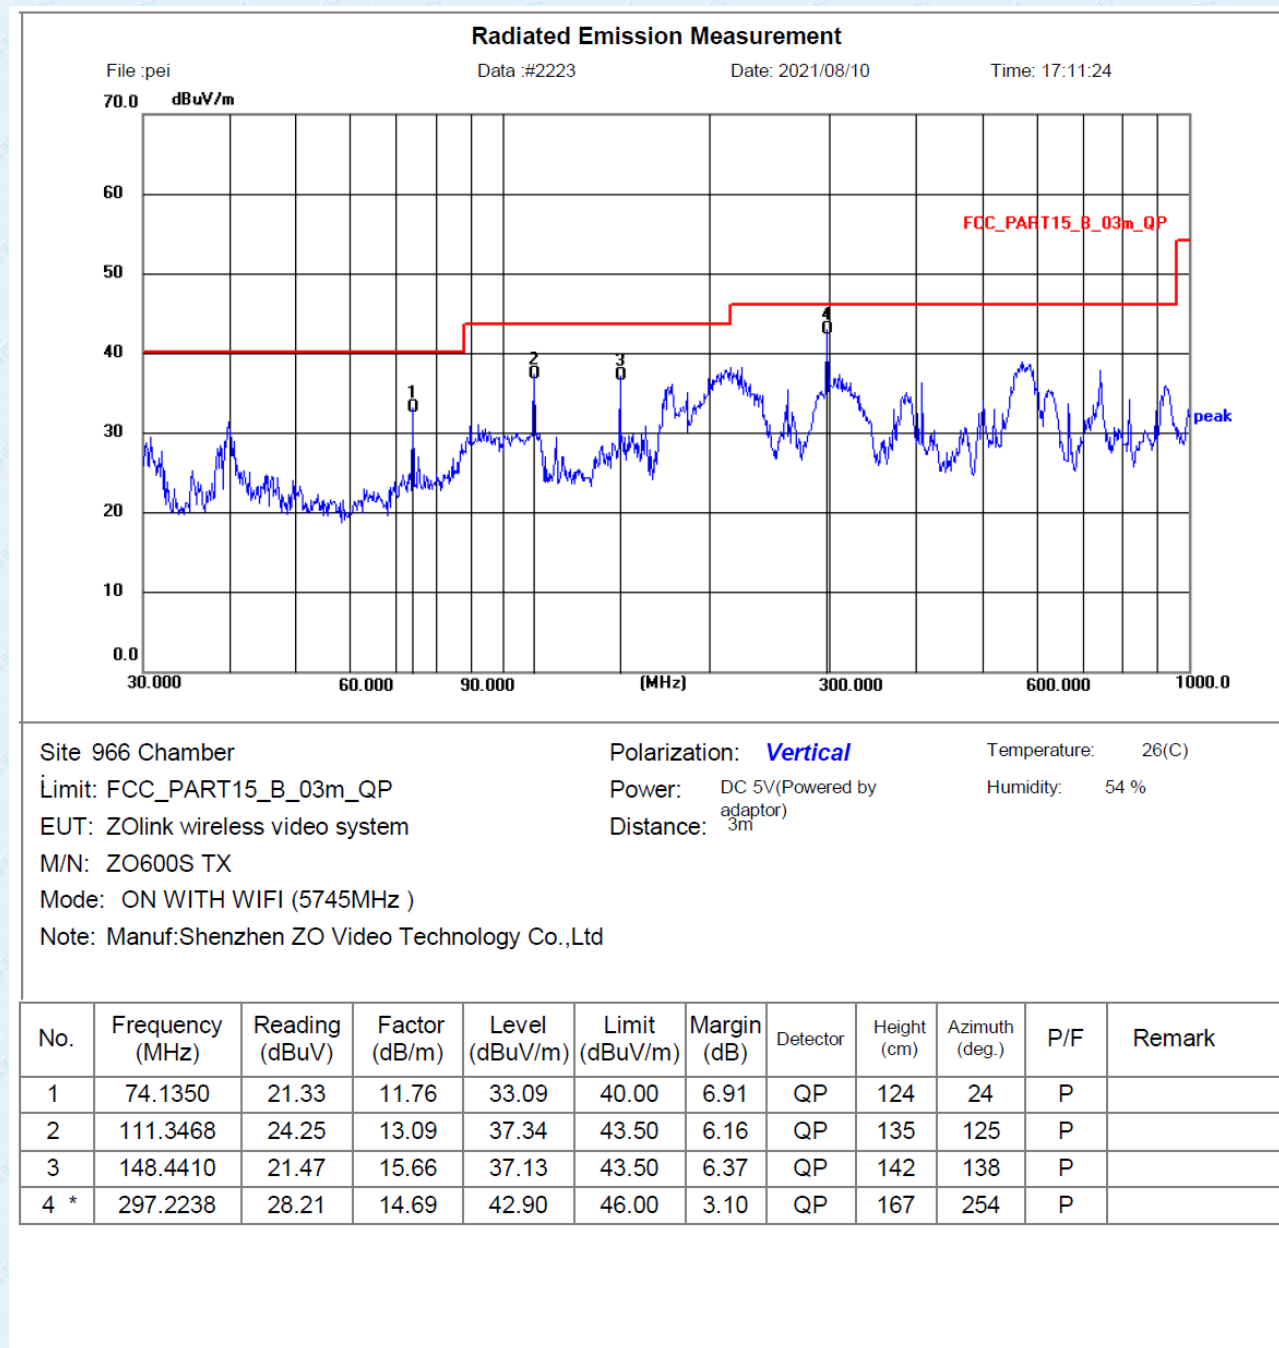

Horizontal: 802.11a (TX 5825MHz)

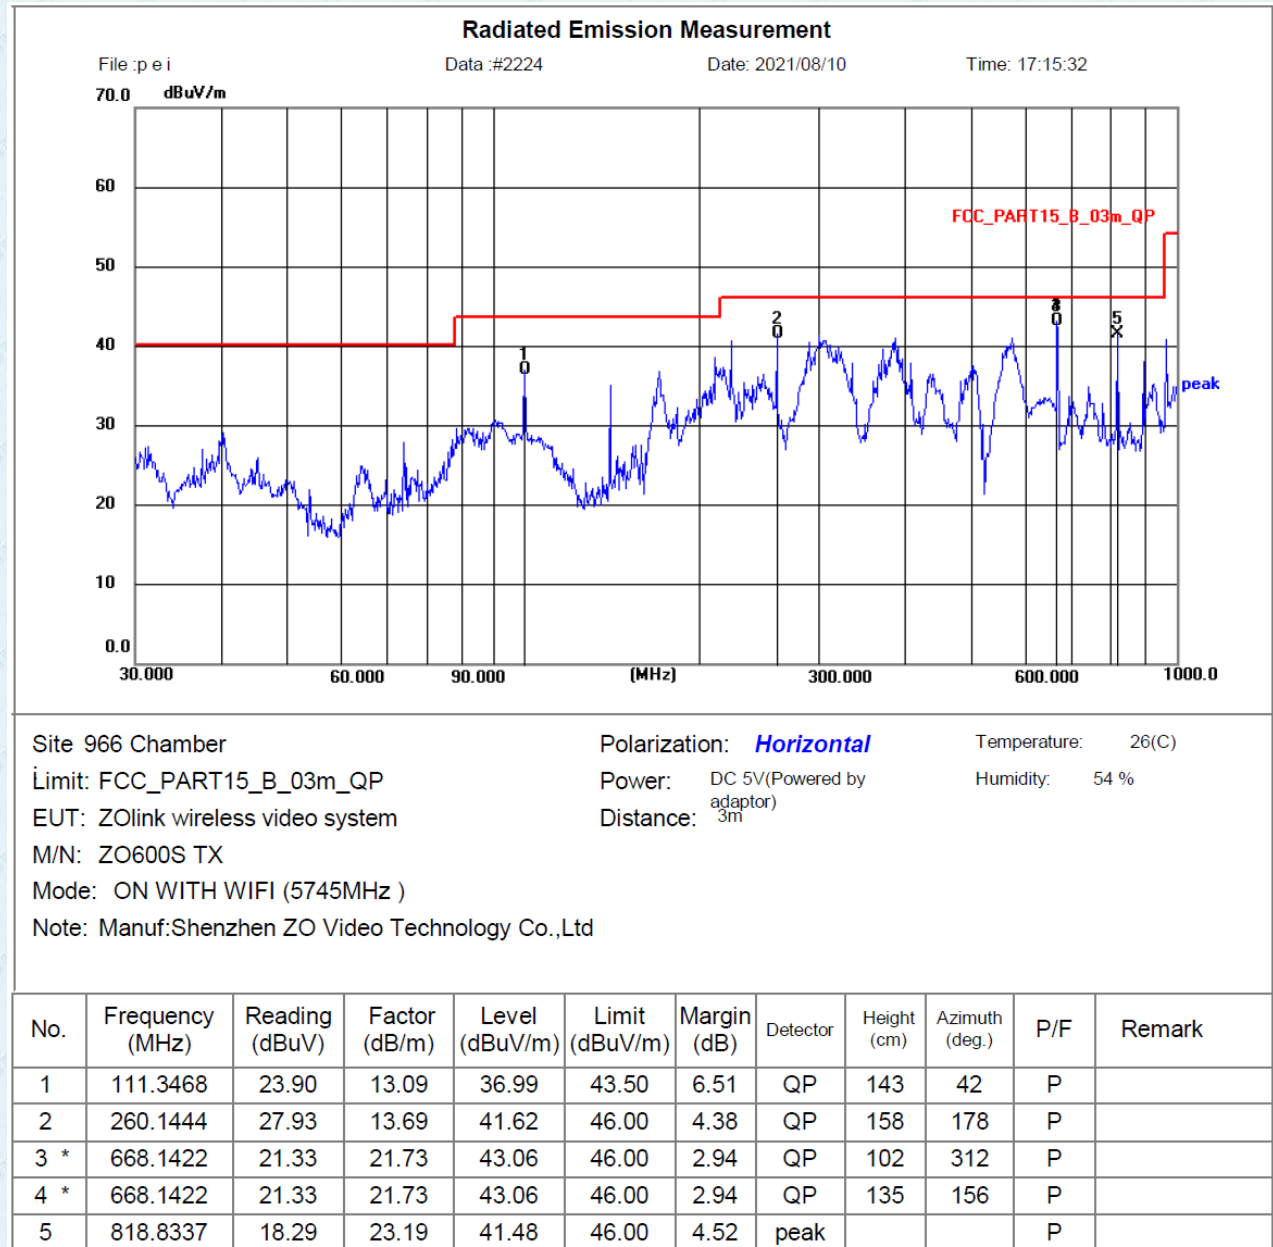


Vertical: 802.11a (TX 5825MHz)

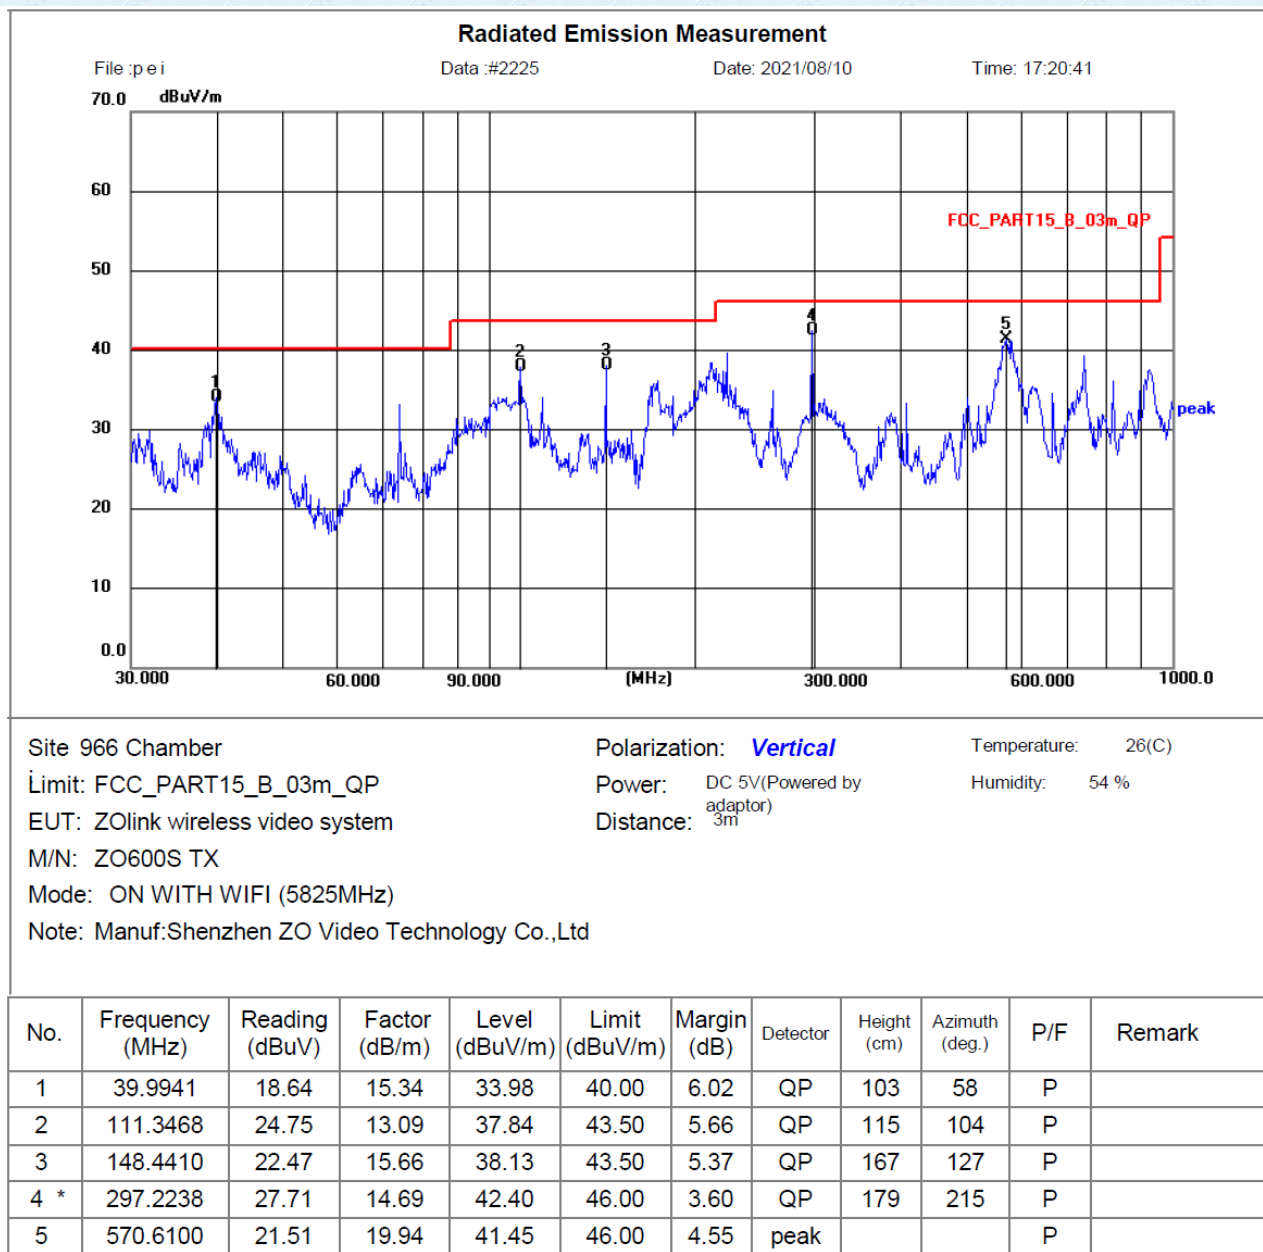


1GHz~ 18GHz


Horizontal: 802.11a (TX 5745MHz)

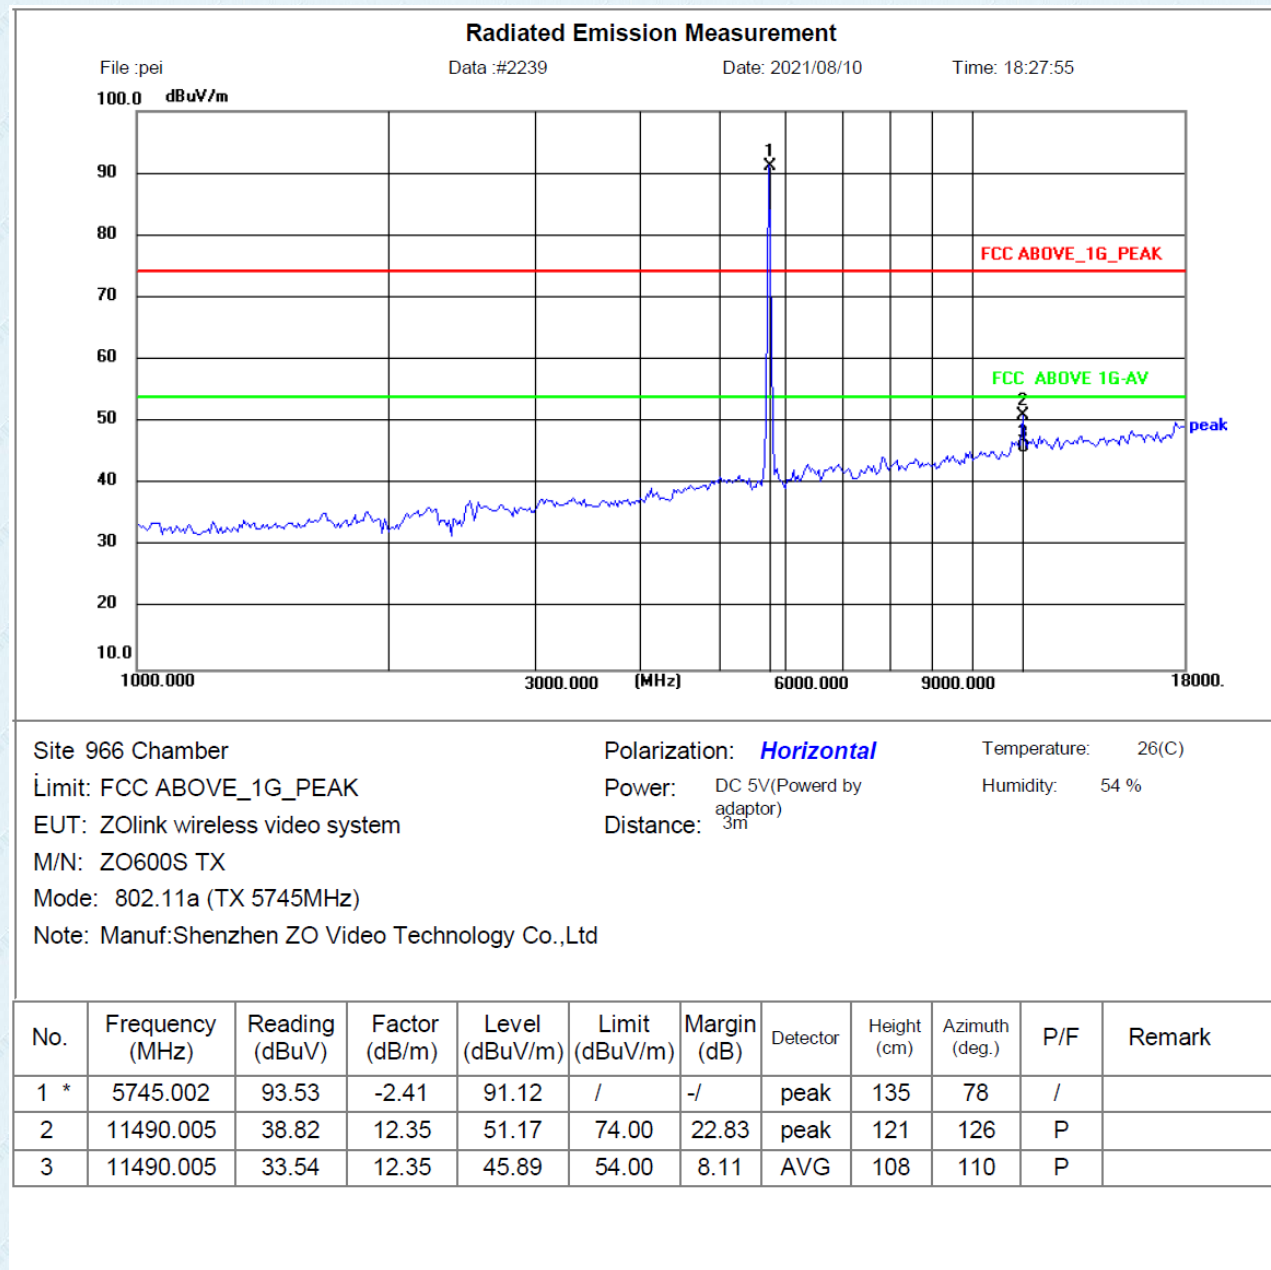


Vertical: 802.11a (TX 5745MHz)

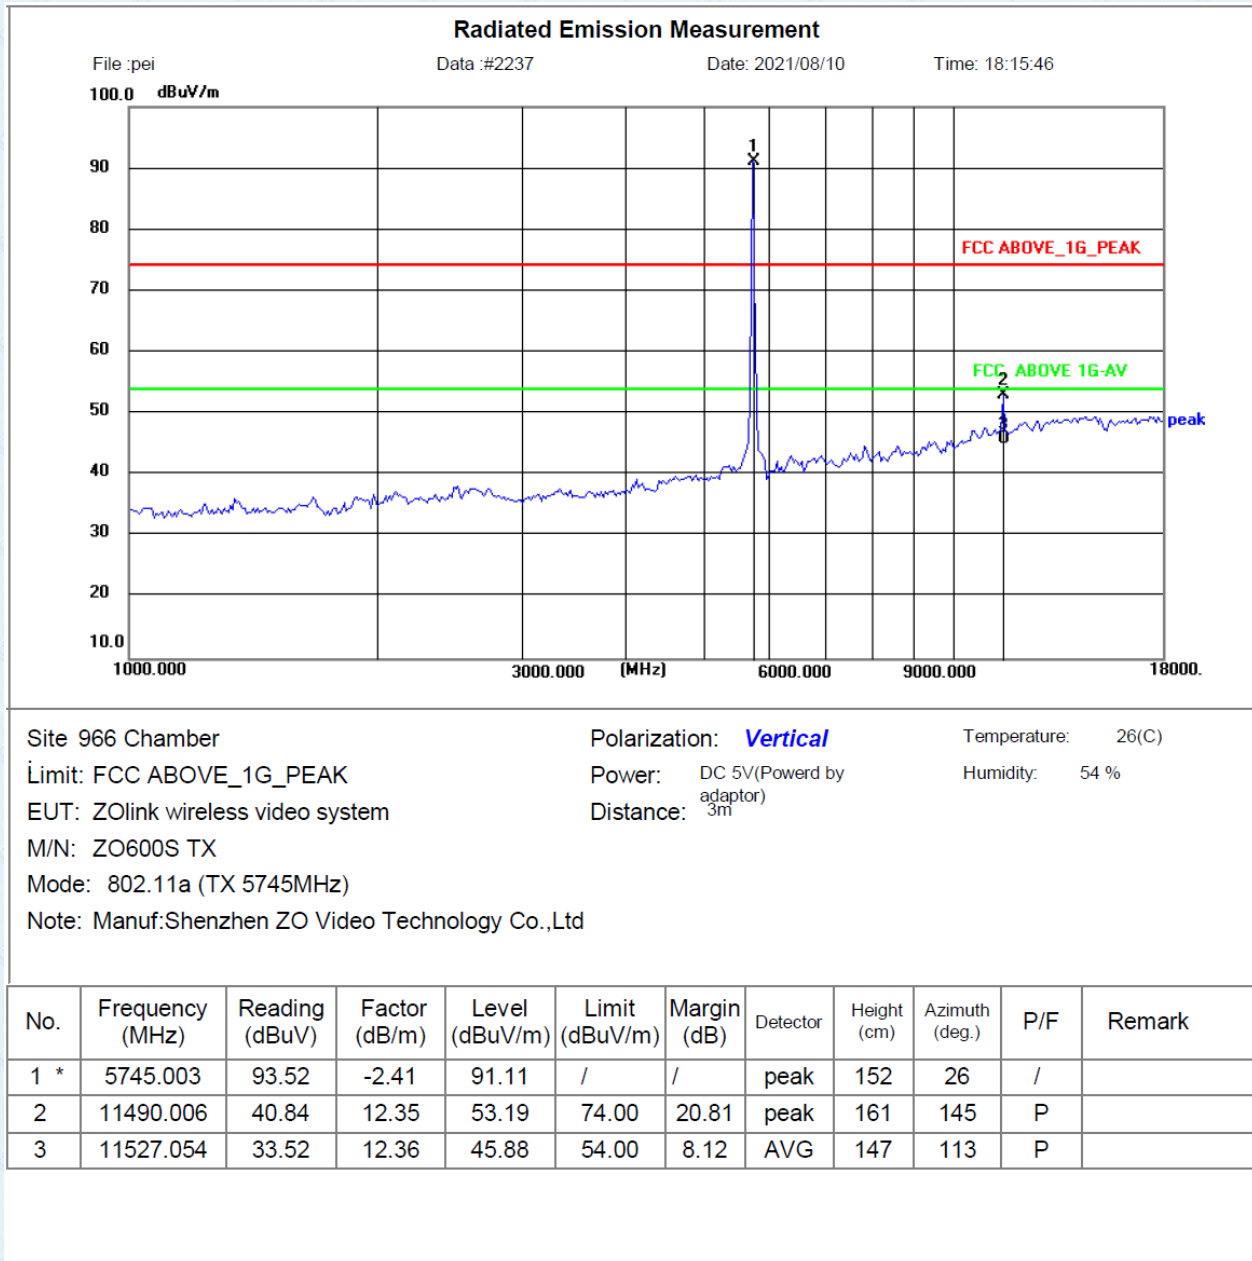


Horizontal: 802.11a (TX 5825MHz)

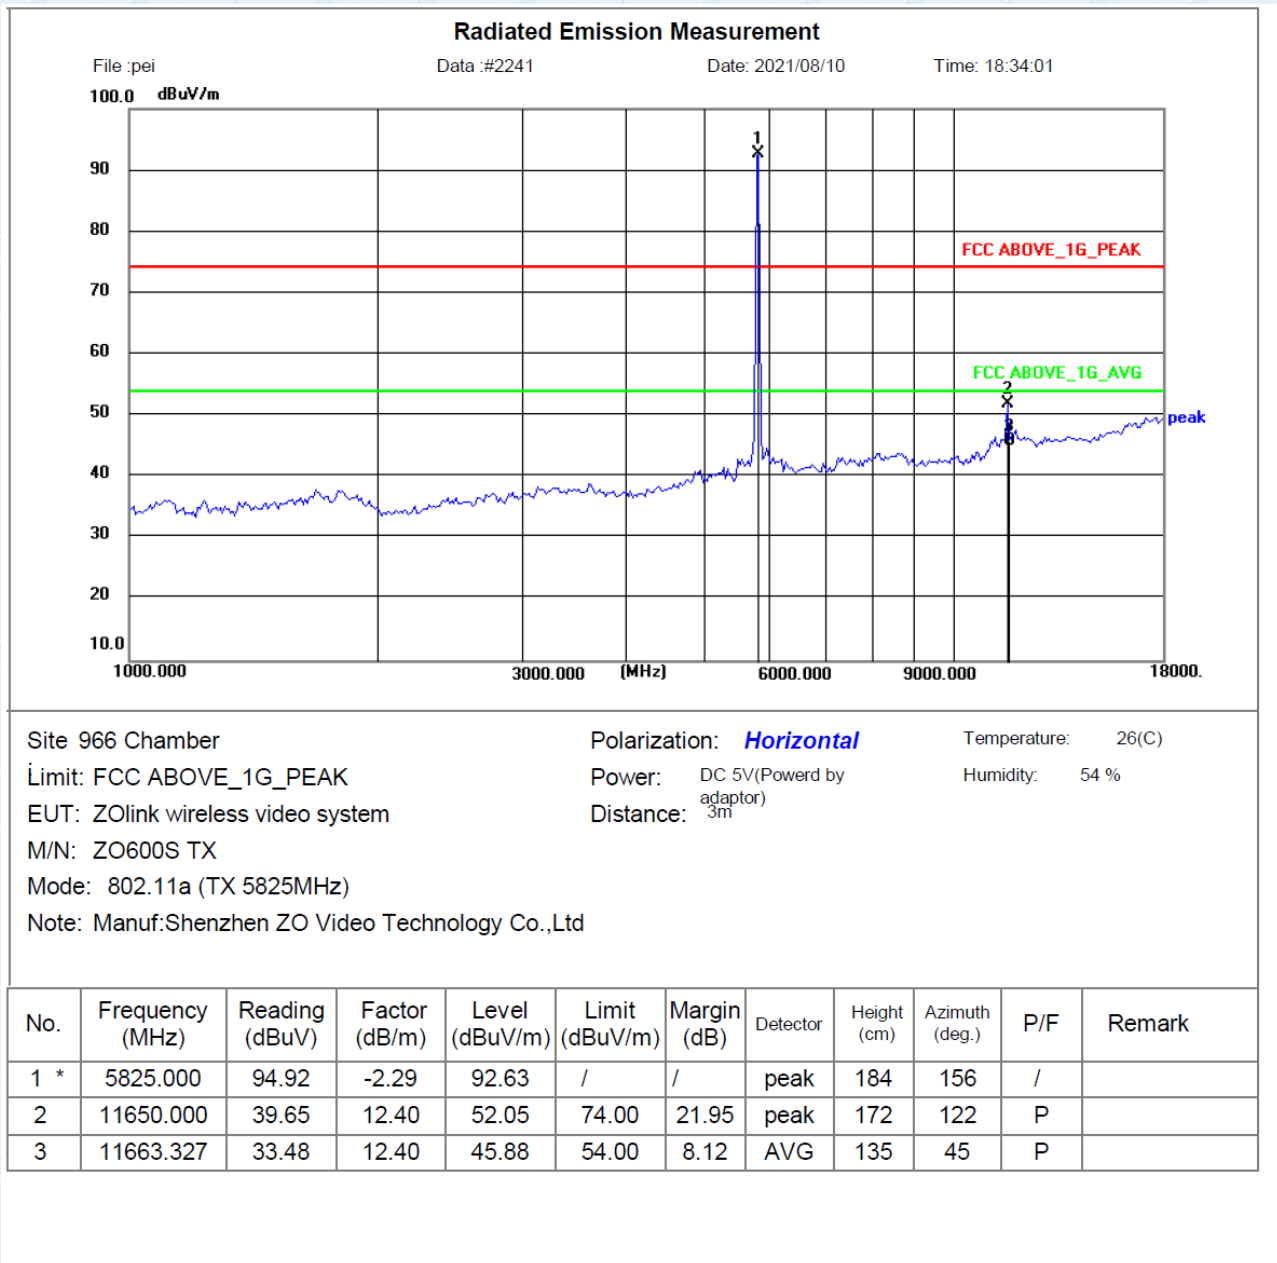


Vertical: 802.11a (TX 5825MHz)

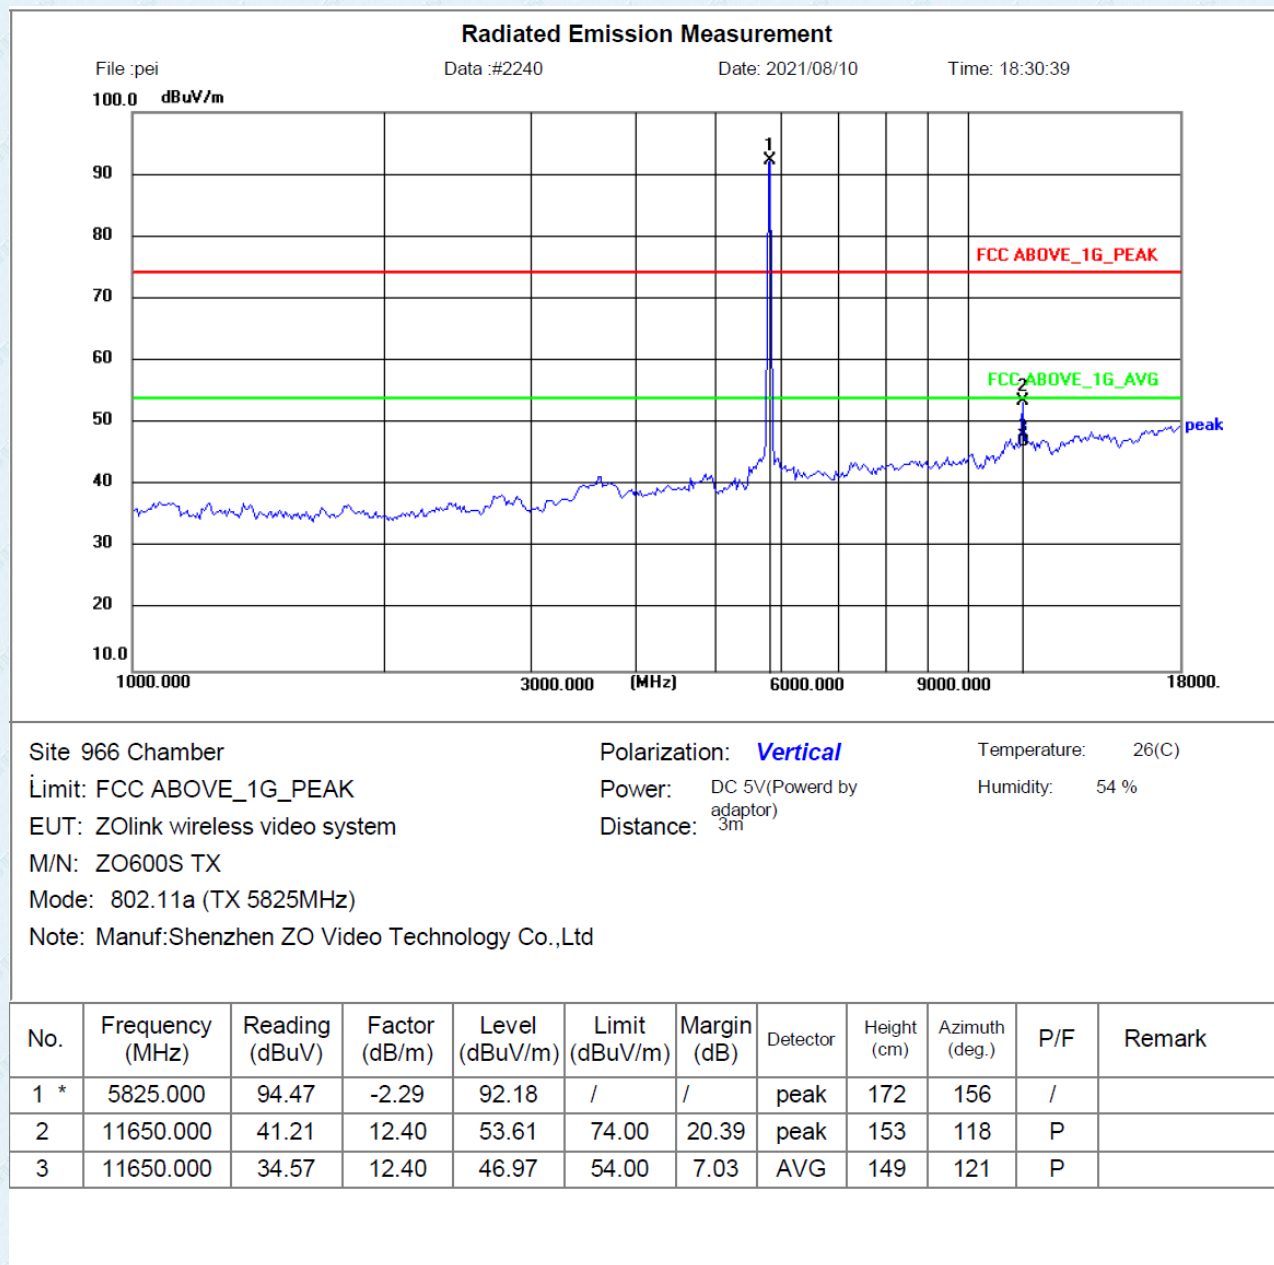


Horizontal: 802.11n-HT20 (TX 5745MHz)

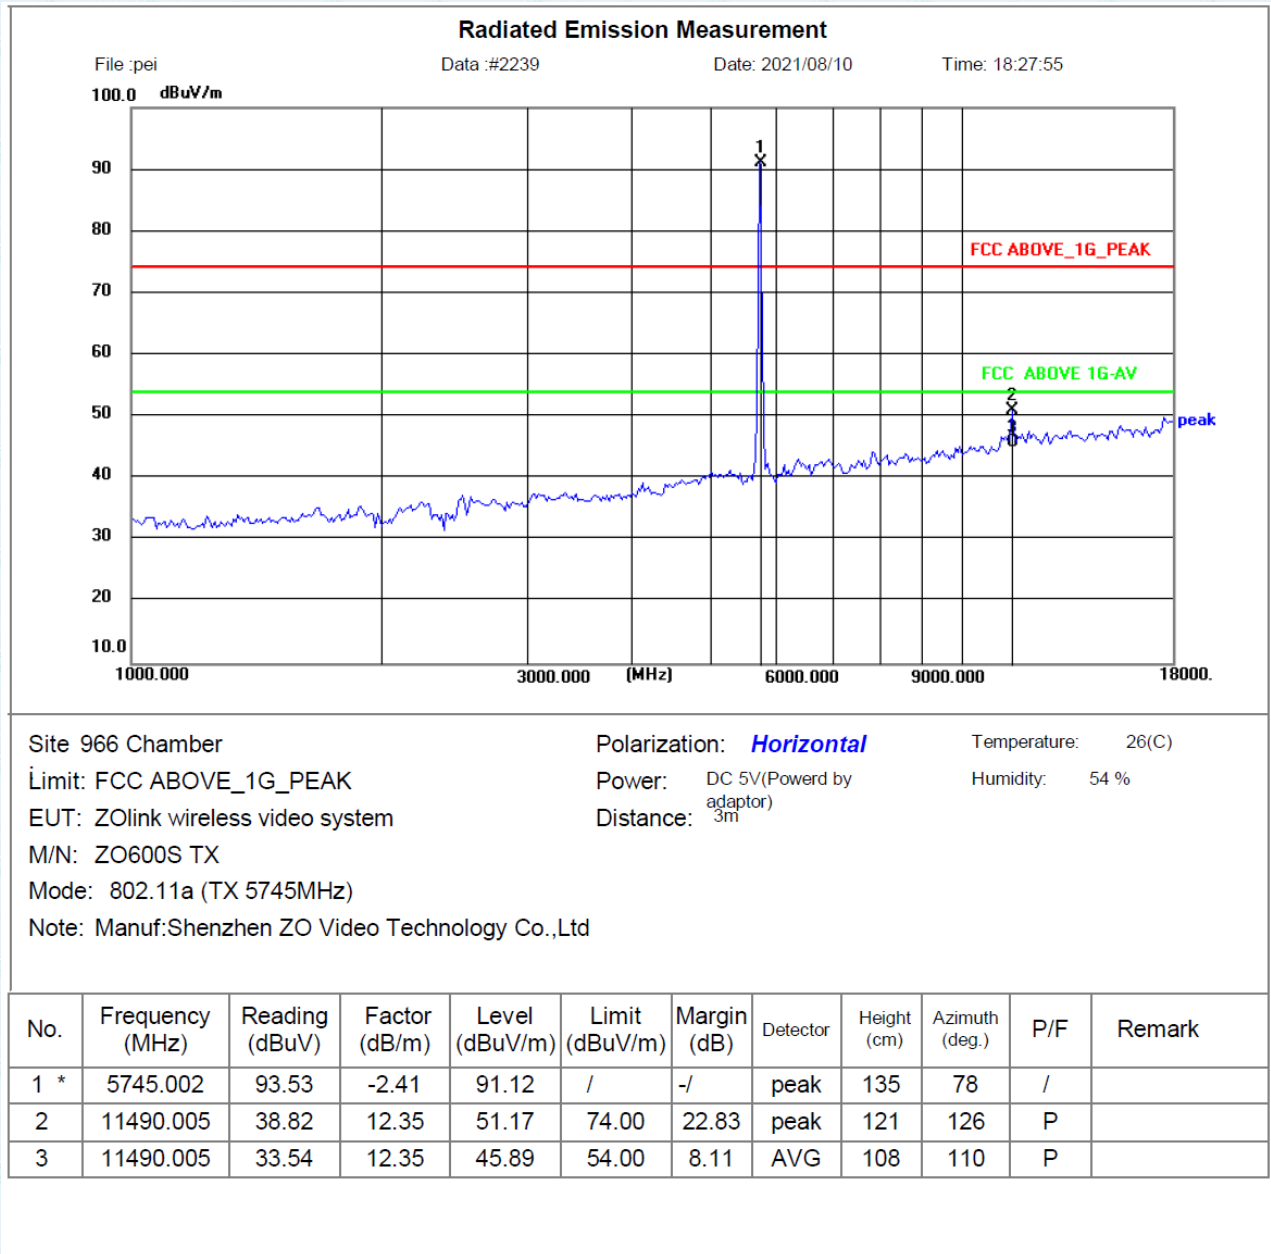


Vertical: 802.11n-HT20 (TX 5745MHz)

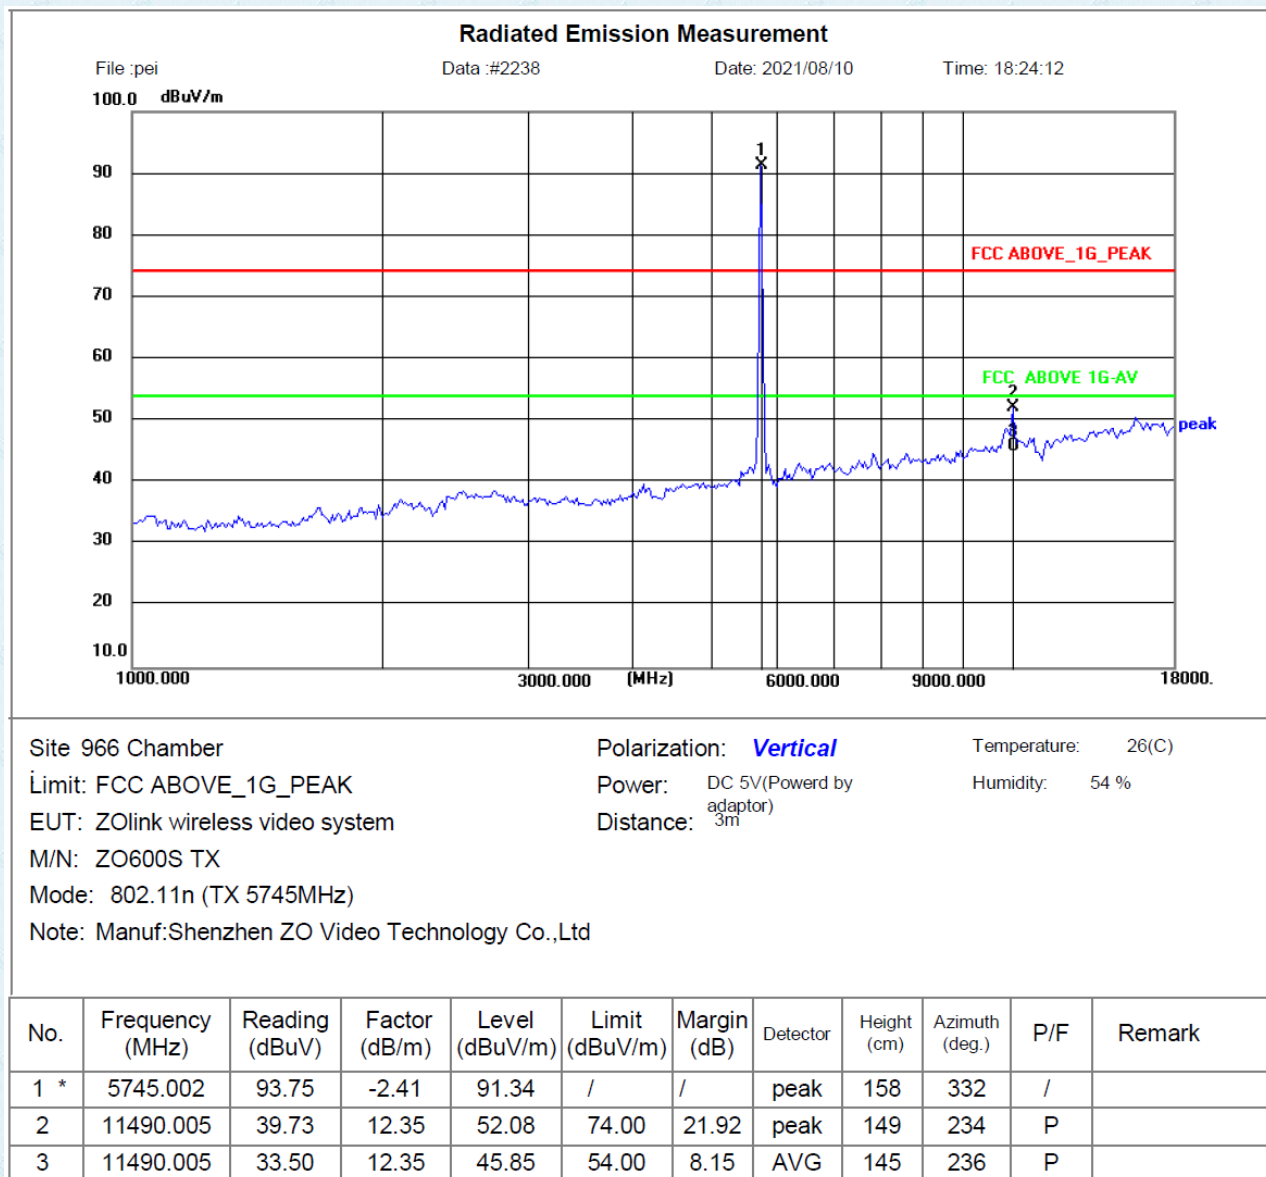

Horizontal: 802.11n-HT20 (TX 5825MHz)

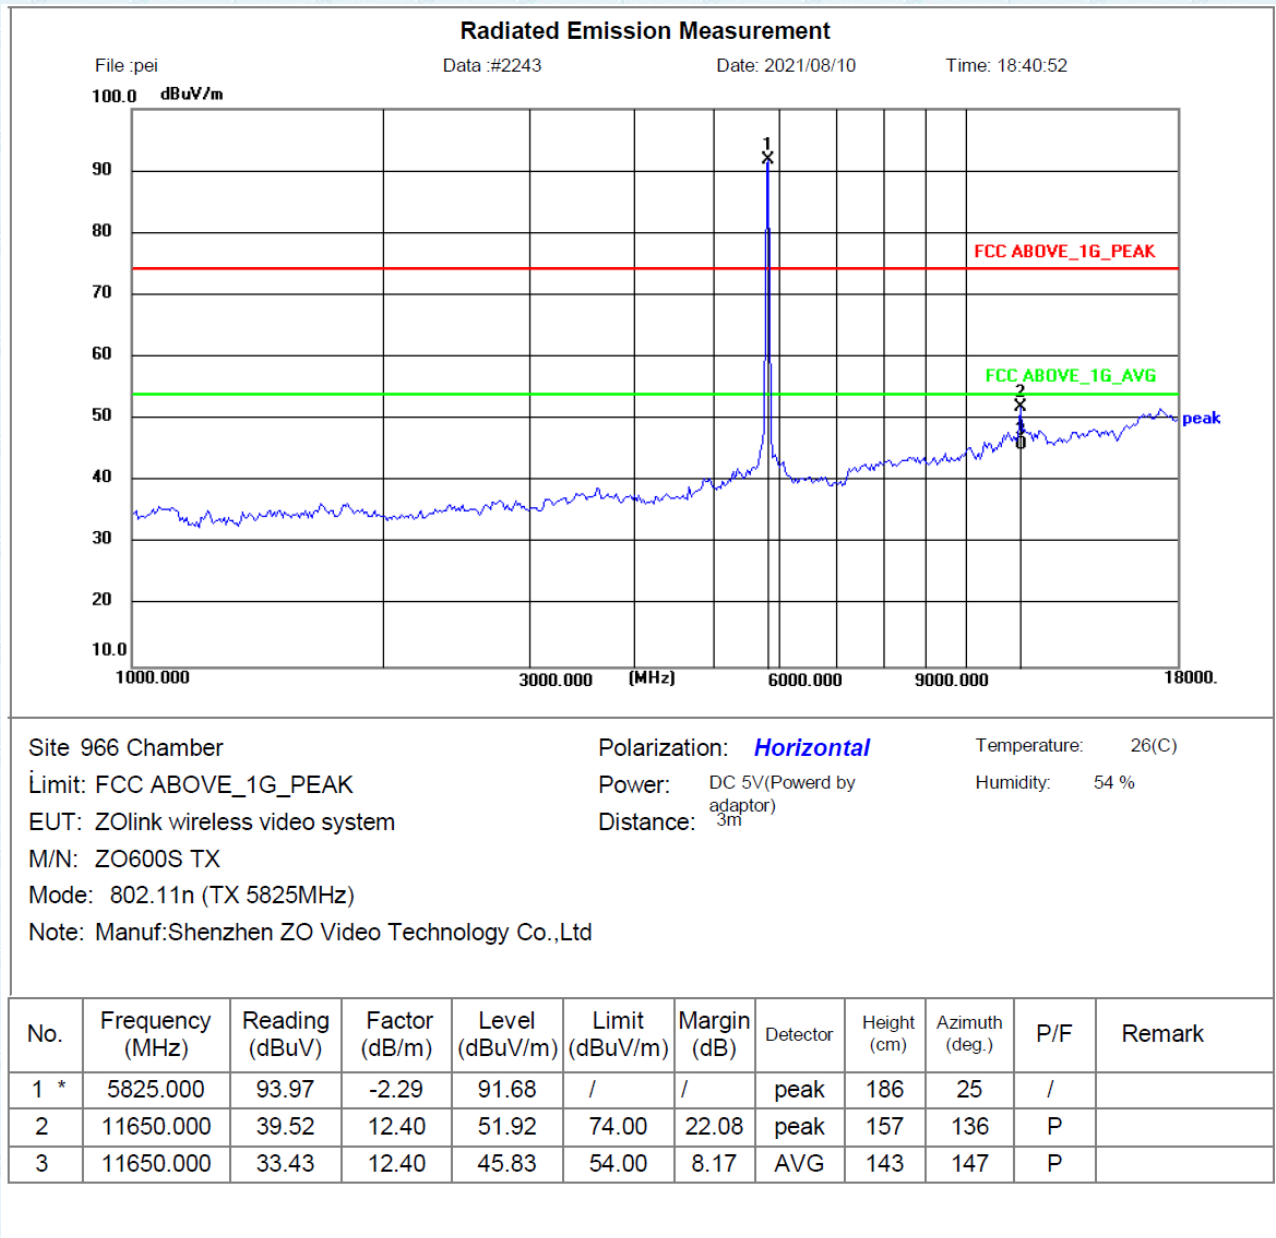

Vertical: 802.11n-HT20 (TX 5825MHz)

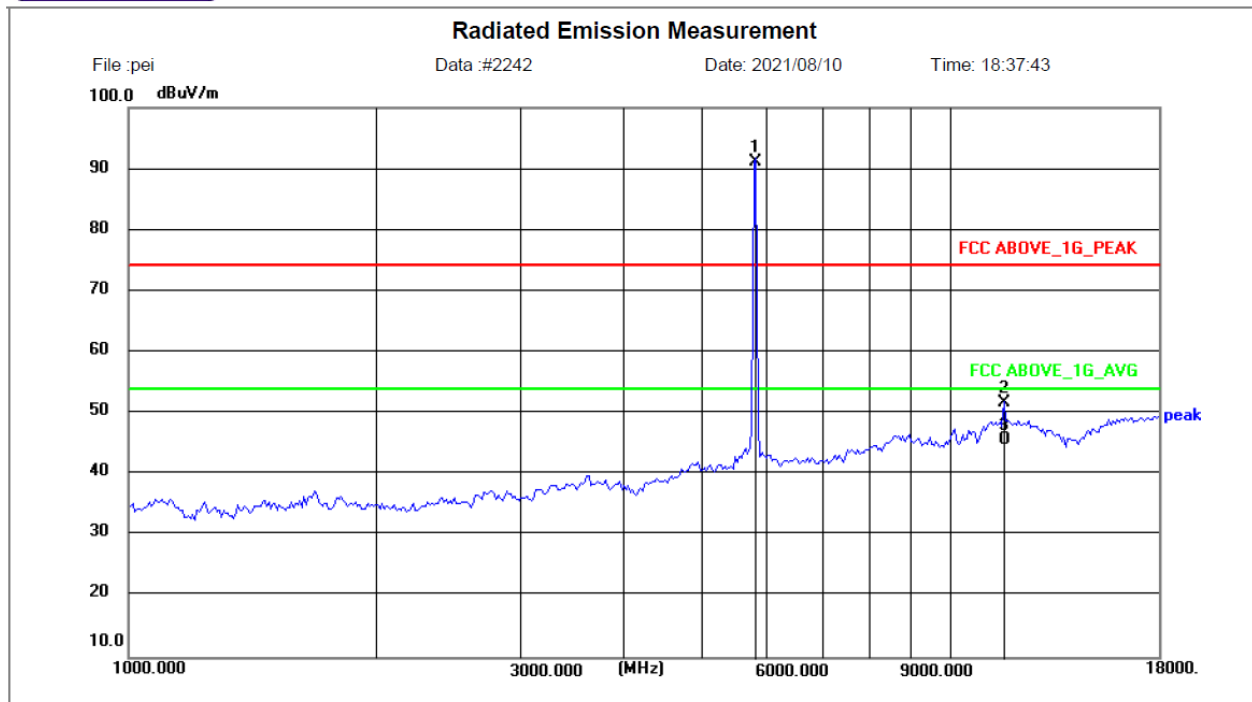


Site 966 Chamber
 Limit: FCC ABOVE_1G_PEAK
 EUT: Zolink wireless video system
 M/N: ZO600S TX
 Mode: 802.11n (TX 5825MHz)
 Note: Manuf:Shenzhen ZO Video Technology Co.,Ltd

Polarization: **Vertical**
 Power: DC 5V(Powered by adaptor)
 Distance: 3m


Temperature: 26(C)
 Humidity: 54 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5825.000	93.38	-2.29	91.09	/	/	peak	143	155	/	
2	11650.000	39.24	12.40	51.64	74.00	22.36	peak	124	102	P	
3	11650.000	33.16	12.40	45.56	54.00	8.44	AVG	130	89	P	


18GHz~ 26.5GHz
Horizontal: 802.11a (TX 5745MHz)

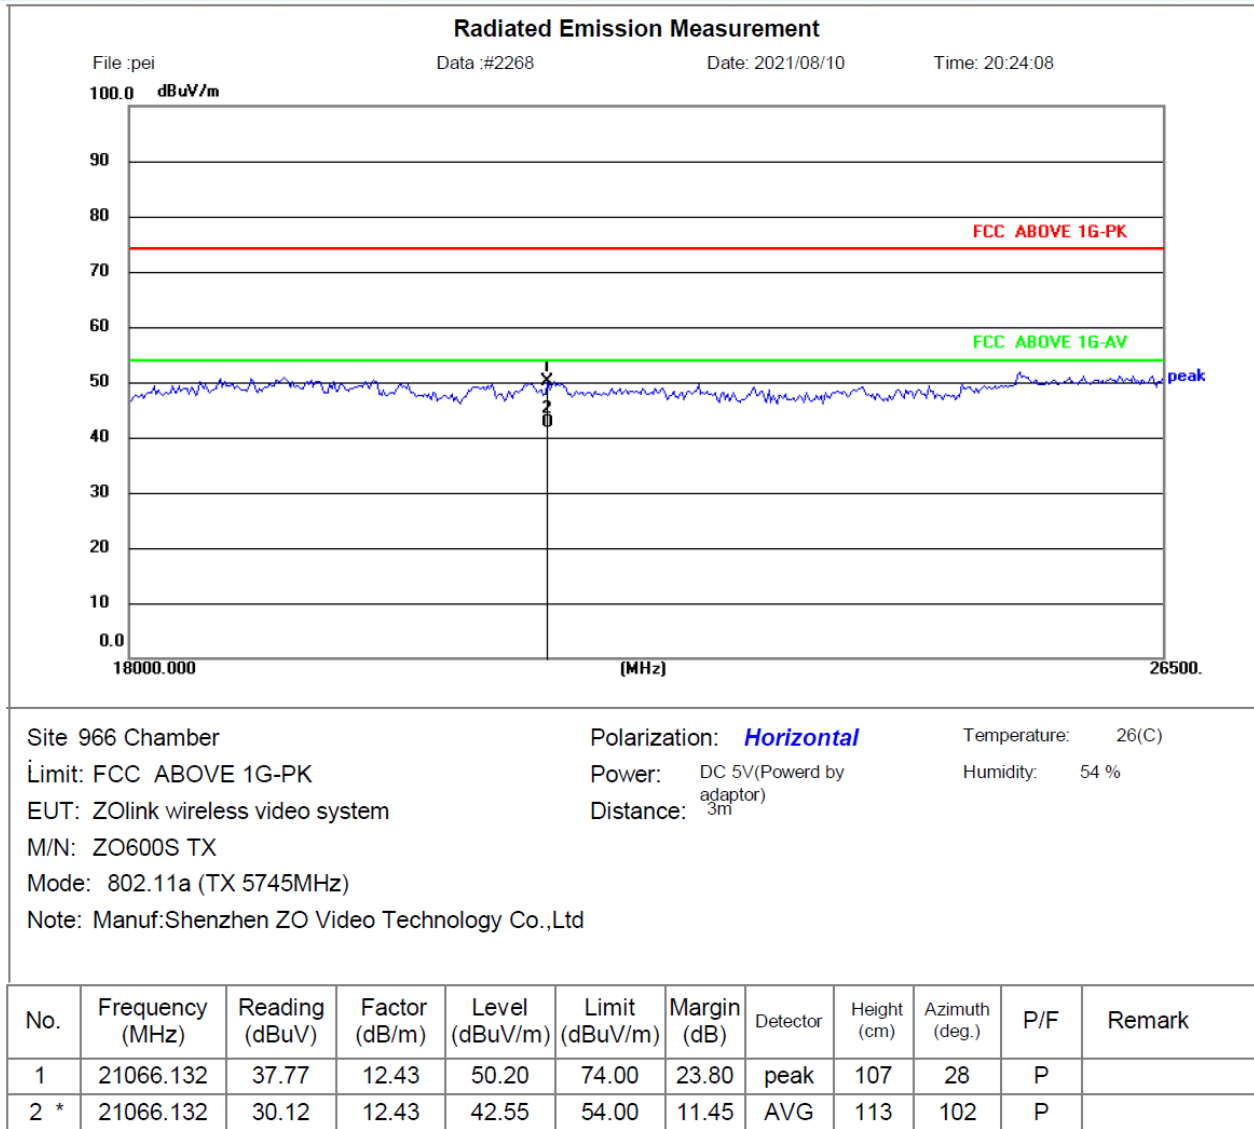


Vertical: 802.11a (TX 5745MHz)

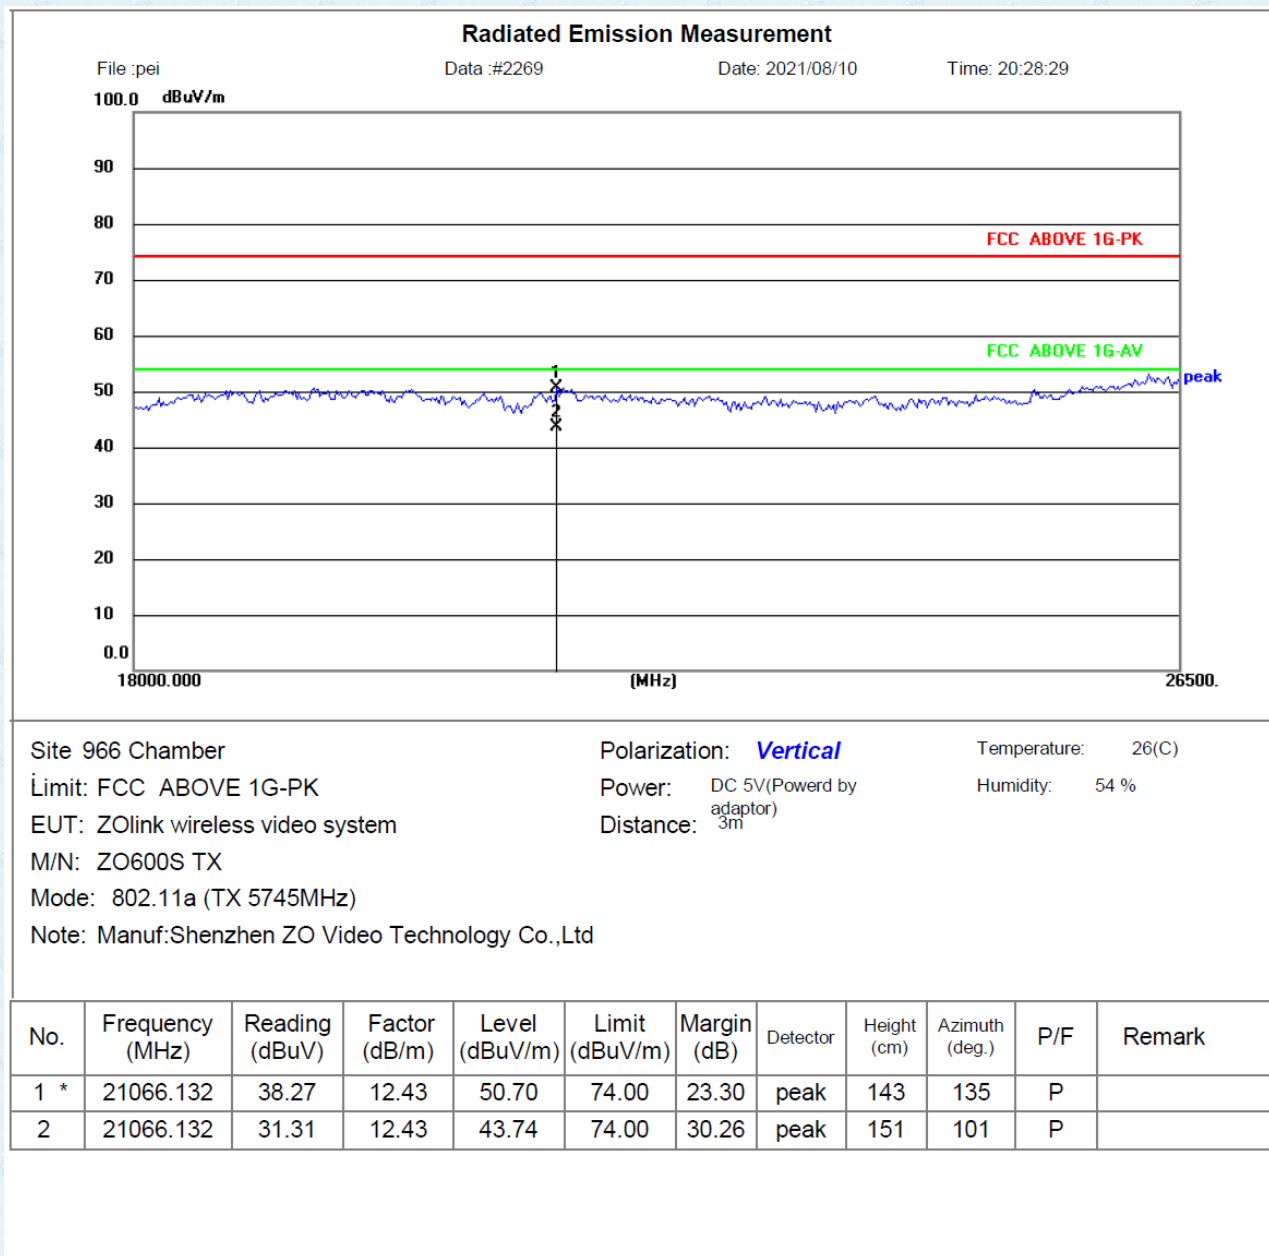


Horizontal: 802.11a (TX 5825MHz)

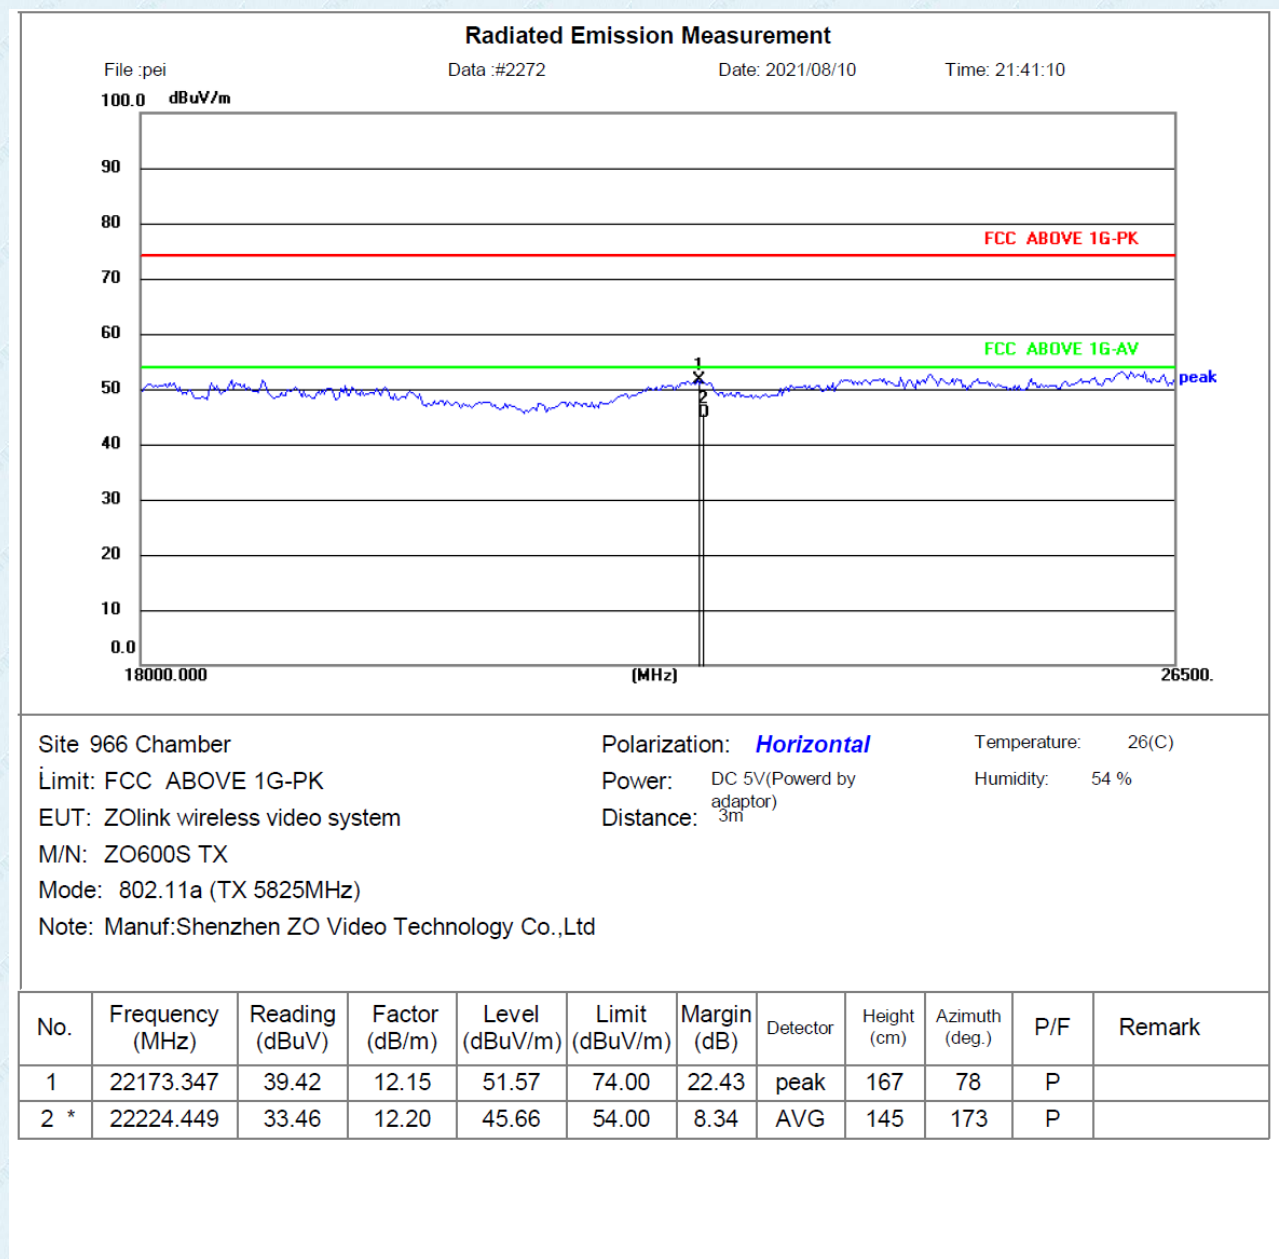


Vertical: 802.11a (TX 5825MHz)

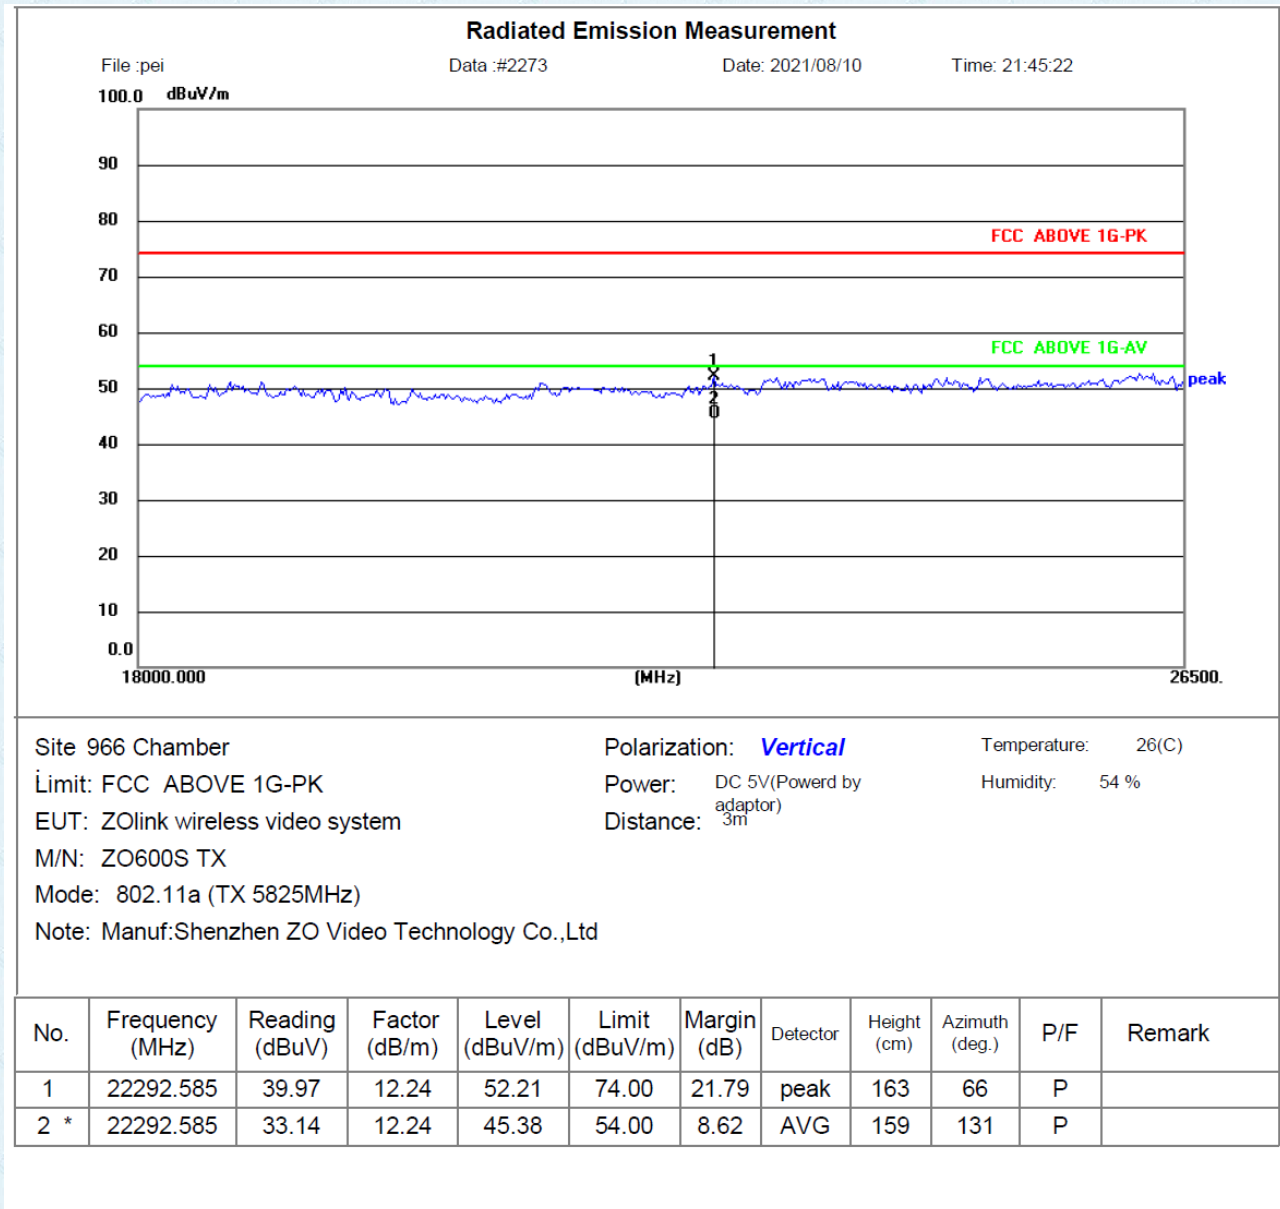


Horizontal: 802.11n-HT20 (TX 5745MHz)

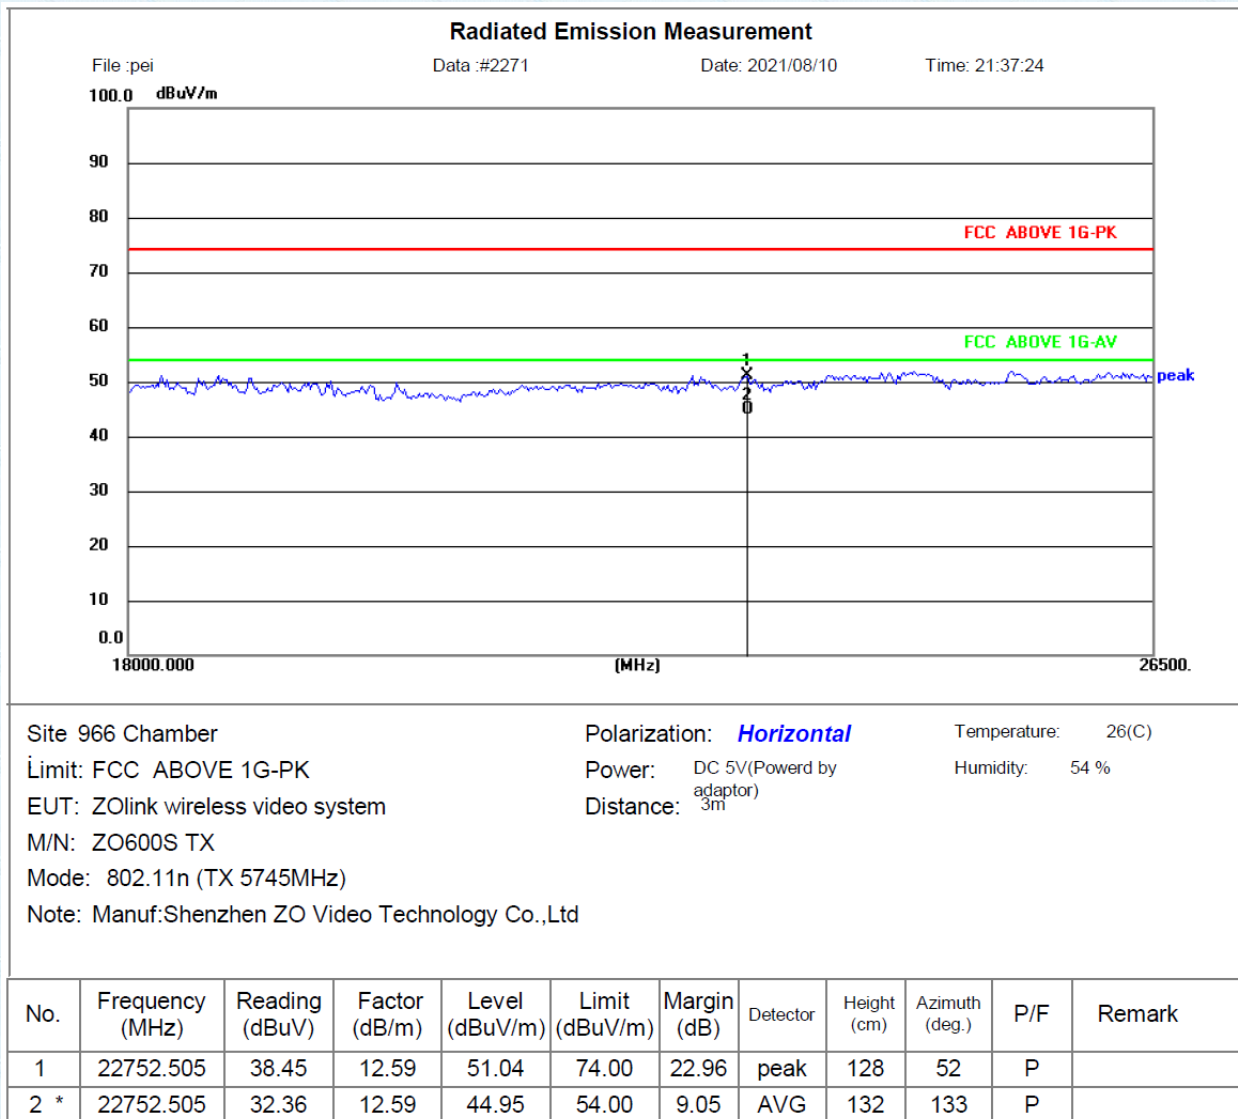


Vertical: 802.11n-HT20 (TX 5745MHz)

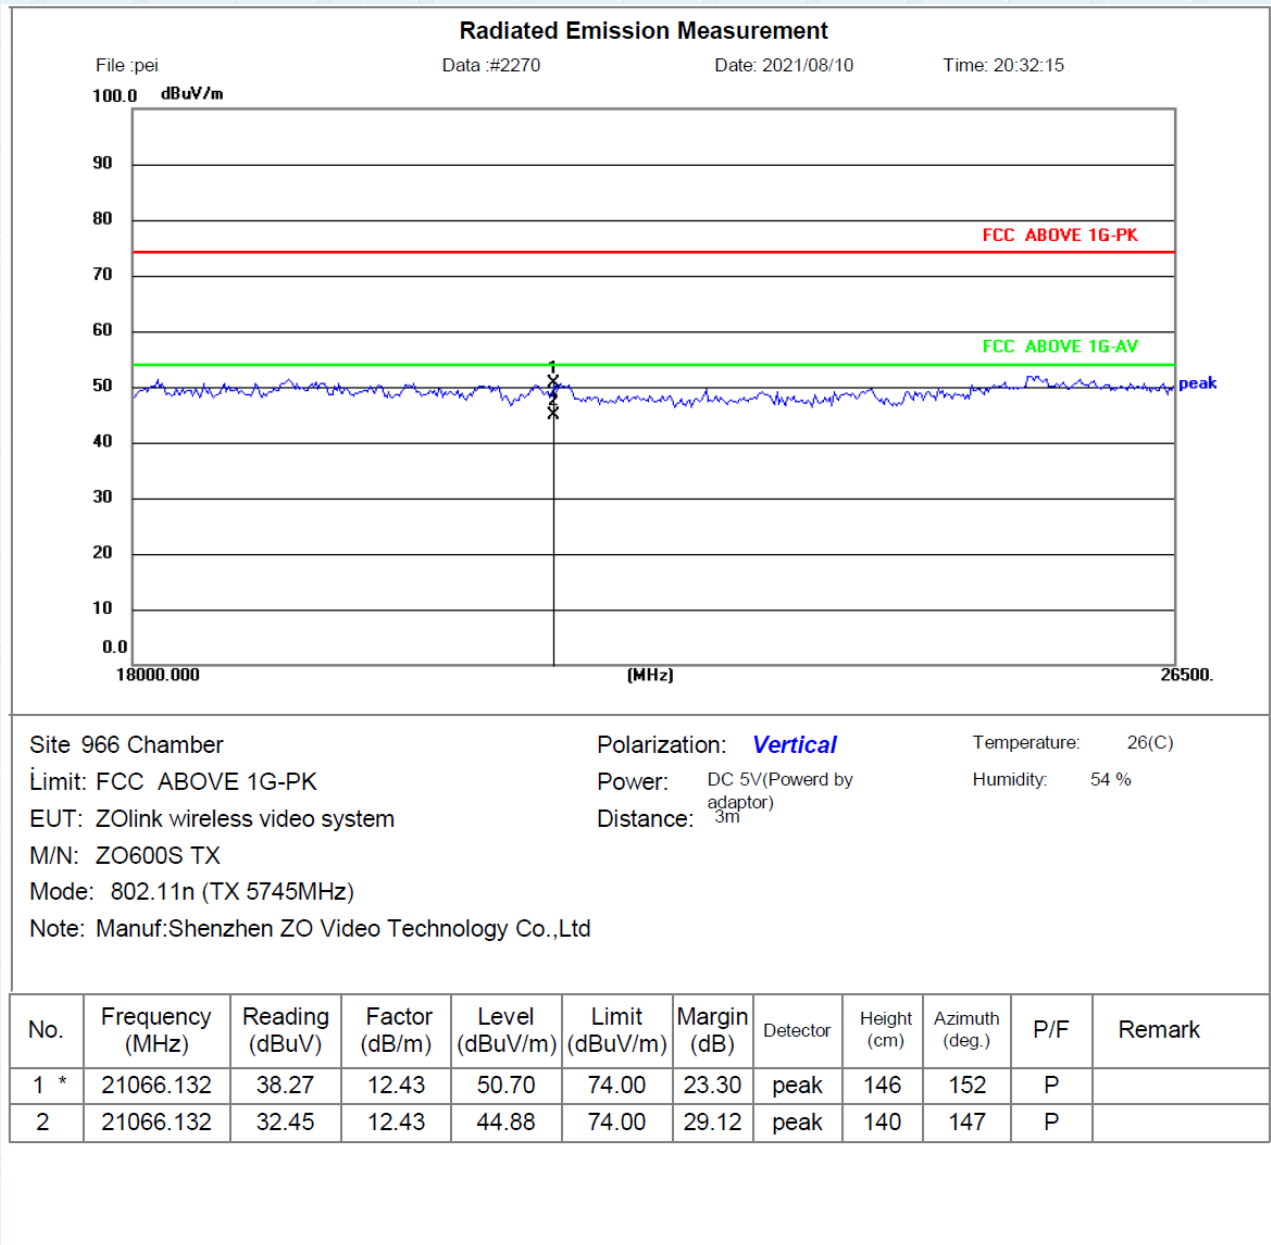

Horizontal: 802.11n-HT20 (TX 5825MHz)

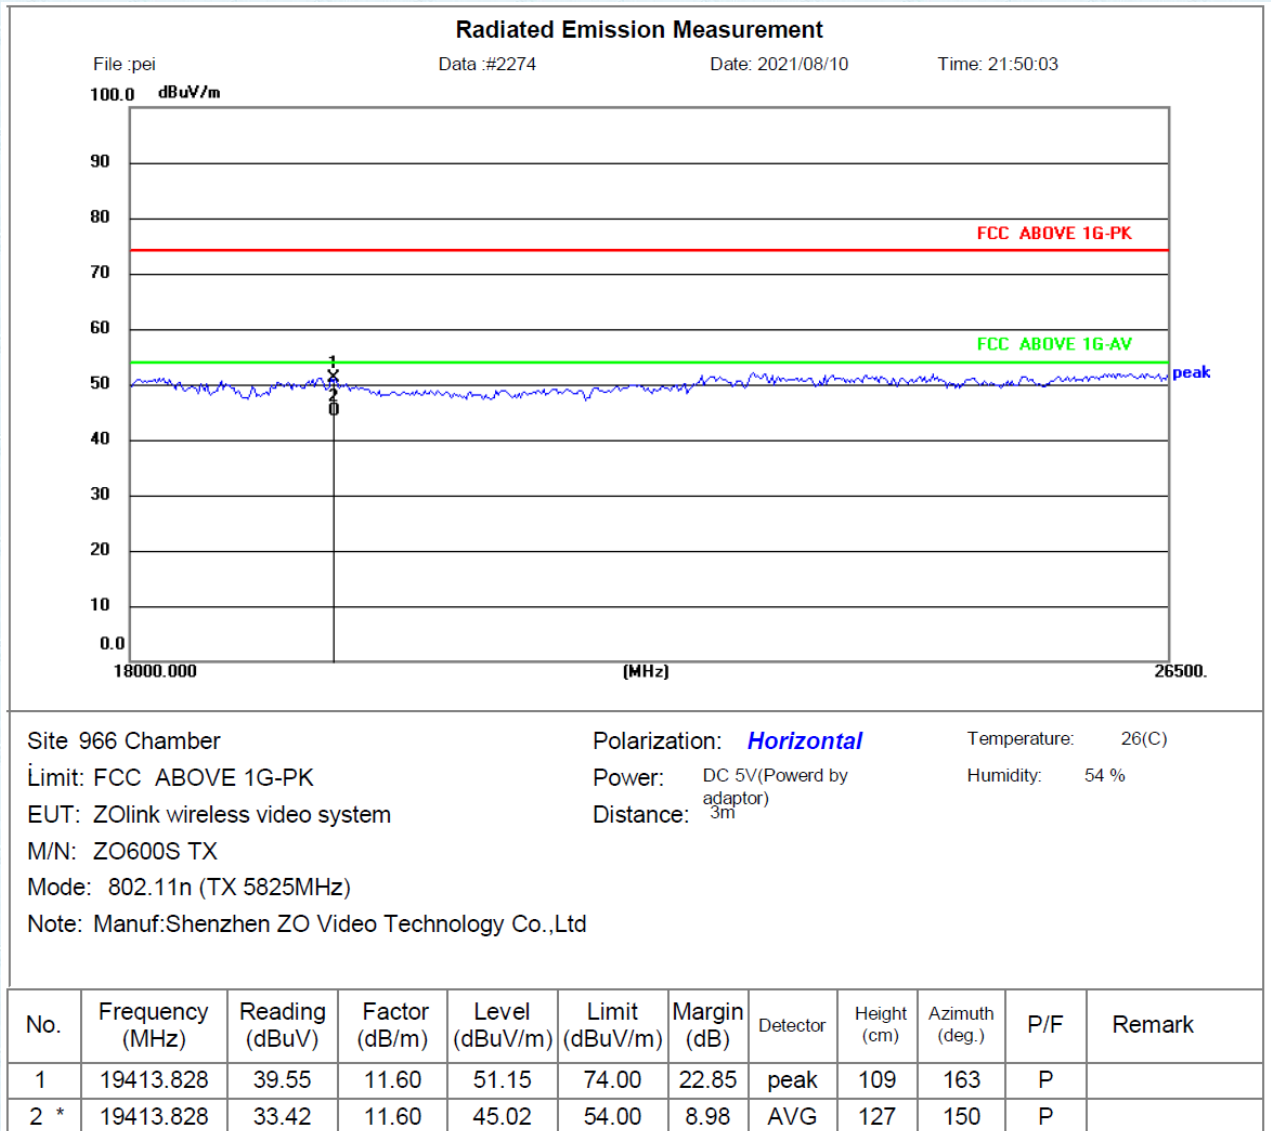

Vertical: 802.11n-HT20 (TX 5825MHz)

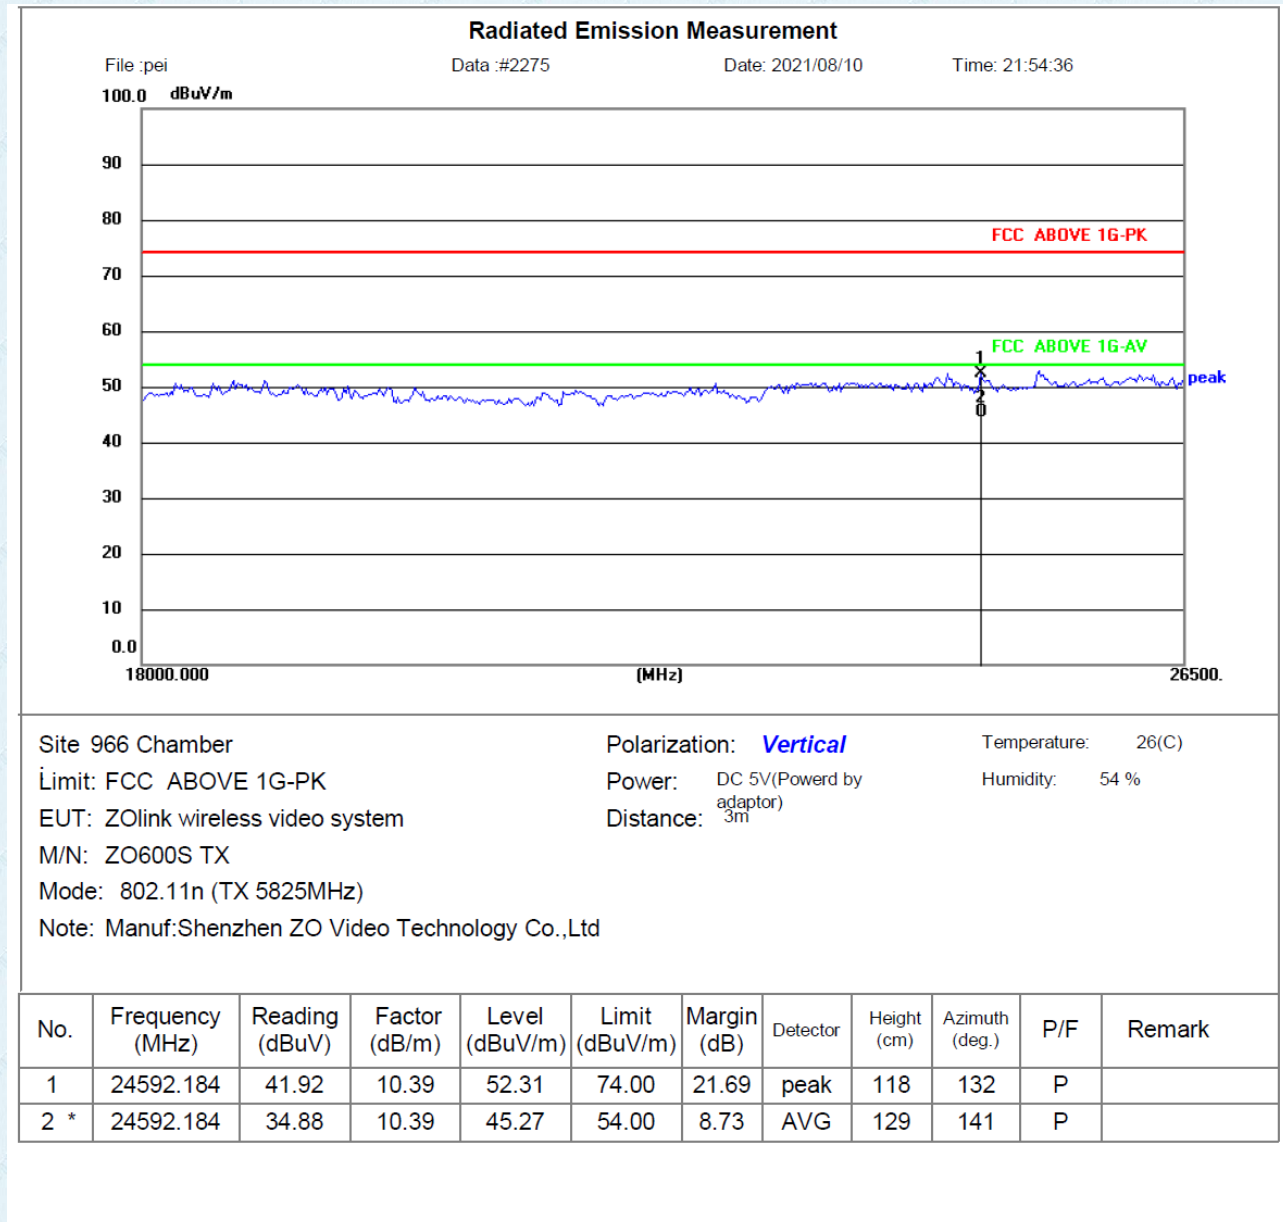

Notes:

1. Level = Read Level + Antenna Factor+ Cable loss- Preamp Factor.
2. The test trace is same as the ambient noise (the test frequency range: 26.5GHz~40GHz), therefore no data appear in the report.
3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.
4. We tested 802.11a/n mode the all data rate and recorded the worst case data for this channel to be 6Mbps for 802.11a mode and MCS0 for 802.11n mode.


26.5GHz~ 40GHz

The test trace is same as the ambient noise (the test frequency range: 26.5GHz~40GHz), therefore no data appear in the report.


Notes:

1. Level = Read Level + Antenna Factor+ Cable loss- Preamp Factor.
2. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.


Spurious Emission in restricted band:
Horizontal: 802.11a (TX 5745MHz)

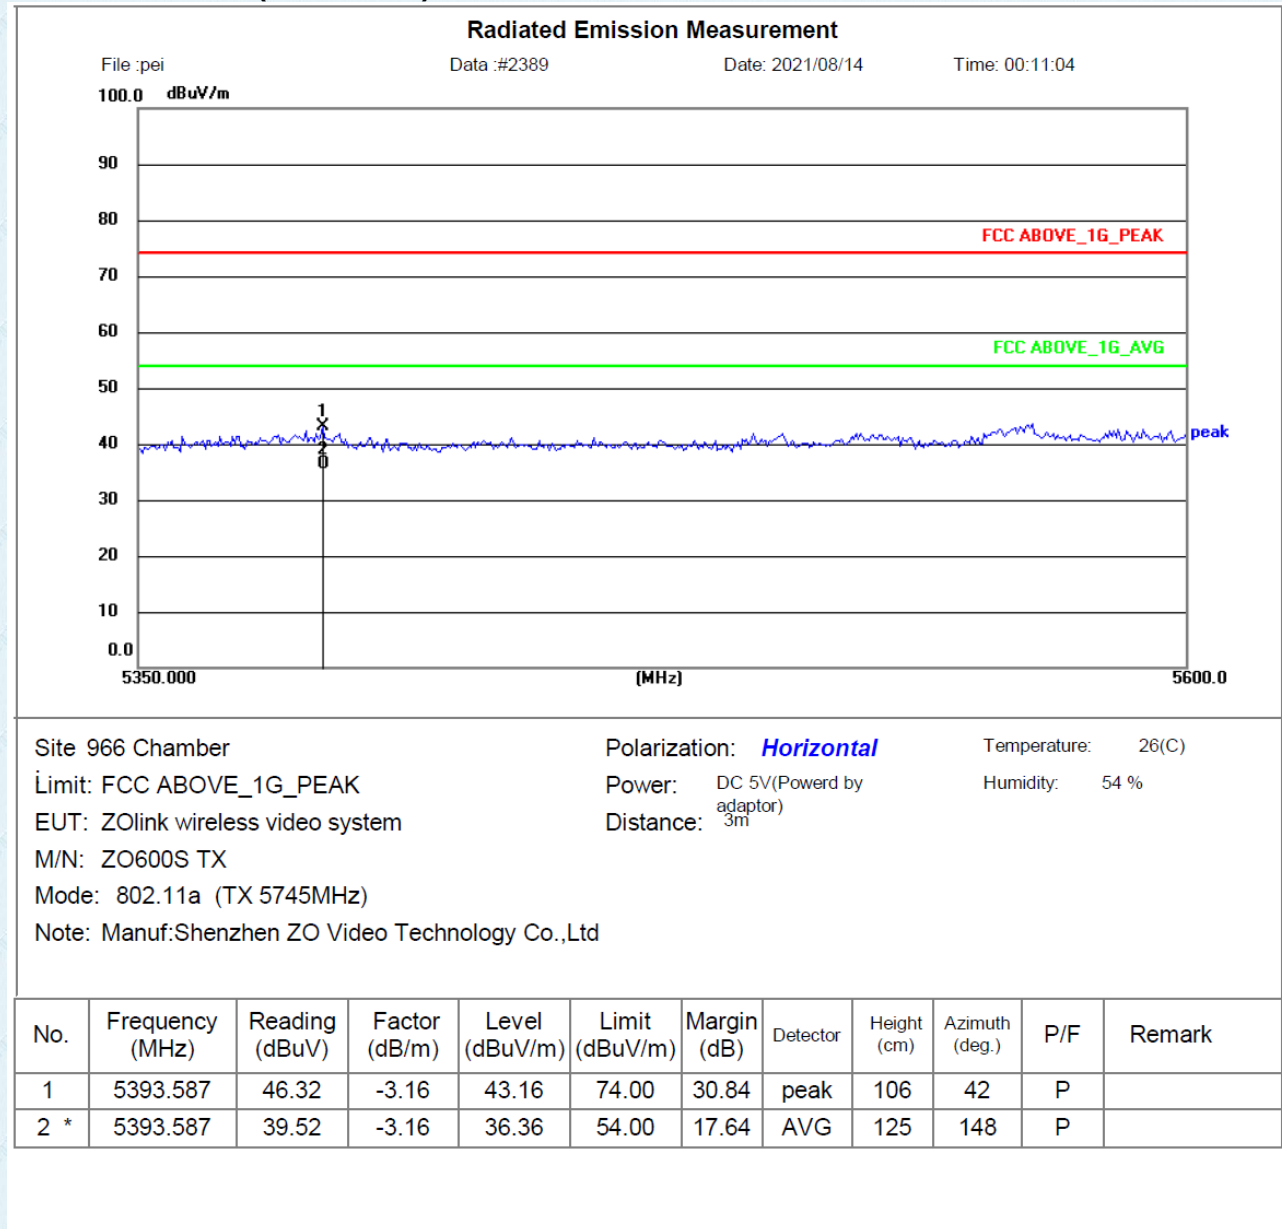

Vertical: 802.11a (TX 5745MHz)

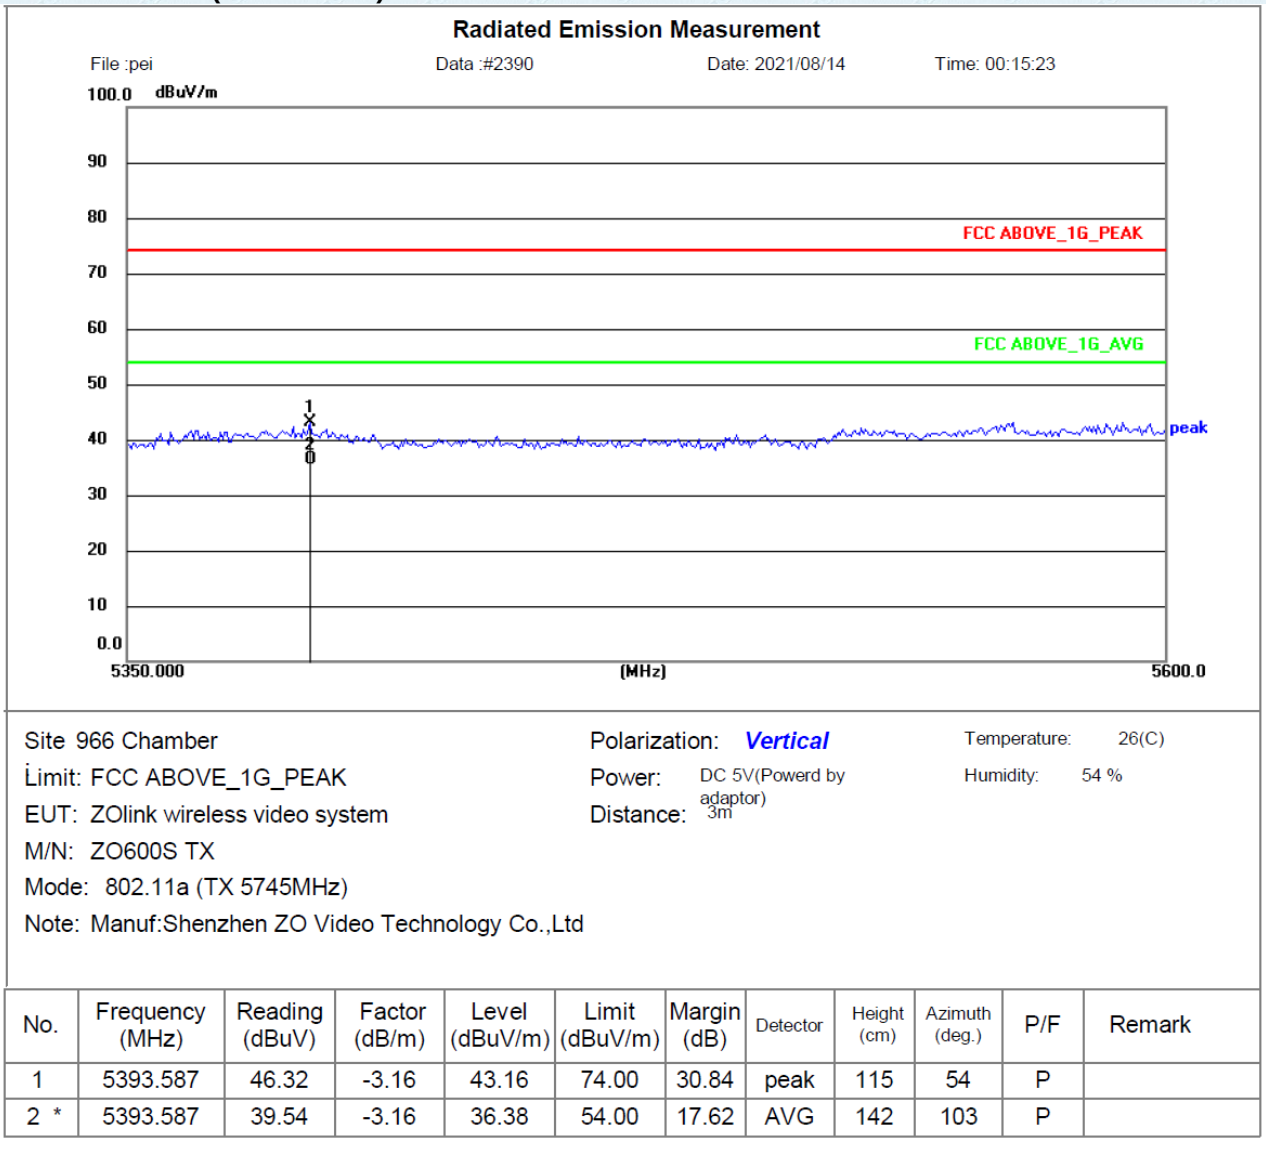


Horizontal: 802.11a (TX 5825MHz)

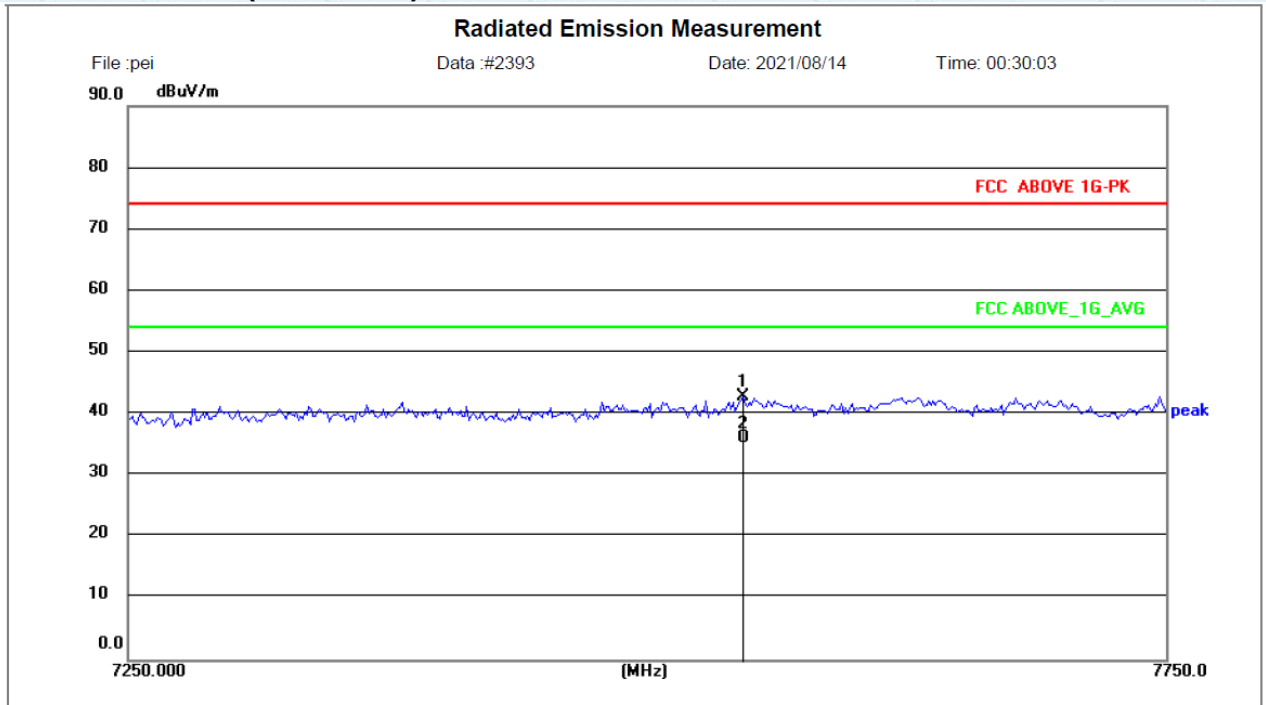


Site 966 Chamber	Polarization: Horizontal	Temperature: 26(C)
Limit: FCC ABOVE 1G-PK	Power: DC 5V(Powerd by adaptor)	Humidity: 54 %
EUT: ZOLink wireless video system	Distance: 3m	
M/N: ZO600S TX		
Mode: 802.11a (TX 5825MHz)		
Note: Manuf:Shenzhen ZO Video Technology Co.,Ltd		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	7542.585	37.60	5.37	42.97	74.00	31.03	peak	105	172	P	
2 *	7542.585	30.78	5.37	36.15	54.00	17.85	AVG	116	135	P	

Vertical: 802.11a (TX 5825MHz)

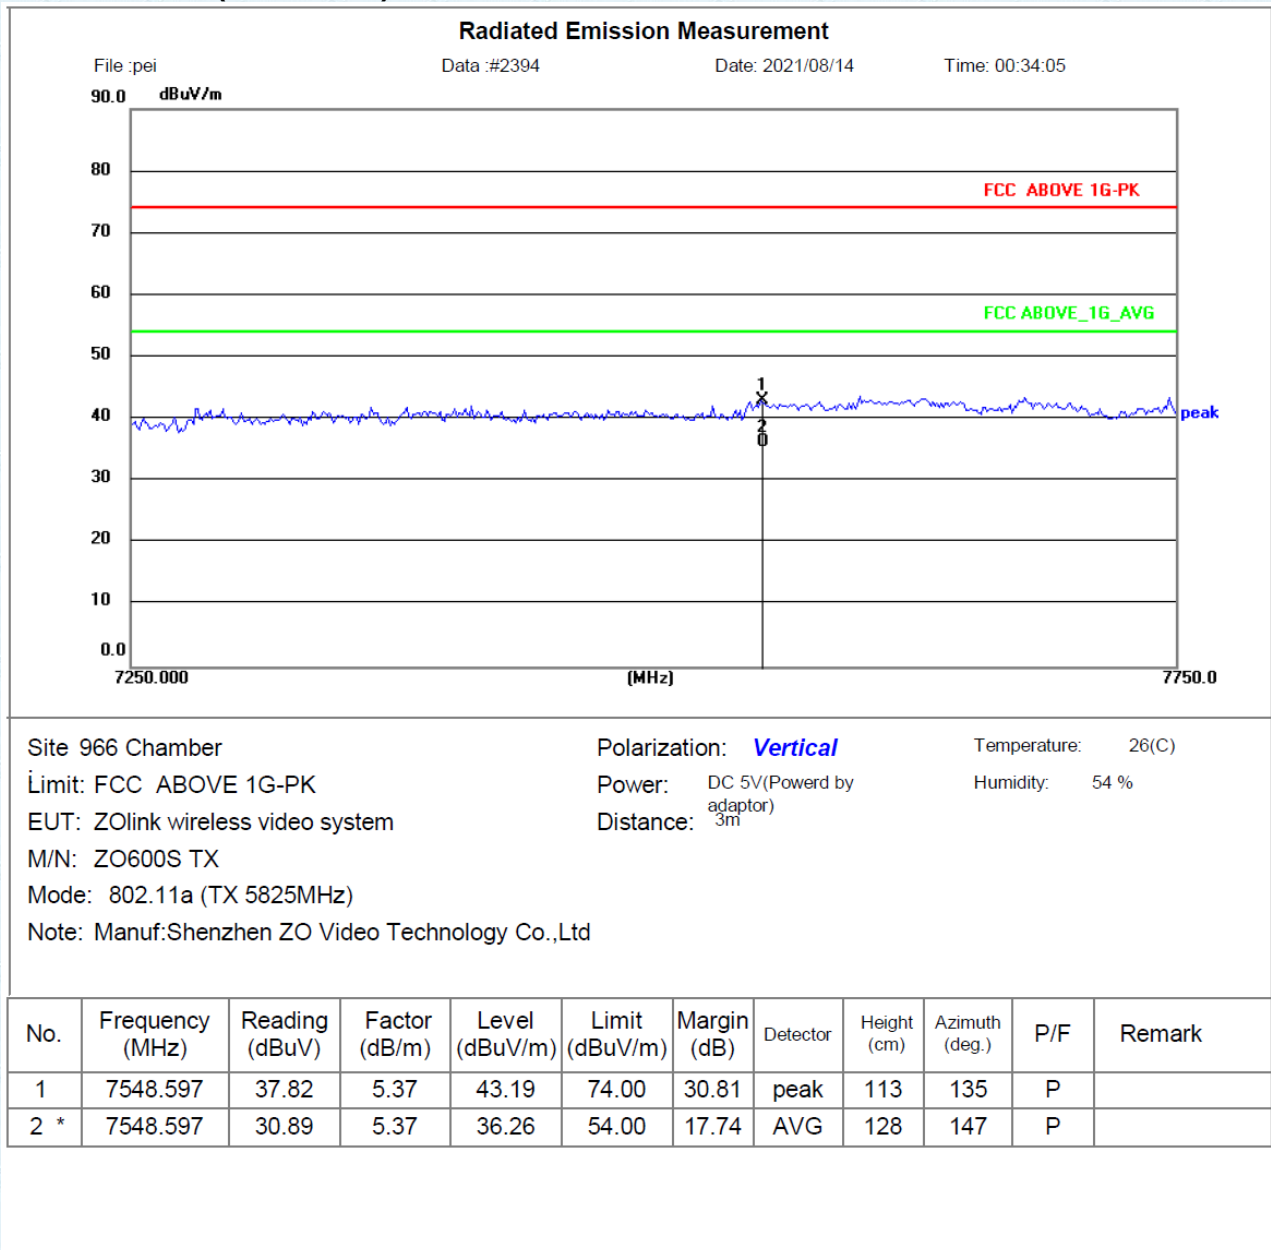


Horizontal: 802.11n (HT20) (TX 5745MHz)

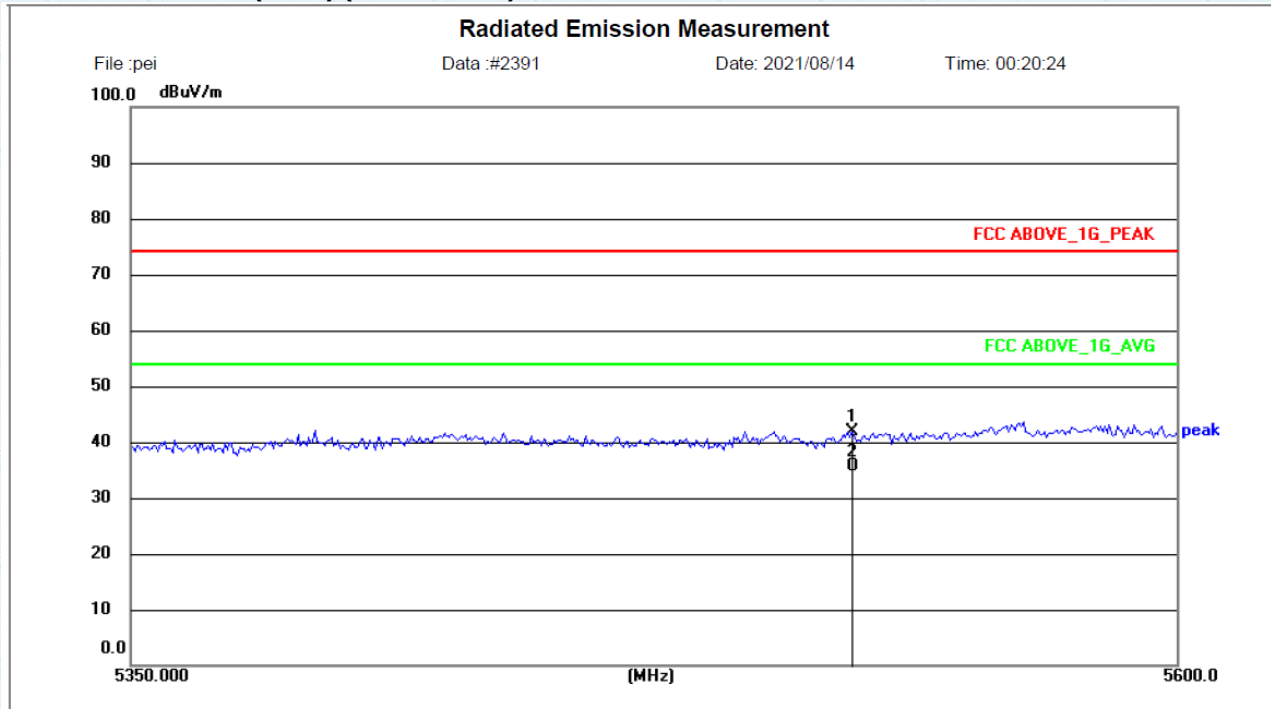


Site 966 Chamber	Polarization: Horizontal	Temperature: 26(C)
Limit: FCC ABOVE_1G_PEAK	Power: DC 5V(Powerd by adaptor)	Humidity: 54 %
EUT: ZOlink wireless video system	Distance: 3m	
M/N: ZO600S TX		
Mode: 802.11n (TX 5745MHz)		
Note: Manuf:Shenzhen ZO Video Technology Co.,Ltd		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5521.342	44.67	-2.77	41.90	74.00	32.10	peak	146	141	P	
2 *	5521.342	38.29	-2.77	35.52	54.00	18.48	AVG	152	103	P	


Vertical: 802.11n (HT20) (TX 5745MHz)

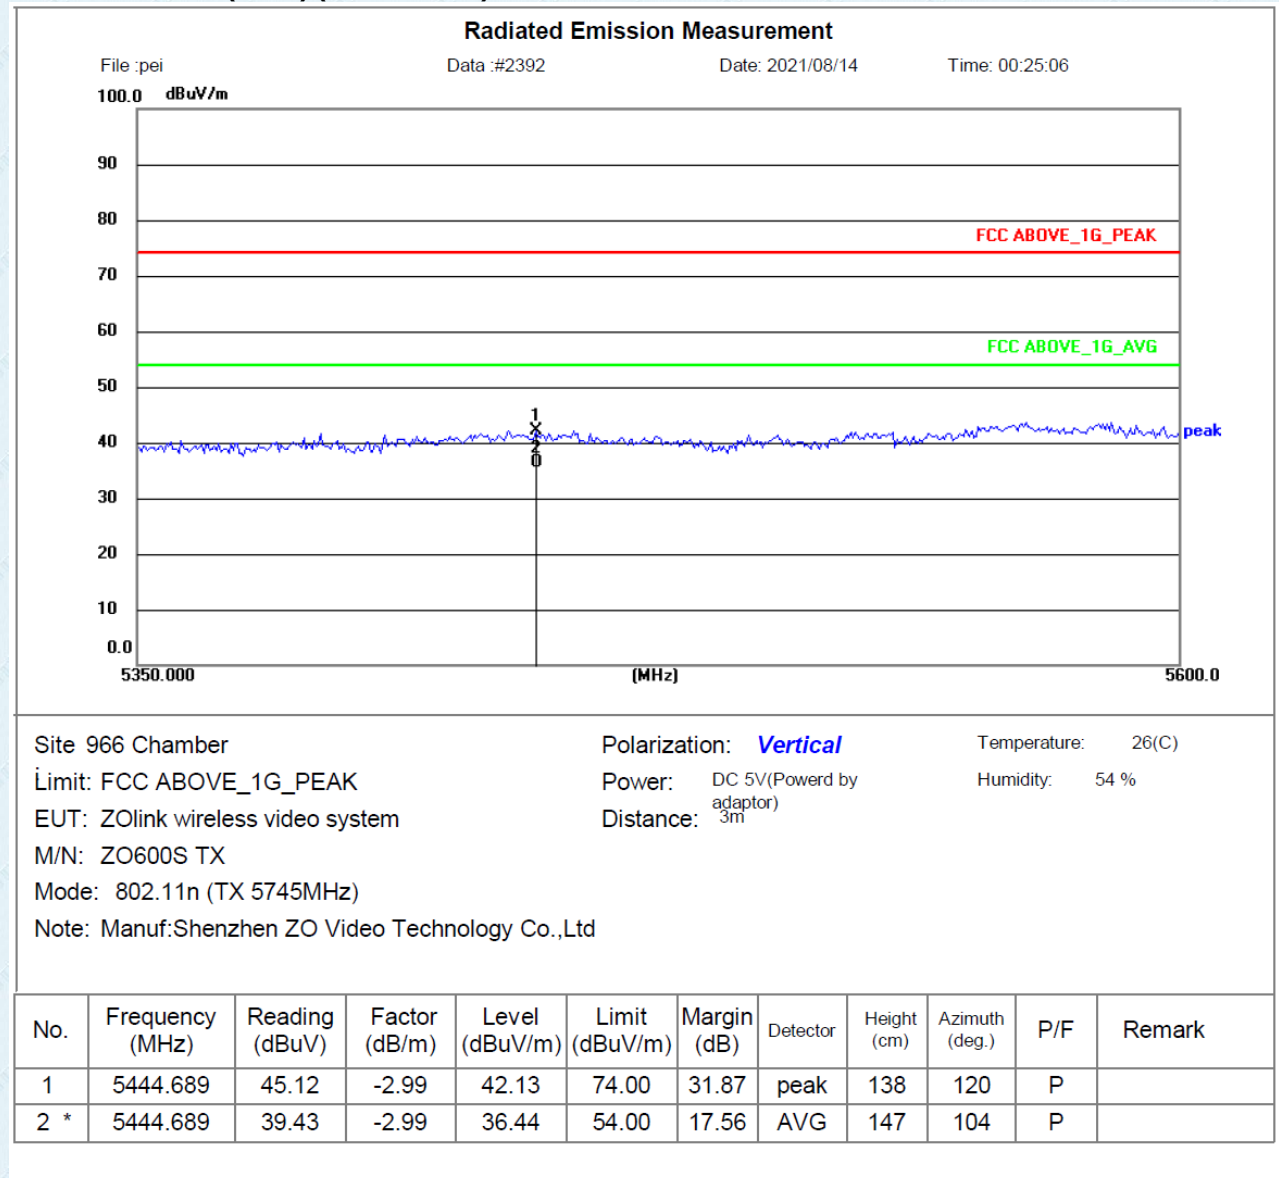


Horizontal: 802.11n (HT20) (TX 5825MHz)

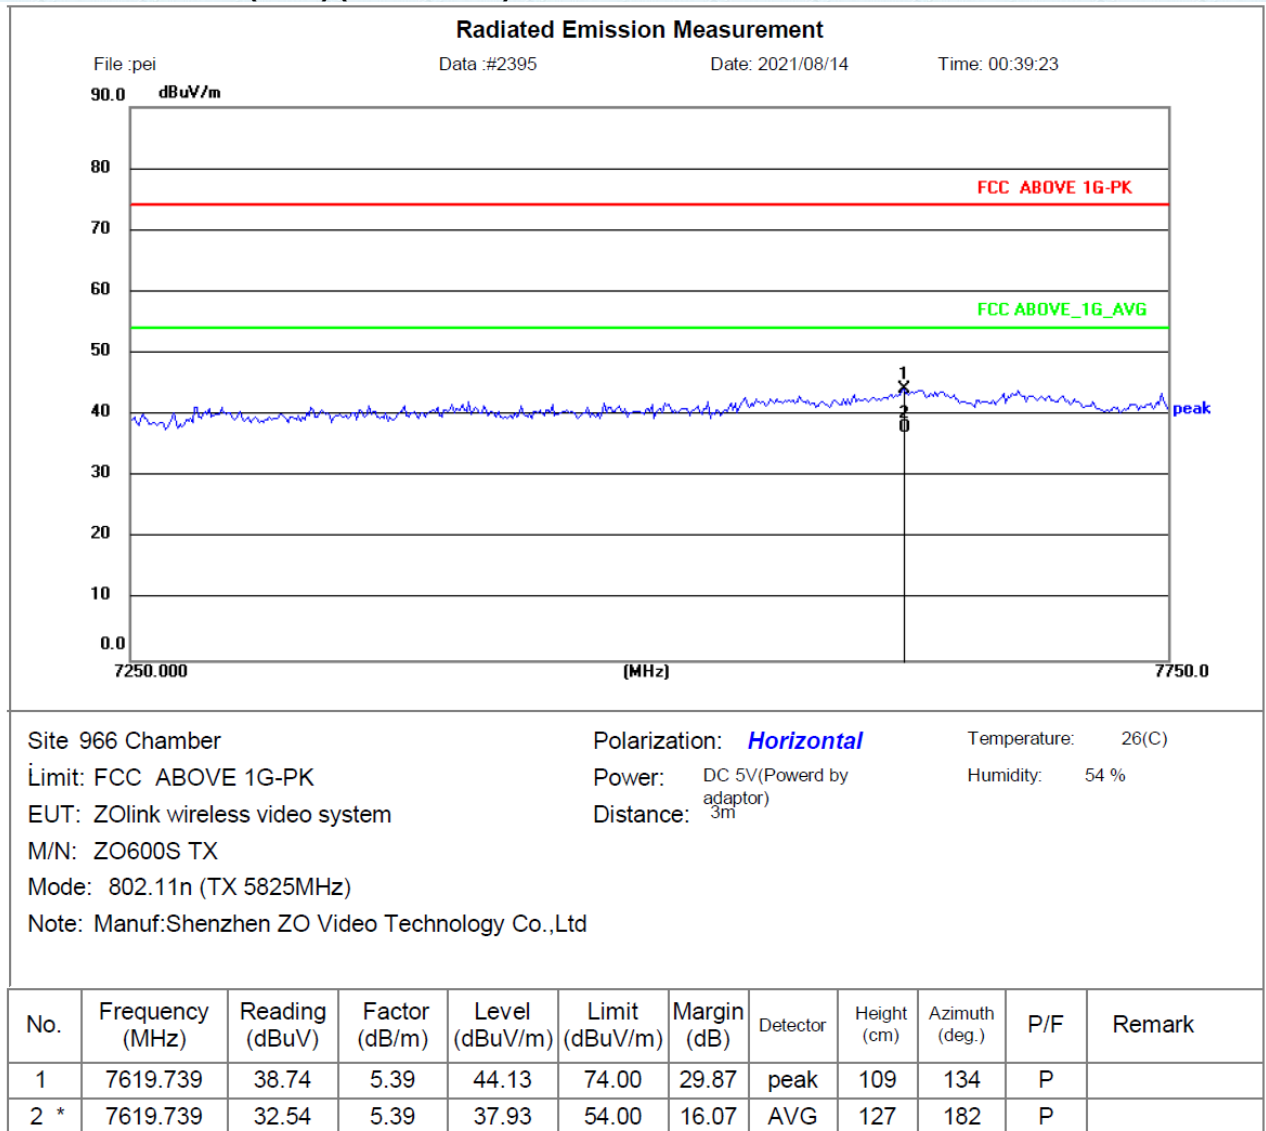

Vertical: 802.11n (HT20) (TX 5825MHz)

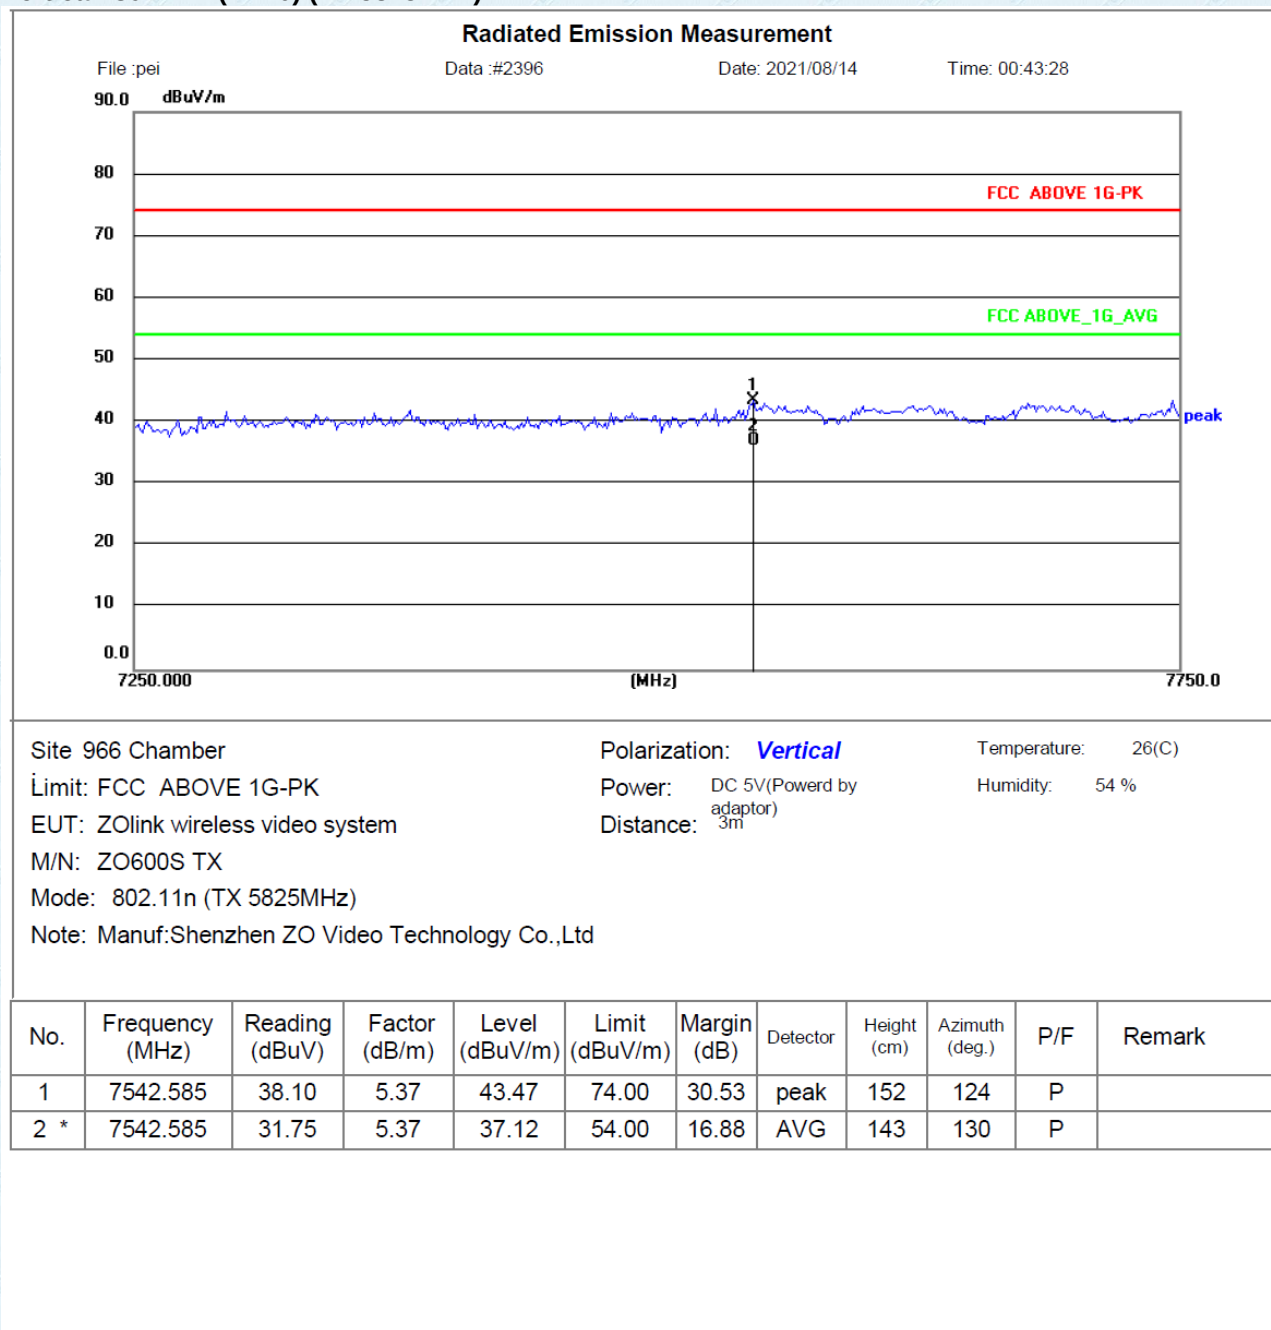

7.8 Frequency stability

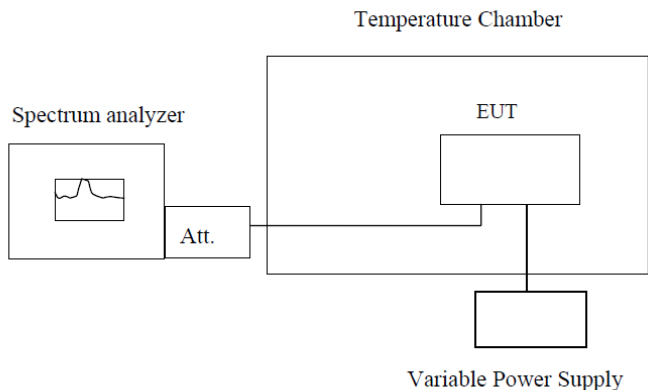Test Requirement:	FCC Part15 C Section 15.407(g)
Test Method:	ANSI C63.10:2013, FCC Part 2.1055
Limit:	Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified
Test Procedure:	The EUT was setup to ANSI C63.4, 2003; tested to 2.1055 for compliance to FCC Part 15.407(g) requirements.
Test setup:	 Note : Measurement setup for testing on Antenna connector
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Remark: Set the EUT transmits at un-modulation mode to test frequency stability.

Pre-scan all test modes, found worst case at 802.11a, and so only show the test result of 802.11a

Measurement data:

Frequency stability versus Temp.									
Worse Case Operating Frequency: 5745MHz									
Temp. (°C)	Power Supply (VAC)	0 minute		2 minute		5 minute		10 minute	
		Measured Frequency (MHz)	Pass /Fail	Measured Frequency (MHz)	Pass /Fail	Measured Frequency (MHz)	Pass /Fail	Measured Frequency (MHz)	Pass /Fail
-30	120	5744.96	Pass	5744.98	Pass	5744.98	Pass	5744.97	Pass
-20	120	5744.98	Pass	5744.96	Pass	5744.96	Pass	5744.96	Pass
-10	120	5744.96	Pass	5744.96	Pass	5744.96	Pass	5744.98	Pass
0	120	5744.96	Pass	5744.96	Pass	5744.98	Pass	5744.98	Pass
10	120	5744.98	Pass	5744.98	Pass	5744.98	Pass	5744.96	Pass
20	120	5744.96	Pass	5744.98	Pass	5744.96	Pass	5744.96	Pass
30	120	5744.96	Pass	5744.96	Pass	5744.96	Pass	5744.97	Pass
40	120	5744.98	Pass	5744.96	Pass	5744.98	Pass	5744.96	Pass
50	120	5744.96	Pass	5744.96	Pass	5744.98	Pass	5744.98	Pass
Frequency stability versus Temp.									
Worse Case Operating Frequency: 5745MHz									
Temp. (°C)	Power Supply (VAC)	0 minute		2 minute		5 minute		10 minute	
		Measured Frequency (MHz)	Pass /Fail	Measured Frequency (MHz)	Pass /Fail	Measured Frequency (MHz)	Pass /Fail	Measured Frequency (MHz)	Pass /Fail
25	120	5744.98	Pass	5744.99	Pass	5744.97	Pass	5745.00	Pass

Frequency stability versus Temp.									
Worse Case Operating Frequency: 5825MHz									
Temp. (°C)	Power Supply (VAC)	0 minute		2 minute		5 minute		10 minute	
		Measured Frequency (MHz)	Pass /Fail	Measured Frequency (MHz)	Pass /Fail	Measured Frequency (MHz)	Pass /Fail	Measured Frequency (MHz)	Pass /Fail
-30	120	5824.98	Pass	5825.00	Pass	5824.96	Pass	5824.98	Pass
-20	120	5825.00	Pass	5824.97	Pass	5824.99	Pass	5825.00	Pass
-10	120	5824.96	Pass	5824.98	Pass	5824.98	Pass	5824.96	Pass
0	120	5824.97	Pass	5824.99	Pass	5825.00	Pass	5824.99	Pass
10	120	5824.98	Pass	5824.98	Pass	5824.96	Pass	5824.98	Pass
20	120	5825.00	Pass	5825.00	Pass	5824.99	Pass	5825.00	Pass
30	120	5824.96	Pass	5824.97	Pass	5824.98	Pass	5824.96	Pass
40	120	5824.97	Pass	5824.98	Pass	5825.00	Pass	5824.99	Pass
50	120	5824.98	Pass	5824.99	Pass	5824.96	Pass	5824.98	Pass
Frequency stability versus Temp.									
Worse Case Operating Frequency: 5825MHz									
Temp. (°C)	Power Supply (VAC)	0 minute		2 minute		5 minute		10 minute	
		Measured Frequency (MHz)	Pass /Fail	Measured Frequency (MHz)	Pass /Fail	Measured Frequency (MHz)	Pass /Fail	Measured Frequency (MHz)	Pass /Fail
25	120	5825.00	Pass	5824.98	Pass	5824.99	Pass	5824.99	Pass

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

-----END-----