

LTK-1900T_TRANSMITTER TUNE UP PROCEDURE

PERFORMANCE TEST

The procedure in this chapter allows the verification of the electrical performance of transmitter. These tests do not require access to the interior of the instrument.

Recommended test equipment


Description	Minimum specification	Model
Power meter	+ / - 0.2dB, - 60 to -20dBm. 100 KHz to 1GHz	HP-436A/8481D
Spectrum analyzer	100KHz to 12GHz, up to -120 dBm	HP-8591E
Measuring receiver	0.2 to 1300MHz, 0 to -125dBm, Freq Counter	HP-8902A
Oscilloscope	DC to 100MHz, 5mV to 1V/div, Rise Time capavity	TEK TDS360
Frequency Counter	+ / - 0.1ppm, 10Hz ~ 1GHz, 9digit	HP-53181A
Attenuator	10W, 20dB Att, DC to 1GHz	Tescom 99910

1. Frequency Accuracy

Frequency : 311MHz

Stability : Same as reference oscillator accuracy. Internal 1ppm 0 to 50degC

1.Test Setup (Connect LTK-1900T RF Line without case)

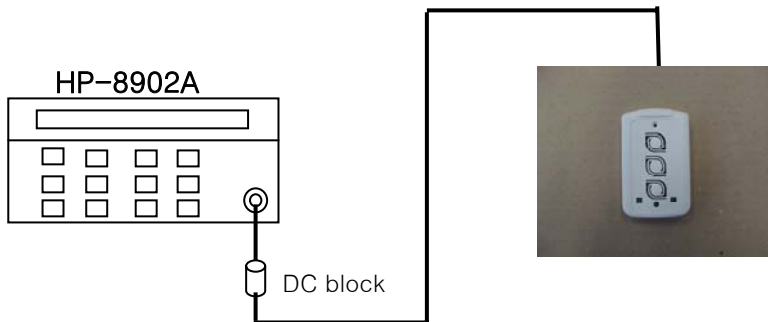

Carrier frequency accuracy test

2. HP-8902A : auto tuning, frequency display

3. LTK-1900T TRANSMITTER


- 1) Push button
- 2) check frequency accuracy


2. RF Output Level Accuracy

RF level : 10dBm 미만

Accuracy : +/-1dB

1.Test Setup



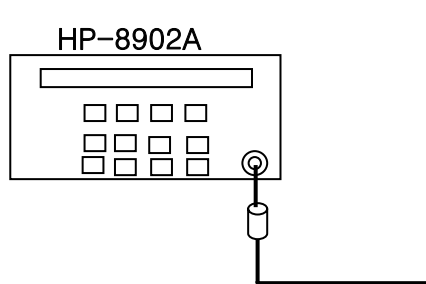

(Connect LTK-1900T RF Line without case)

2. HP-8902A : Auto-tuning, RF Power


3. LTK-1900T TRANSMITTER

- 1) Connect DC block
- 2) Push button and check RF Level

3. Harmonic Spurious

Harmonic Level at $2 \times F_{OUT}$: $< -40\text{dBc}$

1. Test Setup.

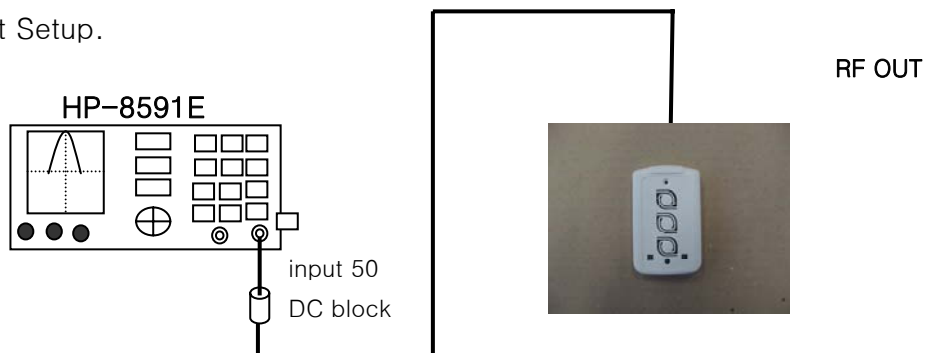

Harmonice test

(Connect LTK-1900T RF Line without case)

2. HP 8591E : Span = 500KHz, RBW = 10KHz, VBW = 30KHz.

3. LTK-1900T TRANSMITTER:

- 1) Connect DC block
- 3) Push button and check harmonic


LTK-1900T TRANSMITTER Harmonic Spurious

Fout(MHz)	Spurious(MHz)	Level(dBm)	Fout-2*Fout	Limit	Remark
311MHz	622Mhz			-40dbc	

4. Modulation

4.1. AM(RECT) (Internal ASK Test Patterns)

1. Test Setup

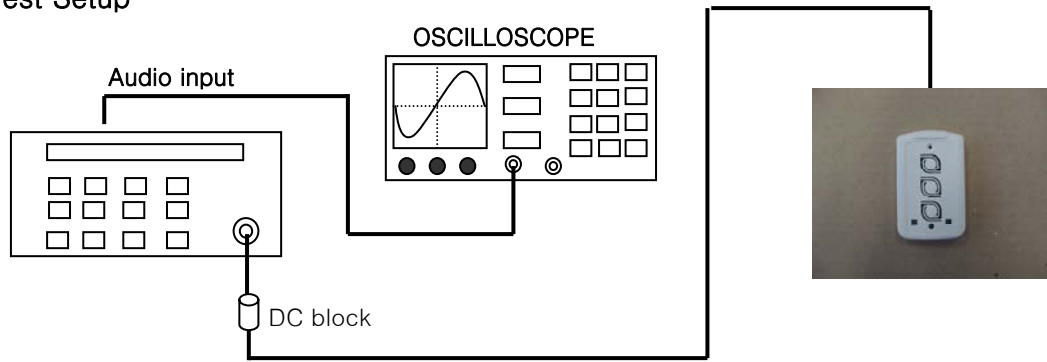

FSK Deviation and Noise Test

(Connect LTK-1900T RF Line without case)

2. Equipment

HP-8902A : AM

TDS360 : 250us/div, 500mV/div Average : 16

3. LTK-1900T TRANSMITTER:

- 1) Connect DC block
- 2) Push button and check modulation