

LTK-2008TE_TRANSMITTER TUNE UP PROCEDURE

PERFORMANCE TEST

The procedure in this chapter allows the verification of the electrical performance of transmitter. These tests do not require access to the interior of the instrument.

Recommended test equipment


Description	Minimum specification	Model
Power meter	+ / - 0.2dB, - 60 to -20dBm. 100 KHz to 1GHz	HP-436A/8481D
Spectrum analyzer	100KHz to 12GHz, up to -120 dBm	HP-8591E
Measuring receiver	0.2 to 1300MHz, 0 to -125dBm, Freq Counter	HP-8902A
Oscilloscope	DC to 100MHz, 5mV to 1V/div, Rise Time capavity	TEK TDS360
Frequency Counter	+ / - 0.1ppm, 10Hz ~ 1GHz, 9digit	HP-53181A
Attenuator	10W, 20dB Att, DC to 1GHz	Tescom 99910

1. Frequency Accuracy

Frequency : 433.92MHz

Stability : Same as reference oscillator accuracy. Internal 1ppm 0 to 50degC

1.Test Setup (Connect LTK-2008TE RF Line without case)

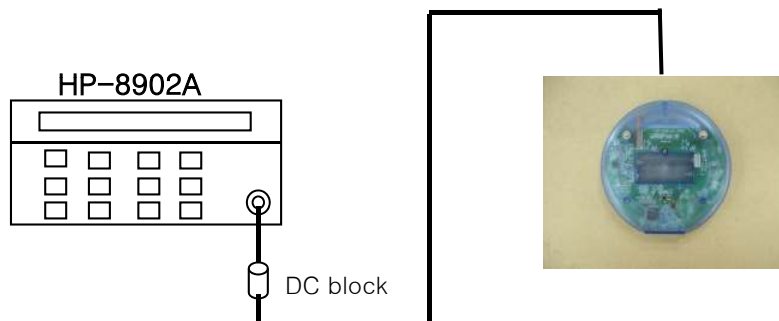

Carrier frequency accuracy test

2. HP-8902A : auto tuning, frequency display

3. LTK-2008TE TRANSMITTER

- 1) Push button
- 2) check frequency accuracy


2. RF Output Level Accuracy

RF level : 10dBm 미만

Accuracy : +/-1dB

1.Test Setup



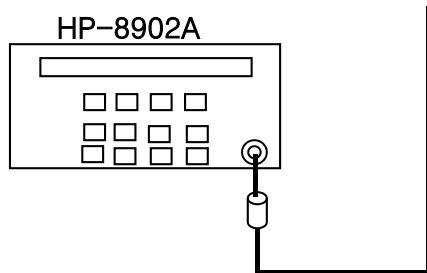

(Connect LTK-2008TE RF Line without case)

2. HP-8902A : Auto-tuning, RF Power


3. LTK-2008TE TRANSMITTER

- 1) Connect DC block
- 2) Push button and check RF Level

3. Harmonic Spurious

Harmonic Level at $2 \times F_{OUT}$: $< -40\text{dBc}$

1. Test Setup.

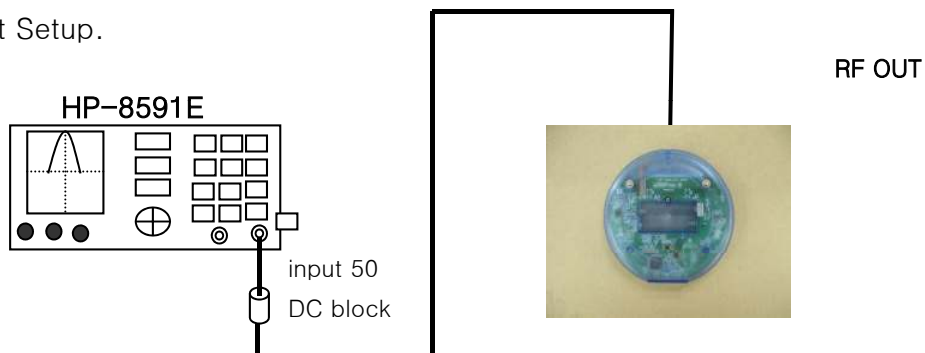

Harmonice test

(Connect LTK-2008TE RF Line without case)

2. HP 8591E : Span = 500KHz, RBW = 10KHz, VBW = 30KHz.

3. LTK-2008TE TRANSMITTER:

- 1) Connect DC block
- 3) Push button and check harmonic


LTK-2008TE TRANSMITTER Harmonic Spurious

Fout(MHz)	Spurious(MHz)	Level(dBm)	Fout-2*Fout	Limit	Remark
433.92MHz	867.84Mhz			- 40dbc	

4. Modulation

4.1. FM(RECT) (Internal FSK Test Patterns)

1. Test Setup

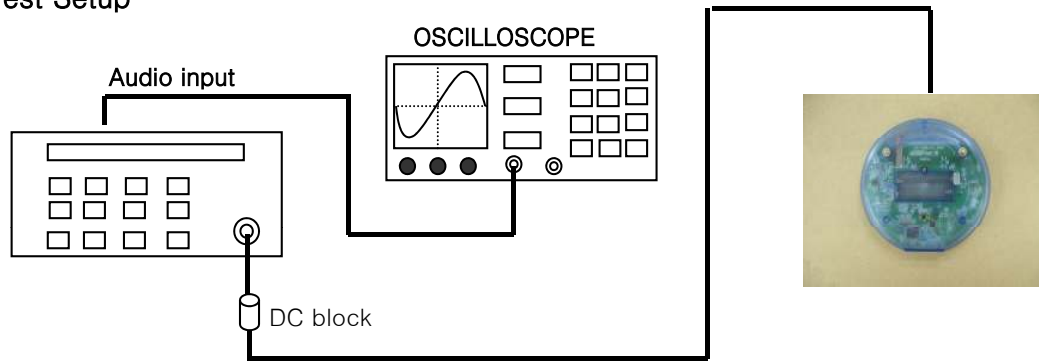

FSK Deviation and Noise Test

(Connect LTK-2008TE RF Line without case)

2. Equipment

HP-8902A : FM

TDS360 : 250us/div, 500mV/div Average : 16

3. LTK-2008TE TRANSMITTER:

- 1) Connect DC block
- 2) Push button and check modulation