

LTK-SCT SERVERCALL TRANSMITTER TUNE UP PROCEDURE

PERFORMANCE TEST

The procedure in this chapter allows the verification of the electrical performance of waitercall. These tests do not require access to the interior of the instrument.

Recommended test equipment


Description	Minimum specification	Model
Power meter	+ / - 0.2dB, - 60 to -20dBm. 100 KHz to 1GHz	HP-436A/8481D
Spectrum analyzer	100KHz to 3GHz, up to -120 dBm	HP-8591E
Measuring receiver	0.2 to 1300MHz, 0 to -125dBm, Freq Counter	HP-8902A
Oscilloscope	DC to 100MHz, 5mV to 1V/div, Rise Time capavity	TEK TDS360
Frequency Counter	+ / - 0.1ppm, 10Hz ~ 1GHz, 9digit	HP-53181A
Attenuator	10W, 20dB Att, DC to 1GHz	Tescom 99910

1. Frequency Accuracy

Frequency : 457.5750MHz

Stavility : Same as reference oscillator accuracy. Internal 1ppm 0 to 50degC

1.Test Setup

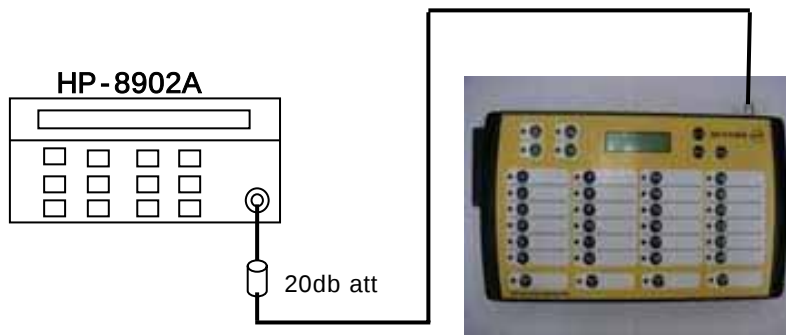

Carrier frequency accuracy test

2. HP-8902A : auto tuning, frequency display


3. WAITERCALL

- 1) Connect 20dB Attenuators
- 2) Power On
- 3) Press the Setup key - Input "2386" - Press ENTER - "RF OUT: OFF" displayed
 - Press the 3X key - "RF OUT:ON" displayed (To off the RF OUT, Press the 3X key twice)

TC-1950A FREQ	Lower Limit	Actual	Upper Limit	Remarks
457.5750MHz	457.5748		457.5752	

2. RF Output Level Accuracy
 RF level : 30dBm
 Accuracy : +/- 1dB

1. Test Setup

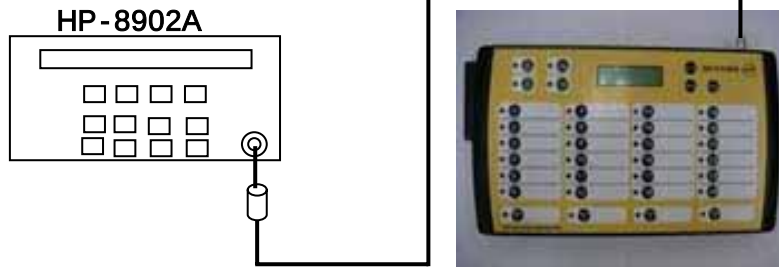

2. HP-8902A : Auto-tuning, RF Power

3. WAITERCALL :

- 1) Connect 20dB Attenuators
- 2) Power On
- 3) Press the Setup key - Input "2386" - Press ENTER - "RF OUT: OFF" displayed
 - Press the 3X key - "RF OUT:ON" displayed (To off the RF OUT, Press the 3X key twice)


Level	WAITERCALL Output mod on/off (MHz)	Lower Limit	Actual	Upper Limit	Remark
30dBm	Service Off	29		31	

3. Spectral Purity

3.1. Residual FM Noise

RMS Noise : <10Hz Typ, 300Hz ~ 3KHz
 <70Hz Typ, 50Hz ~ 3KHz

1. Test Setup.

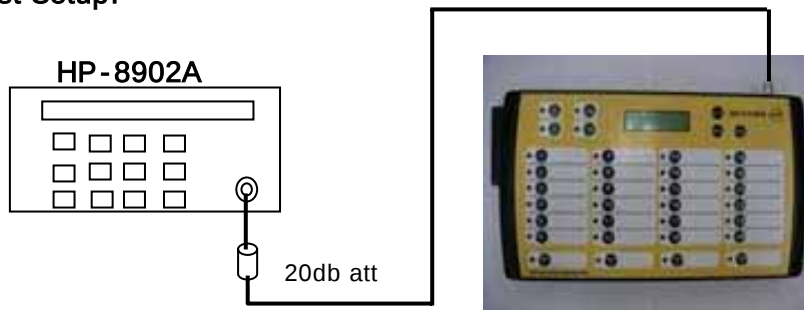

2. HP 8902A : FM, RMS, Filter BW 300Hz ~ 3KHz

3. WAITERCALL :


- 1) Connect 20dB Attenuators
- 2) Power On
- 3) Press the Setup key - Input "2386" - Press ENTER - "RF OUT: OFF" displayed
 - Press the 3X key - "RF OUT:ON" displayed (To off the RF OUT, Press the 3X key twice)

8902 Filter BW		Actual	Limit (Hz)	Remark
HPF	LPF			
300Hz	3KHz		10Hz	
50Hz	3KHz		70Hz	

3.2. Harmonic Spurious :

Harmonic Level at 2xFOUT : < -60dBc

1. Test Setup.

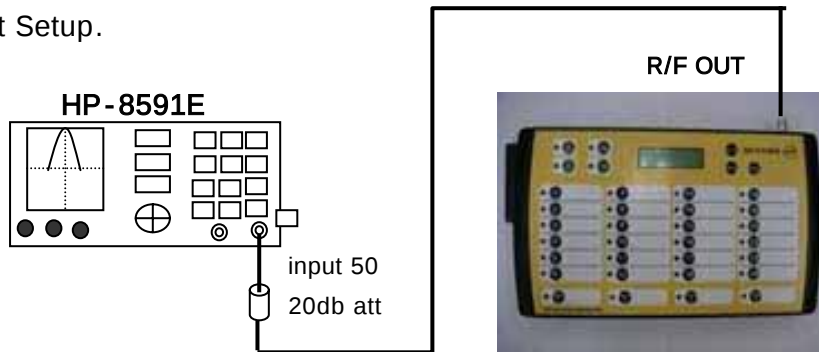

Harmonice test

2. HP 8591E : Span = 500KHz, RBW = 10KHz, VBW = 30KHz.

3. WAITERCALL :

- 1) Connect 20dB Attenuators
- 2) Power On
- 3) Press the Setup key - Input "2386" - Press ENTER - "RF OUT: OFF" displayed
 - Press the 3X key - "RF OUT:ON" displayed (To off the RF OUT, Press the 3X key twice)

WAITERCALL Harmonic Spurious

Fout(MHz)	Spurious(MHz)	Level(dBm)	Fout - 2 * Fout	Limit	Remark
457,.575	915.15			-60dbc	

4. Modulation


4.1. FM(RECT) (Internal F S K Test Patterns)

Deviation Accuracy

Deviation : 4.5KHz,

Accuracy : +/- 5% (4.275 < FM < 4.725)@4.5KHz

1. Test Setup

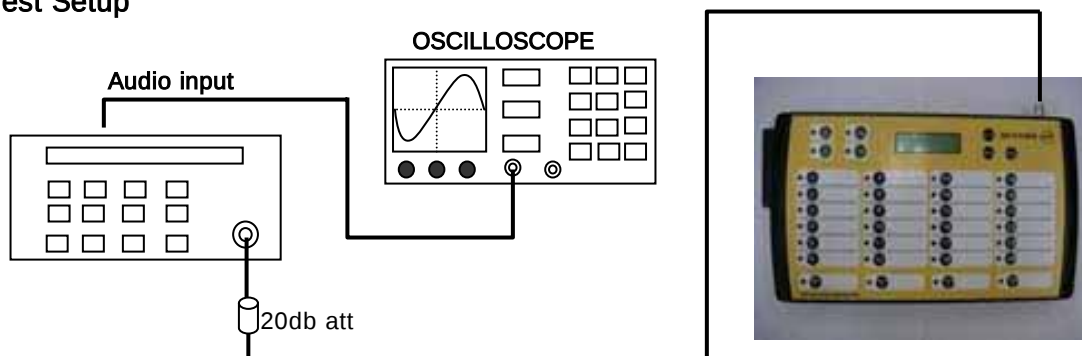

FSK Deviation and Noise Test

2. Equipment

HP-8902A : FM, AVG, HPF=OFF, LPF=15KHz

TDS360 : 250us/div, 500mV/div Average : 16

3. WAITERCALL

1) Connect 20dB Attenuators

2) Power On

3) Press the Setup key - Input "2386" - Press ENTER - "RF OUT: OFF" displayed

' - Press the 3X key - "RF OUT:ON" displayed (To off the RF OUT, Press the 3X key twice)

4. Read FM Deviation in RMS.

DEV(WAITERCALL)

4.5KHz

Limit

4.5KHz + - 5%

Table : F S K Deviation Accuracy

Item	Lower	Actual	Upper	Remark
Deviation (AVG)	4.275		4.725	

)