

TEST REPORT

Product Name : Mobile Power Adapter
Model Number : DLH-8690A, DLH-XXXXY(X represents the 0-9 arbitrary Numbers or any letters a-z, Y represent 0-9 any Numbers or any letters a-z)
FCC ID : 2A2TODLH-8690A
Prepared for : SHENZHEN DELE POWER ELECTRONIC CO.,LTD
Address : E2, No. 27 Shasan Road, Shajing Street, Baoan District, Shenzhen, Guangdong, China

Prepared by : EMTEK (SHENZHEN) CO., LTD.
Address : Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China

Tel: (0755) 26954280
Fax: (0755) 26954282

Report Number : ES210607006W01
Date(s) of Tests : June 07, 2021 to July 28, 2021
Date of issue : July 28, 2021

TABLE OF CONTENT

Test Report Description	Page
1. SUMMARY OF TEST RESULTS.....	5
2. GENERAL INFORMATION	6
2.1. Description of Device (EUT)	6
2.2. Independent Operation Modes	7
2.3. Test Manner	7
2.4. Description of Test Facility	7
2.5. Test Software	7
2.6. Description of Support Device	8
2.7. Measurement Uncertainty.....	8
3. MEASURING DEVICE AND TEST EQUIPMENT.....	9
3.1. Conducted Emission Test Equipment.....	9
3.2. For 3m Radiated Emission Measurement 9K-30M (3m chamber 1#).....	9
4. 20DB BANDWIDTH	10
4.1. Test Procedure.....	10
4.2. Test Results	10
5. POWER LINE CONDUCTED EMISSION MEASUREMENT	11
5.1. Block Diagram of Test Setup	11
5.2. Limits.....	11
5.3. Test Procedure.....	11
5.4. Measuring Results	12
6. RADIATED EMISSION TEST.....	15
6.1. Measurement Procedure	15
6.2. Test SET-UP (Block Diagram of Configuration).....	15
6.3. Radiated Emission Limit	16
6.4. Measurement Result.....	17
7. PHOTOGRAPHS.....	25
7.1. Photos of Power Line Conducted Emission Measurement	25
7.2. Photos of Radiation Emission Measurement	26

TEST REPORT DESCRIPTION

Applicant : SHENZHEN DELE POWER ELECTRONIC CO.,LTD

Address : E2, No. 27 Shasan Road, Shajing Street, Baoan District, Shenzhen, Guangdong, China

Manufacturer : SHENZHEN DELE POWER ELECTRONIC CO.,LTD

Address : E2, No. 27 Shasan Road, Shajing Street, Baoan District, Shenzhen, Guangdong, China

EUT : Mobile Power Adapter

Model Name : DLH-8690A, DLH-XXXXY(X represents the 0-9 arbitrary Numbers or any letters a-z, Y represent 0-9 any Numbers or any letters a-z)

Trademark : DELE

We hereby certify that:

The above equipment was tested by EMTEK (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15C

The test results of this report relate only to the tested sample identified in this report.

Date of Test : June 07, 2021 to July 28, 2021

Prepared by : 
Sewen Guo /Editor

Reviewer : 
Joe Xia/Supervisor

Approved & Authorized Signer : 
Lisa Wang/Manager



Modified Information

Version	Report No.	Revision Data	Summary
Ver.1.0	ES210607006W01	/	Original Version



1. SUMMARY OF TEST RESULTS

EMISSION		
Description of Test Item	Standard & Limits	Results
Conducted Emission	FCC Part 15, Subpart C- Section 15.207 ANSI C63.10-2013	Pass
Radiated Emission	FCC Part 15, Subpart C- Section 15.209 ANSI C63.10-2013	Pass
Note: N/A is an abbreviation for Not Applicable.		



2. GENERAL INFORMATION

2.1. Description of Device (EUT)

EUT	: Mobile Power Adapter
Model Number	: DLH-8690A, DLH-XXXXY(X represents the 0-9 arbitrary Numbers or any letters a-z, Y represent 0-9 any Numbers or any letters a-z) Note: (These models are identical in circuitry and electrical, mechanical and physical construction; Only indicates for different market purposes; We chose DLH-8690 as the final test prototype)
Power supply	: Adapter modelInput: AC100-240V 50/60Hz 0.4A USB-C output: 5V 3A, 9V 2.22A, 12V 1.67A USB-A output: 5V 3A, 9V 2A, 12V 1.5A USB-C+USB-A simultaneous output: 5V 3A Mobile power mode USB-C output: 5V 3A, 9V 2.22A, 12V 1.67A USB-A output: 5V 3A, 5V 4.5A, 9V 2A, 12V 1.5A USB-C+USB-A simultaneous output: 5V 3A DC USB-C Input:5V 3A, 9V 2.22A, 12V 1.67A Wireless charging mode Wireless charging output: 15W(Max) USB-C+USB-A+Wireless charging simultaneously output: 5V 3A Battery capacity: 9600mAh 3.7V
Applicant	: SHENZHEN DELE POWER ELECTRONIC CO.,LTD
Address	: E2, No. 27 Shasan Road, Shajing Street, Baoan District, Shenzhen, Guangdong, China
Manufacturer	: SHENZHEN DELE POWER ELECTRONIC CO.,LTD
Address	: E2, No. 27 Shasan Road, Shajing Street, Baoan District, Shenzhen, Guangdong, China
Date of Received	: June 07, 2021
Date of Test	: June 07, 2021 to July 28, 2021

2.2. Independent Operation Modes

- A ON
1. Wireless Charging

2.3. Test Manner

Test Items	Test Voltage	Operation Modes
Conducted Emission	AC 120V/60Hz	Mode A.1
Radiated Emission	AC 120V/60Hz DC3.7V	Mode A.1

2.4. Description of Test Facility

Site Description

EMC Lab.	: Accredited by CNAS The Certificate Registration Number is L2291. The Laboratory has been assessed and proved to be in compliance with CNAS-CL01 (identical to ISO/IEC 17025:2017)
	Accredited by FCC Designation Number: CN1204 Test Firm Registration Number: 882943
	Accredited by A2LA The Certificate Number is 4321.01.
	Accredited by Industry Canada The Conformity Assessment Body Identifier is CN0008
Name of Firm	: EMTEK (SHENZHEN) CO., LTD.
Site Location	: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China

2.5. Test Software

Item	Software
Conducted Emission	: EMTEK(Ver.CON-03A1)-Shenzhen
Radiated Emission	: EMTEK(Ver.RA-03A1)-Shenzhen

2.6. Description of Support Device

No.	Equipment	Trade name	Model	S/N	Power Cord
1.	iPhone	Apple	A1526	N/A	N/A
2.					

2.7. Measurement Uncertainty

Test Item	Uncertainty
Conducted Emission Uncertainty	3.16dB(9k~150kHz Conduction 2#) 2.90dB(150k-30MHz Conduction 2#)
Radiated Emission Uncertainty (3m Chamber)	3.78dB (30M~1GHz Polarize: H) 4.27dB (30M~1GHz Polarize: V) 4.46dB (1~6GHz)

3. MEASURING DEVICE AND TEST EQUIPMENT

3.1. Conducted Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	May 17, 2021	May 16, 2022
L.I.S.N.	Schwarzbeck	NNLK8129	8129203	May 17, 2021	May 16, 2022
50Ω Coaxial Switch	Anritsu	MP59B	M20531	May 17, 2021	May 16, 2022
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	May 17, 2021	May 16, 2022
Voltage Probe	Rohde & Schwarz	TK9416	N/A	May 17, 2021	May 16, 2022
I.S.N	Rohde & Schwarz	ENY22	1109.9508.02	May 17, 2021	May 16, 2022

3.2. For 3m Radiated Emission Measurement

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	May 17, 2021	May 16, 2022
Pre-Amplifier	HP	8447D	2944A07999	May 17, 2021	May 16, 2022
Bilog Antenna	Schwarzbeck	VULB9163	142	May 17, 2021	May 16, 2022
Loop Antenna	ARA	PLA-1030/B	1029	May 17, 2021	May 16, 2022
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	May 17, 2021	May 16, 2022
Horn Antenna	Schwarzbeck	BBHA 9120	D143	May 17, 2021	May 16, 2022
Cable	Schwarzbeck	AK9513	ACRX1	May 17, 2021	May 16, 2022
Cable	Rosenberger	N/A	FP2RX2	May 17, 2021	May 16, 2022
Cable	Schwarzbeck	AK9513	CRPX1	May 17, 2021	May 16, 2022
Cable	Schwarzbeck	AK9513	CRRX2	May 17, 2021	May 16, 2022

3.3. Radio Frequency Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
Spectrum Analyzer	Rohde & Schwarz	FSV40	100967	May 17, 2021	May 16, 2022

4. 20DB BANDWIDTH

4.1. Test Procedure


Set to the maximum power setting and enable the EUT transmit continuously
 Set RBW = 100Hz.
 Set the video bandwidth (VBW) =300Hz.
 Set Span= 2KHz
 Set Detector = Peak.
 Set Trace mode = max hold.
 Set Sweep = auto couple.
 Measure and record the results in the test report.

4.2. Test Results

Temperature: 24℃
 Humidity: 53 %

Test Date: July 16, 2021
 Test By: XW


20dB Band=535.50Hz

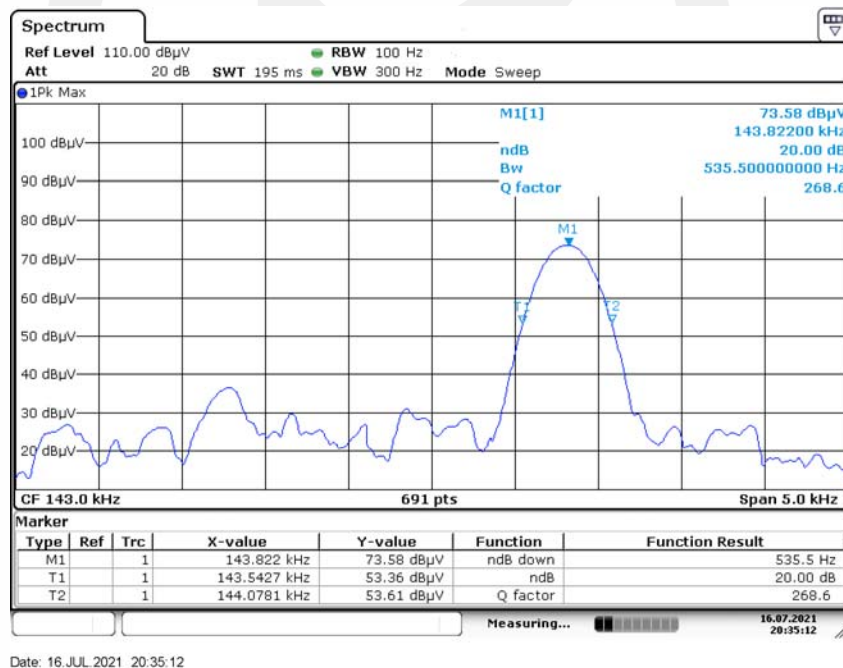

Date: 16 JUL 2021 20:35:12

5. POWER LINE CONDUCTED EMISSION MEASUREMENT

5.1. Block Diagram of Test Setup

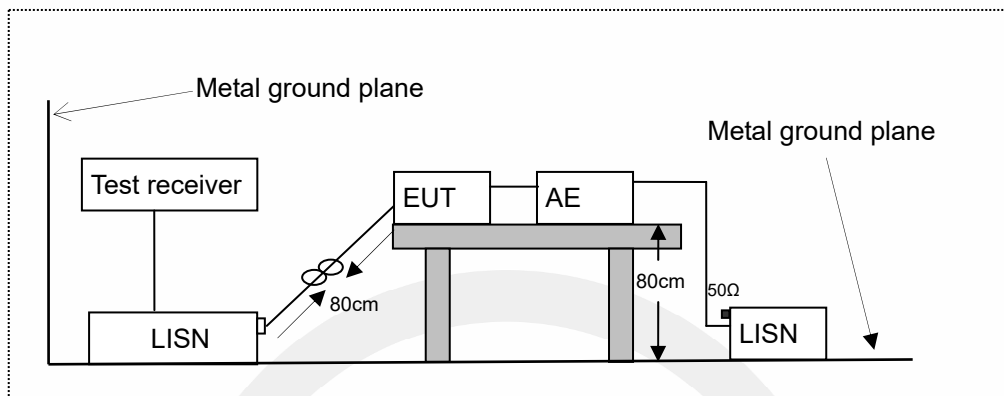

LISN: Line Impedance Stabilization Network

AE: Associated equipment

EUT: Equipment under test

5.2. Limits

FCC Part 15.207

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
0.50 ~ 5.00	56.0	46.0
5.00 ~ 30.00	60.0	50.0

NOTE1-The lower limit shall apply at the transition frequencies.
NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

5.3. Test Procedure

The EUT was placed on a desk 0.8 m height from the metal ground plane and 0.4 m from the conducting wall of the shielding room and it was kept at least 0.8 m from any other grounded conducting surface. The size of the table will nominally be 1.5 m x1.0 m.

The rear of the arrangement shall be flush with the back of the supporting tabletop unless that would not be possible or typical of normal use.

All units of equipment forming the system under test (includes the EUT as well as connected peripherals and associated equipment or devices) shall be arranged such that a nominal 0.1 m separation is achieved between the neighboring units.

Connect EUT to the power mains through a line impedance stabilization network (LISN). Where the mains cable supplied by the manufacturer is longer than 1 m, the excess should be folded at the centre into a bundle no longer than 0.4 m, so that its length is shortened to 1 m.

All the support units are connecting to the other LISN.

The LISN provides 50 ohm coupling impedance for the measuring instrument.

Both sides of AC line were checked for maximum conducted interference.

The frequency range from 150 kHz to 30 MHz was sweep.

Set the test-receiver system to quasi peak detect function and average detect function, and to measure the conducted emissions values.

Test results were obtained from the following equation:


Emission Level (dB μ V) = LISN Factor (dB) + Cable Loss (dB) + Reading (dB μ V)

Margin (dB) = Emission Level (dB μ V) - Limit (dB μ V)

5.4. Measuring Results

PASS.



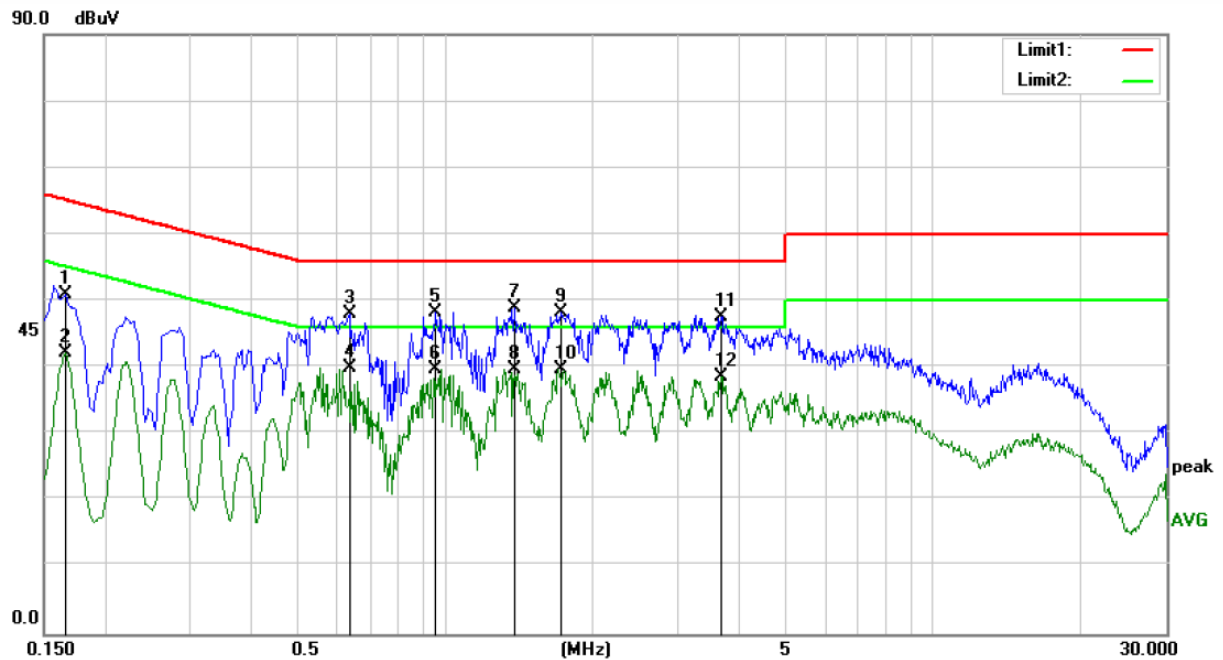

Site Conduction #1

Phase: **L1**

Temperature: 19.4

Limit: (CE)FCC Part 15.207_QP


Power: AC 120V/60Hz

Humidity: 37 %

Mode: Wireless Charging

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1660	41.33	9.53	50.86	65.16	-14.30	QP	
2		0.1660	32.73	9.53	42.26	55.16	-12.90	AVG	
3		0.6340	38.78	9.27	48.05	56.00	-7.95	QP	
4	*	0.6340	30.59	9.27	39.86	46.00	-6.14	AVG	
5		0.9540	38.45	9.80	48.25	56.00	-7.75	QP	
6		0.9540	29.86	9.80	39.66	46.00	-6.34	AVG	
7		1.3820	38.99	9.92	48.91	56.00	-7.09	QP	
8		1.3820	29.77	9.92	39.69	46.00	-6.31	AVG	
9		1.7220	38.38	9.93	48.31	56.00	-7.69	QP	
10		1.7220	29.85	9.93	39.78	46.00	-6.22	AVG	
11		3.6660	37.56	9.93	47.49	56.00	-8.51	QP	
12		3.6660	28.57	9.93	38.50	46.00	-7.50	AVG	

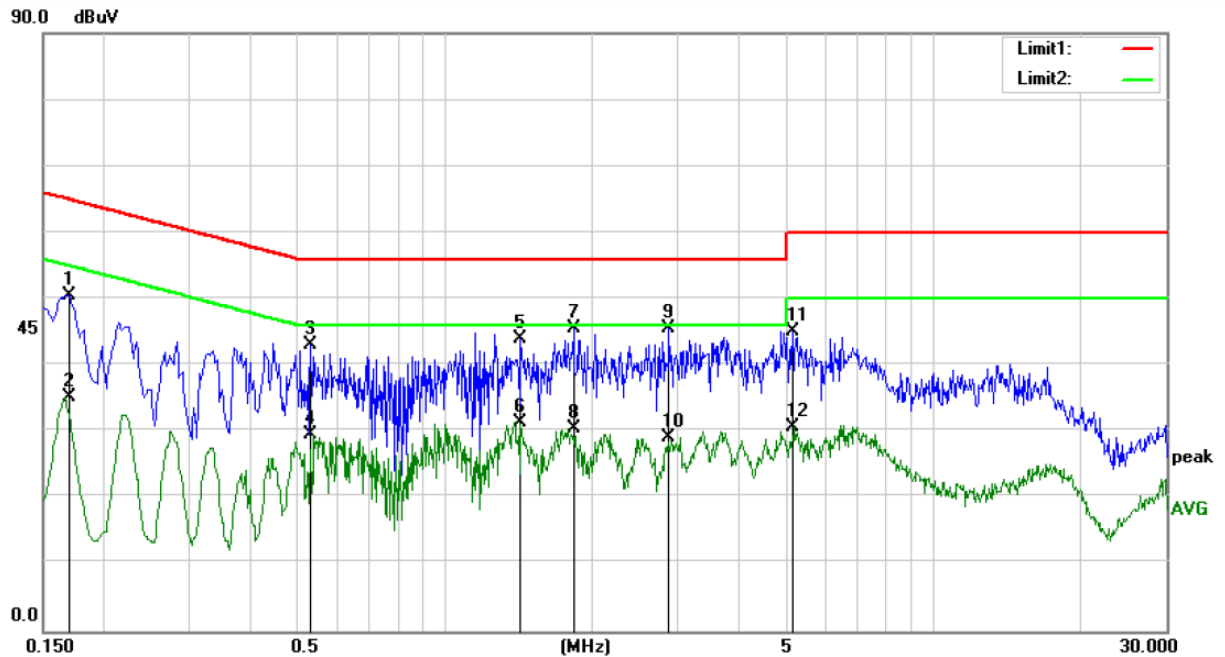

Site Conduction #1

Phase: **N**

Temperature: 19.4

Limit: (CE)FCC Part 15.207_QP

Power: AC 120V/60Hz

Humidity: 37 %

Mode: Wireless Charging

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1700	41.00	9.52	50.52	64.96	-14.44	QP	
2		0.1700	25.65	9.52	35.17	54.96	-19.79	AVG	
3		0.5300	33.89	9.25	43.14	56.00	-12.86	QP	
4		0.5300	20.39	9.25	29.64	46.00	-16.36	AVG	
5		1.4260	34.05	9.92	43.97	56.00	-12.03	QP	
6		1.4260	21.57	9.92	31.49	46.00	-14.51	AVG	
7		1.8300	35.64	9.93	45.57	56.00	-10.43	QP	
8		1.8300	20.50	9.93	30.43	46.00	-15.57	AVG	
9	*	2.8740	35.66	9.95	45.61	56.00	-10.39	QP	
10		2.8740	19.27	9.95	29.22	46.00	-16.78	AVG	
11		5.1500	35.20	9.92	45.12	60.00	-14.88	QP	
12		5.1500	20.72	9.92	30.64	50.00	-19.36	AVG	


6. RADIATED EMISSION TEST

6.1. Measurement Procedure


1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured were complete.
5. Use the following receiver/spectrum analyzer settings:
Span = wide enough to fully capture the emission being measured
RBW=200Hz for 9KHz to 150KHz,
RBW=9kHz for 150KHz to 30MHz,
RBW=120KHz for 30MHz to 1GHz
VBW $\geq 3 \times$ RBW
Sweep = auto
Detector function = QP
Trace = max hold

6.2. Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

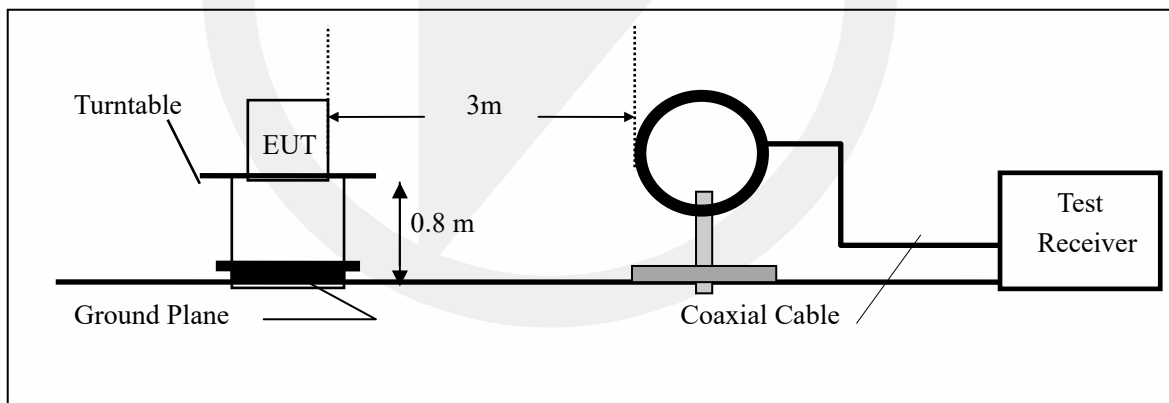

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

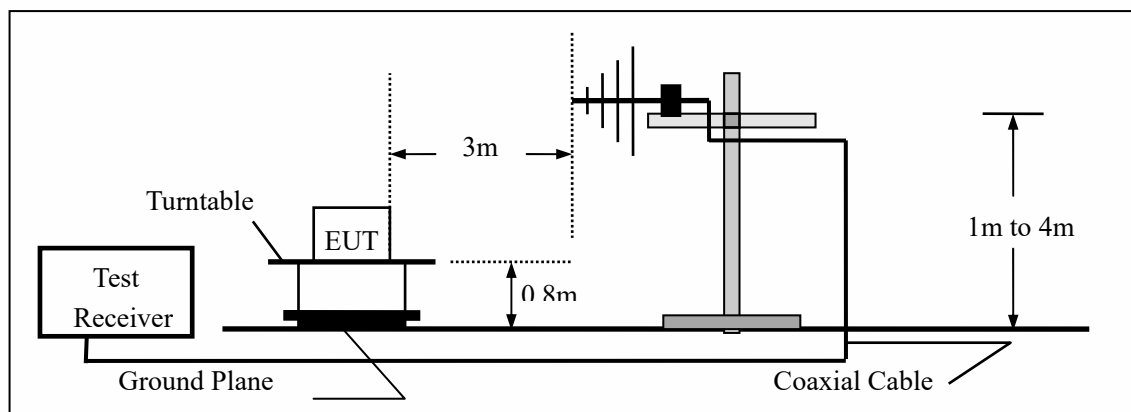

6.3. Radiated Emission Limit

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

FCC Part 15.209				
Frequency (MHz)	Field Strength Limitation		Field Strength Limitation Frequency tion at 3m Measurement Dist	
	(uV/m)	Dist	(uV/m)	(dBuV/m)
0.009 – 0.490	2400 / F(KHz)	300m	10000 * 2400/F(KHz)	20log 2400/F(KHz) + 80
0.490 – 1.705	24000 / F(KHz)	30m	100 * 24000/F(KHz)	20log 24000/F(KHz) + 40
1.705 – 30.00	30	30m	100* 30	20log 30 + 40
30.0 – 88.0	100	3m	100	20log 100
88.0 – 216.0	150	3m	150	20log 150
216.0 – 960.0	200	3m	200	20log 200
Above 960.0	500	3m	500	20log 500


15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	⁽²⁾

- Remark:
1. Emission level in dBuV/m=20 log (uV/m)
 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
 3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of § 15.205, and the emissions located in restricted bands also comply with 15.209 limit.

6.4.Measurement Result

9KHz-150KHz:

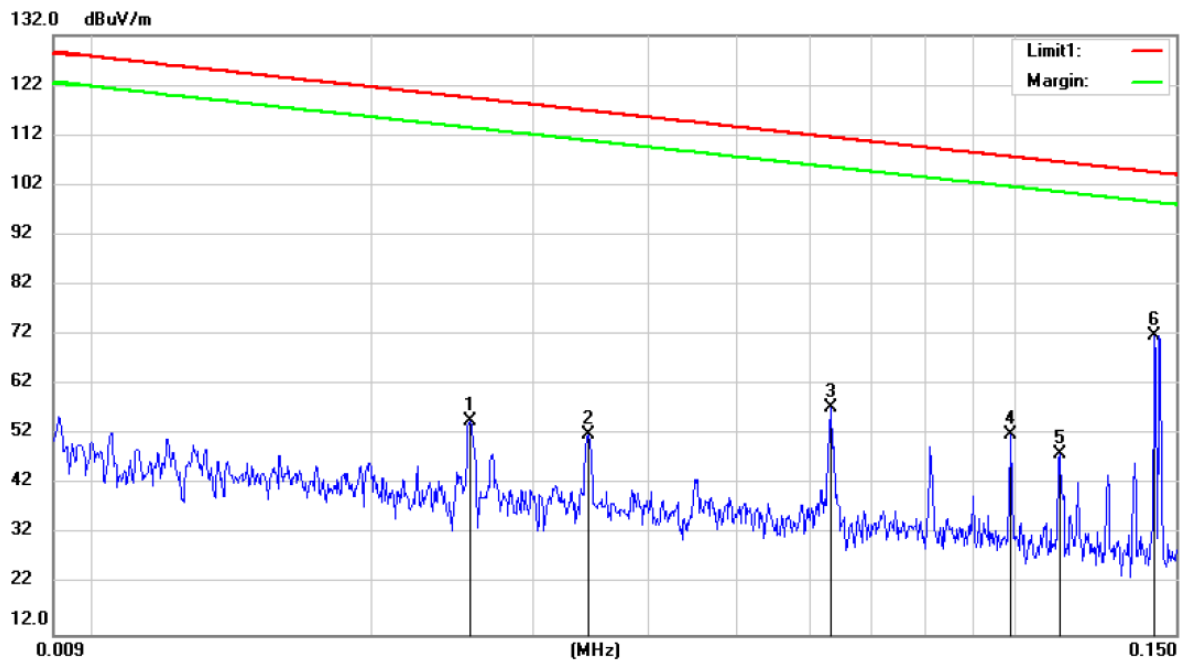

Site 3m Chamber #1

Polarization: X

Temperature: 29.5 C

Limit: (RE)FCC PART 15.209(9K-30M)


Power: DC 3.7V

Humidity: 48 %

Mode:Wireless Charging

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		0.0255	34.24	20.59	54.83	119.46	-64.63	peak		
2		0.0343	31.30	20.63	51.93	116.89	-64.96	peak		
3		0.0630	36.83	20.73	57.56	111.61	-54.05	peak		
4		0.0991	31.28	20.74	52.02	107.67	-55.65	peak		
5		0.1120	27.36	20.74	48.10	106.61	-58.51	peak		
6	*	0.1421	51.58	20.29	71.87	104.55	-32.68	peak		

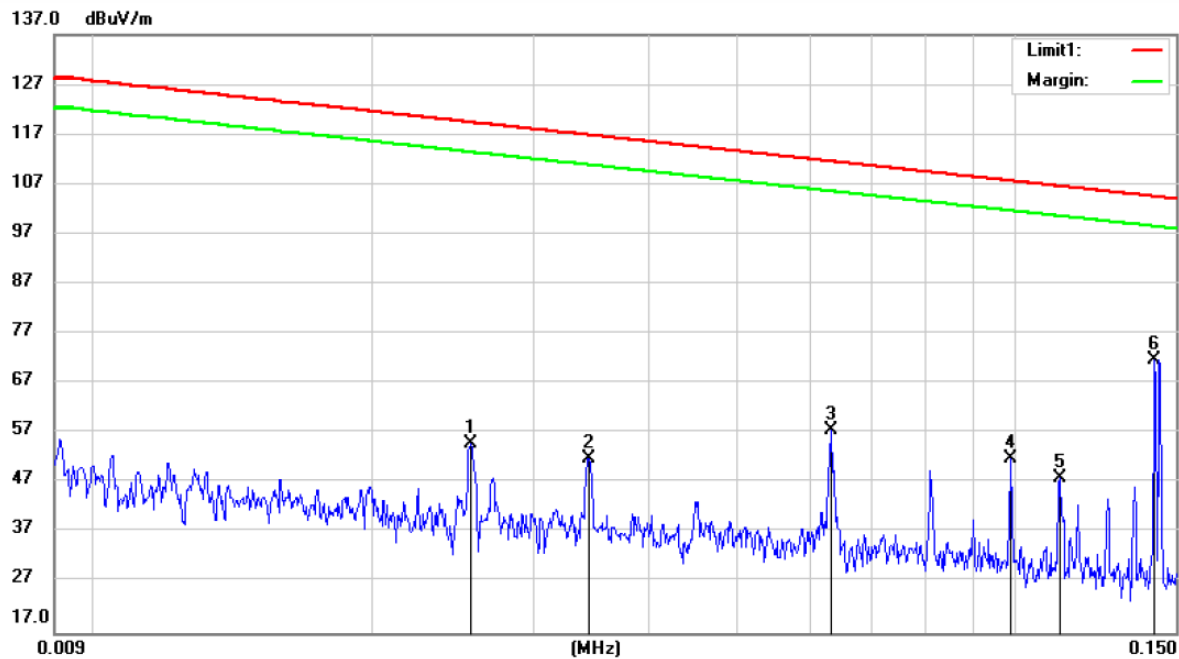

Site 3m Chamber #1

Polarization: Y

Temperature: 29.5 C

Limit: (RE)FCC PART 15.209(9K-30M)


Power: DC 3.7V

Humidity: 48 %

Mode: Wireless Charging

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		0.0255	34.24	20.59	54.34	119.46	-65.12	peak		
2		0.0343	31.30	20.63	50.56	116.89	-66.33	peak		
3		0.0630	36.83	20.73	56.48	111.61	-55.13	peak		
4		0.0991	31.28	20.74	52.65	107.67	-55.02	peak		
5		0.1120	27.36	20.74	48.18	106.61	-58.43	peak		
6	*	0.1421	51.58	20.29	71.43	104.55	-33.12	peak		

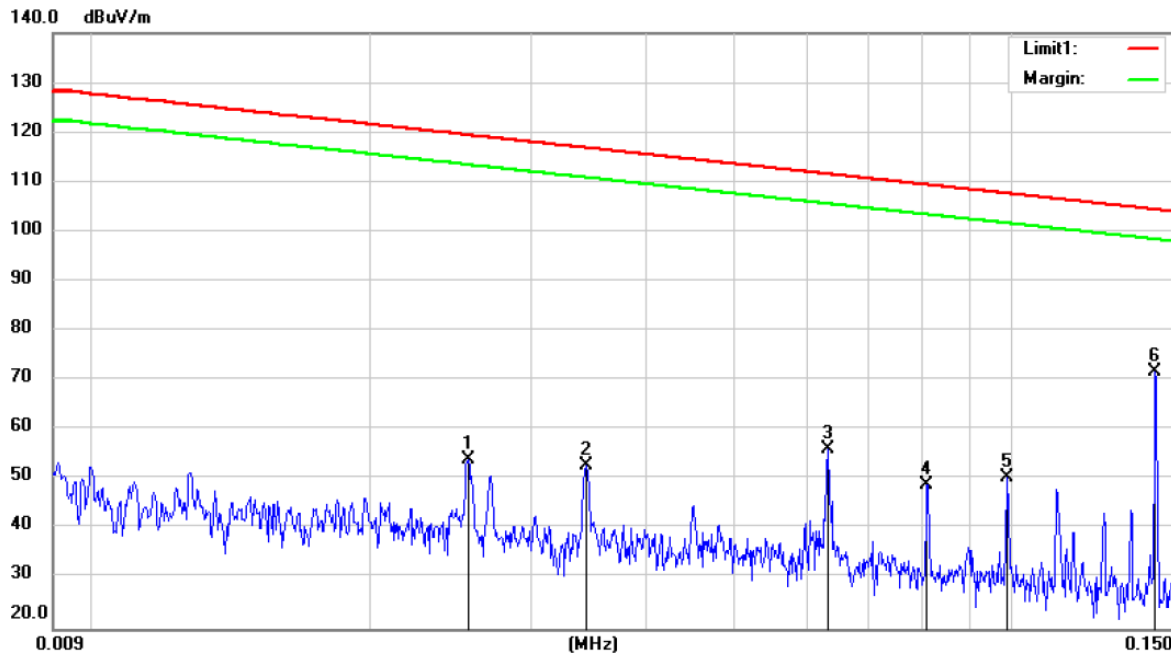

Site 3m Chamber #1

Polarization: **Z**

Temperature: 29.5 C

Limit: (RE)FCC PART 15.209(9K-30M)

Power: DC 3.7V


Humidity: 48 %

Mode: Wireless Charging

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		0.0255	33.59	20.59	54.18	119.46	-65.28	peak		
2		0.0343	32.32	20.63	52.95	116.89	-63.94	peak		
3		0.0630	35.47	20.73	56.20	111.61	-55.41	peak		
4		0.0810	28.37	20.69	49.06	109.43	-60.37	peak		
5		0.0990	29.70	20.74	50.44	107.68	-57.24	peak		
6	*	0.1438	51.56	20.29	71.85	104.44	-32.59	peak		

150KHz-30MHz:

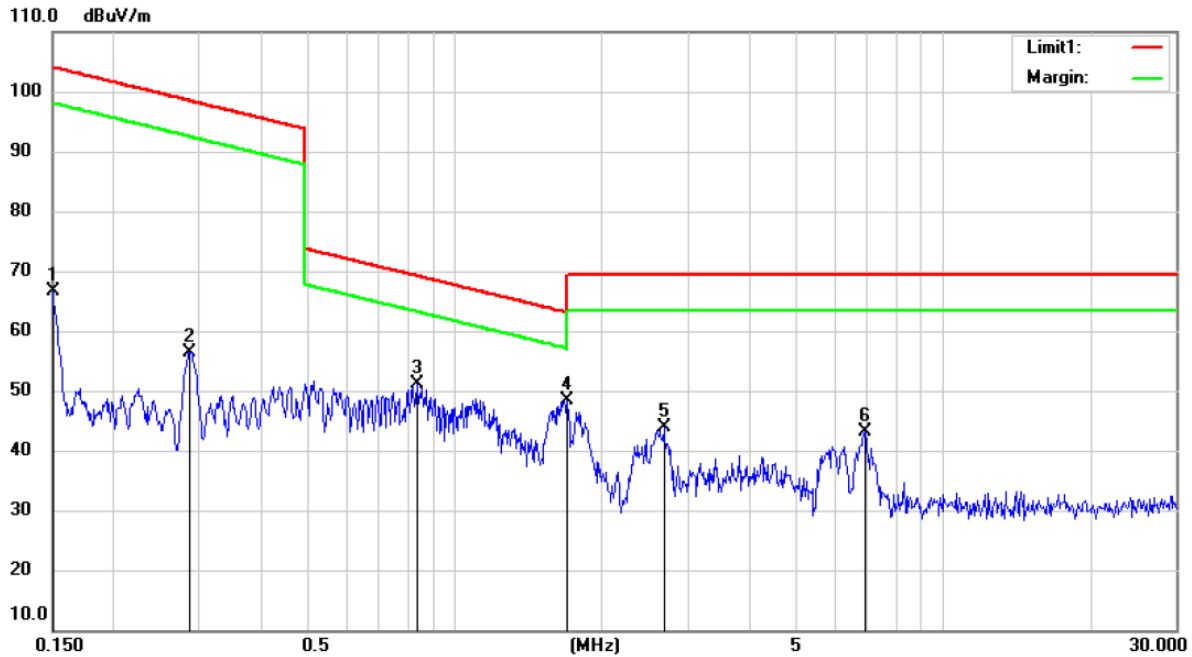

Site 3m Chamber #1

Polarization: X

Temperature: 29.5 C

Limit: (RE)FCC PART 15.209(9K-30M)


Power: DC 3.7V

Humidity: 48 %

Mode: Wireless Charging

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table
		MHz	Level	Factor	ment			Height	Degree
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
							Detector		Comment
1		0.1500	46.42	20.29	66.71	104.08	-37.37	peak	
2		0.2862	35.89	20.56	56.45	98.47	-42.02	peak	
3		0.8348	30.02	21.07	51.09	69.19	-18.10	peak	
4	*	1.6980	27.56	20.94	48.50	63.04	-14.54	peak	
5		2.6781	23.18	20.70	43.88	69.50	-25.62	peak	
6		6.9141	22.44	20.58	43.02	69.50	-26.48	peak	

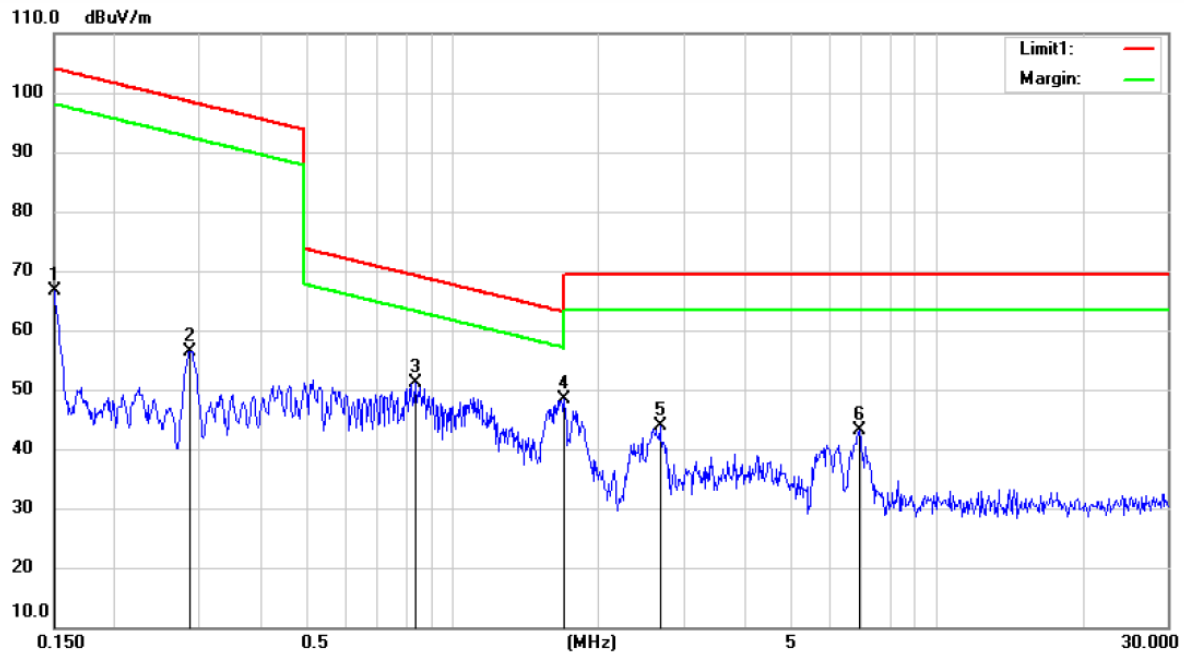

Site: 3m Chamber #1

Polarization: **Y**

Temperature: 29.5 C

Limit: (RE)FCC PART 15.209(9K-30M)


Power: DC 3.7V

Humidity: 48 %

Mode: Wireless Charging

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		0.1500	46.42	20.29	66.71	104.08	-37.37	peak		
2		0.2862	35.89	20.56	56.45	98.47	-42.02	peak		
3		0.8348	30.02	21.07	51.09	69.19	-18.10	peak		
4	*	1.6980	27.56	20.94	48.50	63.04	-14.54	peak		
5		2.6781	23.18	20.70	43.88	69.50	-25.62	peak		
6		6.9141	22.44	20.58	43.02	69.50	-26.48	peak		

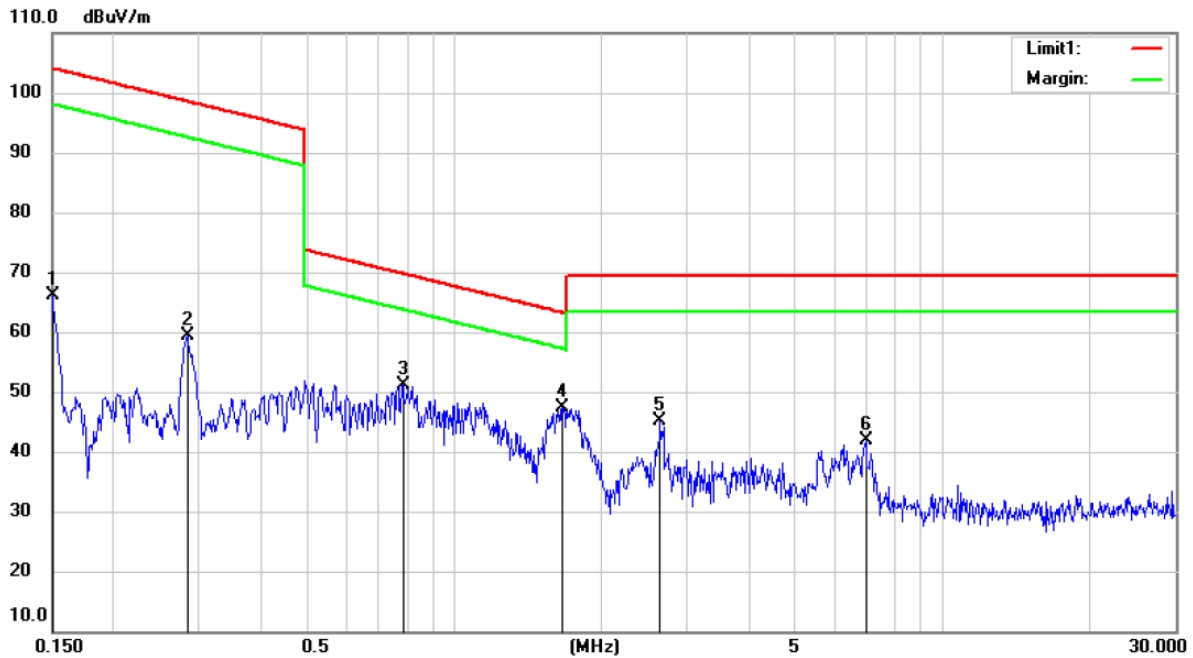

Site 3m Chamber #1

Polarization: **Z**

Temperature: 29.5 C

Limit: (RE)FCC PART 15.209(9K-30M)

Power: DC 3.7V


Humidity: 48 %

Mode: Wireless Charging

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		0.1500	45.84	20.29	66.13	104.08	-37.95	peak		
2		0.2832	38.93	20.56	59.49	98.56	-39.07	peak		
3		0.7834	30.05	21.06	51.11	69.74	-18.63	peak		
4	*	1.6624	26.53	20.94	47.47	63.22	-15.75	peak		
5		2.6360	24.53	20.71	45.24	69.50	-24.26	peak		
6		6.9508	21.20	20.58	41.78	69.50	-27.72	peak		

30MHz-1GHz:

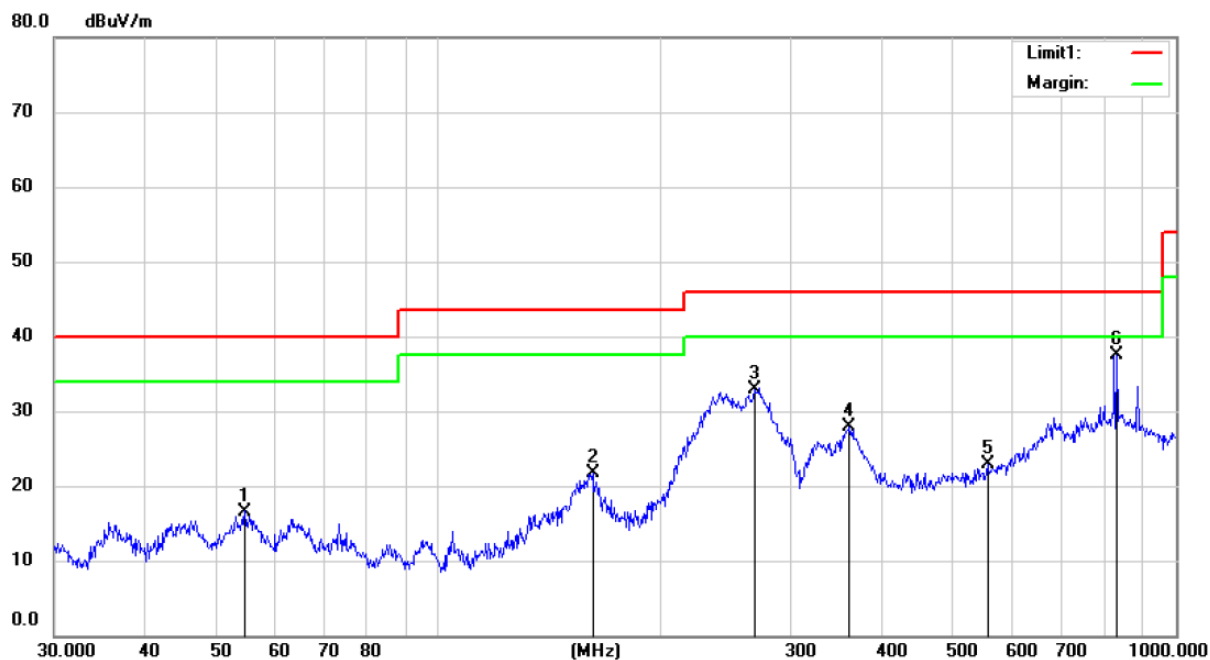

Site 3m Chamber #3

Polarization: **Vertical**

Temperature: 18.4 C

Limit: (RE)FCC PART 15 CLASS B


Power: DC 3.7V

Humidity: 24 %

Mode: Wireless Charging

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		54.5471	31.38	-14.78	16.60	40.00	-23.40	QP		
2		161.5450	39.18	-17.39	21.79	43.50	-21.71	QP		
3		267.8975	47.04	-14.17	32.87	46.00	-13.13	QP		
4		360.9220	38.60	-10.74	27.86	46.00	-18.14	QP		
5		554.8254	29.31	-6.33	22.98	46.00	-23.02	QP		
6	*	831.1284	36.82	0.72	37.54	46.00	-8.46	QP		

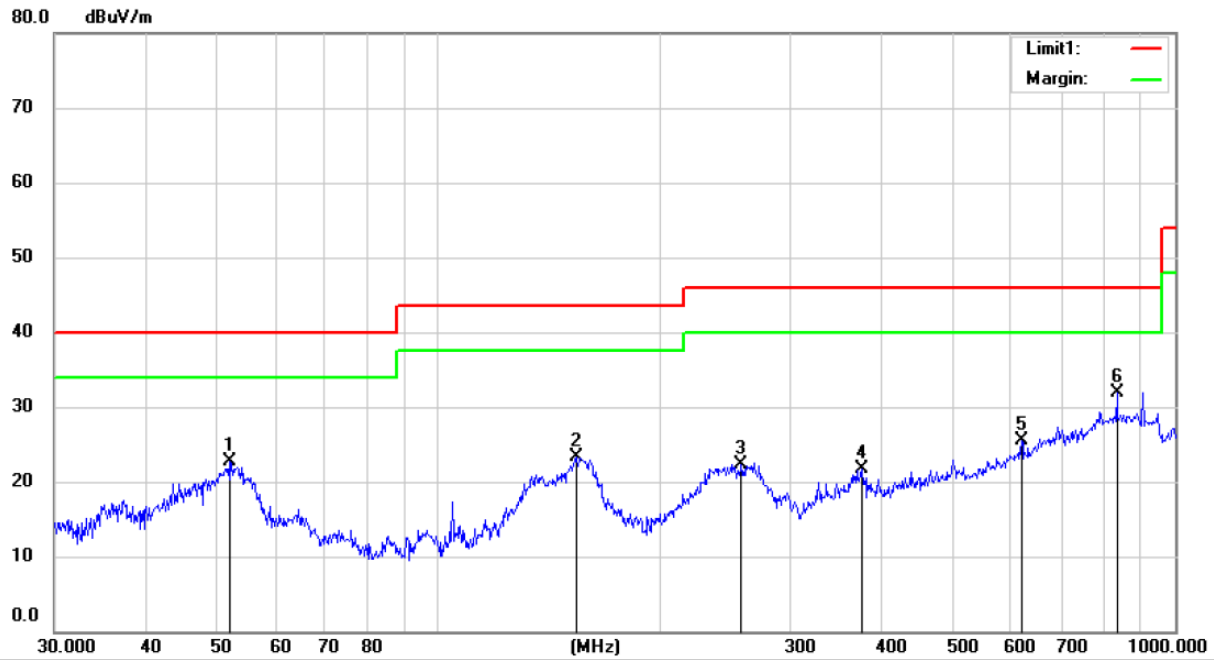

Site 3m Chamber #3

Polarization: **Horizontal**

Temperature: 18.4 C

Limit: (RE)FCC PART 15 CLASS B

Power: DC 3.7V

Humidity: 24 %

Mode: Wireless Charging

Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		51.8885	37.30	-14.63	22.67	40.00	-17.33	QP		
2		154.2110	40.62	-17.28	23.34	43.50	-20.16	QP		
3		257.6480	36.86	-14.61	22.25	46.00	-23.75	QP		
4		376.7633	31.99	-10.26	21.73	46.00	-24.27	QP		
5		618.5370	30.13	-4.64	25.49	46.00	-20.51	QP		
6	*	834.0480	31.07	0.83	31.90	46.00	-14.10	QP		

7. PHOTOGRAPHS

7.1.Photos of Power Line Conducted Emission Measurement



7.2.Photos of Radiation Emission Measurement

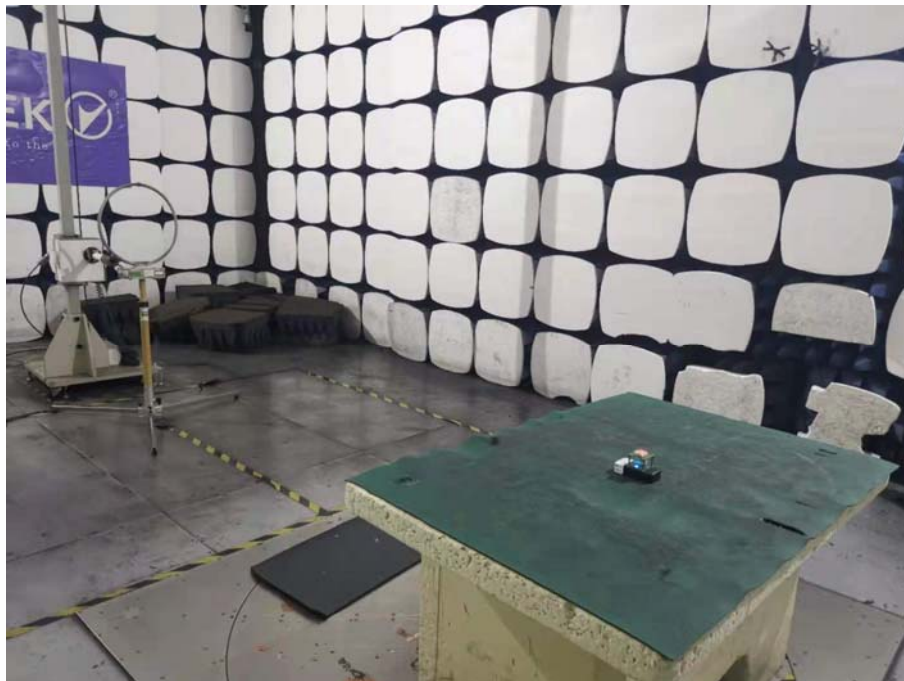

-----The end-----