



# MEASUREMENT REPORT

## FCC Part 15B / ICES-003

---

**FCC ID:** 2A2TS2021IG830

**Application:** Honglink Wireless Solutions Co., Ltd.

**Application Type:** Certification

**Product:** LTE USB MODEM

**Model No.:** IG830

**Brand Name:** DJI

**FCC Rule Part(s):** FCC Part 15 Subpart B: 2021

**ISED Rule(s):** ICES-003 Issue 7 Class B October 2020

**Test Procedure(s):** ANSI C63.4: 2014

**Test Date:** June 23 ~ November 10, 2021

**Reviewed By:**

\_\_\_\_\_  
Sunny Sun

**Approved By:**

\_\_\_\_\_  
Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2014. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

---

## Revision History

| Report No.    | Version | Description    | Issue Date | Note    |
|---------------|---------|----------------|------------|---------|
| 2106RSU002-U4 | Rev. 01 | Initial Report | 10-26-2021 | Invalid |
| 2106RSU002-U4 | Rev. 02 | Added FCC ID   | 11-11-2021 | Valid   |

## CONTENTS

| Description                                        | Page      |
|----------------------------------------------------|-----------|
| <b>1. General Information.....</b>                 | <b>4</b>  |
| 1.1. Applicant .....                               | 4         |
| 1.1. Manufacturer.....                             | 4         |
| 1.2. Testing Facility .....                        | 4         |
| 1.3. Product Information.....                      | 5         |
| 1.4. Test Mode.....                                | 5         |
| 1.5. Configuration of Tested System .....          | 6         |
| 1.6. Test System Details .....                     | 7         |
| 1.7. EMI Suppression Device(s)/Modifications ..... | 7         |
| <b>2. TEST EQUIPMENT CALIBRATION DATE.....</b>     | <b>8</b>  |
| <b>3. MEASUREMENT UNCERTAINTY.....</b>             | <b>9</b>  |
| <b>4. TEST RESULT .....</b>                        | <b>10</b> |
| 4.1. Summary .....                                 | 10        |
| 4.2. Conducted Emission Measurement.....           | 11        |
| 4.2.1. Test Limit .....                            | 11        |
| 4.2.2. Test Setup .....                            | 11        |
| 4.2.3. Test Result.....                            | 12        |
| 4.3. Radiated Emission Measurement.....            | 14        |
| 4.3.1. Test Limit .....                            | 14        |
| 4.3.2. Test Setup .....                            | 15        |
| 4.3.3. Test Result.....                            | 16        |
| <b>5. CONCLUSION.....</b>                          | <b>20</b> |
| <b>Appendix A - Test Setup Photograph .....</b>    | <b>21</b> |
| <b>Appendix B - EUT Photograph.....</b>            | <b>22</b> |

## 1. General Information

### 1.1. Applicant

Honglink Wireless Solutions Co., Ltd.

Room 611-390, R&D Center Building, China (Hefei) International Intelligent Voice Industrial Park,  
No.3333 Xiyao Road, High-tech Zone, Hefei

### 1.1. Manufacturer

Honglink Wireless Solutions Co., Ltd.

Room 611-390, R&D Center Building, China (Hefei) International Intelligent Voice Industrial Park,  
No.3333 Xiyu Road, High-tech Zone, Hefei

## 1.2. Testing Facility

|                                     |                                                                                                 |                                  |                                  |                                  |  |
|-------------------------------------|-------------------------------------------------------------------------------------------------|----------------------------------|----------------------------------|----------------------------------|--|
| <input checked="" type="checkbox"/> | <b>Test Site – MRT Suzhou Laboratory</b>                                                        |                                  |                                  |                                  |  |
|                                     | <b>Laboratory Location (Suzhou - Wuzhong)</b>                                                   |                                  |                                  |                                  |  |
|                                     | D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China              |                                  |                                  |                                  |  |
|                                     | <b>Laboratory Location (Suzhou - SIP)</b>                                                       |                                  |                                  |                                  |  |
|                                     | 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China    |                                  |                                  |                                  |  |
|                                     | <b>Laboratory Accreditations</b>                                                                |                                  |                                  |                                  |  |
| A2LA: 3628.01                       |                                                                                                 | CNAS: L10551                     |                                  |                                  |  |
| FCC: CN1166                         |                                                                                                 | ISED: CN0001                     |                                  |                                  |  |
| VCCI:                               | <input type="checkbox"/> R-20025                                                                | <input type="checkbox"/> G-20034 | <input type="checkbox"/> C-20020 | <input type="checkbox"/> T-20020 |  |
|                                     | <input type="checkbox"/> R-20141                                                                | <input type="checkbox"/> G-20134 | <input type="checkbox"/> C-20103 | <input type="checkbox"/> T-20104 |  |
| <input type="checkbox"/>            | <b>Test Site – MRT Shenzhen Laboratory</b>                                                      |                                  |                                  |                                  |  |
|                                     | <b>Laboratory Location (Shenzhen)</b>                                                           |                                  |                                  |                                  |  |
|                                     | 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China |                                  |                                  |                                  |  |
|                                     | <b>Laboratory Accreditations</b>                                                                |                                  |                                  |                                  |  |
|                                     | A2LA: 3628.02                                                                                   |                                  | CNAS: L10551                     |                                  |  |
|                                     | FCC: CN1284                                                                                     |                                  | ISED: CN0105                     |                                  |  |
| <input type="checkbox"/>            | <b>Test Site – MRT Taiwan Laboratory</b>                                                        |                                  |                                  |                                  |  |
|                                     | <b>Laboratory Location (Taiwan)</b>                                                             |                                  |                                  |                                  |  |
|                                     | No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)                        |                                  |                                  |                                  |  |
|                                     | <b>Laboratory Accreditations</b>                                                                |                                  |                                  |                                  |  |
|                                     | TAF: L3261-190725                                                                               |                                  |                                  |                                  |  |
|                                     | FCC: 291082, TW3261                                                                             |                                  | ISED: TW3261                     |                                  |  |

### 1.3. Product Information

|                                                                                                                                                       |                                                                  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|
| Product Name                                                                                                                                          | LTE USB MODEM                                                    |
| Model No.                                                                                                                                             | IG830                                                            |
| Brand Name                                                                                                                                            | DJI                                                              |
| IMEI                                                                                                                                                  | 867914050004567                                                  |
| Operating Temperature                                                                                                                                 | -20 ~ 55 °C                                                      |
| Supply Voltage                                                                                                                                        | 4.5 ~ 5.5Vdc, typical 5Vdc                                       |
| GSM Band (s)                                                                                                                                          | GSM 850, PCS 1900                                                |
| UMTS Band                                                                                                                                             | Band 2, 4, 5                                                     |
| E-UTRA Band                                                                                                                                           | FDD Band: 2, 4, 5, 7, 12, 13, 25, 26, 66, 71<br>TDD Band: 38, 41 |
| Antenna Information                                                                                                                                   | Refer to section 1.6                                             |
| Remark: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer. |                                                                  |


### 1.4. Test Mode

|                                                                                  |
|----------------------------------------------------------------------------------|
| Test Mode                                                                        |
| <b>Mode 1:</b> Power on EUT + GSM850 Traffic                                     |
| Note: The other transmitter functions have been assessed in each RF test report. |


### 1.5. Configuration of Tested System

The measurement procedures and appropriate EUT setup described in the American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-2014) was used in the measurement.

Radiated Emission Connection Diagram (Mode 1)

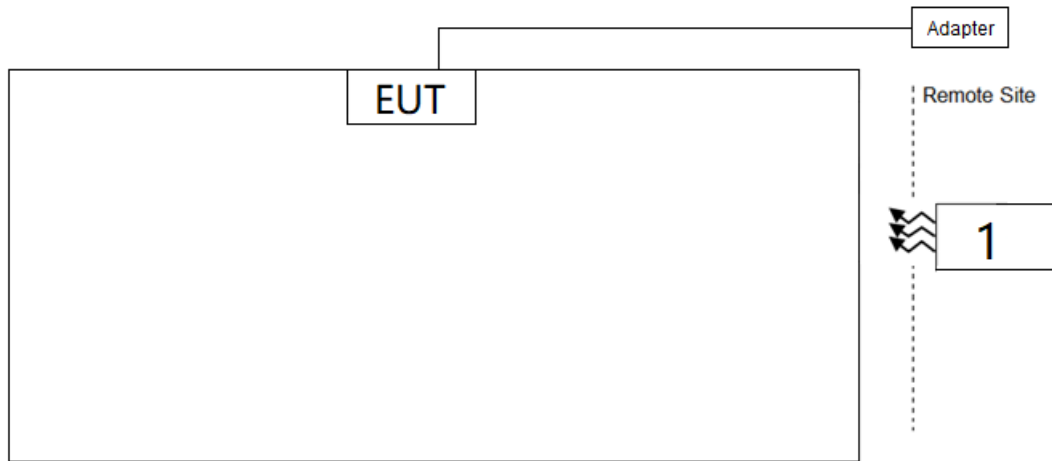

Conducted Emission Connection Diagram (Mode 1)

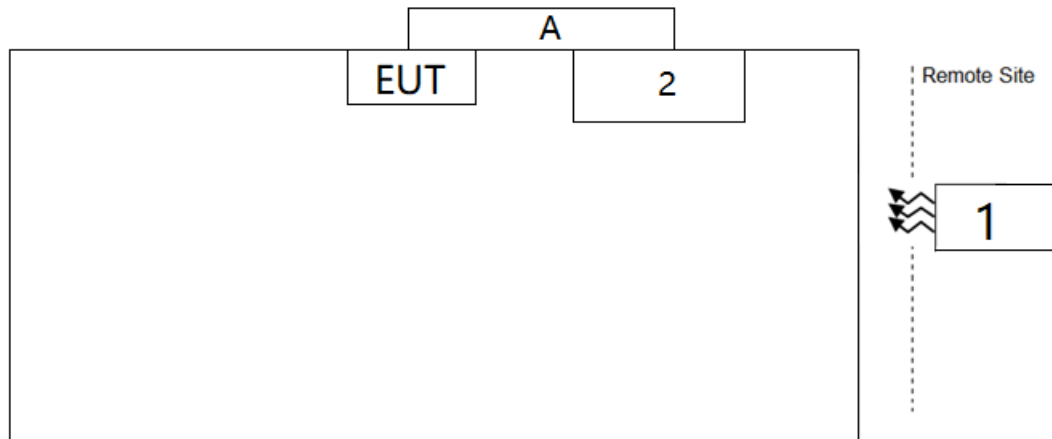

| Cable Type |           | Signal Cable Description |
|------------|-----------|--------------------------|
| A          | USB Cable | Shielding, > 10m         |

### 1.6. Test System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

| Product |                                     | Manufacturer | Model No. |
|---------|-------------------------------------|--------------|-----------|
| 1       | Wideband Radio Communication Tester | R&S          | CMW 500   |
| 2       | Notebook                            | Lenovo       | X21       |

### 1.7. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

## 2. TEST EQUIPMENT CALIBRATION DATE

### Conducted Emission (WZ-SR2)

| Instrument         | Manufacturer | Type No. | Asset No.   | Cali. Interval | Cali. Due Date |
|--------------------|--------------|----------|-------------|----------------|----------------|
| EMI Test Receiver  | R&S          | ESR3     | MRTSUE06909 | 1 year         | 2022/11/01     |
| Two-Line V-Network | R&S          | ENV216   | MRTSUE06002 | 1 year         | 2022/06/08     |
| Thermal Hygrometer | testo        | 608-H1   | MRTSUE06404 | 1 year         | 2022/06/28     |

### Radiated Emission (SIP-AC2)

| Instrument           | Manufacturer | Type No.    | Asset No.   | Cali. Interval | Cali. Due Date |
|----------------------|--------------|-------------|-------------|----------------|----------------|
| EMI Test Receiver    | R&S          | ESR3        | MRTSUE06613 | 1 year         | 2022/06/24     |
| MXA Signal Analyzer  | Keysight     | N9020B      | MRTSUE06604 | 1 year         | 2021/09/26     |
| MXA Signal Analyzer  | Keysight     | N9020B      | MRTSUE06604 | 1 year         | 2022/09/25     |
| Loop Antenna         | Schwarzbeck  | FMZB 1519 B | MRTSUE06937 | 1 year         | 2022/03/09     |
| Bilog Period Antenna | Schwarzbeck  | VULB9168    | MRTSUE06646 | 1 year         | 2021/08/30     |
| Bilog Period Antenna | Schwarzbeck  | VULB9168    | MRTSUE06646 | 1 year         | 2022/08/29     |
| Horn Antenna         | Schwarzbeck  | BBHA9120D   | MRTSUE06648 | 1 year         | 2021/11/26     |
| Horn Antenna         | Schwarzbeck  | BBHA9170    | MRTSUE06599 | 1 year         | 2021/11/26     |
| Preamplifier         | EMCI         | EMC051845SE | MRTSUE06644 | 1 year         | 2021/11/09     |
| Preamplifier         | EMCI         | EMC051845SE | MRTSUE06644 | 1 year         | 2022/11/08     |
| Preamplifier         | EMCI         | EMC184045SE | MRTSUE06602 | 1 year         | 2021/10/12     |
| Preamplifier         | EMCI         | EMC184045SE | MRTSUE06602 | 1 year         | 2022/10/11     |
| Thermal Hygrometer   | testo        | 608-H1      | MRTSUE06624 | 1 year         | 2021/12/03     |
| Anechoic Chamber     | RIKEN        | SIP-AC2     | MRTSUE06781 | 1 year         | 2021/12/24     |

| Software     | Version | Function          |
|--------------|---------|-------------------|
| EMI Software | V3      | EMI Test Software |

### 3. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

#### Conducted Emission Measurement

The maximum measurement uncertainty is evaluated as:

9kHz~150kHz: 3.74dB

150kHz~30MHz: 3.44dB

#### Radiated Emission Measurement

The maximum measurement uncertainty is evaluated as:

Horizontal: 30MHz~300MHz: 5.04dB

300MHz~1GHz: 4.95dB

1GHz~40GHz: 6.40dB

Vertical: 30MHz~300MHz: 5.24dB

300MHz~1GHz: 6.03dB

1GHz~40GHz: 6.40dB

## 4. TEST RESULT

### 4.1. Summary

| FCC Part Section(s) | ISED Part Section(s) | Test Description    | Test Result |
|---------------------|----------------------|---------------------|-------------|
| 15.107              | 3.2.1                | Conducted Emissions | Pass        |
| 15.109              | 3.2.2                | Radiated Emissions  | Pass        |

## 4.2. Conducted Emission Measurement


### 4.2.1. Test Limit

| FCC Part 15.107 / ICES-003 Issue 7 Limit |                    |                    |
|------------------------------------------|--------------------|--------------------|
| Frequency<br>(MHz)                       | QP<br>(dB $\mu$ V) | AV<br>(dB $\mu$ V) |
| 0.15 ~ 0.50                              | 66 ~ 56            | 56 ~ 46            |
| 0.50 ~ 5.0                               | 56                 | 46                 |
| 5.0 ~ 30                                 | 60                 | 50                 |

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 4.2.2. Test Setup

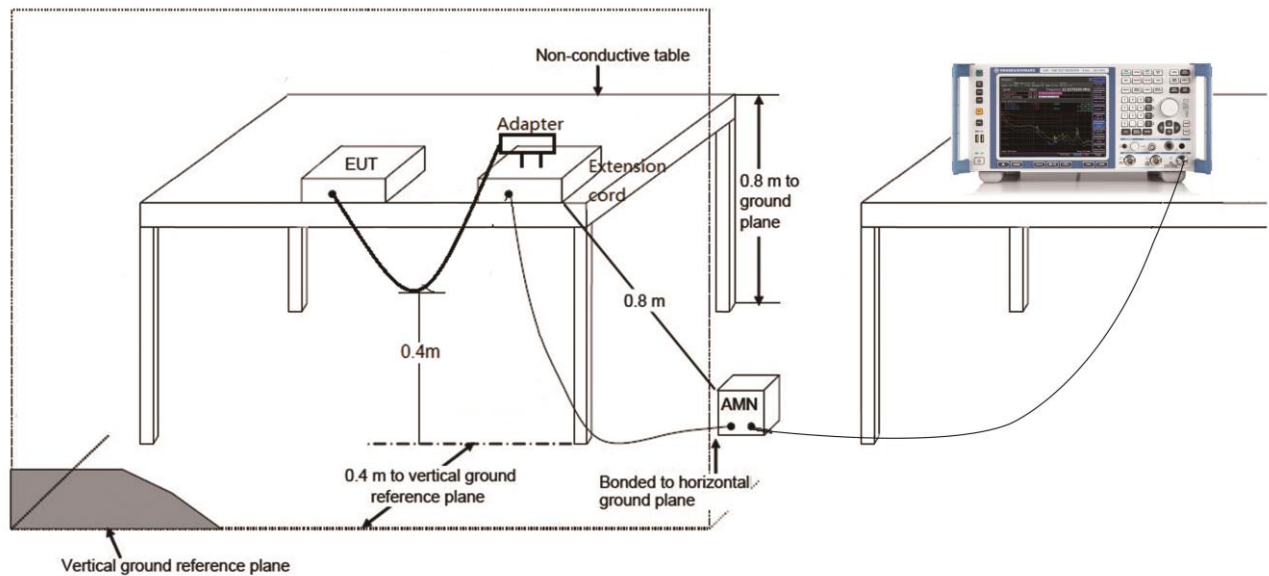

### 4.2.3. Test Result

|                                             |                          |
|---------------------------------------------|--------------------------|
| Site: WZ-SR2                                | Time: 2021/11/10 - 10:06 |
| Limit: FCC_Part15.107_CE_AC Power _ Class B | Engineer: Helen Han      |
| Probe: ENV216_101683_Filter Off _ C         | Polarity: Line           |
| EUT: LTE USB MODEM                          | Power: AC 120V/60Hz      |
| Test Mode 1                                 |                          |

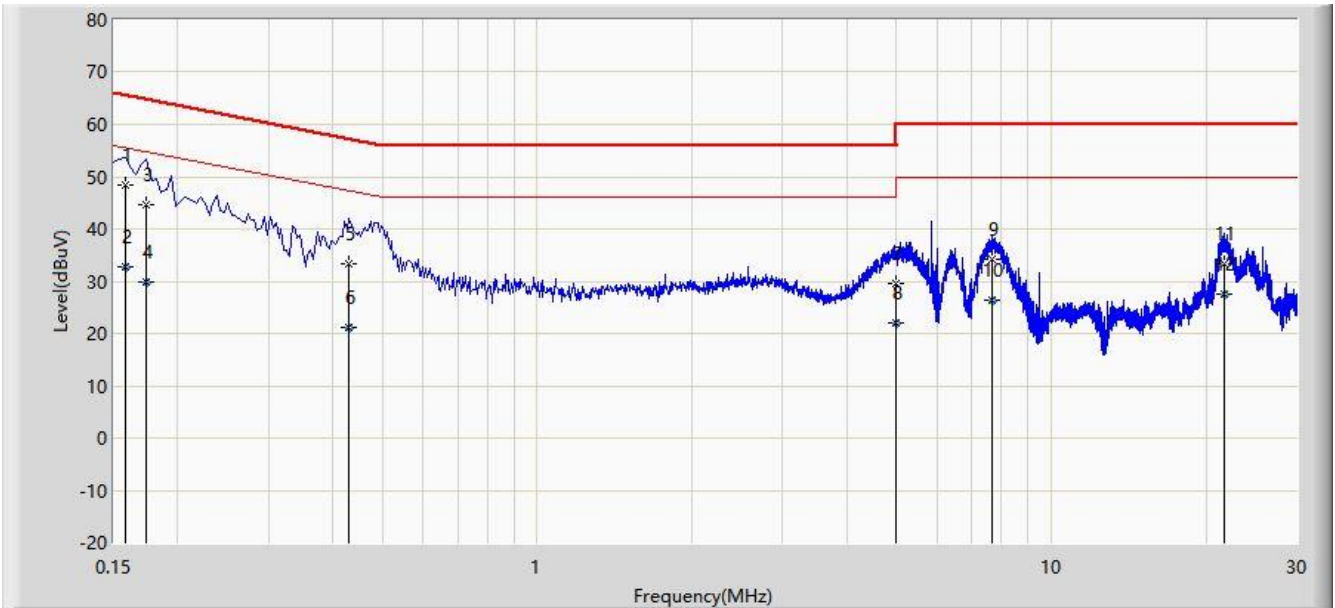


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV) | Factor (dB) | Type |
|----|------|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1  |      | *    | 0.158           | 48.512               | 38.464               | -17.056     | 65.568       | 10.048      | QP   |
| 2  |      |      | 0.158           | 32.700               | 22.652               | -22.868     | 55.568       | 10.048      | AV   |
| 3  |      |      | 0.174           | 44.780               | 34.735               | -19.987     | 64.767       | 10.045      | QP   |
| 4  |      |      | 0.174           | 29.799               | 19.754               | -24.968     | 54.767       | 10.045      | AV   |
| 5  |      |      | 0.430           | 33.379               | 23.278               | -23.874     | 57.253       | 10.101      | QP   |
| 6  |      |      | 0.430           | 21.191               | 11.090               | -26.061     | 47.253       | 10.101      | AV   |
| 7  |      |      | 5.000           | 29.536               | 18.827               | -26.464     | 56.000       | 10.709      | QP   |
| 8  |      |      | 5.000           | 22.068               | 11.359               | -23.932     | 46.000       | 10.709      | AV   |
| 9  |      |      | 7.658           | 34.197               | 23.393               | -25.803     | 60.000       | 10.804      | QP   |
| 10 |      |      | 7.658           | 26.318               | 15.514               | -23.682     | 50.000       | 10.804      | AV   |
| 11 |      |      | 21.706          | 33.201               | 21.950               | -26.799     | 60.000       | 11.250      | QP   |
| 12 |      |      | 21.706          | 27.444               | 16.194               | -22.556     | 50.000       | 11.250      | AV   |

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

|                                             |                          |
|---------------------------------------------|--------------------------|
| Site: WZ-SR2                                | Time: 2021/11/10 - 16:27 |
| Limit: FCC_Part15.107_CE_AC Power _ Class B | Engineer: Helen Han      |
| Probe: ENV216_101683_Filter Off _ C         | Polarity: Neutral        |
| EUT: LTE USB MODEM                          | Power: AC 120V/60Hz      |
| Test Mode 1                                 |                          |

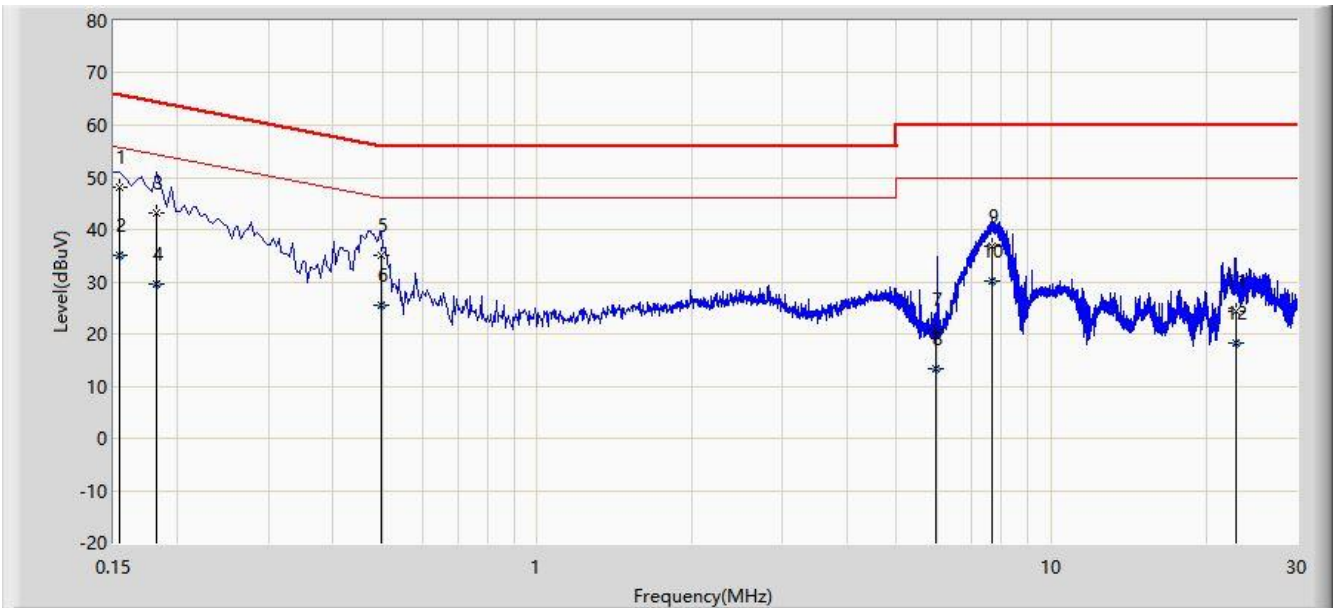

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV) | Factor (dB) | Type |
|----|------|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1  |      | *    | 0.154           | 48.109               | 37.739               | -17.672     | 65.781       | 10.370      | QP   |
| 2  |      |      | 0.154           | 35.065               | 24.694               | -20.717     | 55.781       | 10.370      | AV   |
| 3  |      |      | 0.182           | 43.221               | 32.877               | -21.173     | 64.394       | 10.345      | QP   |
| 4  |      |      | 0.182           | 29.459               | 19.115               | -24.935     | 54.394       | 10.345      | AV   |
| 5  |      |      | 0.498           | 34.952               | 24.572               | -21.082     | 56.033       | 10.380      | QP   |
| 6  |      |      | 0.498           | 25.562               | 15.182               | -20.471     | 46.033       | 10.380      | AV   |
| 7  |      |      | 5.979           | 20.796               | 9.800                | -39.204     | 60.000       | 10.996      | QP   |
| 8  |      |      | 5.979           | 13.296               | 2.300                | -36.704     | 50.000       | 10.996      | AV   |
| 9  |      |      | 7.686           | 36.713               | 25.659               | -23.287     | 60.000       | 11.054      | QP   |
| 10 |      |      | 7.686           | 30.274               | 19.220               | -19.726     | 50.000       | 11.054      | AV   |
| 11 |      |      | 22.854          | 24.300               | 12.807               | -35.700     | 60.000       | 11.494      | QP   |
| 12 |      |      | 22.854          | 18.396               | 6.903                | -31.604     | 50.000       | 11.494      | AV   |

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

### 4.3. Radiated Emission Measurement

#### 4.3.1. Test Limit

| FCC Part 15.109 / ICES-003 Issue 7 Limit |                 |                          |
|------------------------------------------|-----------------|--------------------------|
| Frequency<br>(MHz)                       | Distance<br>(m) | Level<br>(dB $\mu$ V/m)  |
| 30 - 88                                  | 3               | 40                       |
| 88 - 216                                 | 3               | 43.5                     |
| 216 - 230                                | 3               | 46                       |
| 230 - 960                                | 3               | 46 / 47 <sup>Note4</sup> |
| 960 - 1000                               | 3               | 54                       |
| Above 1000                               | 3               | 54                       |

Note 1: The lower limit shall apply at the transition frequency.


Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

Note 3: E field strength (dB $\mu$ V/m) = 20 log E field strength (uV/m)


Note 4: For the range of 216MHz to 960MHz, the limit of FCC Part 15.109 is more stringent than the limit of ICES-003 Issue 7, so only the limit of FCC Part 15.109 is shown in the test data.

### 4.3.2. Test Setup

#### Below 1GHz Test Setup:

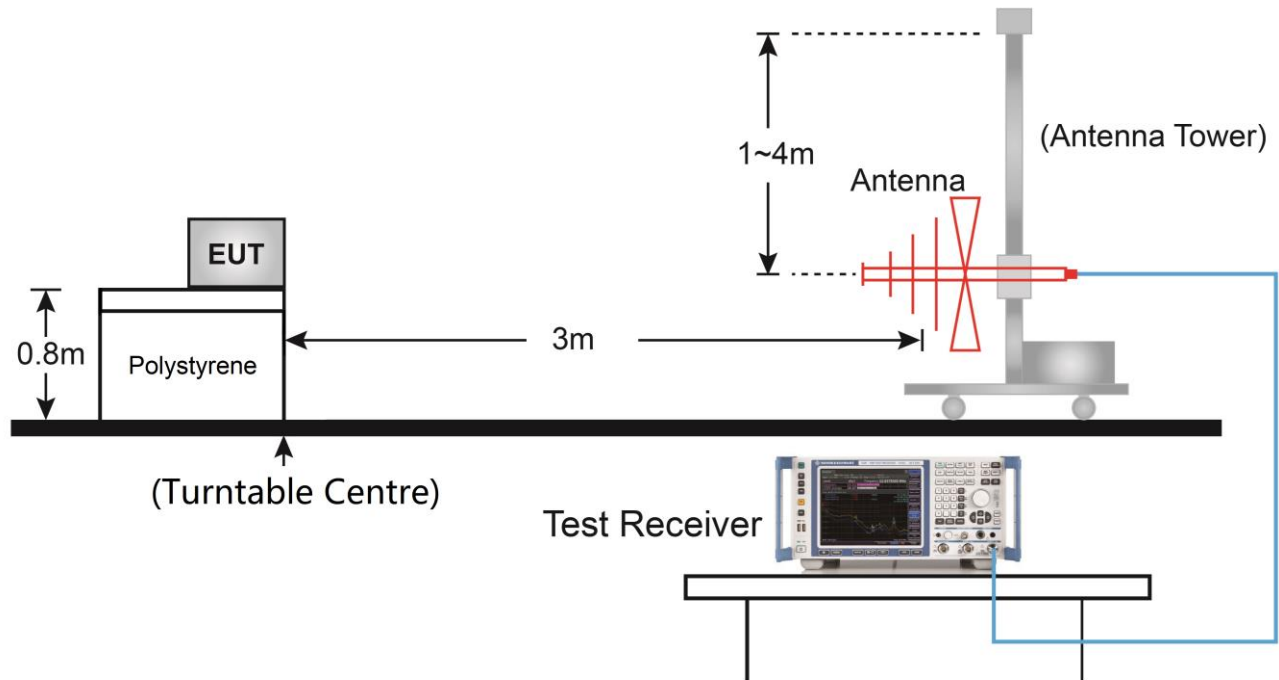


#### Above 1GHz Test Setup:

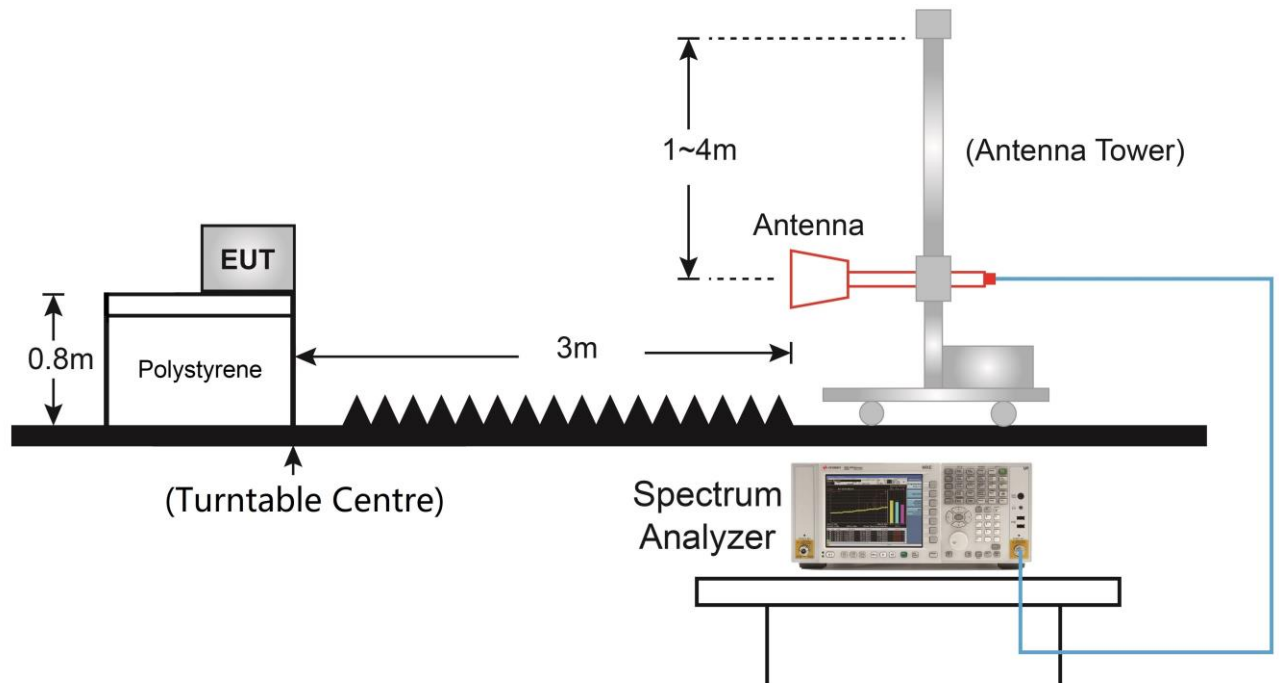

### 4.3.3.Test Result

|                                      |                          |
|--------------------------------------|--------------------------|
| Site: SIP-AC2                        | Time: 2021/06/23 - 00:30 |
| Limit: FCC_Part15.109_RE(3m)_Class B | Engineer: Edward Zhang   |
| Probe: SIP-AC2_VULB 9168 _30-1000MHz | Polarity: Horizontal     |
| EUT: LTE USB MODEM                   | Power: By USB            |
| Test Mode 1                          |                          |

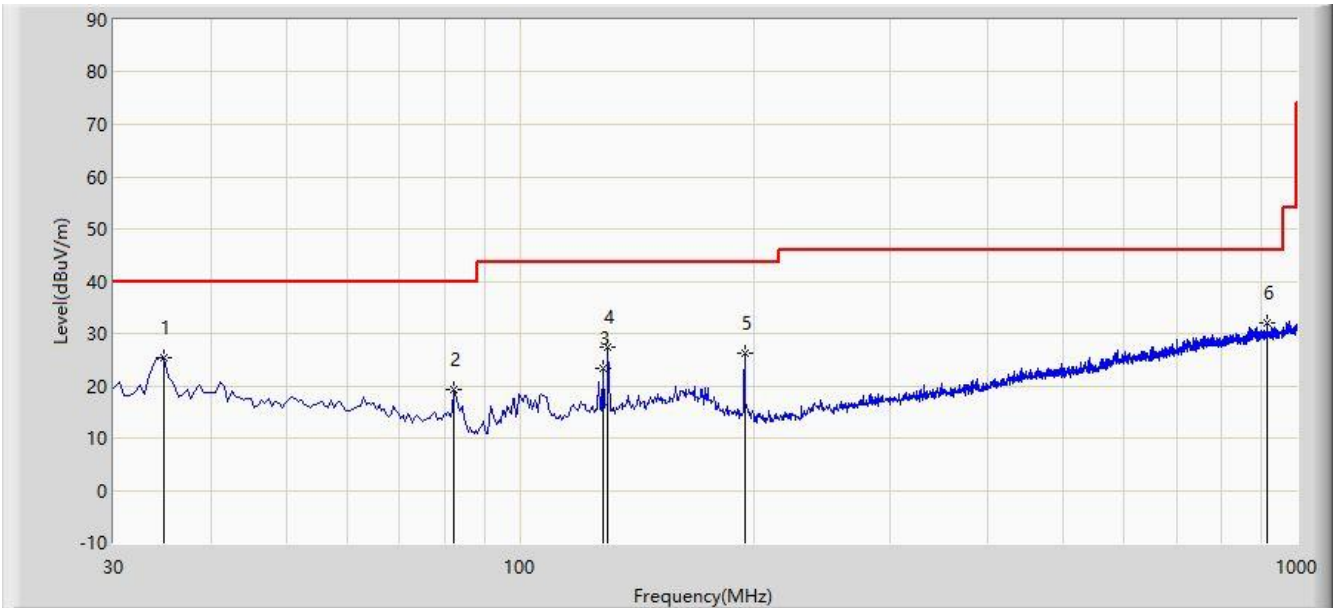


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 34.850          | 25.310                 | 7.824                | -14.690     | 40.000         | 17.486      | PK   |
| 2  |      |      | 82.380          | 19.271                 | 5.874                | -20.729     | 40.000         | 13.397      | PK   |
| 3  |      |      | 127.970         | 23.401                 | 6.491                | -20.099     | 43.500         | 16.910      | PK   |
| 4  |      |      | 129.910         | 27.503                 | 10.386               | -15.997     | 43.500         | 17.117      | PK   |
| 5  |      |      | 194.900         | 26.109                 | 10.546               | -17.391     | 43.500         | 15.563      | PK   |
| 6  |      | *    | 914.640         | 31.937                 | 1.583                | -14.063     | 46.000         | 30.354      | PK   |

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 2: QP measurement was not performed when peak measure level was lower than the QP limit.

|                                      |                          |
|--------------------------------------|--------------------------|
| Site: SIP-AC2                        | Time: 2021/06/23 - 00:36 |
| Limit: FCC_Part15.109_RE(3m)_Class B | Engineer: Edward Zhang   |
| Probe: SIP-AC2_VULB 9168 _30-1000MHz | Polarity: Vertical       |
| EUT: LTE USB MODEM                   | Power: By USB            |
| Test Mode 1                          |                          |

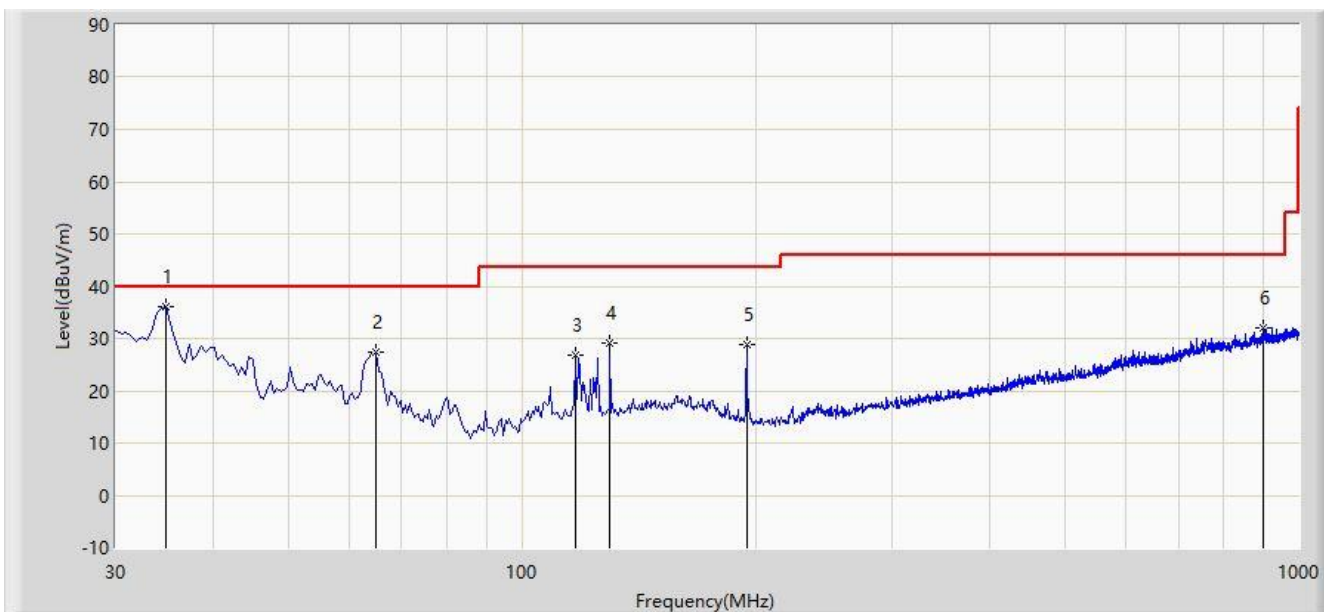


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 34.850          | 36.082                 | 18.596               | -3.918      | 40.000         | 17.486      | PK   |
| 2  |      |      | 64.920          | 27.461                 | 10.147               | -12.539     | 40.000         | 17.314      | PK   |
| 3  |      |      | 117.300         | 26.870                 | 10.919               | -16.630     | 43.500         | 15.951      | PK   |
| 4  |      |      | 129.910         | 29.086                 | 11.969               | -14.414     | 43.500         | 17.117      | PK   |
| 5  |      |      | 194.900         | 28.839                 | 13.276               | -14.661     | 43.500         | 15.563      | PK   |
| 6  |      |      | 900.090         | 32.002                 | 1.821                | -13.998     | 46.000         | 30.181      | PK   |

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 2: QP measurement was not performed when peak measure level was lower than the QP limit.

|                                      |                          |
|--------------------------------------|--------------------------|
| Site: SIP-AC2                        | Time: 2021/06/23 - 00:56 |
| Limit: FCC_Part15.109_RE(3m)_Class B | Engineer: Edward Zhang   |
| Probe: SIP-AC2_BBHA9120D_1-18GHz     | Polarity: Horizontal     |
| EUT: LTE USB MODEM                   | Power: By USB            |
| Test Mode 1                          |                          |

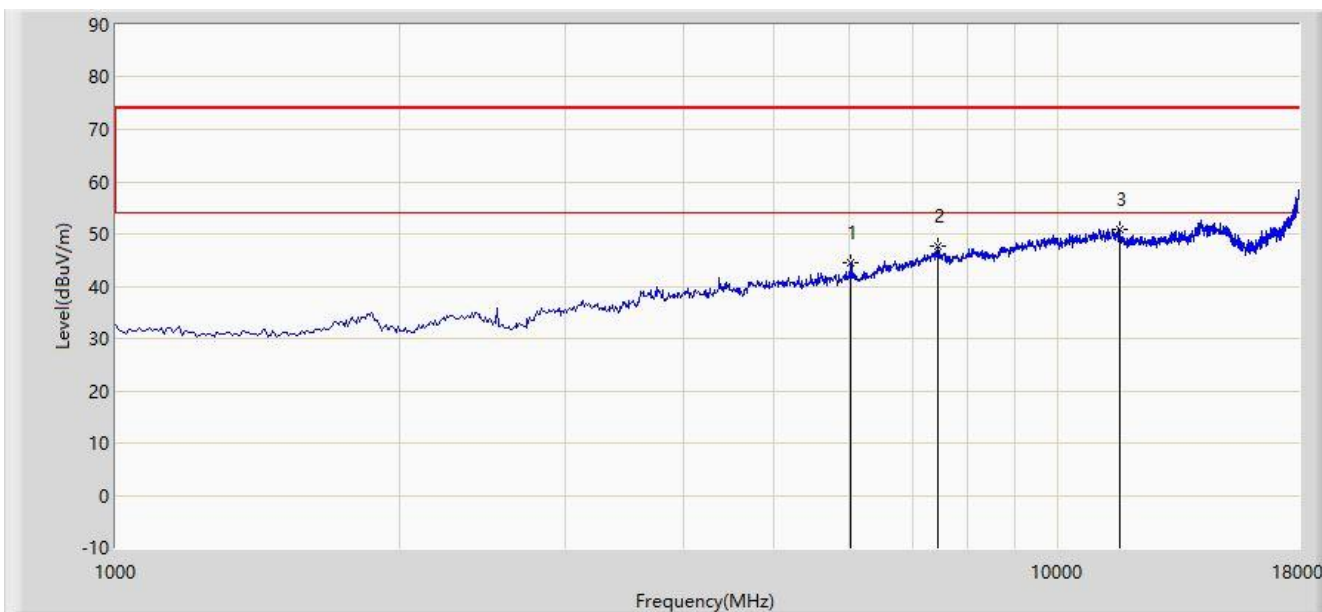


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 6032.000        | 44.553                 | 51.455               | -29.447     | 74.000         | -6.902      | PK   |
| 2  |      |      | 7460.000        | 47.661                 | 48.692               | -26.339     | 74.000         | -1.031      | PK   |
| 3  |      | *    | 11616.500       | 50.887                 | 45.764               | -23.113     | 74.000         | 5.123       | PK   |

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Note 2: The amplitude of radiated emissions (frequency range from 18GHz to 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

|                                      |                          |
|--------------------------------------|--------------------------|
| Site: SIP-AC2                        | Time: 2021/06/23 - 01:03 |
| Limit: FCC_Part15.109_RE(3m)_Class B | Engineer: Edward Zhang   |
| Probe: SIP-AC2_BBHA9120D_1-18GHz     | Polarity: Vertical       |
| EUT: LTE USB MODEM                   | Power: By USB            |
| Test Mode 1                          |                          |

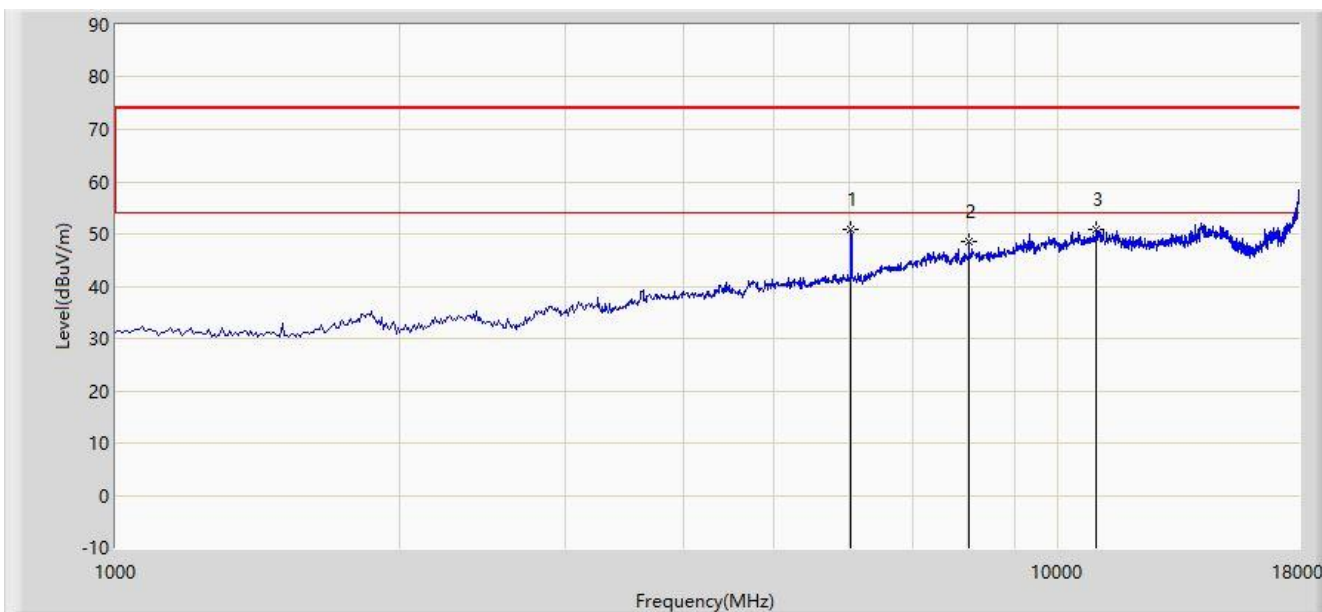

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 6032.000        | 50.964                 | 57.866               | -23.036     | 74.000         | -6.902      | PK   |
| 2  |      |      | 8046.500        | 48.419                 | 48.844               | -25.581     | 74.000         | -0.425      | PK   |
| 3  |      |      | 10987.500       | 50.805                 | 45.970               | -23.195     | 74.000         | 4.836       | PK   |

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Note 2: The amplitude of radiated emissions (frequency range from 18GHz to 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

## 5. CONCLUSION

The data collected relate only the item(s) tested and show that this device has been tested to comply with the requirements specified in §15.107 / §15.109 of the FCC Rules and ICES-003 of ISED Rules.

---

The End

## **Appendix A - Test Setup Photograph**

Refer to "2106RSU002-UT" file.

## **Appendix B - EUT Photograph**

Refer to "2106RSU002-UE" file.