




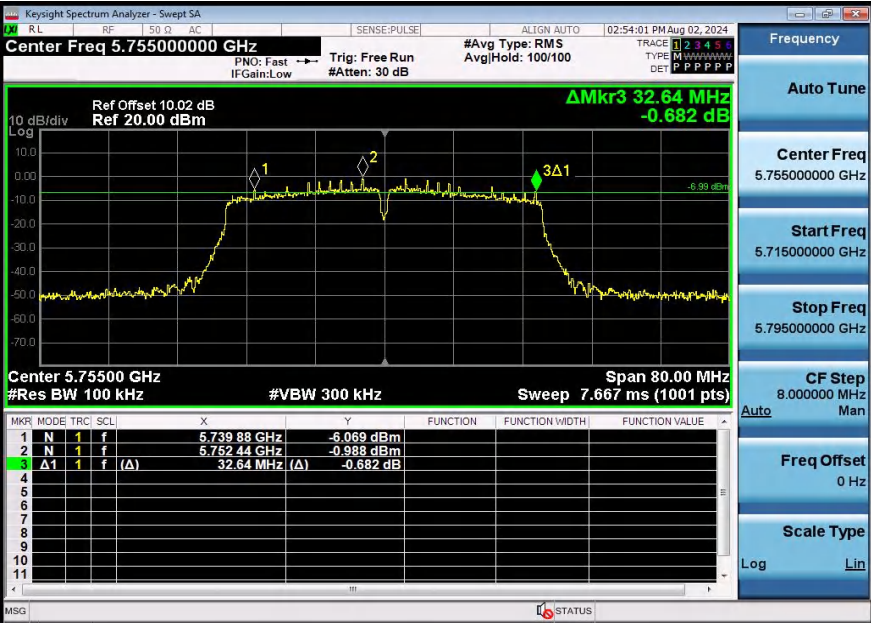


11AC40SISO-Ant2-5755-PASS

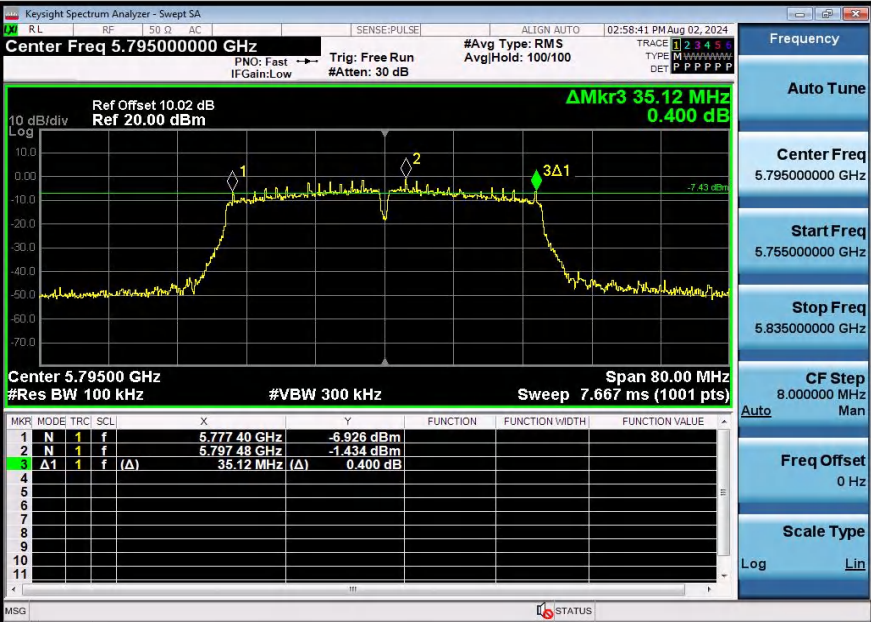


11AC40SISO-Ant2-5795-PASS

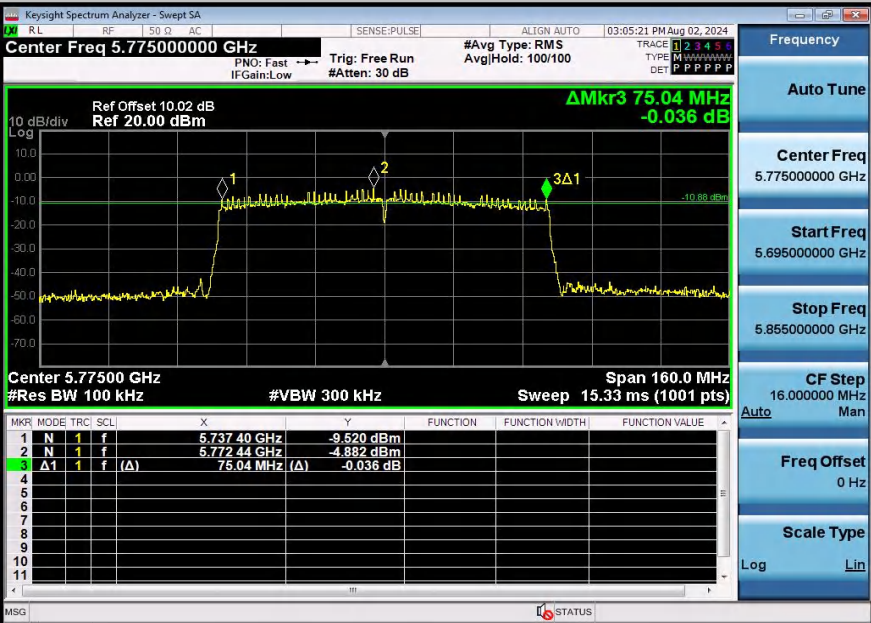


11AC80SISO-Ant2-5775-PASS

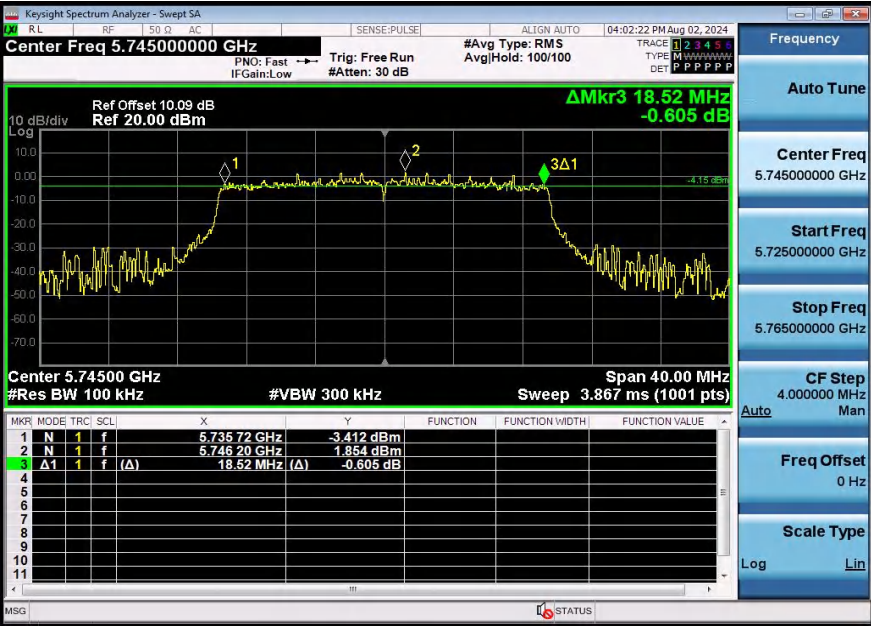


11AX20SISO-Ant2-5745-PASS

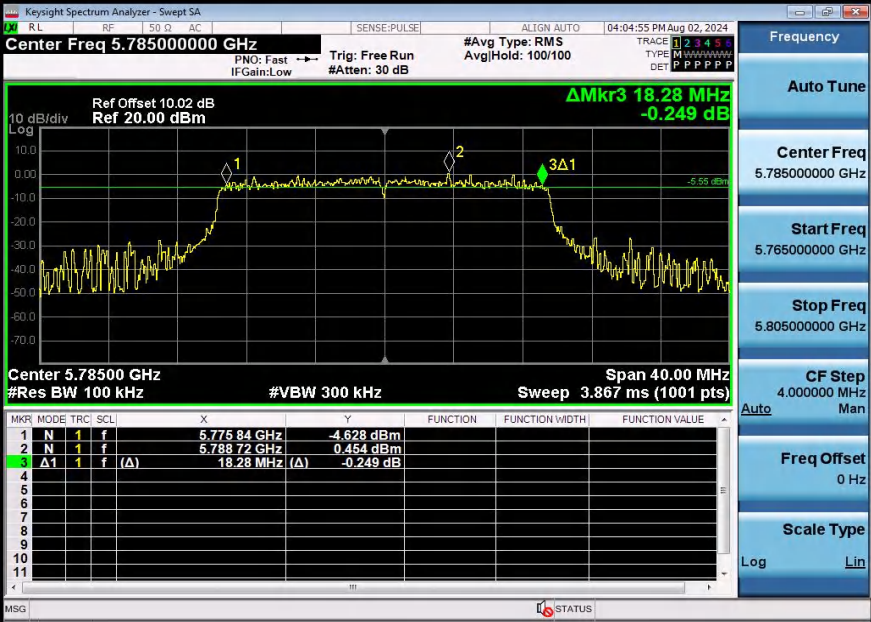


11AX20SISO-Ant2-5785-PASS

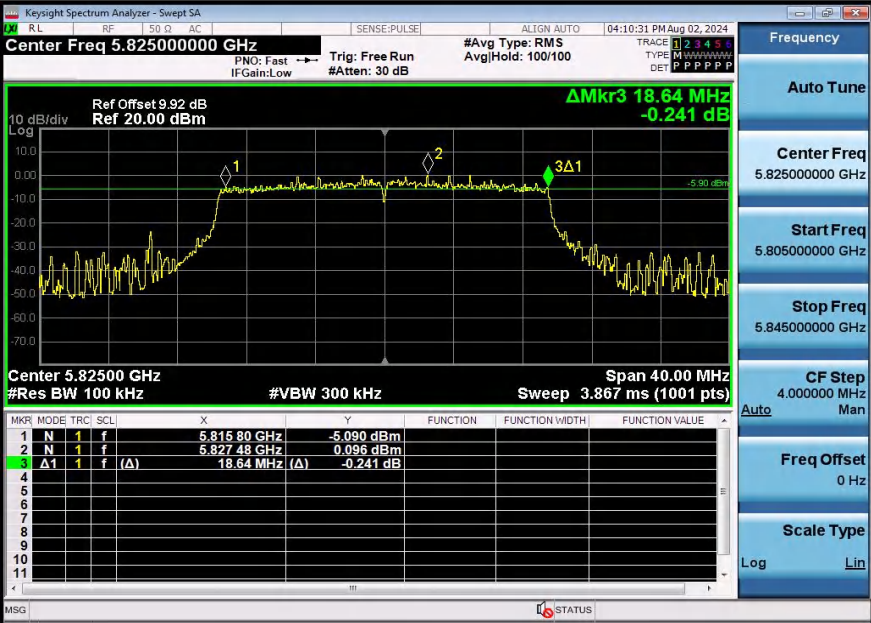


11AX20SISO-Ant2-5825-PASS

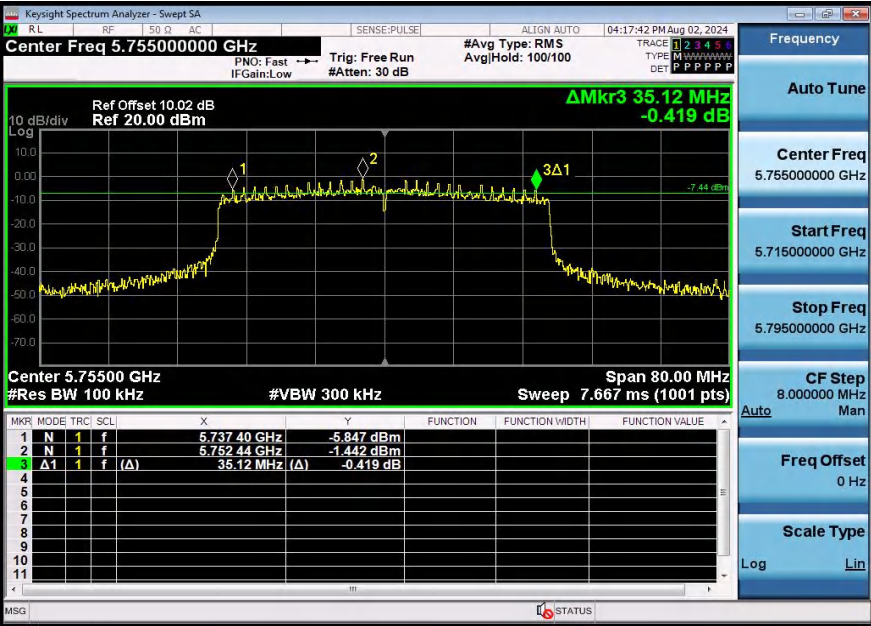

11AX40SISO-Ant2-5755-PASS

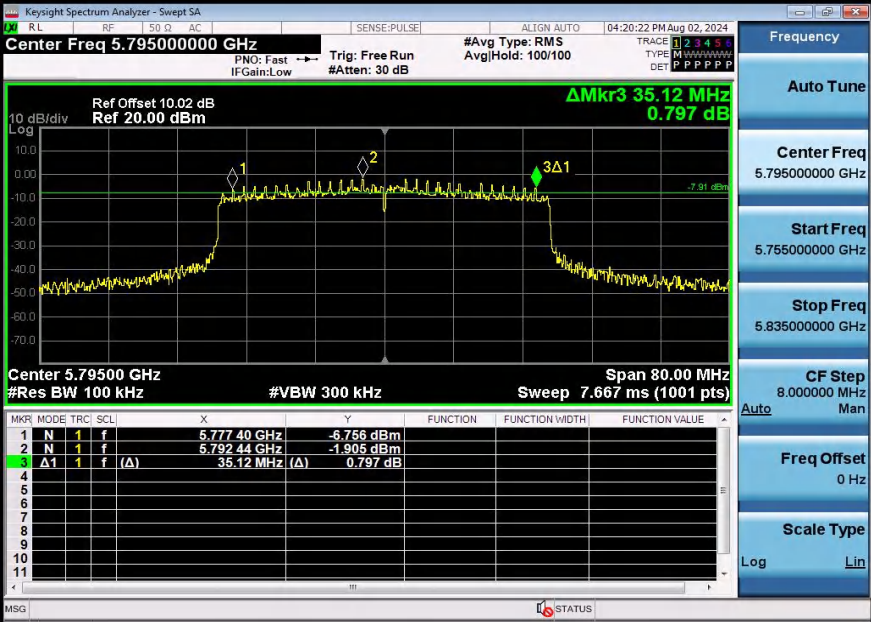

11AX40SISO-Ant2-5795-PASS

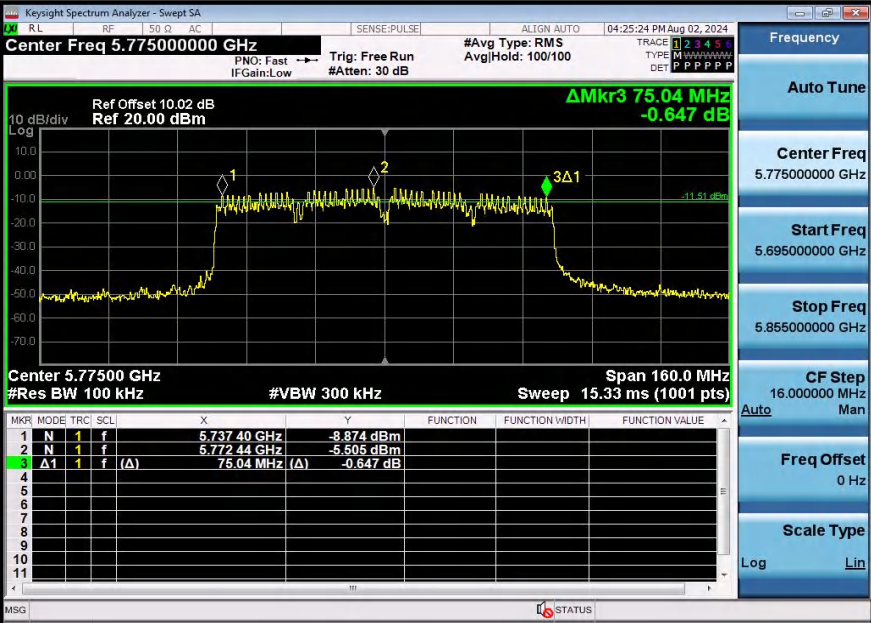


11AX80SISO-Ant2-5775-PASS

4.7 Frequency Stability

LIMIT

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

TEST CONFIGURATION

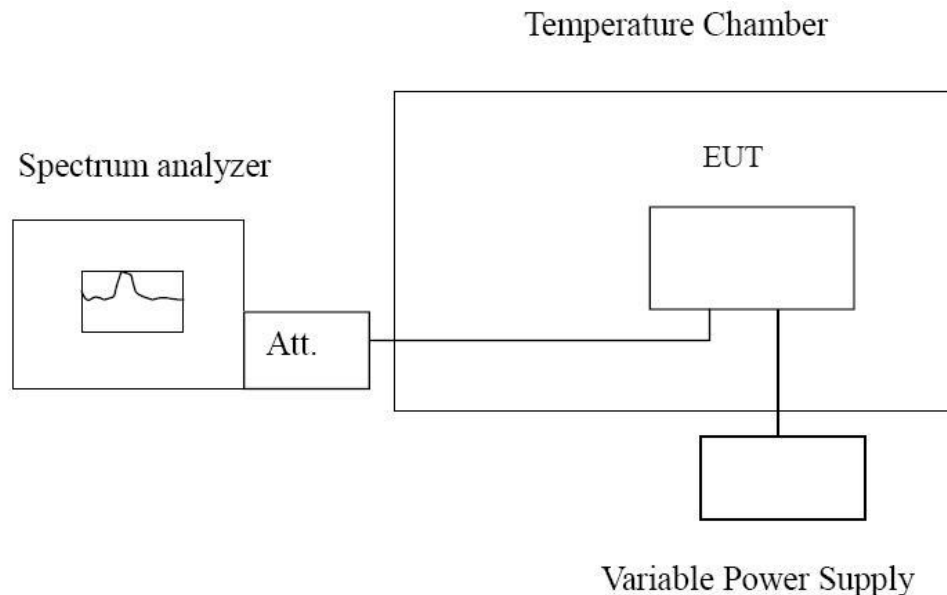

TEST PROCEDURE

Frequency Stability under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

Frequency Stability under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

TEST RESULTS

Record worst case as below:

Ant 1

Reference Frequency: 802.11ac channel=36 frequency=5180MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
24.0	-30	168.42	0.03251	Within the band of operation	Pass
	-20	153.95	0.02972		
	-10	147.29	0.02843		
	0	136.82	0.02641		
	10	140.17	0.02706		
	20	158.43	0.03058		
	30	161.24	0.03113		
	40	156.37	0.03019		
	50	172.85	0.03337		
26.4	20	144.31	0.02786	Within the band of operation	Pass
21.6	20	156.28	0.03017		

Reference Frequency: 802.11ac channel=149 frequency=5745MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
24.0	-30	147.34	0.02565	Within the band of operation	Pass
	-20	166.89	0.02905		
	-10	152.17	0.02649		
	0	143.68	0.02501		
	10	155.37	0.02704		
	20	159.26	0.02772		
	30	146.85	0.02556		
	40	143.14	0.02492		
	50	138.28	0.02407		
26.4	20	140.52	0.02446	Within the band of operation	Pass
21.6	20	136.43	0.02375		

Ant 2

Reference Frequency: 802.11ac channel=36 frequency=5180MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
24.0	-30	153.26	0.02959	Within the band of operation	Pass
	-20	148.13	0.02860		
	-10	162.47	0.03136		
	0	154.45	0.02982		
	10	137.68	0.02658		
	20	142.35	0.02748		
	30	165.46	0.03194		
	40	151.79	0.02930		
	50	162.34	0.03134		
26.4	20	148.27	0.02862	Within the band of operation	Pass
21.6	20	146.38	0.02826		

Reference Frequency: 802.11ac channel=149 frequency=5745MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
24.0	-30	147.48	0.02567	Within the band of operation	Pass
	-20	133.67	0.02327		
	-10	142.59	0.02482		
	0	154.26	0.02685		
	10	161.34	0.02808		
	20	152.45	0.02654		
	30	143.82	0.02503		
	40	147.31	0.02564		
	50	132.98	0.02315		
26.4	20	155.46	0.02706	Within the band of operation	Pass
21.6	20	154.87	0.02696		

4.8 Automatically Discontinue Transmission

Standard Applicable

FCC CFR Title 47 Part 15 Subpart C Section 15.407(c):

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

Test Result:

Declared by applicants that the device will automatically discontinue transmission in case of either absence of information to transmit or operational failure.

4.9 Band edge for RF Conducted Emissions

Limit

1) For transmitters operating in the 5.15 – 5.25 GHz band: All emissions outside of the 5.15 – 5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

2) For transmitters operating solely in the 5.725 – 5.850 GHz band.

All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector , and max hold.


Test Configuration




Test Results

Test plot as follows:


Ant 1

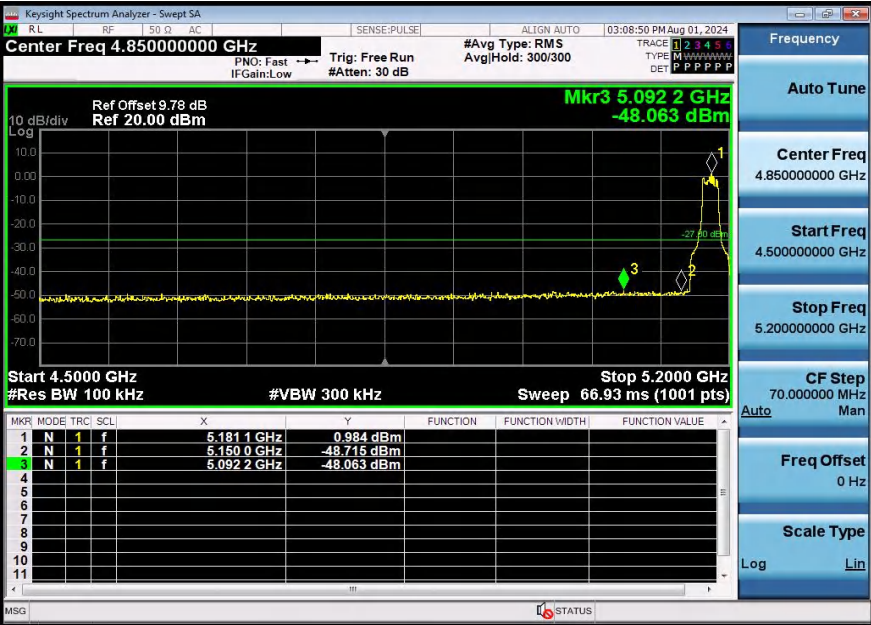


11A-Ant1-5180-PASS

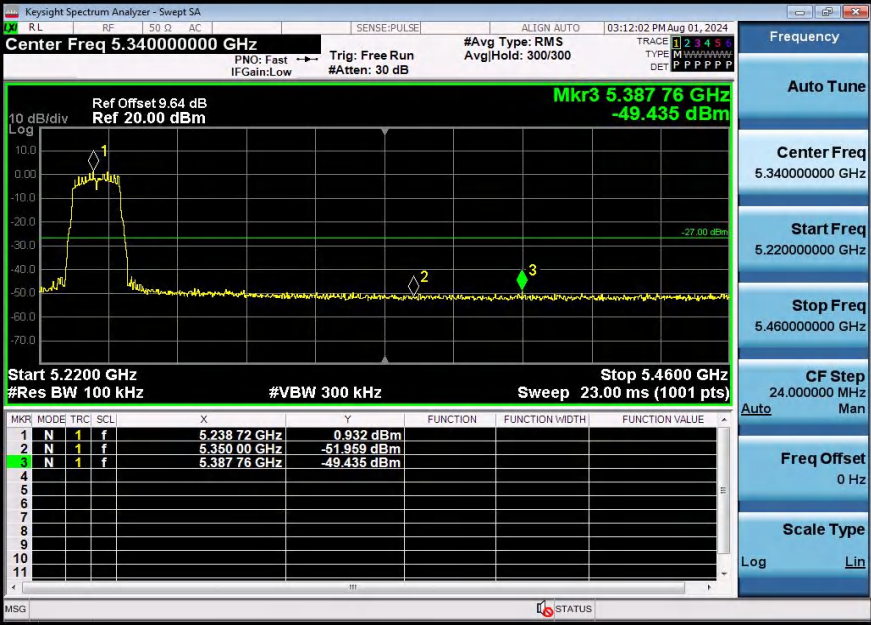


11A-Ant1-5240-PASS

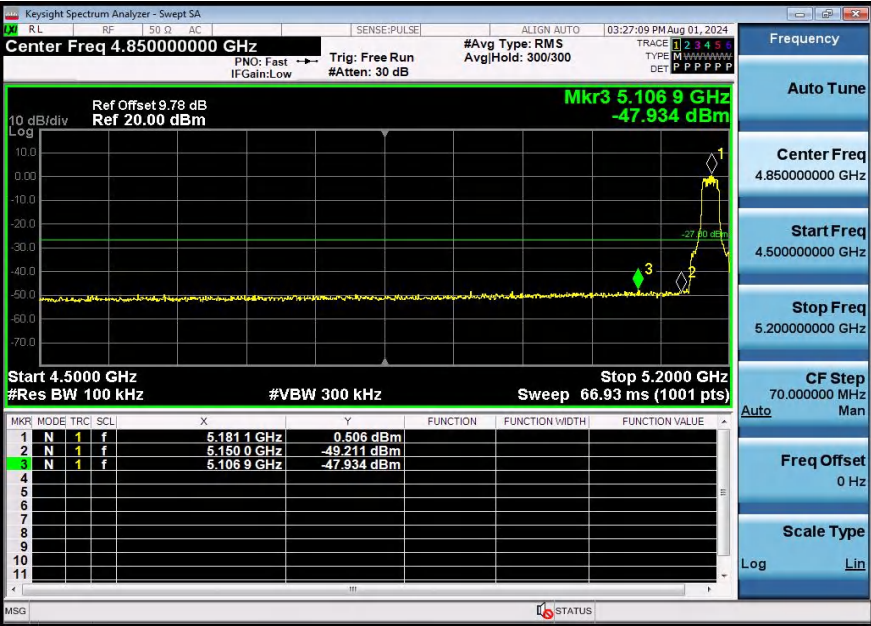


11N20SISO-Ant1-5180-PASS

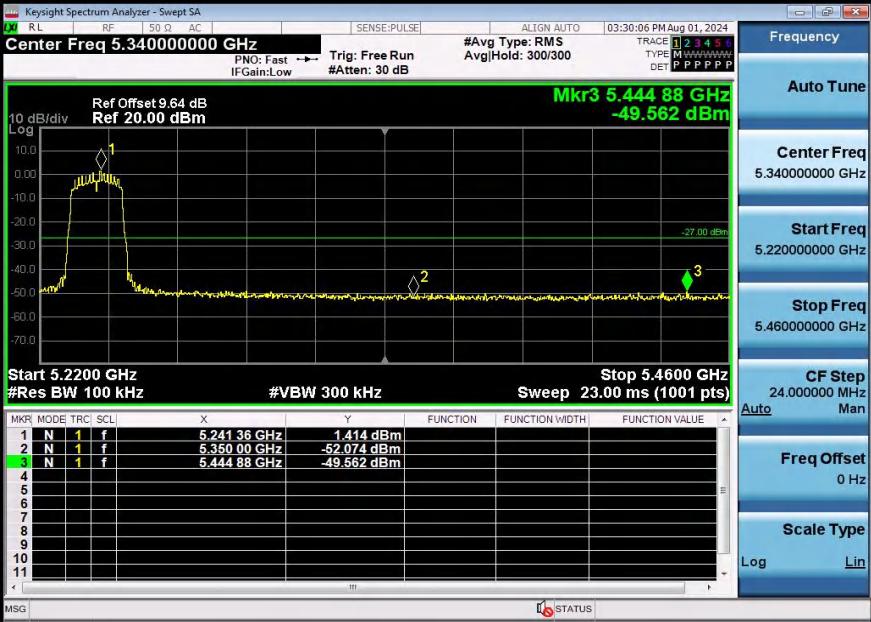


11N20SISO-Ant1-5240-PASS

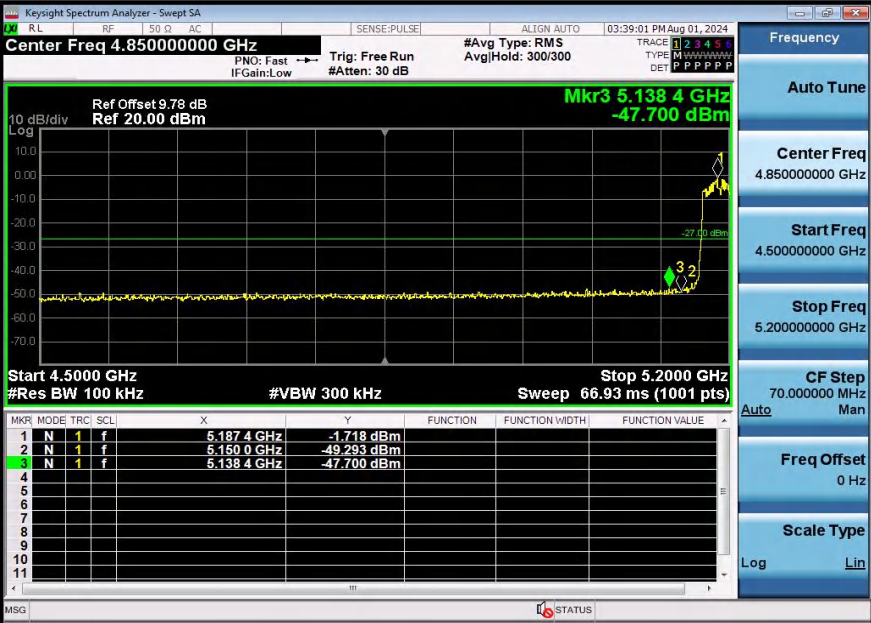


11N40SISO-Ant1-5190-PASS

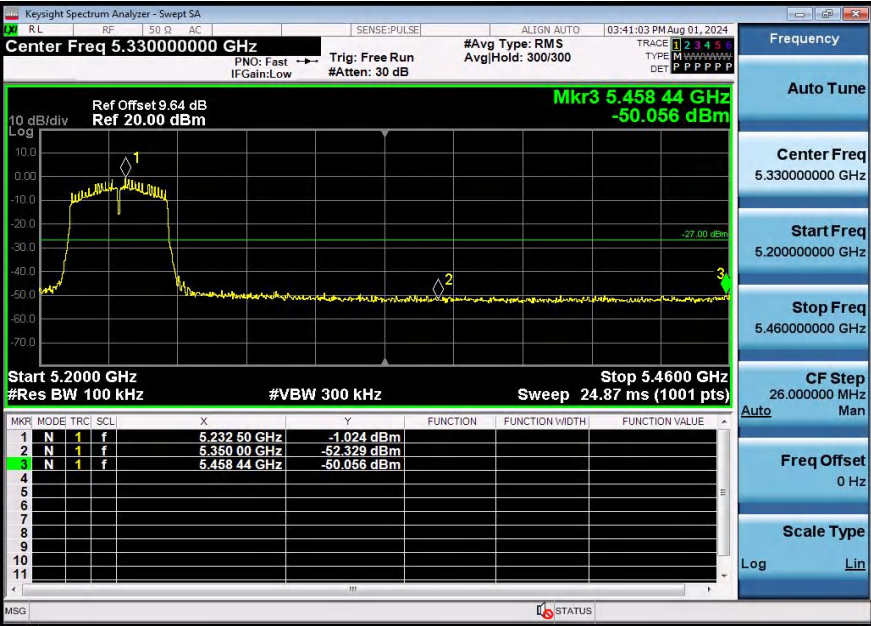


11N40SISO-Ant1-5230-PASS

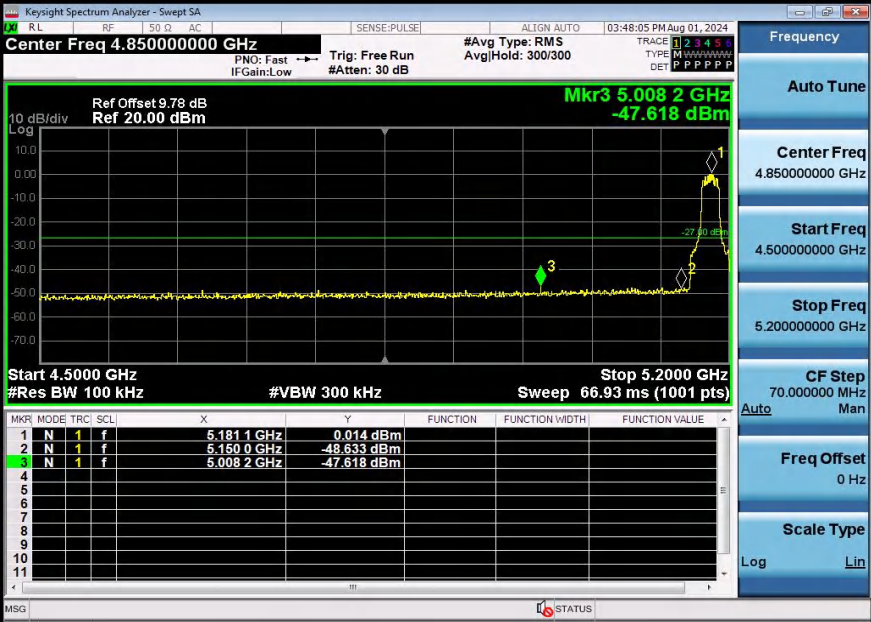


11AC20SISO-Ant1-5180-PASS

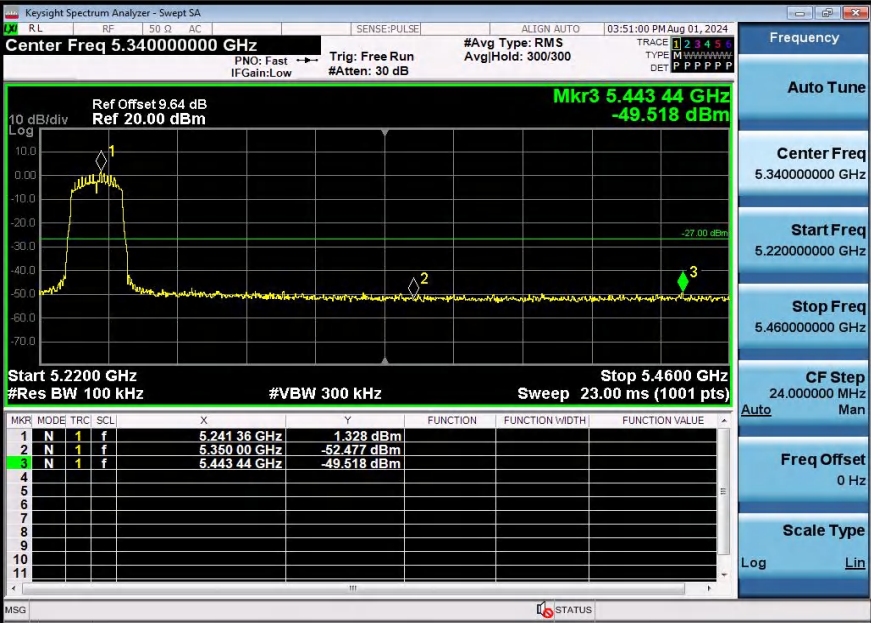


11AC20SISO-Ant1-5240-PASS

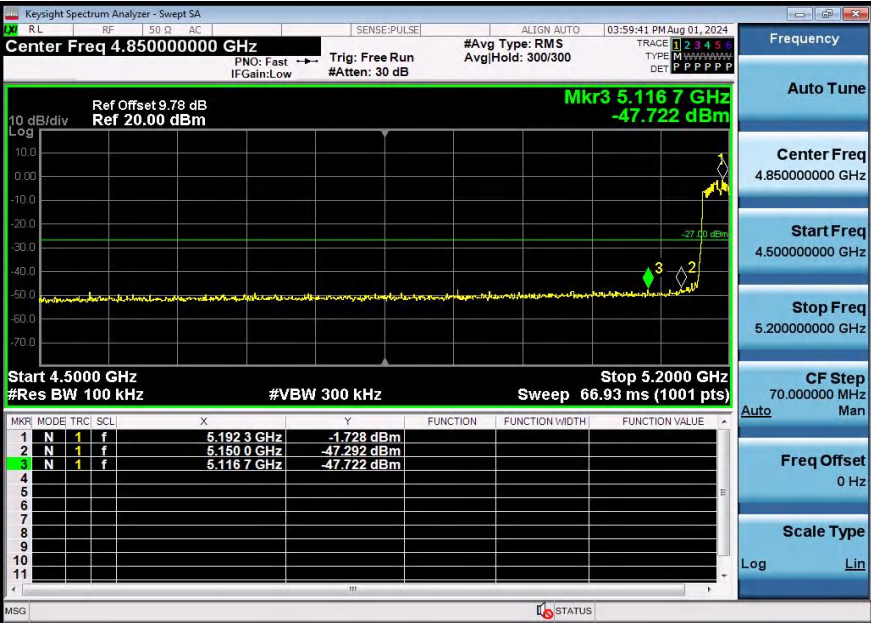


11AC40SISO-Ant1-5190-PASS

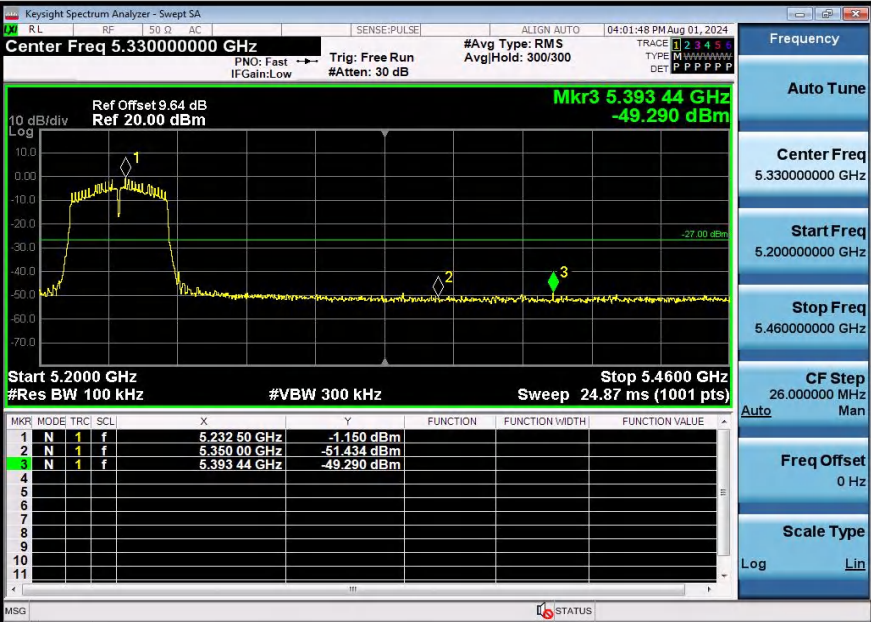


11AC40SISO-Ant1-5230-PASS

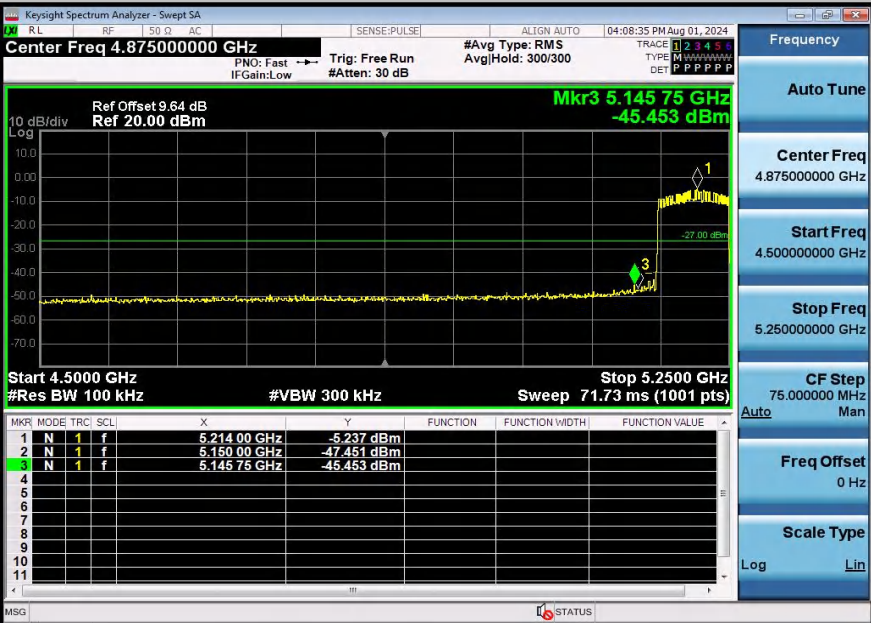


11AC80SISO-Ant1-5210-PASS

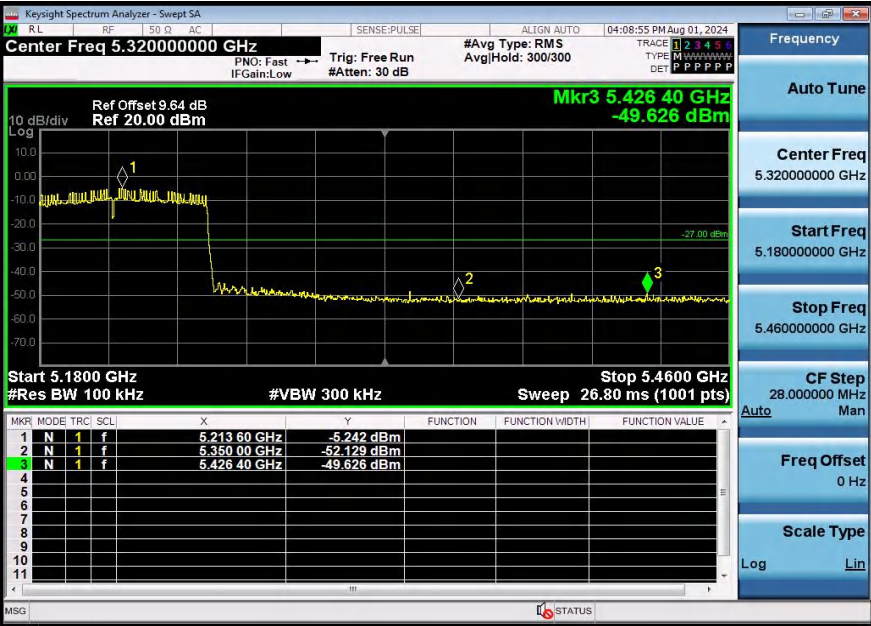


11AC80SISO-Ant1-5210-PASS

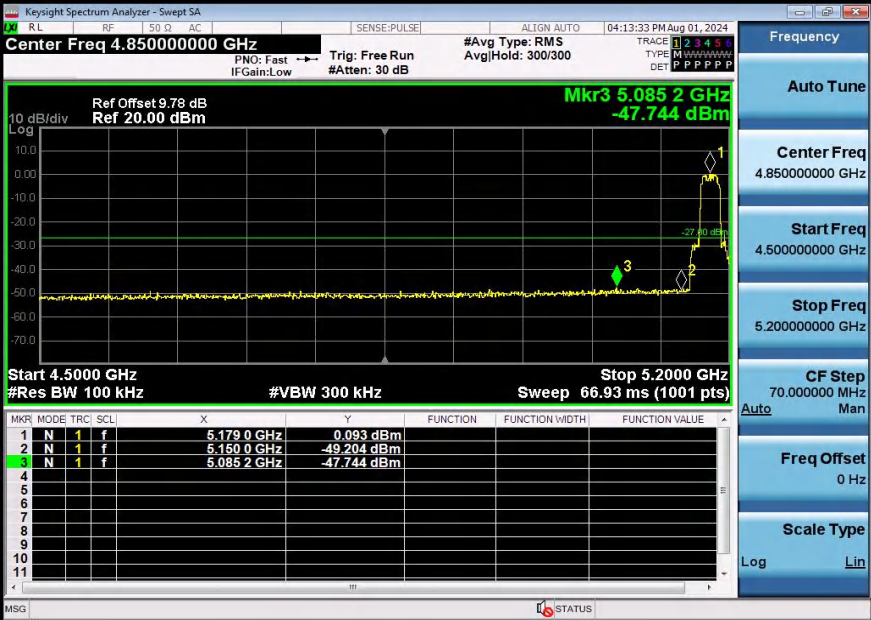


11AX20SISO-Ant1-5180-PASS

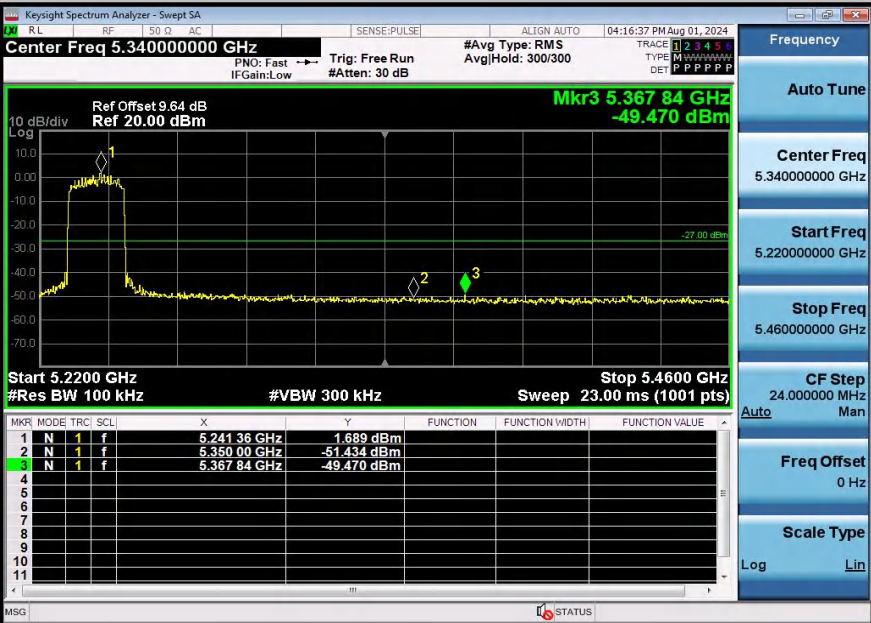


11AX20SISO-Ant1-5240-PASS

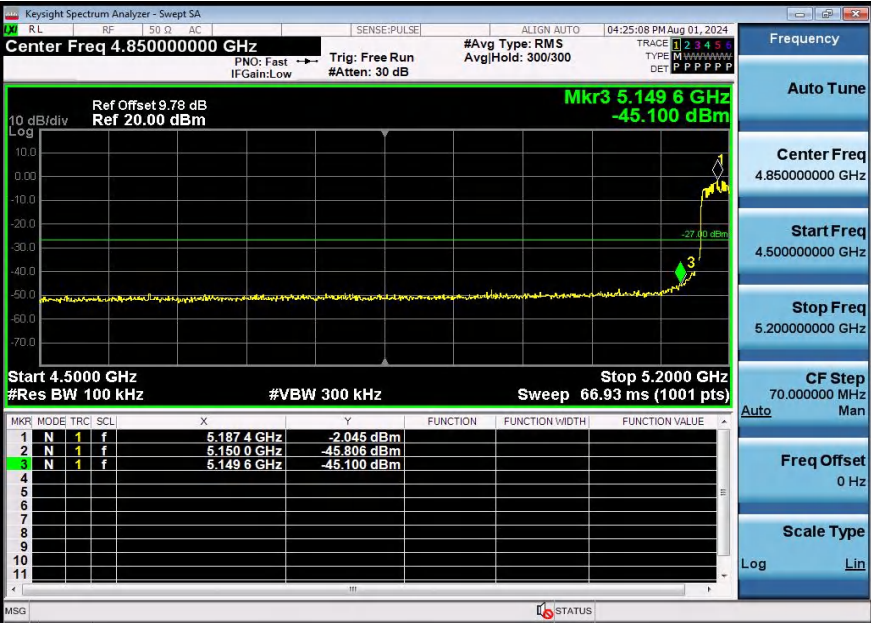


11AX40SISO-Ant1-5190-PASS


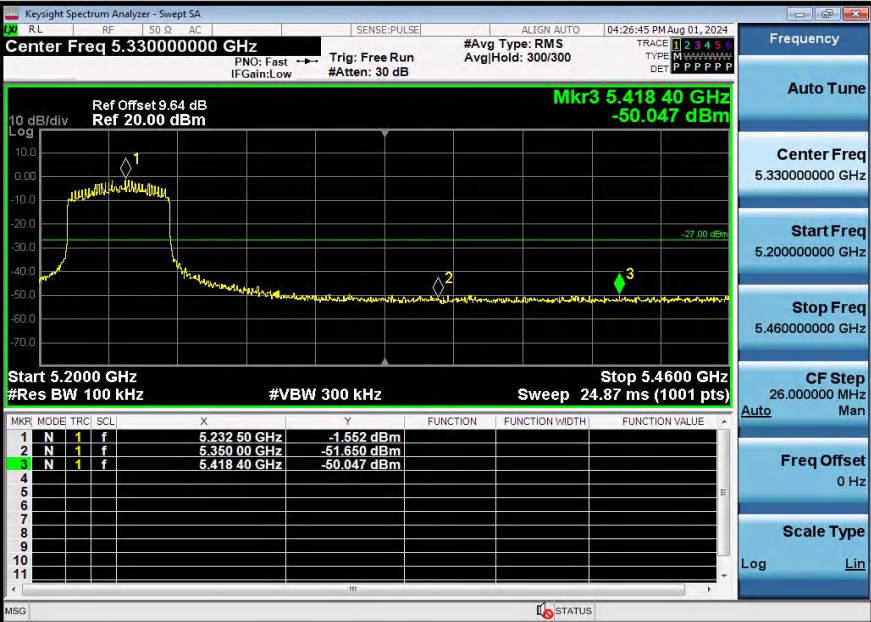


11AX40SISO-Ant1-5230-PASS

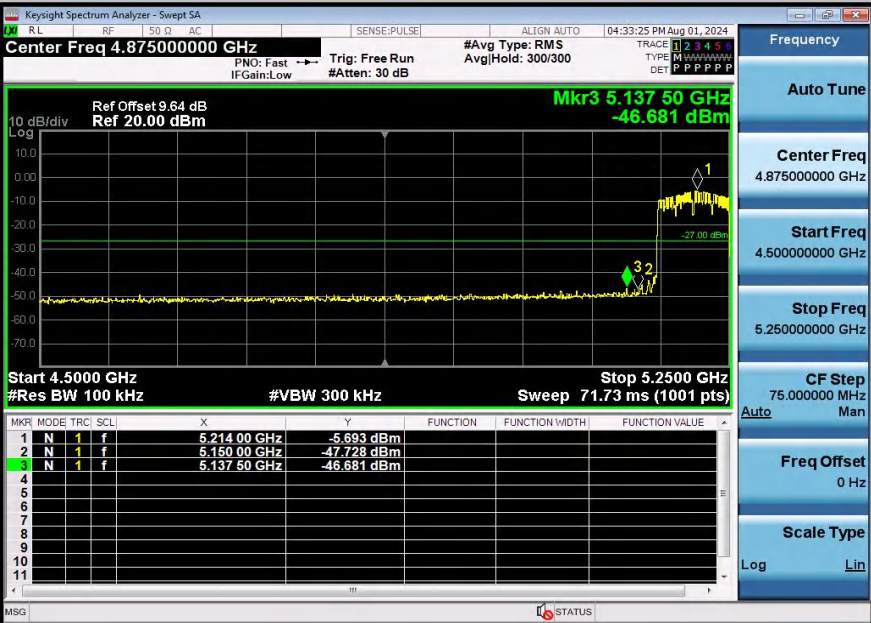

11AX80SISO-Ant1-5210-PASS

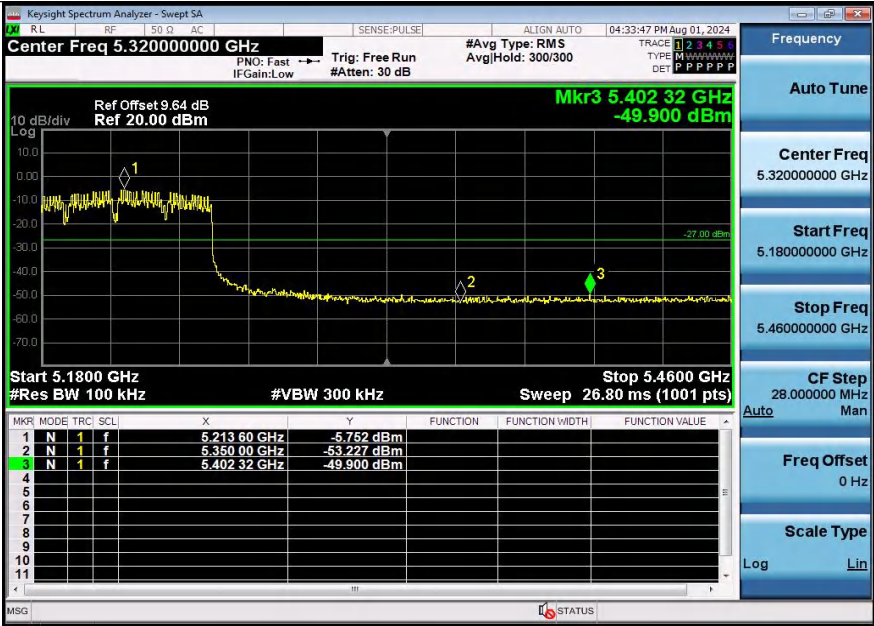


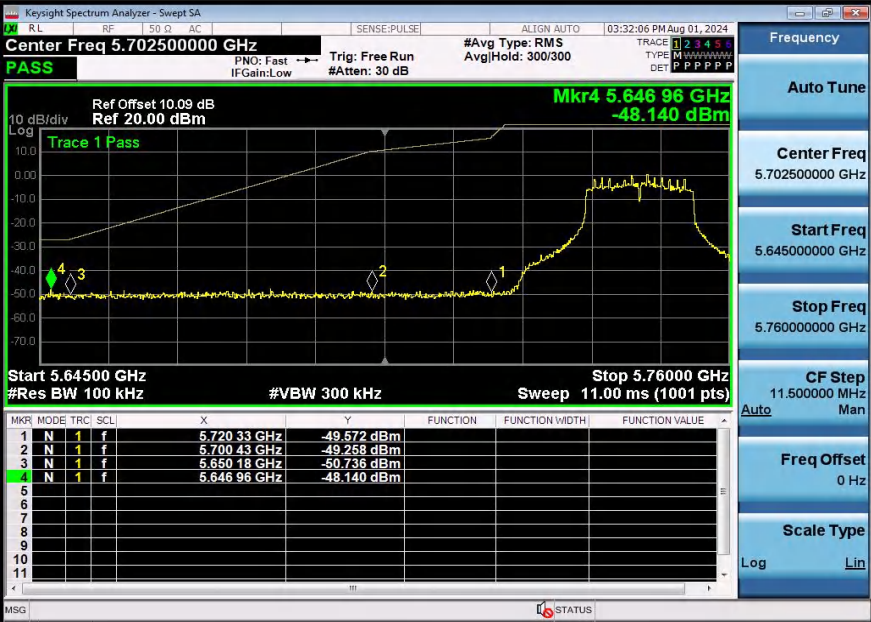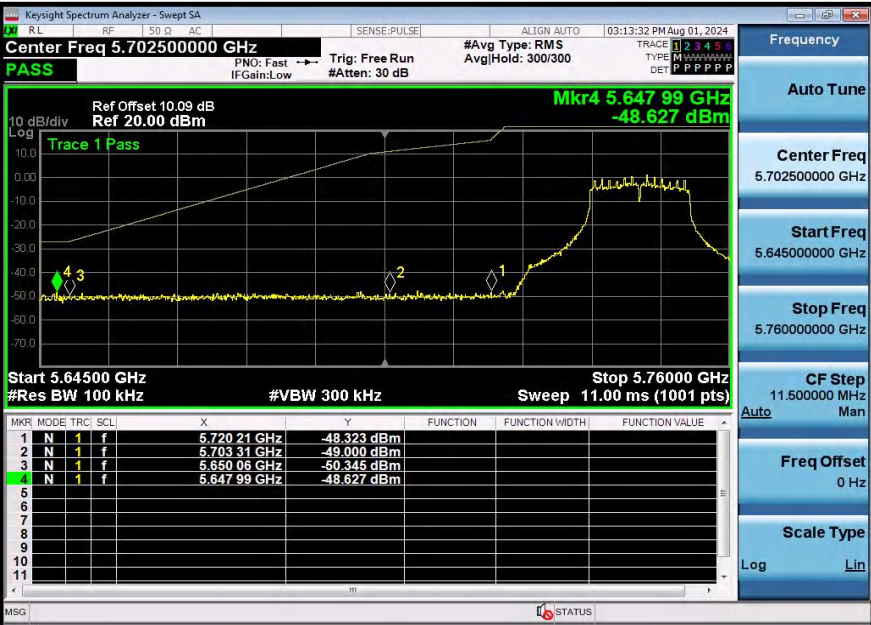

11N20SISO-Ant1-5745-PASS



11N20SISO-Ant1-5825-PASS

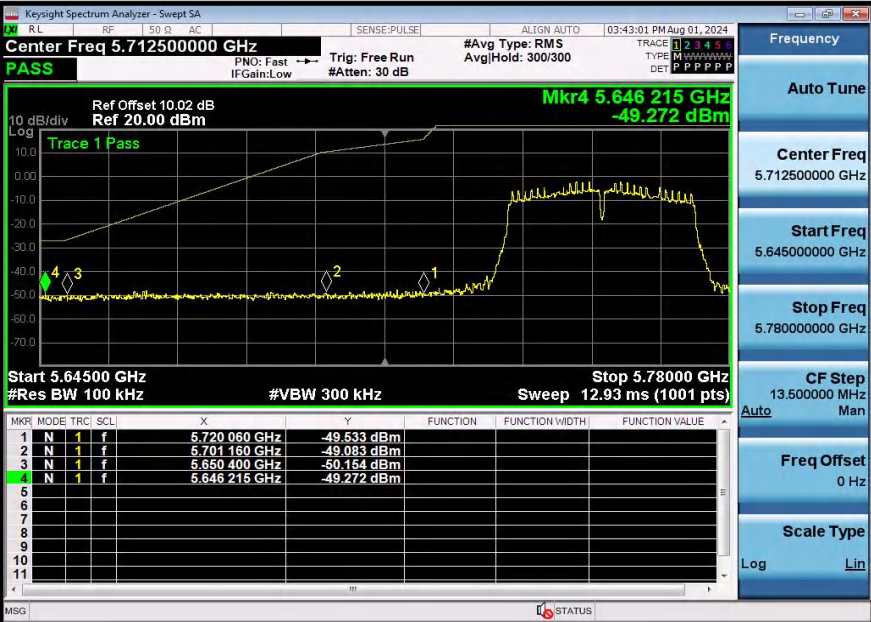

11N40SISO-Ant1-5755-PASS



11N40SISO-Ant1-5795-PASS