



Datasheet

Lyra 24P

Version 1.0

REVISION HISTORY

| Version | Date | Notes | Contributors | Approver |
|---------|-------------|---|---|---------------|
| 1.0 | 24 May 2023 | Initial Release | Robert Gosewehr, Raj Khatri, Dave Drogowski | Jonathan Kaye |
| 1.1 | 26 May 2023 | Updated figure in section Lyra 24P USB Adaptor Label Marking | Raj Khatri | Jonathan Kaye |

CONTENTS

| | | |
|------|---|----|
| 1 | Introduction | 5 |
| 1.1 | Key Features | 5 |
| 1.2 | Hardware Features | 6 |
| 1.3 | Firmware Options | 7 |
| 2 | Ordering Information | 7 |
| 3 | System Overview | 8 |
| 3.1 | Block Diagram | 8 |
| 3.2 | EFR32BG24 SoC | 9 |
| 3.3 | Integrated Antenna | 9 |
| 3.4 | External Antenna | 9 |
| 3.5 | Power Supply | 10 |
| 3.6 | General Purpose Input / Output (GPIO) | 10 |
| 3.7 | Security | 10 |
| 4 | Electrical Characteristics | 13 |
| 4.1 | Absolute Maximum Ratings | 13 |
| 4.2 | General Operating Conditions | 14 |
| 4.3 | MCU Current Consumption with 3 V Supply | 15 |
| 4.4 | Radio Current Consumption with 3 V Supply | 16 |
| 4.5 | RF Transmitter General Characteristics for the 2.4 GHz Band | 17 |
| 4.6 | RF Receiver General Characteristics for the 2.4 GHz Band | 18 |
| 4.7 | RF Receiver Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 1 Mbps Data Rate | 18 |
| 4.8 | RF Receiver Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 2 Mbps Data Rate | 19 |
| 4.9 | RF Receiver Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 500 kbps Data Rate | 20 |
| 4.10 | RF Receiver Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 125 kbps Data Rate | 21 |
| 4.11 | High-Frequency Crystal | 22 |
| 4.12 | Low-Frequency Crystal Oscillator | 22 |
| 4.13 | Precision Low Frequency RC Oscillator (LFRCO) | 23 |
| 4.14 | GPIO Pins | 23 |
| 4.15 | Microcontroller Peripherals | 24 |
| 4.16 | Antenna Radiation and Efficiency for Lyra 24P Integrated Antenna | 24 |
| 5 | Reference Diagrams | 28 |
| 5.1 | Network Co-Processor (NCP) Application with UART Host | 28 |
| 5.2 | SoC Application | 29 |
| 5.3 | Boot | 29 |
| 6 | Pin Definitions | 30 |
| 6.1 | Lyra 24P 36-Pin PCB Module Pinout | 30 |
| 6.2 | Alternate Function Table | 31 |
| 6.3 | Analog Peripheral Connectivity | 32 |

| | | |
|------|---|----|
| 6.4 | Digital Peripheral Connectivity..... | 33 |
| 7 | Design Guidelines | 36 |
| 7.1 | Layout and Placement..... | 36 |
| 7.2 | Proximity to Other Materials | 38 |
| 7.3 | Proximity to Human Body | 38 |
| 7.4 | Reset..... | 38 |
| 7.5 | Debug..... | 38 |
| 7.6 | Packet Trace Interface (PTI) | 38 |
| 7.7 | Lyra 24P Module 50 Ohms RF Track Design for Connecting External Antenna with the Lyra 24P Module, 20dBm, RF Pad Variant (453-00148) | 39 |
| 7.8 | External Antenna Integration with the Lyra 24P Module, 20dBm, RF pad variant (453-00148) | 41 |
| 8 | Mechanical Specifications | 42 |
| 8.1 | Dimensions (Lyra 24P series modules)..... | 42 |
| 8.2 | PCB Land Pattern (Lyra 24P series modules)..... | 43 |
| 8.3 | Dimensions for 450-00184 Lyra 24P – Bluetooth v5.3 USB Adaptor (20dBm) with Integrated Antenna (Silicon Labs EFR32BG24)..... | 44 |
| 8.4 | Lyra 24P Series Module Label Marking..... | 45 |
| 8.5 | Lyra 24P USB Adapter Label Marking..... | 46 |
| 9 | Soldering Recommendations..... | 47 |
| 9.1 | Reflow for lead Free Solder Paste..... | 47 |
| 9.2 | Recommended Reflow Profile for lead Free Solder Paste | 47 |
| 10 | Miscellaneous..... | 48 |
| 10.1 | Cleaning | 48 |
| 10.2 | Rework | 48 |
| 10.3 | Handling and Storage..... | 48 |
| 11 | Tape and Reel | 49 |
| 12 | Reliability Test | 50 |
| 12.1 | Climatic And Dynamic | 50 |
| 12.2 | Reliability MTBF Prediction | 51 |
| 13 | Regulatory | 52 |
| 13.1 | Regulatory information | 52 |
| 13.2 | Maximum Regulatory Certified RF TX Power per Country (TBD)..... | 52 |
| 14 | Bluetooth SIG Qualification | 53 |
| 14.1 | Overview | 53 |
| 14.2 | Qualification Steps When Referencing on End Product Listing | 54 |
| 15 | Additional Information | 55 |

1 INTRODUCTION

The Lyra 24P is a secure, high-performance wireless module optimized for the needs of battery and line powered IoT devices running on Bluetooth networks.

Based on the **Series 2 EFR32BG24 SoC**, it enables Bluetooth® Low Energy connectivity, delivering exceptional RF performance and energy efficiency, industry leading Secure Vault® technology, and future-proofing capabilities.


The Lyra 24P is a complete solution offered with robust and fully upgradeable software stacks, global regulatory certifications, advanced development and debugging tools, and documentation that simplifies and minimizes the development cycle of your end-product, helping to accelerate its time-to-market.

The Lyra 24P is intended for a broad range of applications, including:

- Smart Home Devices
- Lighting
- Building Automation and Security
- Gateways and Digital Assistants
- Bluetooth mesh Low Power Node

1.1 Key Features

- Bluetooth Low Energy 5.3
- Bluetooth Mesh connectivity
- Built-in antenna or RF pin
- +10 or +20 dBm TX output power (see [Maximum Regulatory Certified RF TX Power per Country](#))
- -98.5 dBm BLE 1M RX sensitivity
- 32-bit ARM® Cortex®-M33 core at 39 MHz
- 1536/256 kB of Flash/RAM memory
- Vault High or Vault Mid security
- Rich set of analog and digital peripherals
- 26 GPIO pins
- -40 °C to 105 °C
- 12.9 mm x 15.0 mm

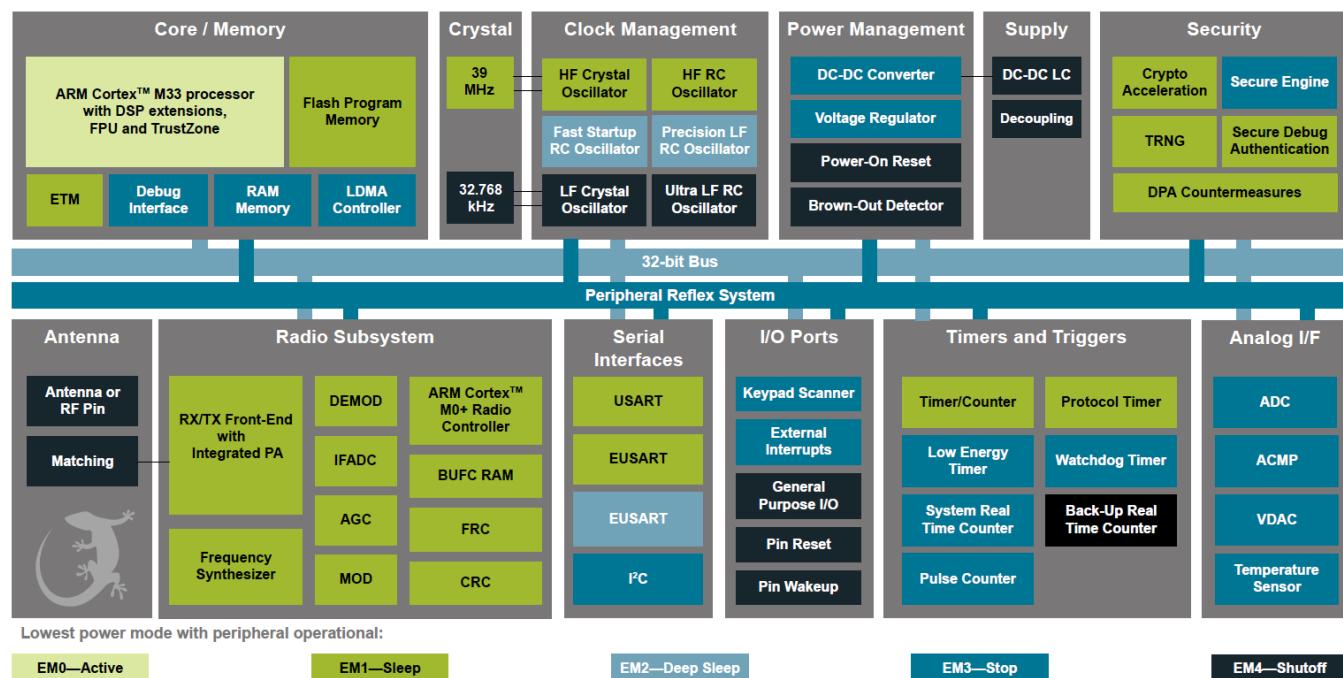

1.2 Hardware Features

• Supported Protocols

- Bluetooth Low Energy (BLE) 5.3
- Bluetooth Mesh
- Matter-ready Smart Home Connectivity

• Wireless System-on-Chip

- 2.4 GHz radio
- TX power up to +20 dBm (see [Maximum Regulatory Certified RF TX Power per Country](#))
- 32-bit ARM Cortex®-M33 with DSP instruction and floating-point unit for efficient signal processing
- 1536 kB flash program memory 256 kB RAM data memory
- Embedded Trace Macrocell (ETM) for advanced debugging

• Receiver Sensitivity

- -106.5 dBm sensitivity (0.1% BER) at 125 kbps GFSK
- -102.2 dBm sensitivity (0.1% BER) at 500 kbps GFSK
- -98.5 dBm sensitivity (0.1% BER) at 1 Mbps GFSK
- -95.7 dBm sensitivity (0.1% BER) at 2 Mbps GFSK

• Current Consumption

- 4.5 mA RX current at 1 Mbps GFSK
- 4.8 mA TX current at 0 dBm (BGM240Px22)
- 18.8 mA TX current at 10 dBm (BGM240Px22)
- 154.8 mA TX current at 19.6 dBm (BGM240Px32)
- 33.4 μ A/MHz in Active Mode (EM0) at 39.0 MHz
- 1.3 μ A EM2 DeepSleep current (16 kB RAM retention and RTC running from LFRCO)

• Regulatory Certifications

- CE (EU)
- UKCA (UK)
- FCC (USA)
- ISED (Canada)
- MIC (Japan)
- KC (South Korea)
- AS/NZ (Australia, New Zealand)

• Operating Range

- 1.8 to 3.8 V
- -40 to +105°C

• Dimensions

- 12.9 mm x 15.0 mm x 2.15 mm

• Security

- Secure Boot with Root of Trust and Secure Loader (RTSL)
- Hardware Cryptographic Acceleration with DPA countermeasures for AES128/256, SHA-1, SHA-2 (up to 256-bit), ECC (up to 256-bit), ECDSA, and ECDH
- True Random Number Generator (TRNG) compliant with NIST SP800-90 and AIS-31
- ARM® TrustZone®
- Secure Debug Interface lock/unlock Secure Key Management with PUF Anti-Tamper
- Secure Attestation

• MCU Peripherals

- Analog to Digital Converter (ADC)
 - 12-bit @ 1 Msps
 - 16-bit @ 76.9 ksp
- 2 × Analog Comparator (ACMP)
- 2 × Digital to Analog Converter (VDAC)
- Up to 26 General Purpose I/O pins with output state retention and asynchronous interrupts
- 8 Channel DMA Controller
- 16 Channel Peripheral Reflex System (PRS)
- 3 × 16-bit Timer/Counter with 3 Compare/Capture/PWM channels
- 2 × 32-bit Timer/Counter with 3 Compare/Capture/PWM channels
- 2 × 32-bit Real Time Counter (SYSRTC/BURTC)
- 24-bit Low Energy Timer for waveform generation (LETIMER)
- 16-bit Pulse Counter with asynchronous operation (PCNT)
- 2 × Watchdog Timer (WDOG)
- 1 × Universal Synchronous/Asynchronous Receiver/Transmitter (USART), supporting UART/SPI/SmartCard (ISO 7816)/IrDA/I2S
- 2 × Enhanced Universal Synchronous/Asynchronous Receiver/Transmitter (EUSART) supporting UART/SPI/DALI/ IrDA
- 2 × I2C interface with SMBus support
- Low-Frequency RC Oscillator with precision mode to replace 32 kHz sleep crystal (LFRCO)
- Keypad scanner supporting up to 6x8 matrix (KEYSCAN)
- Die temperature sensor with $\pm 1.5^{\circ}\text{C}$ accuracy after single point calibration

1.3 Firmware Options

The Lyra 24P series supports two different firmware options for software development:

AT Command Set – fully featured and extensible to suit any developer's needs.

- Proven over 5+ years
- Basic Bluetooth LE cable replacement
- Simplest implementation possible

C Code – Full software development with Silicon Labs SDK and Toolchain

- Native C code development
- Use Simplicity Studio IDE
- Full functionality of Silicon Labs HW / SW

2 ORDERING INFORMATION

Table 1: Ordering Information

| Part | Description |
|--------------|--|
| 453-00142R | Lyra 24P Series - Bluetooth v5.3 PCB Module (10dBm) with integrated antenna (Silicon Labs EFR32BG24) - Tape / Reel |
| 453-00142C | Lyra 24P Series - Bluetooth v5.3 PCB Module (10dBm) with integrated antenna (Silicon Labs EFR32BG24) – Cut / Tape |
| 453-00145R | Lyra 24P Series - Bluetooth v5.3 PCB Module (20dBm) with integrated antenna (Silicon Labs EFR32BG24) - Tape / Reel |
| 453-00145C | Lyra 24P Series - Bluetooth v5.3 PCB Module (20dBm) with integrated antenna (Silicon Labs EFR32BG24) – Cut / Tape |
| 453-00148R | Lyra 24P Series - Bluetooth v5.3 PCB Module (20dBm) with RF Trace Pad (Silicon Labs EFR32BG24) - Tape / Reel |
| 453-00148C | Lyra 24P Series - Bluetooth v5.3 PCB Module (20dBm) with RF Trace Pad (Silicon Labs EFR32BG24) – Cut / Tape |
| 453-00142-K1 | Lyra 24P Series - Development Kit - Bluetooth v5.3 PCB Module (10dBm) with integrated antenna |
| 453-00145-K1 | Lyra 24P Series - Development Kit - Bluetooth v5.3 PCB Module (20dBm) with integrated antenna |
| 453-00148-K1 | Lyra 24P Series - Development Kit - Bluetooth v5.3 PCB Module (20dBm) with RF Trace Pad |
| 450-00184 | Lyra 24P Series - Bluetooth v5.3 USB Adapter (20dBm) with integrated antenna (Silicon Labs EFR32BG24) |

Note:

1. Lyra 24P series modules operate in the 2.4 GHz ISM frequency band.
2. The maximum RF TX power allowed by different regional regulatory authorities may differ from the maximum output power a module can produce. End-product manufacturers must then verify that the module is configured to meet the regulatory limits for each region in accordance with the local rules and the formal certification test reports.
3. See section [Maximum Regulatory Certified RF TX Power per Country](#) per Lyra 24P module part number.
4. Lyra 24P modules are pre-programmed with **Lyra 24P BGAPI UART/OTA DFU** bootloader. Lyra 24P AT firmware can be loaded by the customer (via SWD interface or via boot loader (UART or OTA)). Lyra 24P USB dongle ships with bootloader and AT firmware.

3 SYSTEM OVERVIEW

3.1 Block Diagram

The Lyra 24P module is a highly-integrated, high-performance system with all the hardware components needed to enable 2.4 GHz wireless connectivity and support robust networking capabilities via multiple wireless protocols.

Built around the **EFR32BG24** Wireless SoC, the Lyra 24P includes a built-in antenna, an RF matching network (optimized for transmit power efficiency), supply decoupling and filtering components, an LC tank for DC-DC conversion, a 39 MHz reference crystal, and an RF shield. Also, it supports the use of an external 32 kHz crystal as a low frequency reference signal via GPIO pins for use cases demanding maximum energy efficiency.

For designs where an external antenna solution may be beneficial, a module variant with a 50 Ω-matched RF pin instead of the built-in antenna is available (**for Lyra 24P, RF, 20dBm, RF Trace only**).

Because the RF matching network is optimized for transmit power efficiency, modules rated for +20 dBm will show non-optimal current consumption and performance when operated at a lower output power (i.e. +10 or 0 dBm).

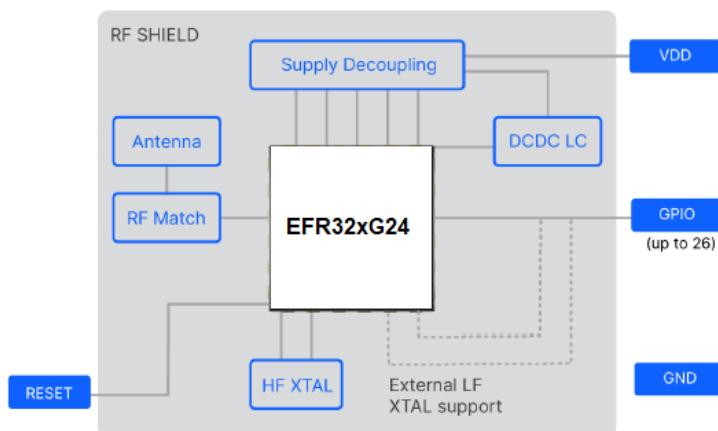


Figure 1: Lyra 24P Block Diagram – Built-in Antenna Variant

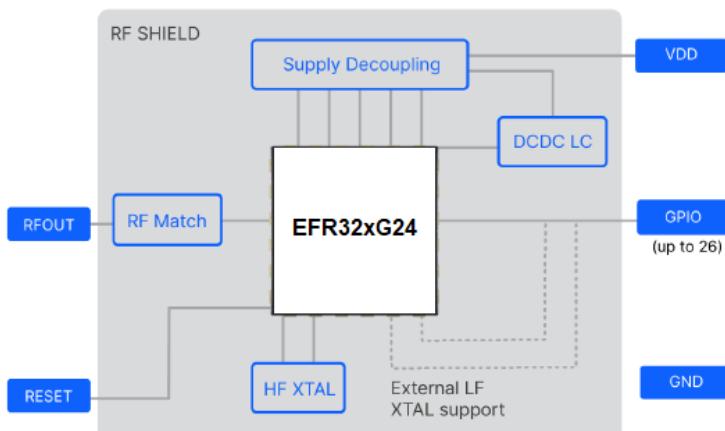


Figure 2: Lyra 24P Block Diagram – RF Pin Variant

A simplified internal schematic for the Lyra 24P module is shown in [Figure 3](#).

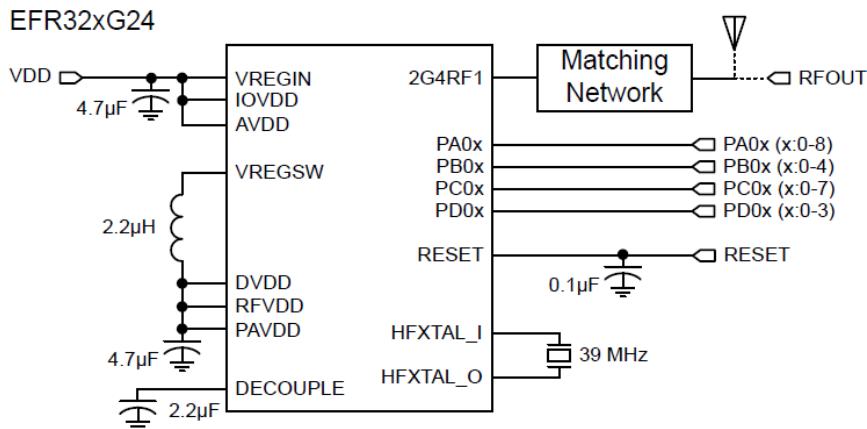


Figure 3: Lyra 24P Module Schematic

3.2 EFR32BG24 SoC

The **EFR32BG24** SoC features a 32-bit ARM Cortex M33 core, a 2.4 GHz high-performance radio, 1536 kB of Flash memory, 256 kB of RAM, a dedicated core for security, a rich set of MCU peripherals, and various clock management and serial interfacing options. See the [EFR32xG24 Reference Manual](#) and [EFR32BG24 Data Sheet](#) for details.

3.3 Integrated Antenna

Lyra 24P modules come with two antenna solutions variants: A built-in antenna or a 50 Ohms matched RF pin to support an external antenna. Typical performance characteristics of the built-in antenna are detailed in table below.

Table 2: Integrated Antenna Efficiency and Peak Gain

| Parameter | With optimal layout | Note |
|------------|---------------------|--|
| Efficiency | -1 dB | Antenna efficiency, gain, and radiation pattern are highly dependent on the application PCB layout and mechanical design. Refer to Design Guidelines for recommendations to achieve optimal antenna performance. |
| Peak gain | 1.82 dBi | |

3.4 External Antenna

Lyra 24P module can be used with external antennas (certified by Laird Connectivity) and requires a RF 50 Ohm track (Ground Coplanar Waveguide) to be designed to run from Lyra 24P module RFOUT (pin 33) to an RF antenna connector (IPEX MHF 4) on the host PCB. The 50 ohm RF track design and length **MUST** be copied as defined in section [Lyra 24P Module 50 Ohms RF Track Design for Connecting External Antenna with the Lyra 24P Module, 20dBm, RF Pad Variant \(453-00148\)](#).

The list of supported external antennas (certified by Laird Connectivity) are listed in section [External Antenna Integration with the Lyra 24P Module](#).

3.5 Power Supply

The Lyra 24P requires a single nominal supply level (VDD) to operate and supports an operating range of 1.8 to 3.8 V. The nominal level needed for **+10 dBm devices** (part number: 453-00142) is **3.0 V** whereas **+20 dBm devices** (part number: 453-00145 and 453-00148) **require 3.3 V** in order to achieve higher TX output power. All necessary decoupling, filtering and DC-DC-related components are included in the module.

Note: The power amplifier for +10 dBm modules is supplied through an internal LDO, and thus is independent of the VDD supply. Respectively, the power amplifier for +20 dBm modules is supplied through the VDD pin with a target level of 3.3 V.

3.6 General Purpose Input / Output (GPIO)

The Lyra 24P has up to 26 General Purpose Input/Output pins. Each GPIO pin can be individually configured as either an output or input. More advanced configurations including open-drain, open-source, and glitch-filtering can be configured for each individual GPIO pin. The GPIO pins can be overridden by peripheral connections, like SPI communication. Each peripheral connection can be routed to several GPIO pins on the device. The input value of a GPIO pin can be routed through the Peripheral Reflex System to other peripherals. The GPIO subsystem supports asynchronous external pin interrupts.

All of the pins on ports A and port B are EM2 capable. These pins may be used by Low-Energy peripherals in EM2/3 and may also be used as EM2/3 pin wake-ups. Pins on ports C and D are latched/retained in their current state when entering EM2 until EM2 exit upon which internal peripherals could once again drive those pads.

A few GPIOs also have EM4 wake functionality. These pins are listed in [Table 19: GPIO Alternate Function Table](#).

3.7 Security

Lyra 24P modules support one of two levels in the Security Portfolio offered by Silicon Labs: **Secure Vault Mid** or **Secure Vault High**. Lyra 24P modules support Secure Vault High.

Secure Vault is a collection of technologies that deliver state-of-the-art security and upgradability features to protect and futureproof IoT devices against costly threats, attacks, and tampering. A dedicated security CPU enables the Secure Vault functions and isolates cryptographic functions and data from the Cortex-M33 core. Lyra 24P part numbers support Secure Vault High.

Table 3: Secure Vault Features

| Feature | Secure Vault Mid | Secure Vault High |
|---|--|--|
| True Random Number Generator (TRNG) | Yes | Yes |
| Secure Boot with Root of Trust and Secure Loader (RTSL) | Yes | Yes |
| Secure Debug with Lock/Unlock | Yes | Yes |
| DPA Countermeasures | Yes | Yes |
| Anti-Tamper | | Yes |
| Secure Attestation | | Yes |
| Secure Key Management | | Yes |
| Symmetric Encryption | <ul style="list-style-type: none"> AES 128 / 192 / 256 bit ECB, CTR, CBC, CFB, CCM, GCM, CBC-MAC, and GMAC | <ul style="list-style-type: none"> AES 128 / 192 / 256 bit ECB, CTR, CBC, CFB, CCM, GCM, CBC-MAC, and GMAC ChaCha20 |
| Public Key Encryption - ECDSA / ECDH / EdDSA | <ul style="list-style-type: none"> p192 and p256 | <ul style="list-style-type: none"> p192, p256, p384 and p521 Curve25519 (ECDH) Ed25519 (EdDSA) |
| Key Derivation | <ul style="list-style-type: none"> ECJ-PAKE p192 and p256 | <ul style="list-style-type: none"> ECJ-PAKE p192, p256, p384, and p521 |

| Feature | Secure Vault Mid | Secure Vault High |
|---------|--|--|
| Hashes | <ul style="list-style-type: none"> SHA-1 SHA-2/256 | <ul style="list-style-type: none"> PBKDF2 HKDF SHA-1 SHA-2 256, 384, and 512 Poly1305 |
| | | |

3.7.1 Secure Boot with Root of Trust and Secure Loader (RTSL)

The Secure Boot with RTSL authenticates a chain of trusted firmware that begins from an immutable memory (ROM).

It prevents malware injection, prevents rollback, ensures that only authentic firmware is executed, and protects Over The Air updates. For more information about this feature, see [AN1218: Series 2 Secure Boot with RTSL](#).

3.7.2 Cryptographic Accelerator

The Cryptographic Accelerator is an autonomous hardware accelerator with Differential Power Analysis (DPA) countermeasures to protect keys.

It supports AES encryption and decryption with 128/192/256-bit keys, ChaCha20 encryption, and Elliptic Curve Cryptography (ECC) to support public key operations, and hashes.

Supported block cipher modes of operation for AES include:

- ECB (Electronic Code Book)
- CTR (Counter Mode)
- CBC (Cipher Block Chaining)
- CFB (Cipher Feedback)
- GCM (Galois Counter Mode)
- CCM (Counter with CBC-MAC)
- CBC-MAC (Cipher Block Chaining Message Authentication Code)
- GMAC (Galois Message Authentication Code)

The Cryptographic Accelerator accelerates Elliptical Curve Cryptography and supports the NIST (National Institute of Standards and Technology) recommended curves including P-192, P-256, P-384, and P-521 for ECDH (Elliptic Curve Diffie-Hellman) key derivation, and ECDSA (Elliptic Curve Digital Signature Algorithm) sign and verify operations. Also supported is the non-NIST Curve25519 for ECDH and Ed25519 for EdDSA (Edwards-curve Digital Signature Algorithm) sign and verify operations.

Secure Vault also supports ECJ-PAKE (Elliptic Curve variant of Password Authenticated Key Exchange by Juggling) and PBKDF2 (Password-Based Key Derivation Function 2).

Supported hashes include SHA-1, SHA-2/256/384/512 and Poly1305.

This implementation provides a fast and energy efficient solution to state of the art cryptographic needs.

3.7.3 True Random Number Generator

The True Random Number Generator module is a non-deterministic random number generator that harvests entropy from a thermal energy source. It includes start-up health tests for the entropy source as required by NIST SP800-90B and AIS-31 as well as online health tests required for NIST SP800-90C.

The **TRNG** is suitable for periodically generating entropy to seed an approved pseudo random number generator.

3.7.4 Secure Debug with Lock / Unlock

For obvious security reasons, it is critical for a product to have its debug interface locked before being released in the field.

In addition, Secure Vault High also provides a secure debug unlock function that allows authenticated access based on public key cryptography. This functionality is particularly useful for supporting failure analysis while maintaining confidentiality of IP and sensitive end- user data.

For more information about this feature, see [AN1190: Series 2 Secure Debug](#).

3.7.5 DPA Countermeasures

The AES and ECC accelerators have Differential Power Analysis (DPA) countermeasures support. This makes it very expensive from a time and effort standpoint to use DPA to recover secret keys.

3.7.6 Secure Key Management with PUF

Key material in Secure Vault High products is protected by "key wrapping" with a standardized symmetric encryption mechanism. This method has the advantage of protecting a virtually unlimited number of keys, limited only by the storage that is accessible by the Cortex-M33, which includes off-chip storage as well. The symmetric key used for this wrapping and unwrapping must be highly secure because it can expose all other key materials in the system. The Secure Vault Key Management system uses a Physically Unclonable Function (PUF) to generate a persistent device-unique seed key on power up to dynamically generate this critical wrapping/unwrapping key which is only visible to the AES encryption engine and is not retained when the device loses power.

3.7.7 Anti-Tamper

Secure Vault High devices provide internal tamper protection which monitors parameters such as voltage, temperature, and electromagnetic pulses as well as detecting tamper of the security sub-system itself. Additionally, eight external configurable tamper pins support external tamper sources, such as enclosure tamper switches.

For each tamper event, the user is able to select the severity of the tamper response ranging from an interrupt, to a reset, to destroying the PUF reconstruction data which will make all protected key materials un-recoverable and effectively render the device inoperable. The tamper system also has an internal resettable event counter with programmable trigger threshold and refresh periods to mitigate false positive tamper events.

For more information about this feature, see [AN1247: Anti-Tamper Protection Configuration and Use](#).

3.7.8 Secure Attestation

Secure Vault High products support Secure Attestation, which begins with a secure identity that is created during the Silicon Labs manufacturing process. During device production, each device generates its own public/private keypair and securely stores the wrapped private key into immutable OTP memory and this key never leaves the device. The corresponding public key is extracted from the device and inserted into a binary DER-encoded X.509 device certificate, which is signed into a Silicon Labs CA chain and then programmed back into the chip into an immutable OTP memory.

The secure identity can be used to authenticate the chip at any time in the life of the product. The production certification chain can be requested remotely from the product. This certification chain can be used to verify that the device was authentically produced by Silicon Labs. The device unique public key is also bound to the device certificate in the certification chain. A challenge can be sent to the chip at any point in time to be signed by the device private key. The public key in the device certificate can then be used to verify the challenge response, proving that the device has access to the securely-stored private key, which prevents counterfeit products or impersonation attacks.

For more information about this feature, see [AN1268: Authenticating Silicon Labs Devices Using Device Certificates](#).

4 ELECTRICAL CHARACTERISTICS

All electrical parameters in all tables are specified under the following conditions, unless stated otherwise:

- Typical values are based on $T_A=25$ °C and **VDD supply at 3.0 V**, by production test and/or technology characterization.
- Radio performance numbers are measured in conducted mode, based on Silicon Laboratories reference designs using output power-specific external RF impedance-matching networks for interfacing to a 50 Ω antenna.
- Minimum and maximum values represent the worst conditions across supply voltage, process variation, and operating temperature, unless stated otherwise.

4.1 Absolute Maximum Ratings

Table 4: Absolute Maximum Ratings

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|---------------------------------------|------------------|----------------|------|-----|---------------|------|
| Storage temperature range | T_{STG} | | -40 | — | +105 | °C |
| Voltage on VDD supply pin | V_{DDMAX} | | -0.3 | — | 3.8 | V |
| Voltage ramp rate on VDD supply pin | $V_{DDRAMPPMAX}$ | | — | — | 1.0 | V/μs |
| DC voltage on any GPIO pin | V_{DIGPIN} | | -0.3 | — | $V_{VDD}+0.3$ | V |
| DC voltage on RESETn pin ¹ | V_{RESETn} | | -0.3 | — | 3.8 | V |
| Absolute voltage on RFOUT pin | V_{MAX2G4} | | -0.3 | — | $V_{VDD}+0.3$ | V |
| Total current into VDD pin | I_{VDDMAX} | Source | — | — | 200 | mA |
| Total current into GND pin | I_{GNDMAX} | Sink | — | — | 200 | mA |
| Current per I/O pin | I_{IOMAX} | Sink | — | — | 50 | mA |
| | | Source | — | — | 50 | mA |
| Current for all I/O pins | $I_{IOALLMAX}$ | Sink | — | — | 200 | mA |
| | | Source | — | — | 200 | mA |

Note:

1. The RESETn pin has a pull-up device to the internal DVDD supply. For minimum leakage, RESETn should not exceed the voltage at DVDD, which is generated by the DC-DC converter. DVDD is equal to 1.8 V when DC-DC is active and bypassed to VDD when DC-DC is inactive.

4.2 General Operating Conditions

Table 5: General Operating Conditions

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|-------------------------------------|-------------------|------------------------------------|-----|------|------|------|
| Operating ambient temperature range | T_A | | -40 | — | +105 | °C |
| VDD operating supply voltage | V_{VDD} | 10 dBm Module, DC-DC in regulation | 2.2 | 3.0 | 3.8 | V |
| | | 20 dBm Module, DC-DC in regulation | 2.2 | 3.3 | 3.8 | V |
| | | 10 dBm Module, DC-DC in bypass | 1.8 | 3.0 | 3.8 | V |
| | | 20 dBm Module, DC-DC in bypass | 1.8 | 3.3 | 3.8 | V |
| HCLK and SYSCLK frequency | f_{HCLK} | VSCALE2, MODE = WS1 | — | — | 78 | MHz |
| | | VSCALE2, MODE = WS0 | — | — | 40 | MHz |
| PCLK frequency | f_{PCLK} | VSCALE2 or VSCALE1 | — | — | 40 | MHz |
| EM01 Group A clock frequency | $f_{EM01GRPACLK}$ | VSCALE2 | — | — | 78 | MHz |
| | | VSCALE1 | — | — | 40 | MHz |
| EM01 Group C clock frequency | $f_{EM01GRPBCLK}$ | VSCALE2 | — | — | 78 | MHz |
| | | VSCALE1 | — | — | 40 | MHz |
| Radio HCLK frequency | f_{RHCLK} | VSCALE2 or VSCALE1 | — | 39.0 | — | MHz |

4.3 MCU Current Consumption with 3 V Supply

Unless otherwise indicated, typical conditions are: **VDD = 3.0 V, DC-DC in regulation. Voltage scaling level = VSCALE1. TA = 25 °C.** Minimum and maximum values in this table represent the worst conditions across process variation at **TA = 25 °C.**

Table 6: MCU Current Consumption with 3 V Supply

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|---|---------------------|--|-----|------|-----|--------|
| Current consumption in EM0 mode with all peripherals disabled | I _{ACTIVE} | 78 MHz HFRCO w/ DPLL referenced to 39 MHz crystal, CPU running Prime from flash, VSCALE2 | — | 33.3 | — | µA/MHz |
| | | 78 MHz HFRCO w/ DPLL referenced to 39 MHz crystal, CPU running while loop from flash, VSCALE2 | — | 32.8 | — | µA/MHz |
| | | 78 MHz HFRCO w/ DPLL referenced to 39 MHz crystal, CPU running CoreMark loop from flash, VSCALE2 | — | 49.1 | — | µA/MHz |
| | | 39 MHz crystal, CPU running Prime from flash | — | 33.9 | — | µA/MHz |
| | | 39 MHz crystal, CPU running while loop from flash | — | 33.4 | — | µA/MHz |
| | | 39 MHz crystal, CPU running CoreMark loop from flash | — | 49.4 | — | µA/MHz |
| | | 38 MHz HFRCO, CPU running while loop from flash | — | 28.1 | — | µA/MHz |
| Current consumption in EM1 mode with all peripherals disabled | I _{EM1} | 78 MHz HFRCO w/ DPLL referenced to 39 MHz crystal, VSCALE2 | — | 22.6 | — | µA/MHz |
| | | 39 MHz crystal | — | 24.4 | — | µA/MHz |
| | | 38 MHz HFRCO | — | 19.0 | — | µA/MHz |
| Current consumption in EM2 mode, VSCALE0 | I _{EM2_VS} | 256 kB RAM and full Radio RAM retention, RTC running from LFXO ¹ | — | 2.9 | — | µA |
| | | 256 kB RAM and full Radio RAM retention, RTC running from LFRCO ¹ | — | 2.9 | — | µA |
| | | 16 kB RAM and full Radio RAM retention, RTC running from LFXO ¹ | — | 1.3 | — | µA |
| | | 16 kB RAM and full Radio RAM retention, RTC running from LFRCO ¹ | — | 1.3 | — | µA |
| | | 16 kB RAM and full Radio RAM retention, RTC running from LFRCO in precision mode ¹ | — | 1.9 | — | µA |
| | | 256 kB RAM and full Radio RAM retention, RTC running from ULFRCO ¹ | — | 2.7 | — | µA |
| Current consumption in EM3 mode, VSCALE0 | I _{EM3_VS} | 16 kB RAM and full Radio RAM retention, RTC running from ULFRCO ¹ | — | 1.1 | — | µA |
| | | No BURTC, No LF Oscillator | — | 0.27 | — | µA |
| Current consumption in EM4 mode | I _{EM4} | BURTC with Lxo | — | 0.64 | — | µA |

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|----------------------------------|-----------|---------------------|-----|-----|-----|---------------|
| Current consumption during reset | I_{RST} | Hard pin reset held | — | 467 | — | μA |

Note:

1. CPU cache retained, EM0/EM1 peripheral states retained.

4.4 Radio Current Consumption with 3 V Supply

RF current consumption measured with MCU in EM1 and all MCU peripherals disabled. Unless otherwise indicated, typical conditions are: $VDD = 3.0 \text{ V}$, DC-DC in regulation, $T_A = 25^\circ\text{C}$.

Table 7: Radio Current Consumption with 3.0 V Supply

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|---|------------------|---|-----|-------|-----|------|
| Current consumption in receive mode, active packet reception, VSCALE1, EM1P | I_{RX_ACTIVE} | 125 kbit/s, 2GFSK, $f = 2.4 \text{ GHz}$ | — | 4.8 | — | mA |
| | | 500 kbit/s, 2GFSK, $f = 2.4 \text{ GHz}$ | — | 4.9 | — | mA |
| | | 1 Mbit/s, 2GFSK, $f = 2.4 \text{ GHz}$ | — | 4.5 | — | mA |
| | | 2 Mbit/s, 2GFSK, $f = 2.4 \text{ GHz}$ | — | 5.2 | — | mA |
| Current consumption in receive mode, listening for packet, VSCALE1, EM1P | I_{RX_LISTEN} | 125 kbit/s, 2GFSK, $f = 2.4 \text{ GHz}$ | — | 4.8 | — | mA |
| | | 500 kbit/s, 2GFSK, $f = 2.4 \text{ GHz}$ | — | 4.8 | — | mA |
| | | 1 Mbit/s, 2GFSK, $f = 2.4 \text{ GHz}$ | — | 4.5 | — | mA |
| | | 2 Mbit/s, 2GFSK, $f = 2.4 \text{ GHz}$ | — | 5.2 | — | mA |
| Current consumption in transmit mode | I_{TX} | $f = 2.4 \text{ GHz}$, CW, 0 dBm output power | — | 4.8 | — | mA |
| | | $f = 2.4 \text{ GHz}$, CW, +10 dBm output power | — | 18.8 | — | mA |
| | | $f = 2.4 \text{ GHz}$, CW, +20 dBm output power, $VDD = 3.3 \text{ V}^1$ | — | 154.8 | — | mA |

Note:

1. Maximum output power for Bluetooth Low Energy is limited to 19.6 dBm for compliance with the Bluetooth Core Specifications.

4.5 RF Transmitter General Characteristics for the 2.4 GHz Band

Unless otherwise indicated, typical conditions are: **VDD = 3.0 V, DC-DC in regulation**. RF center frequency **2.45 GHz**. **T_A=25°C**.

Table 8: RF Transmitter General Characteristics for the 2.4 GHz Band

| Parameter | Symbol | Test Condition (Output Power) | Min | Typ | Max | Unit |
|--|-----------------------|--|------|-------|------|------|
| RF tuning frequency range | F _{RANGE} | | 2402 | — | 2480 | MHz |
| Maximum TX power | POUT _{MAX} | 0 dBm | — | -0.3 | — | dBm |
| | | +10 dBm | — | 10 | — | dBm |
| | | +20 dBm, VDD = 3.3 V ¹ | — | 19.6 | — | dBm |
| Minimum active TX Power | POUT _{MIN} | 0 dBm | — | -24 | — | dBm |
| | | +10 dBm | — | -30 | — | dBm |
| | | +20 dBm, VDD = 3.3 V | — | -33.7 | — | dBm |
| Output power step size | POUT _{STEP} | 0 dBm | 0.1 | 0.7 | 9.9 | dBm |
| | | +10 dBm, -5 dBm < Output power < 0 dBm | 0.6 | 1.1 | 1.8 | dBm |
| | | +10 dBm, 0 dBm < Output power < 10 dBm | 0.1 | 0.3 | 0.8 | dBm |
| | | +20 dBm, VDD = 3.3 V, Output power < 0 dBm | 0.9 | 3.6 | 14.4 | dBm |
| | | +20 dBm, 0 dBm < Output power < 20 dBm | 0.1 | 0.2 | 1.3 | dBm |
| Output power variation vs VDD supply voltage variation, frequency = 2450 MHz | POUT _{VAR_V} | 0 dBm with VDD voltage swept from 1.8 V to 3.8 V | — | 0.01 | — | dB |
| | | +10 dBm with VDD voltage swept from 1.8 V to 3.8 V | — | 0.05 | — | dB |
| | | +20 dBm with VDD voltage swept from 1.8 V to 3.8 V | — | 5.4 | — | dB |
| Output power variation vs temperature, Frequency = 2450 MHz | POUT _{VAR_T} | 0 dBm, (-40 to +105 °C) | — | 1.0 | — | dB |
| | | +10 dBm, (-40 to +105 °C) | — | 0.3 | — | dB |
| | | +20 dBm, VDD = 3.3 V, (-40 to +105 °C) | — | 0.2 | — | dB |
| Output power variation vs RF frequency | POUT _{VAR_F} | 0 dBm | — | 0.2 | — | dB |
| | | +10 dBm | — | 0.2 | — | dB |
| | | +20 dBm, VDD = 3.3 V | — | 0.2 | — | dB |

Note:

1. Maximum output power for Bluetooth Low Energy is limited to 19.6 dBm for compliance with the Bluetooth Core Specifications.

4.6 RF Receiver General Characteristics for the 2.4 GHz Band

Unless otherwise indicated, typical conditions are: **VDD = 3.0 V, DC-DC in regulation**. RF center frequency **2.45 GHz**. **T_A = 25°C**.

Table 9: RF Receiver General Characteristics for the 2.4 GHz Band

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|---------------------------|--------------------|----------------|------|-----|------|------|
| RF tuning frequency range | F _{RANGE} | | 2402 | — | 2480 | MHz |

4.7 RF Receiver Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 1 Mbps Data Rate

Unless otherwise indicated, typical conditions are: **VDD = 3.0 V, DC-DC in regulation**. RF center frequency **2.45 GHz**. **T_A = 25°C**.

Table 10: RF Receiver Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 1 Mbps Data Rate

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|-------------------------------------|-------------------|---|-----|-------|-----|------|
| Max usable receiver input level | SAT | Signal is reference signal ¹ | — | 10 | — | dBm |
| Sensitivity | SENS | +10 dBm Module, Signal is reference signal, 37 byte payload ¹ | — | -98.5 | — | dBm |
| | | +10 dBm Module, Signal is reference signal, 255 byte payload ¹ | — | -96.9 | — | dBm |
| | | +10 dBm Module, With non-ideal signals ^{2 1} | — | -96.5 | — | dBm |
| | | +20 dBm Module, Signal is reference signal, 37 byte payload ¹ | — | -97.6 | — | dBm |
| | | +20 dBm Module, Signal is reference signal, 255 byte payload ¹ | — | -96 | — | dBm |
| | | +20 dBm Module, With non-ideal signals ^{2 1} | — | -95.6 | — | dBm |
| Signal to co-channel interferer | C/I _{CC} | (see notes) ^{1 3} | — | 8.7 | — | dB |
| N ± 1 Adjacent channel selectivity | C/I ₁ | Interferer is reference signal at +1 MHz offset ^{1 3 4 5} | — | -5.4 | — | dB |
| | | Interferer is reference signal at -1 MHz offset ^{1 3 4 5} | — | -5.3 | — | dB |
| N ± 2 Alternate channel selectivity | C/I ₂ | Interferer is reference signal at +2 MHz offset ^{1 3 4 5} | — | -40.9 | — | dB |
| | | Interferer is reference signal at -2 MHz offset ^{1 3 4 5} | — | -39.7 | — | dB |
| N ± 3 Alternate channel selectivity | C/I ₃ | Interferer is reference signal at +3 MHz offset ^{1 3 4 5} | — | -45.5 | — | dB |
| | | Interferer is reference signal at -3 MHz offset ^{1 3 4 5} | — | -45.7 | — | dB |
| Selectivity to image frequency | C/I _{IM} | Interferer is reference signal at image frequency with 1 MHz precision ^{1 5} | — | -23.3 | — | dB |

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|---------------------|--|-----|-------|-----|------|
| Selectivity to image frequency ± 1 MHz | C/I _{IM_1} | Interferer is reference signal at image frequency +1 MHz with 1 MHz precision ^{1 5} | — | -40.9 | — | dB |
| | | Interferer is reference signal at image frequency -1 MHz with 1 MHz precision ^{1 5} | — | -5.4 | — | dB |
| Intermodulation performance | IM | n = 3 (see note ⁶) | — | -17.3 | — | dBm |

Note:

1. 0.017% Bit Error Rate.
2. With non-ideal signals as specified in Bluetooth Test Specification RF-PHY.TS.5.0.1 section 4.7.1
3. Desired signal -67 dBm.
4. Desired frequency 2402 MHz \leq Fc \leq 2480 MHz.
5. With allowed exceptions.
6. As specified in Bluetooth Core specification version 5.1, Vol 6, Part A, Section 4.4

4.8 RF Receiver Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 2 Mbps Data Rate

Unless otherwise indicated, typical conditions are: **VDD = 3.0 V, DC-DC in regulation**. RF center frequency **2.45 GHz**. **T_A = 25 °C**.

Table 11: RF Receiver Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 2 Mbps Data Rate

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|---|-------------------|---|-----|-------|-----|------|
| Max usable receiver input level | SAT | Signal is reference signal ¹ | — | 10 | — | dBm |
| Sensitivity | SENS | +10 dBm Module, Signal is reference signal, 37 byte payload ¹ | — | -95.7 | — | dBm |
| | | +10 dBm Module, Signal is reference signal, 255 byte payload ¹ | — | -94.2 | — | dBm |
| | | +10 dBm Module, With non-ideal signals ^{2 1} | — | -93.9 | — | dBm |
| | | +20 dBm Module, Signal is reference signal, 37 byte payload ¹ | — | -94.8 | — | dBm |
| | | +20 dBm Module, Signal is reference signal, 255 byte payload ¹ | — | -93.3 | — | dBm |
| | | +20 dBm Module, With non-ideal signals ^{2 1} | — | -93.1 | — | dBm |
| Signal to co-channel interferer | C/I _{CC} | (see notes) ^{1 3} | — | 8.6 | — | dB |
| N ± 1 Adjacent channel selectivity | C/I ₁ | Interferer is reference signal at +2 MHz offset ^{1 5 4 3} | — | -5.3 | — | dB |
| | | Interferer is reference signal at -2 MHz offset ^{1 5 4 3} | — | -5.8 | — | dB |
| N ± 2 Alternate channel selectivity | C/I ₂ | Interferer is reference signal at +4 MHz offset ^{1 5 4 3} | — | -42.2 | — | dB |
| | | Interferer is reference signal at -4 MHz offset ^{1 5 4 3} | — | -44.2 | — | dB |
| N ± 3 Alternate channel selectivity | C/I ₃ | Interferer is reference signal at +6 MHz offset ^{1 5 4 3} | — | -48.1 | — | dB |
| | | Interferer is reference signal at -6 MHz offset ^{1 5 4 3} | — | -50.2 | — | dB |

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|---------------------|--|-----|-------|-----|------|
| Selectivity to image frequency | C/I _{IM} | Interferer is reference signal at image frequency with 1 MHz precision ^{1 5} | — | -22.8 | — | dB |
| Selectivity to image frequency ± 2 MHz | C/I _{IM_1} | Interferer is reference signal at image frequency +2 MHz with 1 MHz precision ^{1 5} | — | -42.2 | — | dB |
| | | Interferer is reference signal at image frequency -2 MHz with 1 MHz precision ^{1 5} | — | -5.3 | — | dB |
| Intermodulation performance | IM | n = 3 (see note ⁶) | — | -18.3 | — | dBm |

Note:

1. 0.017% Bit Error Rate.
2. With non-ideal signals as specified in Bluetooth Test Specification RF-PHY.TS.5.0.1 section 4.7.1
3. Desired signal -64 dBm.
4. Desired frequency 2402 MHz ≤ Fc ≤ 2480 MHz.
5. With allowed exceptions.
6. As specified in Bluetooth Core specification version 5.1, Vol 6, Part A, Section 4.4

4.9 RF Receiver Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 500 kbps Data Rate

Unless otherwise indicated, typical conditions are: **VDD = 3.0 V, DC-DC in regulation**. RF center frequency **2.45 GHz**. **T_A = 25 °C**.

Table 12: RF Receiver Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 500 kbps Data Rate

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|-------------------------------------|-------------------|---|-----|--------|-----|------|
| Max usable receiver input level | SAT | Signal is reference signal ¹ | — | 10 | — | dBm |
| Sensitivity | SENS | +10 dBm Module, Signal is reference signal, 37 byte payload ¹ | — | -102.2 | — | dBm |
| | | +10 dBm Module, Signal is reference signal, 255 byte payload ¹ | — | -101 | — | dBm |
| | | +10 dBm Module, With non-ideal signals ^{2 1} | — | -100 | — | dBm |
| | | +20 dBm Module, Signal is reference signal, 37 byte payload ¹ | — | -101.4 | — | dBm |
| | | +20 dBm Module, Signal is reference signal, 255 byte payload ¹ | — | -100 | — | dBm |
| | | +20 dBm Module, With non-ideal signals ^{2 1} | — | -99 | — | dBm |
| Signal to co-channel interferer | C/I _{CC} | (see notes) ^{1 3} | — | 2.7 | — | dB |
| N ± 1 Adjacent channel selectivity | C/I ₁ | Interferer is reference signal at +1 MHz offset ^{1 3} 4 5 | — | -7.1 | — | dB |
| | | Interferer is reference signal at -1 MHz offset ^{1 3} 4 5 | — | -7.4 | — | dB |
| N ± 2 Alternate channel selectivity | C/I ₂ | Interferer is reference signal at +2 MHz offset ^{1 3} 4 5 | — | -46.8 | — | dB |
| | | Interferer is reference signal at -2 MHz offset ^{1 3} 4 5 | — | -49.7 | — | dB |

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|---------------------|--|-----|-------|-----|------|
| N ± 3 Alternate channel selectivity | C/I ₃ | Interferer is reference signal at +3 MHz offset ^{1 3 4 5} | — | -49.4 | — | dB |
| | | Interferer is reference signal at -3 MHz offset ^{1 3 4 5} | — | -54.5 | — | dB |
| Selectivity to image frequency | C/I _{IM} | Interferer is reference signal at image frequency with 1 MHz precision ^{1 5} | — | -49 | — | dB |
| Selectivity to image frequency ± 1 MHz | C/I _{IM_1} | Interferer is reference signal at image frequency +1 MHz with 1 MHz precision ^{1 5} | — | -49.4 | — | dB |
| | | Interferer is reference signal at image frequency -1 MHz with 1 MHz precision ^{1 5} | — | -46.8 | — | dB |

Note:

1. 0.017% Bit Error Rate.
2. With non-ideal signals as specified in Bluetooth Test Specification RF-PHY.TS.5.0.1 section 4.7.1
3. Desired signal -72 dBm.
4. Desired frequency 2402 MHz ≤ Fc ≤ 2480 MHz.
5. With allowed exceptions.

4.10 RF Receiver Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 125 kbps Data Rate

Unless otherwise indicated, typical conditions are: **VDD = 3.0 V, DC-DC in regulation**. RF center frequency **2.45 GHz**. **T_A = 25 °C**.

Table 13: RF Receiver Characteristics for Bluetooth Low Energy in the 2.4 GHz Band 125 kbps Data Rate

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|------------------------------------|-------------------|---|-----|--------|-----|------|
| Max usable receiver input level | SAT | Signal is reference signal ¹ | — | 10 | — | dBm |
| Sensitivity | SENS | +10 dBm Module, Signal is reference signal, 37 byte payload ¹ | — | -106.5 | — | dBm |
| | | +10 dBm Module, Signal is reference signal, 255 byte payload ¹ | — | -106.1 | — | dBm |
| | | +10 dBm Module, With non-ideal signals ^{2 1} | — | -105.7 | — | dBm |
| | | +20 dBm Module, Signal is reference signal, 37 byte payload ¹ | — | -105.6 | — | dBm |
| | | +20 dBm Module, Signal is reference signal, 255 byte payload ¹ | — | -105.3 | — | dBm |
| | | +20 dBm Module, With non-ideal signals ^{2 1} | — | -104.8 | — | dBm |
| Signal to co-channel interferer | C/I _{CC} | (see notes) ^{1 3} | — | 0.9 | — | dB |
| N ± 1 Adjacent channel selectivity | C/I ₁ | Interferer is reference signal at +1 MHz offset ^{1 3 4 5} | — | -12.4 | — | dB |
| | | Interferer is reference signal at -1 MHz offset ^{1 3 4 5} | — | -12.8 | — | dB |
| N ± 2 Alternate | | Interferer is reference signal at +2 | — | -52.6 | — | dB |

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|---------------------|--|-----|-------|-----|------|
| channel selectivity | C/I ₂ | MHz offset ^{1 3 4 5} | — | — | — | dB |
| | | Interferer is reference signal at -2 MHz offset ^{1 3 4 5} | — | -55.5 | — | dB |
| N ± 3 Alternate channel selectivity | C/I ₃ | Interferer is reference signal at +3 MHz offset ^{1 3 4 5} | — | -53.8 | — | dB |
| | | Interferer is reference signal at -3 MHz offset ^{1 3 4 5} | — | -60.0 | — | dB |
| Selectivity to image frequency | C/I _{IM} | Interferer is reference signal at image frequency with 1 MHz precision ^{1 5} | — | -53.0 | — | dB |
| Selectivity to image frequency ± 1 MHz | C/I _{IM_1} | Interferer is reference signal at image frequency +1 MHz with 1 MHz precision ^{1 5} | — | -53.8 | — | dB |
| | | Interferer is reference signal at image frequency -1 MHz with 1 MHz precision ^{1 5} | — | -52.6 | — | dB |

Note:

1. 0.017% Bit Error Rate.
2. With non-ideal signals as specified in Bluetooth Test Specification RF-PHY.TS.5.0.1 section 4.7.1
3. Desired signal -79 dBm.
4. Desired frequency 2402 MHz ≤ Fc ≤ 2480 MHz.
5. With allowed exceptions.

4.11 High-Frequency Crystal

Table 14: High-Frequency Crystal

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|-----------------------------|-------------------------|------------------------------------|-----|-----|-----|------|
| Crystal frequency | f _{HFXTAL} | — | — | 39 | — | MHz |
| Initial calibrated accuracy | ACC _{HFXTAL} | -10 | ±5 | 10 | — | ppm |
| Temperature drift | DRIFT _{HFXTAL} | Across specified temperature range | -20 | — | 20 | ppm |

4.12 Low-Frequency Crystal Oscillator

Table 15: Low-Frequency Crystal Oscillator

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|---------------------|---|------|--------|------|-------|
| Crystal frequency | f _{LFXO} | — | — | 32.768 | — | kHz |
| Supported Crystal equivalent series resistance (ESR) | ESR _{LFXO} | GAIN = 0 | — | — | 80 | kOhms |
| | | GAIN = 1 to 3 | — | — | 100 | kOhms |
| Supported range of crystal load capacitance ¹ | CL _{LFXO} | GAIN = 0 | 4 | — | 6 | pF |
| | | GAIN = 1 | 6 | — | 10 | pF |
| | | GAIN = 2 (see note2) | 10 | — | 12.5 | pF |
| | | GAIN = 3 (see note2) | 12.5 | — | 18 | pF |
| Current consumption | I _{CL12p5} | ESR = 70 kΩ, CL = 12.5pF, GAIN ³ = 2, AGC ⁴ = 1 | — | 294 | — | nA |

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|---|-----------------|---|-----|------|-----|------|
| Startup Time | $t_{STARTUP}$ | ESR = 70 k Ω , CL = 7 pF, GAIN ³ = 1, AGC ⁴ = 1 | — | 52 | — | ms |
| On-chip tuning cap step size | SS_{LFXO} | — | — | 0.26 | — | pF |
| On-chip tuning capacitor value at minimum setting ⁵ | C_{LFXO_MIN} | CAPTUNE=0 | — | 5.2 | — | pF |
| On-chip tuning capacitor value at maximum setting ⁵ | C_{LFXO_MAX} | CAPTUNE=0x4F | — | 26.2 | — | pF |

Note:

1. Total load capacitance seen by the crystal
2. Crystals with a load capacitance of greater than 12 pF require external load capacitors.
3. In LFXO_CAL Register
4. In LFXO_CFG Register
5. The effective load capacitance seen by the crystal will be $C_{LFXO}/2$. This is because each XTAL pin has a tuning cap, and the two caps will be seen in series by the crystal

4.13 Precision Low Frequency RC Oscillator (LFRCO)

Table 16: Precision Low Frequency RC Oscillator (LFRCO)

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|-------------------------------|------------------|---|--------|-------|-----|---------|
| Nominal oscillation frequency | F_{LFRCO} | — | 32.768 | — | — | kHz |
| Frequency accuracy | F_{LFRCO_ACC} | Normal mode | -3 | — | 3 | % |
| | | Precision mode ¹ , across operating temperature range ² | -500 | — | 500 | ppm |
| Startup time | $t_{STARTUP}$ | Normal mode | — | 204 | — | μ s |
| | | Precision mode ¹ | — | 11.7 | — | ms |
| Current consumption | I_{LFRCO} | Normal mode | — | 189.9 | — | nA |
| | | Precision mode ¹ , T = stable at 25°C ³ | — | 649.8 | — | nA |

Note:

1. The LFRCO operates in high-precision mode when CFG_HIGHPRECEN is set to 1. High-precision mode is not available in EM4.
2. Includes ± 40 ppm frequency tolerance of the HFXO crystal.
3. Includes periodic re-calibration against HFXO crystal oscillator.

4.14 GPIO Pins

Table 17: GPIO Pins

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--------------------------------|----------------|-------------------------------|-----|-----|----------|------|
| Leakage current | I_{LEAK_IO} | MODEx = DISABLED, VDD = 3.0 V | — | 2.5 | — | nA |
| Input low voltage ¹ | V_{IL} | Any GPIO pin | — | — | 0.3*VDD | V |
| | | RESETn | — | — | 0.3*DVID | V |

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--------------------------------------|------------------------|---|-----------|-----|---------|------|
| Input high voltage ¹ | V _{IH} | Any GPIO pin | 0.7*VDD | — | — | V |
| | | RESETn | 0.7*DVDD | — | — | V |
| Hysteresis of input voltage | V _{HYS} | Any GPIO pin | 0.05*VDD | — | — | V |
| | | RESETn | 0.05*DVDD | — | — | V |
| Output low voltage | V _{OL} | Sinking 20mA, VDD = 3.0 V | — | — | 0.2*VDD | V |
| Output high voltage | V _{OH} | Sourcing 20mA, VDD = 3.0 V | 0.8*VDD | — | — | V |
| GPIO rise time | T _{GPIO_RISE} | VDD = 3.0V, C _{load} = 50pF, SLEWRATE = 4, 10% to 90% | — | 8.4 | — | ns |
| GPIO fall time | T _{GPIO_FALL} | VDD = 3.0V, C _{load} = 50pF, SLEWRATE = 4, 90% to 10% | — | 7.1 | — | ns |
| Pull up/down resistance ² | R _{PULL} | GPIO pull-up to VDD: MODEn = DISABLE, DOUT=1. GPIO pull-down to GND: MODEn = WIREDORPULLDOWN, DOUT = 0. | 35 | 44 | 55 | kΩ |
| | | RESETn pin pull-up to DVDD. | 35 | 44 | — | kΩ |
| Maximum filtered glitch width | T _{GF} | MODE = INPUT, DOUT = 1 | — | 27 | — | ns |
| RESETn low time to ensure pin reset | T _{RESET} | | 100 | — | — | ns |

Note:

1. GPIO input thresholds are proportional to the VDD pin. RESETn input thresholds are proportional to the internal DVDD supply, which is generated by the DC-DC converter. DVDD is equal to 1.8 V when DC-DC is active and bypassed to VDD when DC-DC is inactive.
2. GPIO pull-ups connect to VDD supply, pull-downs connect to GND. RESETn pull-up connects to internal DVDD supply, which is generated by the DC-DC converter. DVDD is equal to 1.8V when DC-DC is active and bypassed to VDD when DC-DC is inactive.

4.15 Microcontroller Peripherals

The MCU peripherals set available in Lyra 24P modules includes:

- ADC: 12-bit at 1 Msps, 16-bit at 76.9 kspS
- 16-bit and 32-bit Timers/Counters
- 24-bit Low Energy Timer for waveform generation
- 32-bit Real Time Counter
- USART (UART/SPI/SmartCards/IrDA/I2S)
- EUSART (UART/IrDA)
- I²C peripheral interfaces
- 12 Channel Peripheral Reflex System

For details on their electrical performance and to learn which GPIO ports provide access to every peripheral, consult the relevant portions of Section 4 and Section 6 in the SoC datasheet, see [EFR32BG24 SoC](#) section for datasheet link.

To learn which GPIO ports provide access to every peripheral, consult [Analog Peripheral Connectivity](#) and [Digital Peripheral Connectivity](#) sections.

4.16 Antenna Radiation and Efficiency for Lyra 24P Integrated Antenna

Typical performance curves indicate typical characterized performance under the stated conditions.

Typical Lyra 24P radiation patterns and efficiency for the integrated antenna under optimal operating conditions are plotted in the figures that follow. Antenna gain and radiation patterns have a strong dependence on the size and shape of the application PCB the module is mounted on, as well as on the proximity of any mechanical design to the antenna.

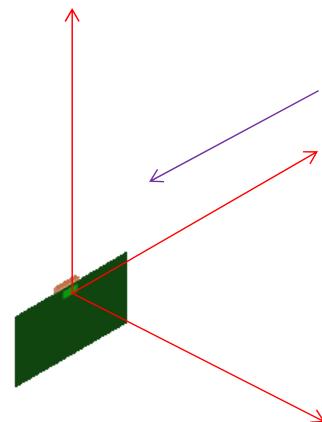
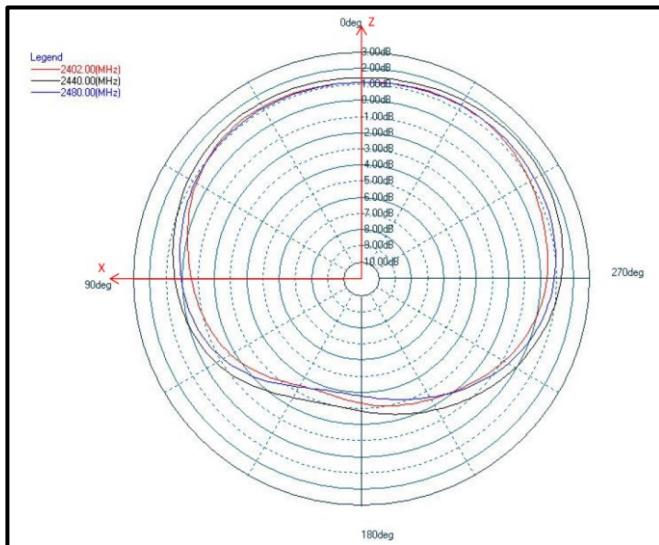


Figure 4: Lyra 24P Integrated Antenna Module Typical 2D Antenna Radiation Patterns - Phi 0° (Side View) Gain dBi

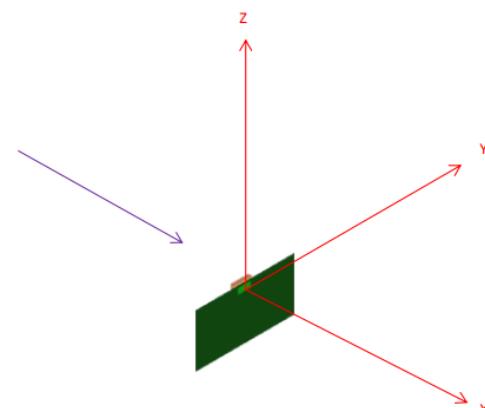
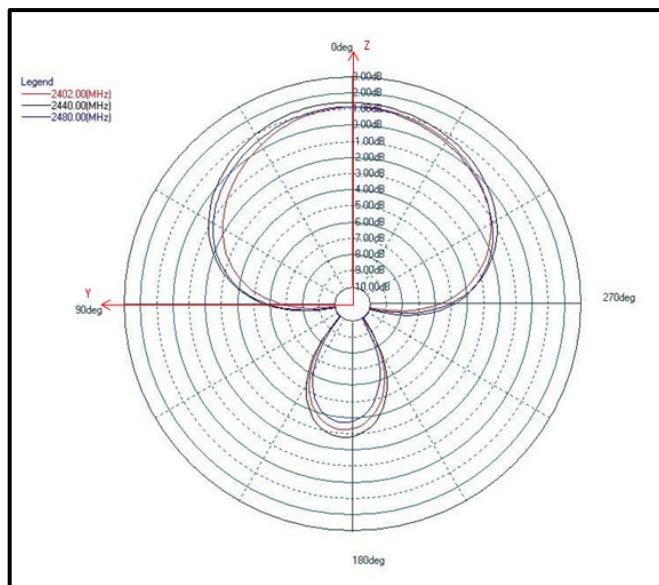


Figure 5: Lyra 24P Integrated Antenna Module Typical 2D Antenna Radiation Patterns - Phi 90° (Top View) Gain dBi

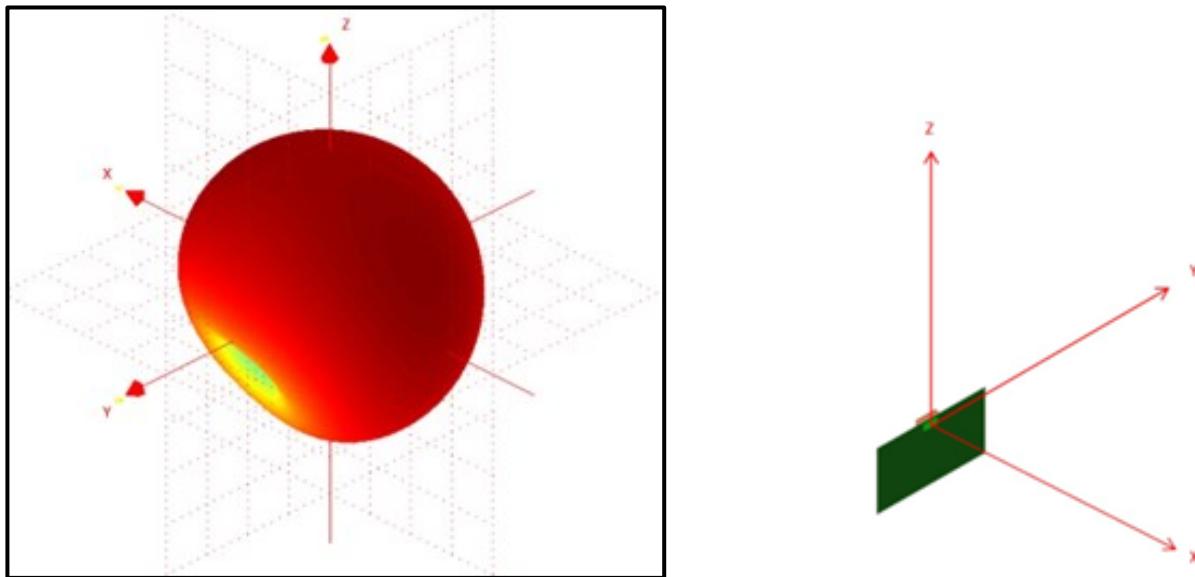


Figure 6: Lyra 24P Integrated Antenna Module Typical 2D Antenna Radiation Patterns - 3D Radiation Pattern at 2440 MHz

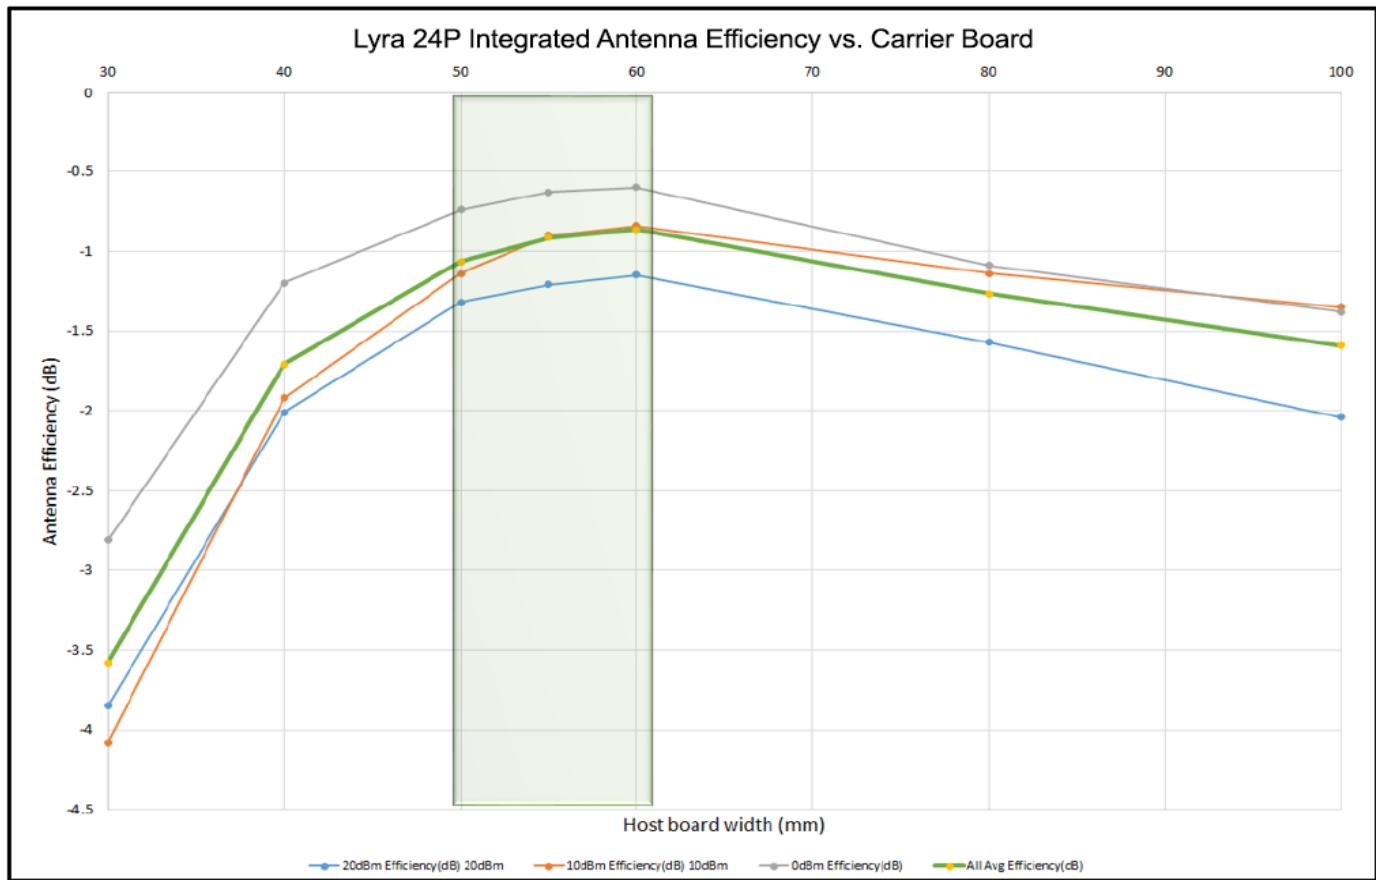


Figure 7: Radiation efficiency of the Built-in Antenna as Function of the Carrier Board Width(mm)

5 REFERENCE DIAGRAMS

5.1 Network Co-Processor (NCP) Application with UART Host

The Lyra 24P can be controlled over the UART interface as a peripheral to an external host processor. Typical power supply, programming/debug interface, and host interface connections are shown in the figure below. For more details, see [AN958: Debugging and Programming Interfaces for Custom Designs](#).

Note: For boot pin, see section 5.3

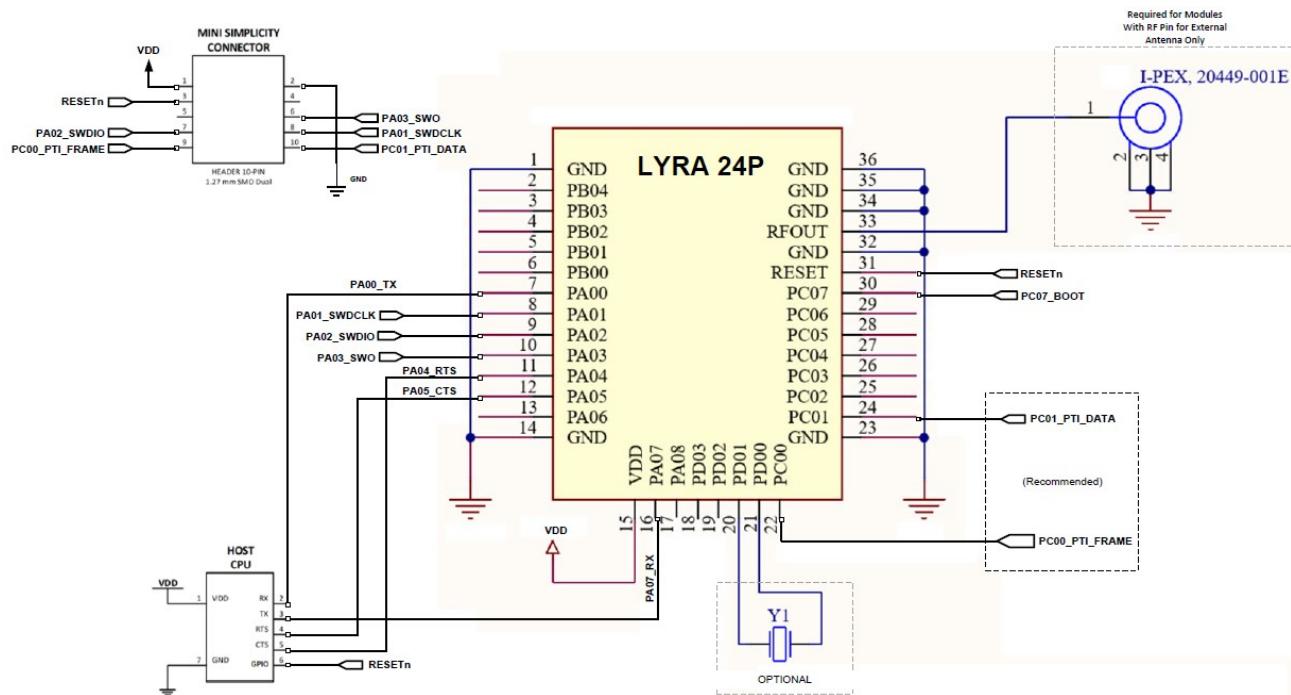


Figure 8: UART NCP Configuration (External Antenna MHF4 RF connector only required for 453-00148 Lyra 24P, RF trace pad variant module)

5.2 SoC Application

The Lyra 24P can be used in a stand-alone SoC configuration without an external host processor. Typical power supply and programming/debug interface connections are shown in the figure below. For more details, see [AN958: Debugging and Programming Interfaces for Custom Designs](#).

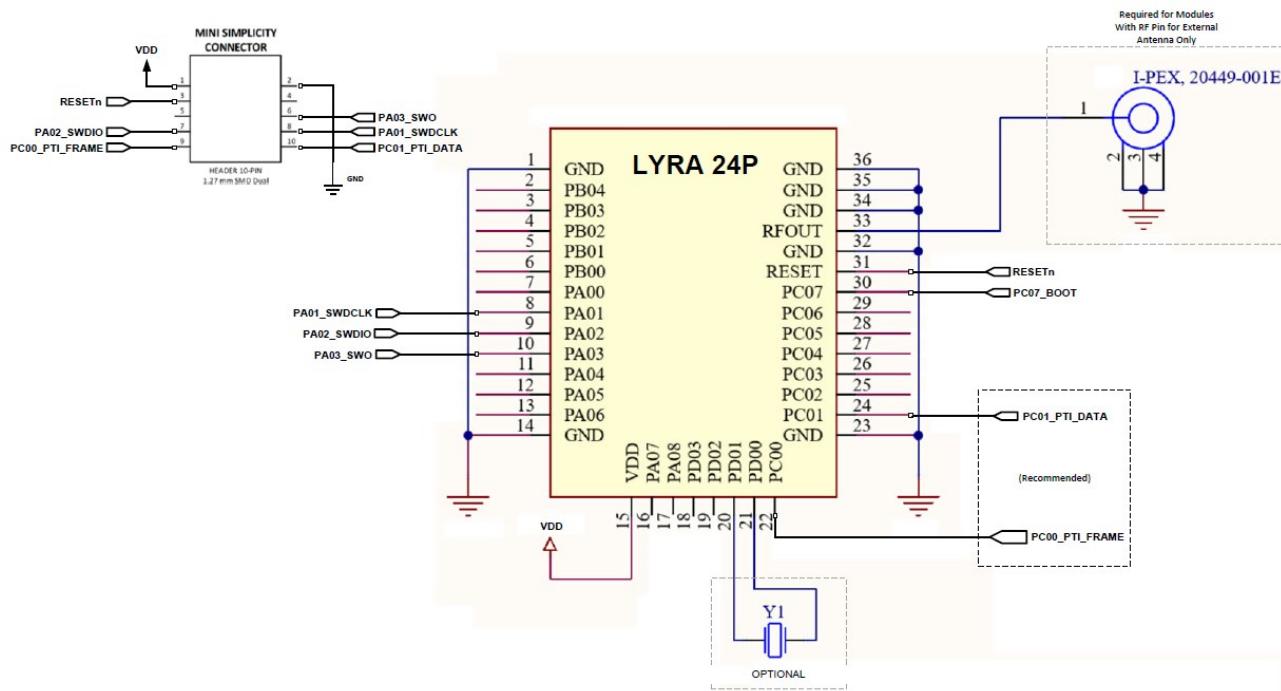


Figure 9: Stand-Alone SoC Configuration (External Antenna MHF4 RF connector only required for 453-00148 Lyra 24P, RF trace pad variant module)

5.3 Boot

The **BOOT** pin is used to determine when execution of the bootloader is required. Upon reset, execution of the bootloader begins. The state of the **BOOT** pin is read immediately upon start-up of the bootloader. If LOW, execution of the bootloader continues, facilitating firmware update via the UART. If the **BOOT** pin is HIGH, the bootloader will stop execution and pass control to the main application firmware.

6 PIN DEFINITIONS

6.1 Lyra 24P 36-Pin PCB Module Pinout

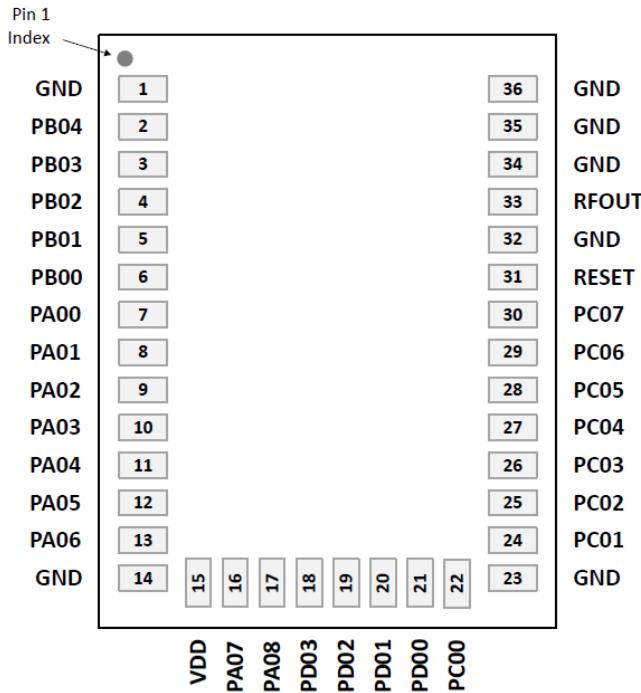


Figure 10: Lyra 24P 36-Pin PCB Module With LF Crystal Device Pinout

For GPIO pin to peripheral assignment in AT firmware, see User Guide – AT Interface Application – Lyra 24 Series.

The following table provides package pin connections and general descriptions of pin functionality. For detailed information on the supported features for each GPIO pin, see [Table 19: GPIO Alternate Function Table](#), [Analog Peripheral Connectivity](#), and [Digital Peripheral Connectivity](#).

Table 18: Lyra 24P Module Pin Definitions

| Pin Name | Pin(s) | Description | Pin Name | Pin(s) | Description |
|----------|--------|----------------------------------|----------|--------|---------------------------------|
| GND | 1 | Ground | PB04 | 2 | GPIO |
| PB03 | 3 | GPIO | PB02 | 4 | GPIO |
| PB01 | 5 | GPIO | PB00 | 6 | GPIO |
| PA00 | 7 | GPIO | PA01 | 8 | GPIO |
| PA02 | 9 | GPIO | PA03 | 10 | GPIO |
| PA04 | 11 | GPIO | PA05 | 12 | GPIO |
| PA06 | 13 | GPIO | GND | 14 | GND |
| VDD | 15 | Power Supply | PA07 | 16 | GPIO |
| PA08 | 17 | GPIO | PD03 | 18 | GPIO |
| PD02 | 19 | GPIO | PD01 | 20 | GPIO / LF XTAL Input (Optional) |
| PD00 | 21 | GPIO / LF XTAL Output (Optional) | PC00 | 22 | GPIO |
| GND | 23 | GPIO | PC01 | 24 | GPIO |

| Pin Name | Pin(s) | Description | Pin Name | Pin(s) | Description |
|----------|--------|---|----------|--------|-------------|
| PC02 | 25 | GPIO | PC03 | 26 | GPIO |
| PC04 | 27 | GPIO | PC05 | 28 | GPIO |
| PC06 | 29 | GPIO | PC07 | 30 | GPIO |
| RESETn | 31 | Reset Pin. The RESETn pin is pulled up to an internal DVDD supply. An external pull-up is not recommended. To apply an external reset source to this pin, it is required to only drive this pin low during reset, and let the internal pull-up ensure that reset is released. The RESETn pin can be left unconnected if no external reset switch or source is used. | GND | 32 | GND |
| RFOUT | 33 | RF Input/Output (External Ant.) | GND | 34 | GND |
| GND | 35 | GND | GND | 36 | GND |

6.2 Alternate Function Table

Some GPIOs support alternate functions like debugging, wake-up from EM4, external low frequency crystal access, etc.. The following table shows which module pins have alternate capabilities and the functions they support. Refer to the SoC's reference manual for more details.

Table 19: GPIO Alternate Function Table

| GPIO | Alternate Function | | |
|------|----------------------------|----------------------------|-----------------------|
| PA00 | IADC0.VREFP | | |
| PA01 | GPIO.SWCLK | | |
| PA02 | GPIO.SWDIO | | |
| PA03 | GPIO.SWV | GPIO.TDO | GPIO.TRACEDATA0 |
| PA04 | GPIO.TDI | GPIO.TRACECLK | |
| PA05 | GPIO.TRACEDATA1 | GPIO.EM4WU0 | |
| PA06 | GPIO.TRACEDATA2 | | |
| PA07 | GPIO.TRACEDATA3 | | |
| PB00 | VDAC0.VDAC_CH0_MAIN_OUTPUT | | |
| PB01 | GPIO.EM4WU3 | VDAC0.VDAC_CH_MAIN_OUTPUT | |
| PB02 | VDAC1.VDAC_CH0_MAIN_OUTPUT | | |
| PB03 | GPIO.EM4WU4 | VDAC1.VDAC_CH1_MAIN_OUTPUT | |
| PC00 | GPIO.EM4WU6 | | |
| PC01 | GPIO.EFP_TX_SDA | | |
| PC02 | GPIO.EFP_TX_SCL | | |
| PC05 | GPIO.EFP_INT | GPIO.EM4WU7 | |
| PC07 | GPIO.EM4WU8 | GPIO.THMSW_EN | GPIO.THMSW_HALFSWITCH |
| PD00 | LFXO.LFXTAL_O | | |
| PD01 | LFXO.LFXTAL_I | LFXO.LF_EXTCLK | |
| PD02 | GPIO.EM4WU9 | | |

6.3 Analog Peripheral Connectivity

Many analog resources are routable and can be connected to numerous GPIO's. The table below indicates which peripherals are available on each GPIO port. **When a differential connection is being used, positive inputs are restricted to the EVEN pins and Negative inputs are restricted to the ODD pins.** When a single ended connection is being used positive input is available on all pins. See the SoC's Reference Manual for more details on the ABUS and analog peripherals, [EFR32BG24 SoC](#).

Table 20: ABUS Routing Table

| Peripheral | Signal | PA | | PB | | PC | | PD | |
|------------|----------------------|------|-----|------|-----|------|-----|------|-----|
| | | EVEN | ODD | EVEN | ODD | EVEN | ODD | EVEN | ODD |
| ACMP0 | ana_neg | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| | ana_pos | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| ACMP1 | ana_neg | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| | ana_pos | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| IADC0 | ana_neg | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| | ana_pos | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| VDAC0 | VDAC_CH0_ABUS_OUTPUT | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| | VDAC_CH1_ABUS_OUTPUT | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| VDAC1 | VDAC_CH0_ABUS_OUTPUT | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| | VDAC_CH1_ABUS_OUTPUT | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |

6.4 Digital Peripheral Connectivity

Many digital resources are routable and can be connected to numerous GPIO's. The table below indicates which peripherals are available on each GPIO port.

Table 21: DBUS Routing Table

| Peripheral.Resource | PORT | | | |
|---------------------------|-----------|-----------|-----------|-----------|
| | PA | PB | PC | PD |
| ACMP0.DIGOUT | Available | Available | Available | Available |
| ACMP1.DIGOUT | | | Available | Available |
| CMU.CLKIN0 | | | Available | Available |
| CMU.CLKOUT0 | | | Available | Available |
| CMU.CLKOUT1 | Available | Available | | |
| CMU.CLKOUT2 | Available | Available | | |
| EUSART0.CS | Available | Available | | |
| EUSART0.CTS | Available | Available | | |
| EUSART0.RTS | Available | Available | | |
| EUSART0.RX | Available | Available | | |
| EUSART0.SCLK | Available | Available | | |
| EUSART0.TX | Available | Available | Available | Available |
| EUSART1.CS | Available | Available | Available | Available |
| EUSART1.CTS | Available | Available | Available | Available |
| EUSART1.RTS | Available | Available | Available | Available |
| EUSART1.RX | Available | Available | Available | Available |
| EUSART1.SCLK | Available | Available | Available | Available |
| EUSART1.TX | | | Available | Available |
| FRC.DCLK | | | Available | Available |
| FRC.DFRAME | | | Available | Available |
| FRC.DOUT | Available | Available | | |
| HFXO0.BUFOUT_REQ_IN_ASYNC | Available | Available | Available | Available |
| I2C0.SCL | Available | Available | Available | Available |
| I2C0.SDA | | | Available | Available |
| I2C1.SCL | | | Available | Available |
| I2C1.SDA | Available | Available | Available | Available |
| KEYSCAN.COL_OUT_0 | Available | Available | Available | Available |
| KEYSCAN.COL_OUT_1 | Available | Available | Available | Available |
| KEYSCAN.COL_OUT_2 | Available | Available | Available | Available |
| KEYSCAN.COL_OUT_3 | Available | Available | Available | Available |
| KEYSCAN.COL_OUT_4 | | | | |
| KEYSCAN.COL_OUT_5 | Available | Available | Available | Available |
| KEYSCAN.COL_OUT_6 | Available | Available | Available | Available |
| KEYSCAN.COL_OUT_7 | Available | Available | Available | Available |
| KEYSCAN.ROW_SENSE_0 | Available | Available | | |
| KEYSCAN.ROW_SENSE_1 | Available | Available | | |

| Peripheral.Resource | PORT | | | |
|---------------------|-----------|-----------|-----------|-----------|
| | PA | PB | PC | PD |
| KEYSCAN.ROW_SENSE_2 | Available | Available | | |
| KEYSCAN.ROW_SENSE_3 | Available | Available | | |
| KEYSCAN.ROW_SENSE_4 | Available | Available | | |
| KEYSCAN.ROW_SENSE_5 | Available | Available | | |
| LETIMER0.OUT0 | Available | Available | | |
| LETIMER0.OUT1 | Available | Available | | |
| MODEM.ANT0 | Available | Available | Available | Available |
| MODEM.ANT1 | Available | Available | Available | Available |
| MODEM.ANT_ROLL_OVER | | | Available | Available |
| MODEM.ANT_RR0 | | | Available | Available |
| MODEM.ANT_RR1 | | | Available | Available |
| MODEM.ANT_RR2 | | | Available | Available |
| MODEM.ANT_RR3 | | | Available | Available |
| MODEM.ANT_RR4 | | | Available | Available |
| MODEM.ANT_RR5 | | | Available | Available |
| MODEM.ANT_SW_EN | | | Available | Available |
| MODEM.ANT_SW_US | | | Available | Available |
| MODEM.ANT_TRIG | | | Available | Available |
| MODEM.ANT_TRIG_STOP | | | Available | Available |
| MODEM.DCLK | Available | Available | | |
| MODEM.DIN | Available | Available | | |
| MODEM.DOUT | Available | Available | | |
| PCNT0.S0IN | Available | Available | | |
| PCNT0.S1IN | Available | Available | | |
| PRS.ASYNCH0 | Available | Available | | |
| PRS.ASYNCH1 | Available | Available | | |
| PRS.ASYNCH2 | Available | Available | | |
| PRS.ASYNCH3 | Available | Available | | |
| PRS.ASYNCH4 | Available | Available | | |
| PRS.ASYNCH5 | Available | Available | | |
| PRS.ASYNCH6 | | | Available | Available |
| PRS.ASYNCH7 | | | Available | Available |
| PRS.ASYNCH8 | | | Available | Available |
| PRS.ASYNCH9 | | | Available | Available |
| PRS.ASYNCH10 | | | Available | Available |
| PRS.ASYNCH11 | | | Available | Available |
| PRS.ASYNCH12 | Available | Available | | |
| PRS.ASYNCH13 | Available | Available | | |
| PRS.ASYNCH14 | Available | Available | | |
| PRS.ASYNCH15 | Available | Available | | |
| PRS.SYNCH0 | Available | Available | Available | Available |

| Peripheral.Resource | PORT | | | |
|---------------------|-----------|-----------|-----------|-----------|
| | PA | PB | PC | PD |
| PRS.SYNCH1 | Available | Available | Available | Available |
| PRS.SYNCH2 | Available | Available | Available | Available |
| PRS.SYNCH3 | Available | Available | Available | Available |
| RAC.LNAEN | Available | Available | Available | Available |
| RAC.PAEN | Available | Available | Available | Available |
| TIMER0.CC0 | Available | Available | Available | Available |
| TIMER0.CC1 | Available | Available | Available | Available |
| TIMER0.CC2 | Available | Available | Available | Available |
| TIMER0.CDTI0 | Available | Available | Available | Available |
| TIMER0.CDTI1 | Available | Available | Available | Available |
| TIMER0.CDTI2 | Available | Available | Available | Available |
| TIMER1.CC0 | Available | Available | Available | Available |
| TIMER1.CC1 | Available | Available | Available | Available |
| TIMER1.CC2 | Available | Available | Available | Available |
| TIMER1.CDTI0 | Available | Available | Available | Available |
| TIMER1.CDTI1 | Available | Available | Available | Available |
| TIMER1.CDTI2 | Available | Available | Available | Available |
| TIMER2.CC0 | Available | Available | | |
| TIMER2.CC1 | Available | Available | | |
| TIMER2.CC2 | Available | Available | | |
| TIMER2.CDTI0 | Available | Available | | |
| TIMER2.CDTI1 | Available | Available | | |
| TIMER2.CDTI2 | Available | Available | | |
| TIMER3.CC0 | | | Available | Available |
| TIMER3.CC1 | | | Available | Available |
| TIMER3.CC2 | | | Available | Available |
| TIMER3.CDTI0 | | | Available | Available |
| TIMER3.CDTI1 | | | Available | Available |
| TIMER3.CDTI2 | | | Available | Available |
| TIMER4.CC0 | Available | Available | | |
| TIMER4.CC1 | Available | Available | | |
| TIMER4.CC2 | Available | Available | | |
| TIMER4.CDTI0 | Available | Available | | |
| TIMER4.CDTI1 | Available | Available | | |
| TIMER4.CDTI2 | Available | Available | | |
| USART0.CLK | Available | Available | Available | Available |
| USART0.CS | Available | Available | Available | Available |
| USART0.CTS | Available | Available | Available | Available |
| USART0.RTS | Available | Available | Available | Available |
| USART0.RX | Available | Available | Available | Available |
| USART0.TX | Available | Available | Available | Available |

7 DESIGN GUIDELINES

7.1 Layout and Placement

For optimal performance of the Lyra 24P:

Place the module aligned to the edge of the application PCB, as illustrated in the figures below.

- Optional on the module with the RF pin.
- Leave the antenna clearance area void of any traces, components, or copper on all layers of the application PCB if you are going to use the built-in antenna.
- Antenna clearance area is not necessary if you are using an external antenna attached to the RF pin.
- RFOUT can be left floating if not used.

Antennas external to the module, either connectorized off-the-shelf antennas or PCB trace antennas, must be well-matched to $50\ \Omega$.

- For external antenna use cases, use a $50\ \Omega$ grounded coplanar transmission line to trace the signal from the RF pin to an external MHF4 RF connector if applicable (see [Figure 12](#)).
- A general rule is to use $50\ \Omega$ transmission lines where the length of the RF trace is longer than $\lambda/16$ at the fundamental frequency, which for 2.4 GHz is approximately 3.5 mm.
- An IPEX MHF4 RF connector can be used in the host PCB for the connection to an external antenna. The use of a MHF4 connector is also recommended for conductive tests. The integrator must use a unique connector, such as a “reverse polarity SMA” or “reverse thread SMA”, if detachable antenna is offered with the host chassis. This is especially required for the FCC and ISED approvals to remain valid, and any other kind of direct connector to the antenna might require a permissive change.
- A trace length of 1.84 mm was used in the certifications host board to connect the module RF pin to the MHF4 RF connector.
- For reference, [Figure 16](#) shows a set of parameters for a $50\ \Omega$ trace. Trace impedance should always be matched to the particular stack-up used on the host board.

Connect all ground pads directly to a solid ground plane.

Place the ground vias as close to the ground pads as possible.

Avoid plastic or any other dielectric material in contact with the antenna.

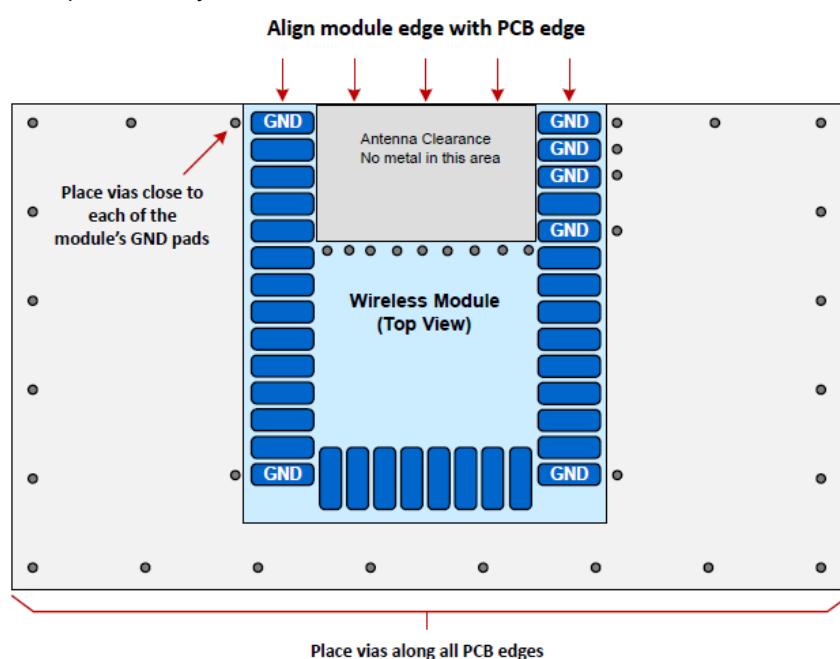


Figure 11: Recommended Layout for Lyra 24P Using Built-in Antenna

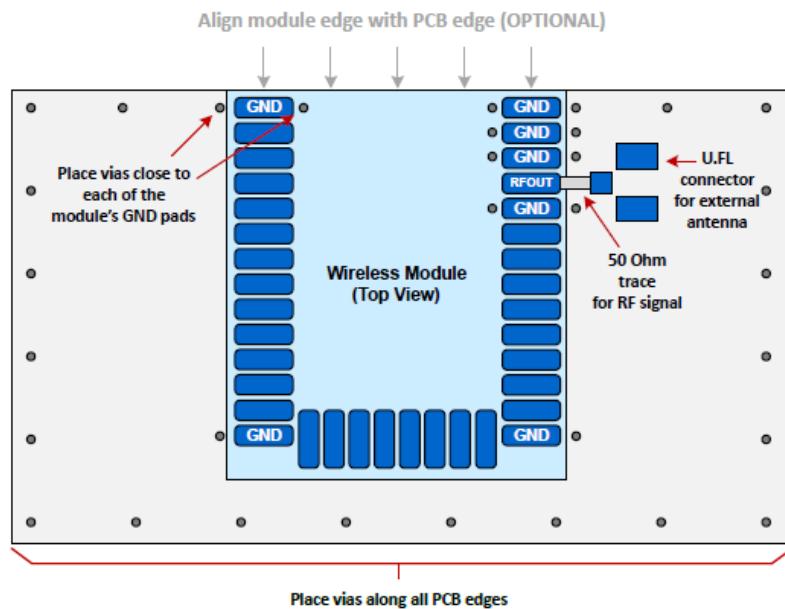


Figure 12: Recommended Layout for Lyra 24P Using External Antenna

The figure below illustrates layout scenarios that will lead to severely degraded RF performance for the module.

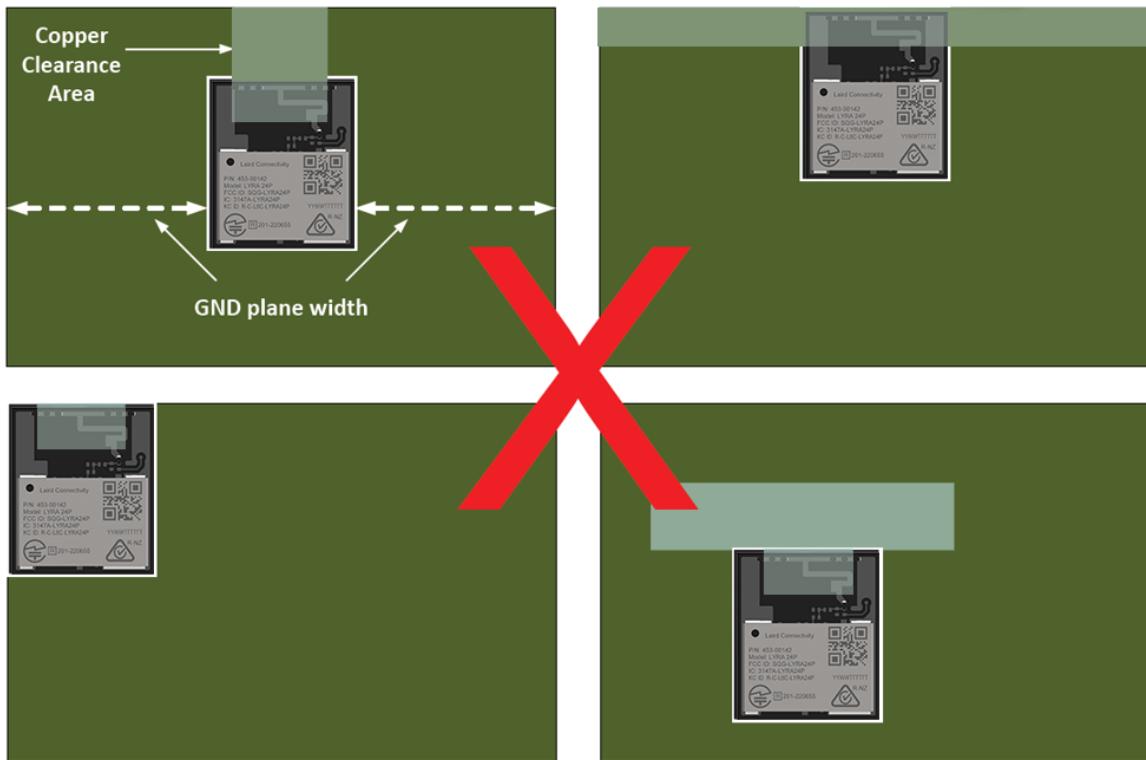


Figure 13: Non-optimal layout examples

The width of the GND plane to the sides the module will impact the efficiency of the built in antenna. **To achieve optimal performance, a GND plane width of 55-60 mm is recommended.** See [Antenna Radiation and Efficiency 錯誤! 找不到參照來源。](#) for reference.

7.2 Proximity to Other Materials

Avoid plastic or any other dielectric material in close contact with the antenna. Conformal coating and other thin dielectric layers are acceptable directly on top of the antenna region, but this will also negatively impact antenna efficiency and reduce range.

Any metallic objects in close proximity to the antenna will prevent the antenna from radiating freely. The minimum recommended distance of metallic and/or conductive objects is 10 mm in any direction from the antenna except in the directions of the application PCB ground planes.

7.3 Proximity to Human Body

Placing the module in contact with or very close to the human body will negatively impact antenna efficiency and reduce range.

7.4 Reset

The Lyra 24P can be reset by pulling the RESET line low, by the internal watchdog timer, or by software command. The reset state does not provide power saving functionality and it is not recommended as a means to conserve power.

7.5 Debug

The Lyra 24P supports hardware debugging via 4-pin JTAG or 2-pin serial-wire debug (SWD) interfaces. **It is recommended to expose the debug pins in your own hardware design for firmware update and debug purposes.** The table below lists the required pins for JTAG and SWD debug interfacing, which are also presented in Section [Alternate Function Table](#).

If JTAG interfacing is enabled, the module must be power cycled to return to a SWD debug configuration if necessary.

Table 22: Debug Pins

| Pin Name | JTAG Signal | SWD Signal | Comments |
|----------|-------------|------------|--|
| PA04 | TDI | N/A | This pin is disabled after reset. Once enabled the pin has a built-in pull-up. |
| PA03 | TDO | N/A | This pin is disabled after reset. |
| PA02 | TMS | SWDIO | Pin is enabled after reset and has a built-in pull-up. |
| PA01 | TCK | SWCLK | Pin is enabled after reset and has a built-in pull-down. |

7.6 Packet Trace Interface (PTI)

The Lyra 24P integrates a true PHY-level packet trace interface (PTI) peripheral that can capture packets non-intrusively to monitor and log device and network traffic without burdening processing resources in the module's SoC. The PTI generates two output signals that can serve as a powerful debugging tool, especially in conjunction with other hardware and software development tools available from Silicon Labs. The **PTI_DATA** and **PTI_FRAME** signals can be accessed through any GPIO on ports C and D (see **FRC.DOUT** and **FRC.DFRAME** peripheral resources in [Pin Definitions](#)).

7.7 Lyra 24P Module 50 Ohms RF Track Design for Connecting External Antenna with the Lyra 24P Module, 20dBm, RF Pad Variant (453-00148)

Lyra 24P module can be used with external antennas (certified by Laird Connectivity), and requires a 50 Ohm RF trace (GCPW, that Grounded Coplanar Waveguide) to be designed to run from Lyra 24P module RFOUT (pin33) to a RF antenna connector (IPEX MHF4) on host PCB. The **50 Ohms RF track design and length MUST be copied** (as specified in this section). Lyra 24P module GND pin32 and GND pin34 used to support GCPW 50Ohm RF trace.

Checklist for SCH



Figure 14: Lyra 24P for External antenna connection host PCB 50-Ohm RF trace schematic with MHF4 RF connector



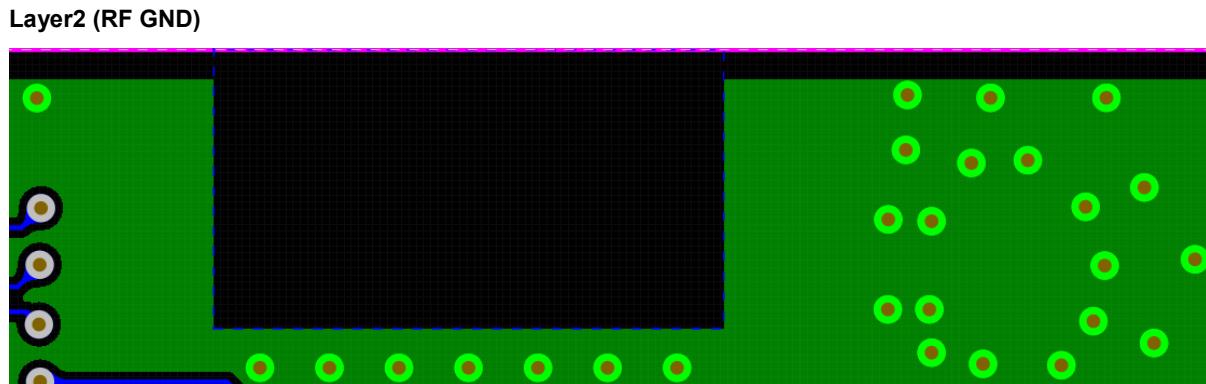


Figure 15: 50-Ohm RF trace design (Layer1 and Layer2) on DVK-Lyra 24P development board 453-00148-K1 (or host PCB) for use with Lyra 24P (453-00148) module

Checklist for PCB:

- MUST use a 50-Ohm RF trace (GCPW, that is Grounded Coplanar Waveguide) from RFOUT pad (pin33) of the Lyra 24P module (453-00148) to RF antenna connector (IPEX MHF4 Receptable (MPN: 20449-001E)) on host PCB.
- To ensure regulatory compliance, MUST follow exactly the following considerations for 50-Ohms RF trace design and test verification:

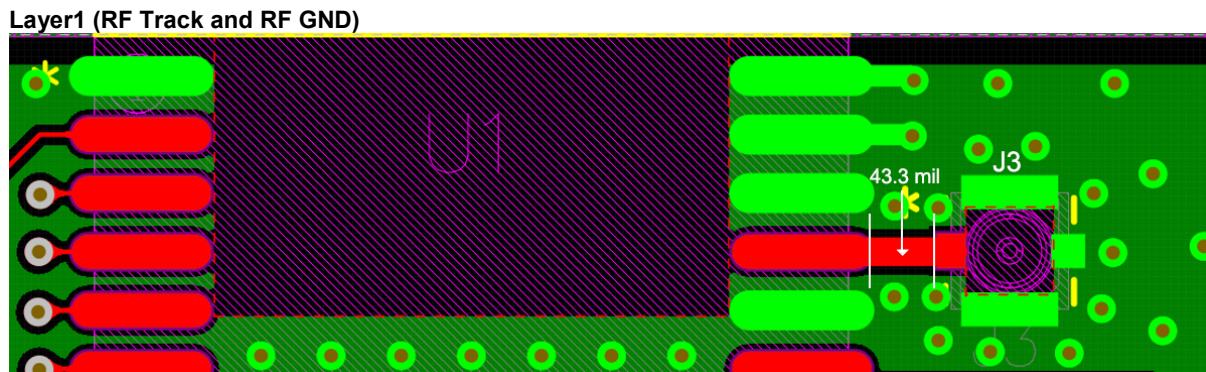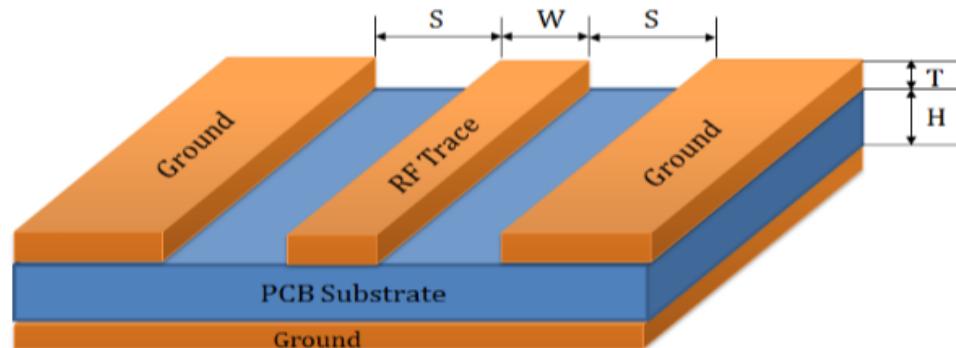

| | Thickness | | Dielectric Constant Er |
|---------------------------|-----------|-------|---------------------------|
| | mil | mm | |
| Solder Mask | 1.0 | 0.025 | 3.5 |
| Layer1 Copper 1oz+plating | 1.5 | 0.038 | |
| Core | 57.60 | 1.463 | 4.2 |
| Layer2 Copper 1oz+plating | 1.5 | 0.038 | |
| Solder Mask | 1.0 | 0.025 | 3.5 |
| Total | 62.6 | 1.59 | |

Stack up for 50 Ohms GCPW

RF Track.

Figure 16: Lyra 24P development board PCB stack-up and 50-Ohms Grounded CPW RF trace design using GND on L1 and L2

Note 1: The plating (ENIG) above base 1ounce copper is not listed, but plating expected to be ENIG.

- The 50-Ohms RF trace design MUST be Grounded Coplanar Waveguide (GCPW) with
 - Layer1 RF track width (W) of 20 mil and
 - Layer1 gap (S) to GND of 5 mil and where the
 - Layer1 to Layer 2 dielectric thickness (H) MUST be 57.6 mil (dielectric constant Er 4.2).
 - Further the Layer1 base copper must be 1-ounce base copper (that is 1.5 mil) plus the plating and
 - Layer1 MUST be covered by solder mask of 1.0 mil thickness (dielectric constant Er 3.5).
- The 50-Ohms RF trace design MUST follow the PCB stack-up shown in [Figure 16](#). (Layer1 to Layer2 thickness MUST be identical to the Lyra 24P development board).
- The 50-Ohms RF track should be a controlled-impedance trace e.g., $\pm 10\%$.
- The 50-Ohms RF trace length MUST be identical (as seen in [Figure 15](#) (43.3mil) to that on the Lyra 24P development board from Lyra 24P module RFOUT RF pad (pin33) to the RF connector IPEX MHF4 Receptable (MPN: 20449-001E).
- Place GND vias regularly spaced either side of 50-Ohms RF trace to form GCPW (Grounded coplanar waveguide) transmission line as shown in [Figure 15](#) and use Lyra 24P module GND pin32, GND pin34.
- Use spectrum analyzer to confirm the radiated (and conducted) signal is within the certification limit.

7.8 External Antenna Integration with the Lyra 24P Module, 20dBm, RF pad variant (453-00148)

Please refer to the Lyra 24P Regulatory Information Guide (coming soon) for details on using Lyra 24P module with external antennas in each regulatory region. This guide will be available at:

www.lairdconnect.com/lyra24-series

The Lyra 24P has been designed to operate with the below external antennas (with a maximum gain of 2.0dBi). The required antenna impedance is 50 ohms. See [Table 23](#). External antennas improve radiation efficiency.

Table 23 : External antennas for the Lyra 24P

| Manufacturer | Model | Laird Connectivity Part Number | Weight | Dimensions | Type | Connector | Peak Gain | |
|--------------------|-----------------------|--------------------------------|--------|----------------------------|------------|-----------|---------------|---------------|
| | | | | | | | 2400-2500 MHz | 2400-2480 MHz |
| Laird Connectivity | NanoBlue | EBL2400A1-10MH4L | | 44.45mm x 12.7mm x 0.81 mm | PCB Dipole | IPEX MHF4 | 2 dBi | - |
| Laird Connectivity | FlexPIFA | 001-0022 | 1.13g | 40.1mm x 11.0mm x 2.5mm | PIFA | IPEX MHF4 | - | 2 dBi |
| Mag Layers | EDA-8709-2G4C1-B27-CY | 0600-00057 | NA | NA | Dipole | IPEX MHF4 | 2 dBi | - |
| Laird Connectivity | mFlexPIFA | EFA2400A3S-10MH4L | 1.8g | 25.4 mm x 23.4 mm x 2.5 mm | PIFA | IPEX MHF4 | - | 2 dBi |

8 MECHANICAL SPECIFICATIONS

8.1 Dimensions (Lyra 24P series modules)

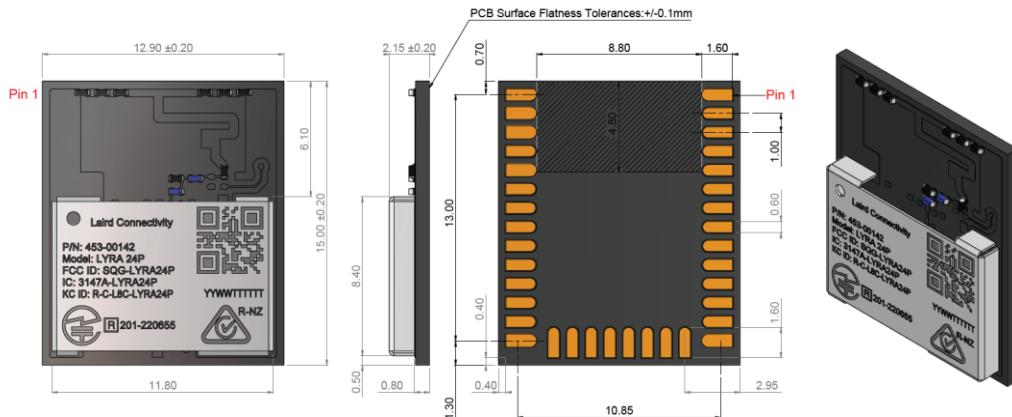


Figure 17: LYRA 24P +10 dBm Module dimensions (mm)

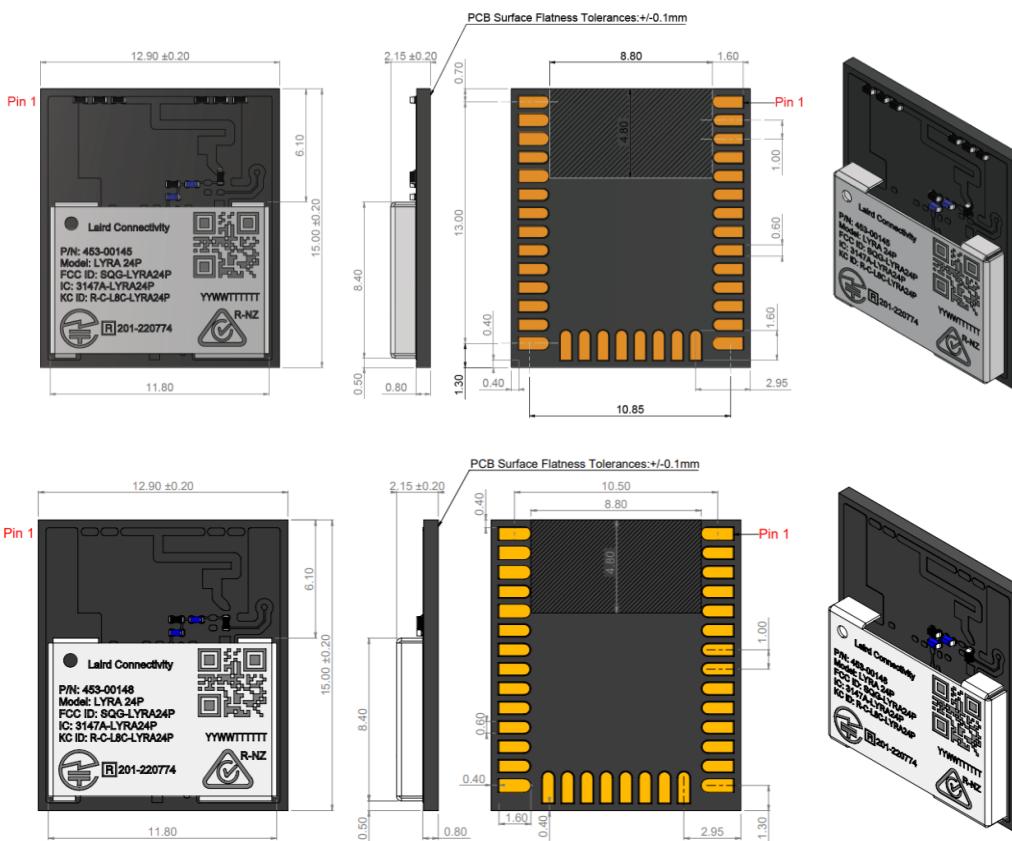


Figure 18: LYRA 24P +20 dBm Module, Integrated Antenna (453-00145) and LYRA 24P +20 dBm Module, RF Trace pad variant (453-00148) dimensions (mm)

8.2 PCB Land Pattern (Lyra 24P series modules)

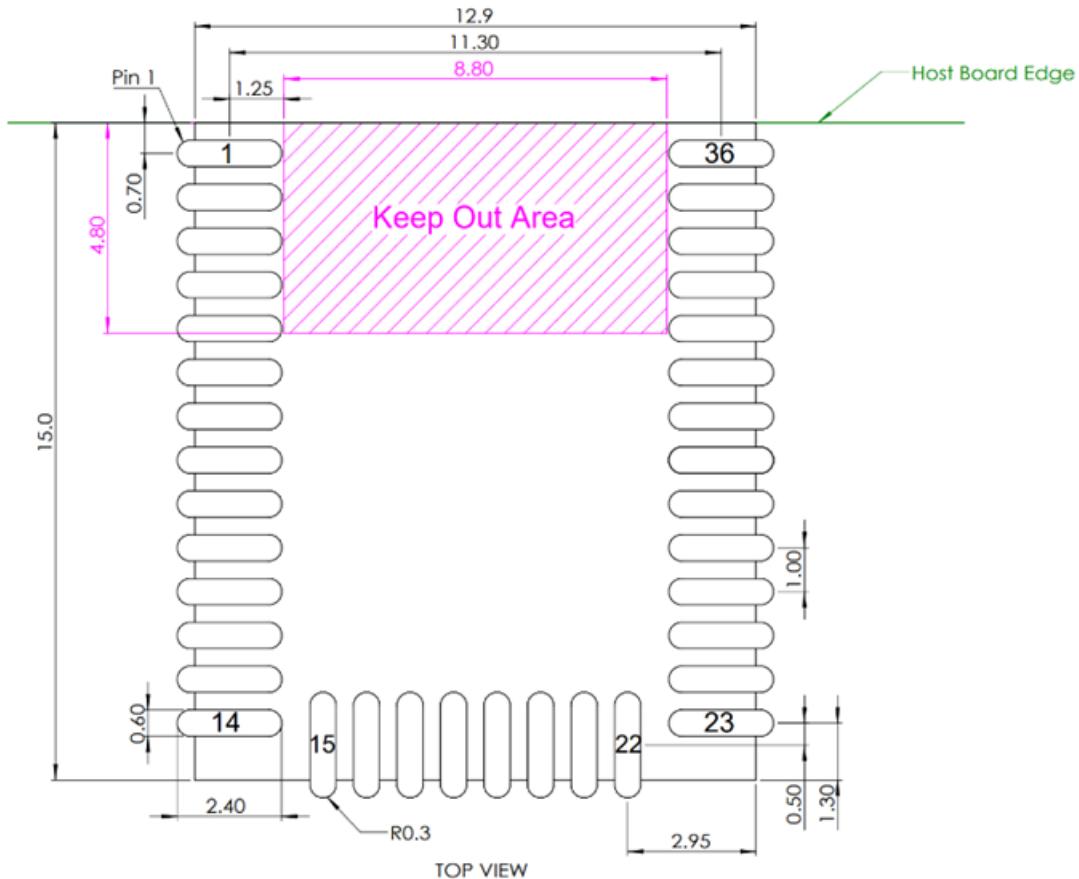


Figure 19: PCB land pattern

Note: For modules with RF pin, the antenna keep out zone in the PCB land pattern above should be omitted.

8.3 Dimensions for 450-00184 Lyra 24P – Bluetooth v5.3 USB Adaptor (20dBm) with Integrated Antenna (Silicon Labs EFR32BG24)

The Lyra 24P USB dongle User Guide is available on the Lyra 24 Series product page:

<https://www.lairdconnect.com/lyra24-series>

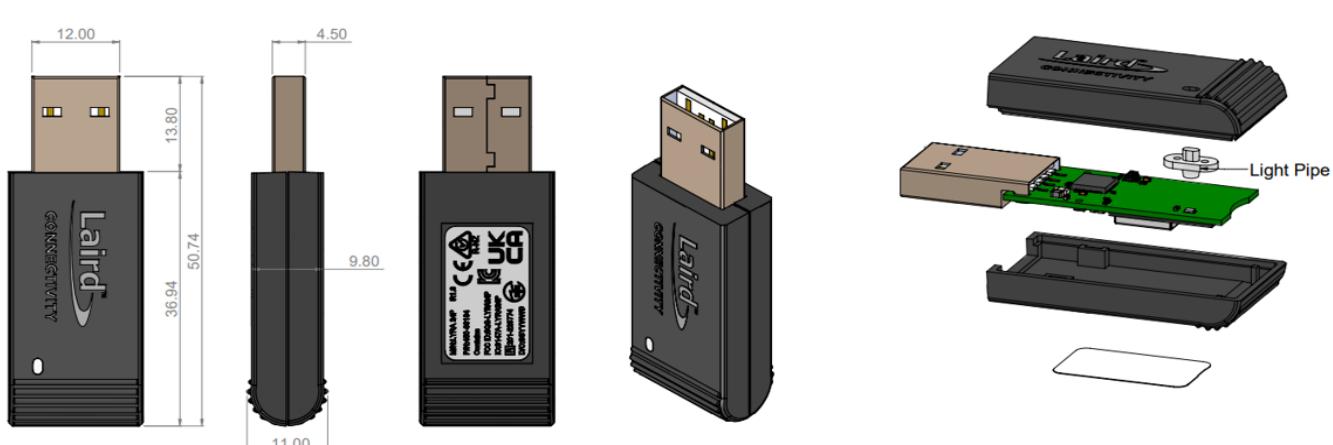


Figure 20: Lyra 24P USB Module - Dimensions

8.4 Lyra 24P Series Module Label Marking

The figure below shows the module markings engraved on the RF shield.

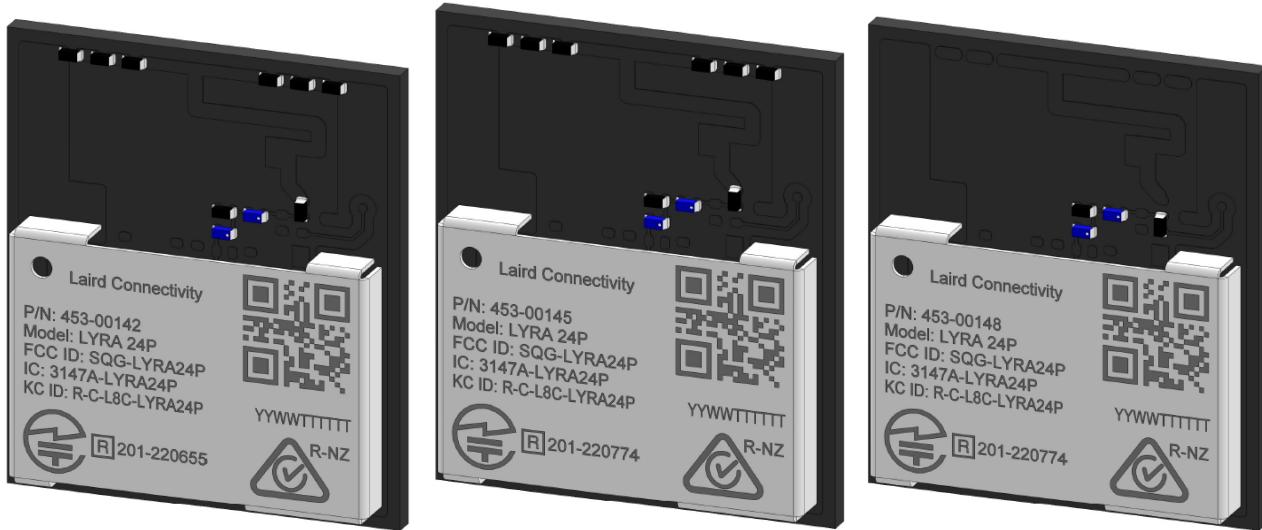


Figure 21: Lyra 24P Top Marking – +10dBm (Integrated antenna), +20 dBm (integrated antenna) and +20 dBm (RF pad) Modules Shown

Mark Description

The package marking consists of:

- P/N - Part number designation
- Model: Lyra 24P Model number designation
- QR Code: YYWWTTTTTT
 - YY – Last two digits of the assembly year.
 - WW – Two-digit workweek when the device was assembled.
 - TTTTTT – Manufacturing trace code. The first two letters are the ID of the manufacturer followed by 4 digits of trace code.
- Date code: YYWWTTTTTT
 - YY – Last two digits of the assembly year.
 - WW – Two-digit workweek when the device was assembled.
 - TTTTTT – Manufacturing trace code. The first two letters are the ID of the manufacturer followed by 4 digits of trace code.
- Certification marks such as the CE logo, FCC, and IC IDs, etc as per above image.

8.5 Lyra 24P USB Adapter Label Marking



Figure 22: Lyra 24P USB Adapter Label Marking

Mark Description

The package marking consists of:

- P/N - Part number designation
- Model: Lyra 24P Model number designation
- Date Code: YYWWTTTTTT
 - YY – Last two digits of the assembly year.
 - WW – Two-digit workweek when the device was assembled.
 - TTTTTT – Manufacturing trace code. The first two letters are the ID of the manufacturer followed by 4 digits of trace code.
- Certification marks such as the CE logo, FCC, and IC IDs, etc as per above image.

9 SOLDERING RECOMMENDATIONS

9.1 Reflow for lead Free Solder Paste

- Optimal solder reflow profile depends on solder paste properties and should be optimized as part of an overall process development.
- It is important to provide a solder reflow profile that matches the solder paste supplier's recommendations.
- Temperature ranges beyond that of the solder paste supplier's recommendation could result in poor solderability.
- All solder paste suppliers recommend an ideal reflow profile to give the best solderability.

9.2 Recommended Reflow Profile for lead Free Solder Paste

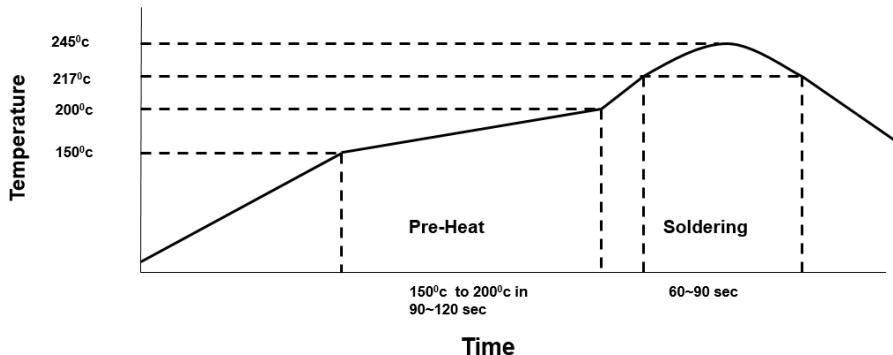


Figure 23: Recommended Reflow Profile

10 MISCELLANEOUS

10.1 Cleaning

In general, cleaning the populated modules is strongly discouraged. Residuals under the module cannot be easily removed with any cleaning process.

- Cleaning with water can lead to capillary effects where water is absorbed into the gap between the host board and the module. The combination of soldering flux residuals and encapsulated water could lead to short circuits between neighboring pads. Water could also damage any stickers or labels.
- Cleaning with alcohol or a similar organic solvent will likely flood soldering flux residuals into the RF shield, which is not accessible for post-washing inspection. The solvent could also damage any stickers or labels.
- Ultrasonic cleaning could damage the module permanently.

10.2 Rework

The Lyra 24P module can be unsoldered from the host board if the Moisture Sensitivity Level (MSL) requirements are met as described in this datasheet.

Never attempt a rework on the module itself, i.e. replacing individual components. Such actions terminate warranty coverage.

10.3 Handling and Storage

10.3.1 Handling

The Lyra 24P module contain a highly sensitive electronic circuitry. Handling without proper ESD protection may damage the module permanently.

10.3.2 Moisture Sensitivity Level (MSL)

Per J-STD-020, devices rated as MSL 4 and not stored in a sealed bag with desiccant pack should be baked prior to use.

Devices are packaged in a Moisture Barrier Bag with a desiccant pack and Humidity Indicator Card (HIC). Devices that will be subjected to reflow should reference the HIC and J-STD-033 to determine if baking is required.

If baking is required, refer to J-STD-033 for bake procedure.

10.3.3 Storage

Per J-STD-033, the shelf life of devices in a Moisture Barrier Bag is 12 months at <40C and <90% room humidity (RH).

Do not store in salty air or in an environment with a high concentration of corrosive gas, such as Cl₂, H₂S, NH₃, SO₂, or NO_x. Do not store in direct sunlight.

The product should not be subject to excessive mechanical shock.

10.3.4 Repeated Reflow Soldering

Only a single reflow soldering process is encouraged for host boards.

11 TAPE AND REEL

Lyra 24P modules are delivered to the customer in cut tape (250 pcs) or reel (1000 pcs) packaging with the dimensions below. All dimensions are given in mm unless otherwise indicated.

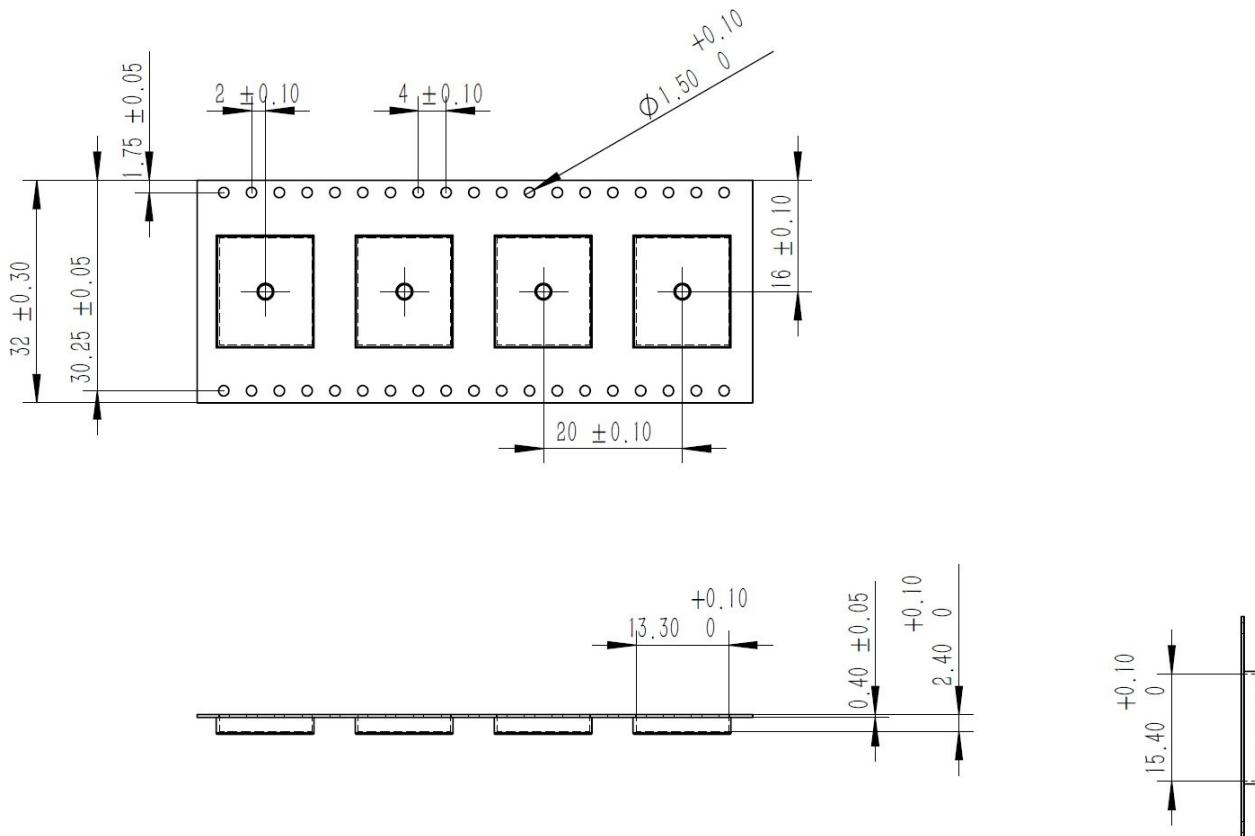


Figure 24: Carrier Tape Dimensions

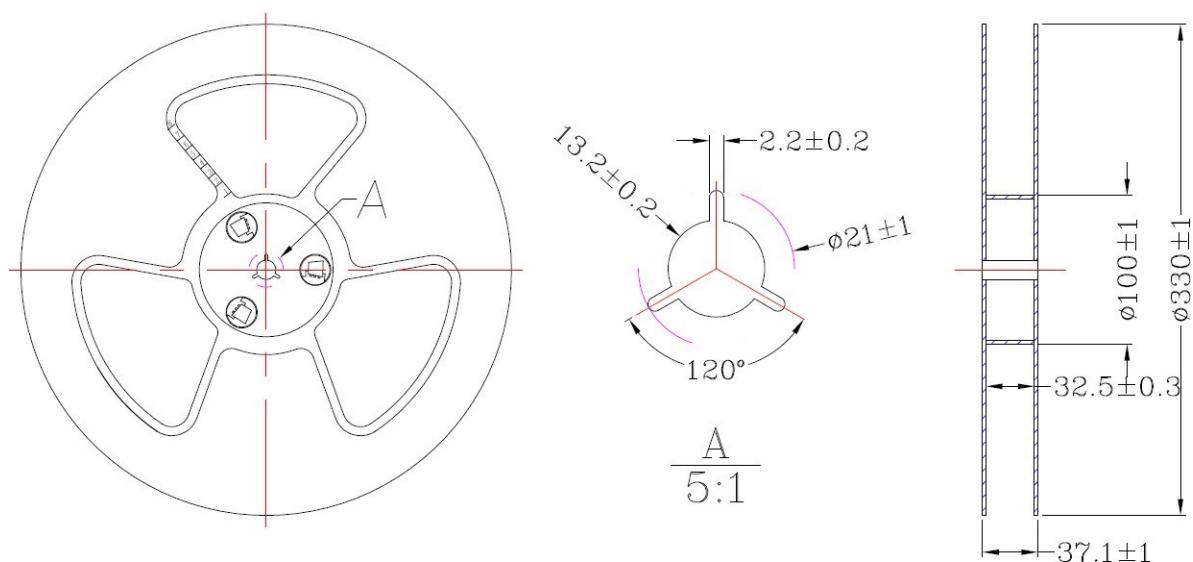


Figure 25: Reel Dimensions

12 RELIABILITY TEST

12.1 Climatic And Dynamic

Table 24: Climatic and Dynamic Reliability Test Results

| Standard | Test Item | Specification | Test Result |
|--------------------------|--|--|-------------|
| JESD22-A113 | Step 1: Pre-conditioning | Pre-check: 1. Function check (Tools and SOP supplied by customers). 2. Mechanical check. | Pass |
| | | Pre-conditioning: 1. Bake 125°C for 24 hours. 2. Moisture Soak 30°C/60% RH for 192 hours Not shorter than 15 minutes and not longer than 4 hours after removal from the temperature/ humidity chamber, subject the sample to 3 cycles of the reflow. | |
| | | Post-check: 1. Function check (Tools and SOP supplied by customers). 2. Mechanical check. 3. Perform inspections of short, open, delamination of DUTs by Optical Microscope (under 40X optical magnification). 4. X-RAY / CSAM (SAT) on any failed samples (Notify customers). 5. Cross-sections analysis based on X-RAY and CSAM results. | |
| JESD22-A104 | Step 2: Temperature Cycling Non-operating | 1. Temperature -40°C for 15 minutes 2. Shock Temperature 85°C within ramp rate 15°C /minute 3. Temperature 85°C for 15 minutes 4. Shock Temperature -40°C within ramp rate 15°C/minute 5. Repeat steps 1-4 Stop to check functions at 500/ 700 cycles | Pass |
| JEDEC 22-B110B.01 (2019) | Mechanical Shock Non-operating Unpackaged device | 1. Pulse shape Half-sine waveform 2. Impact acceleration 1500 g 3. Pulse duration 0.5 ms 4. Number of shocks 30 shocks (5 shocks for each face) 5. Orientation Bottom, top, left, right, front, and rear faces | Pass |

12.2 Reliability MTBF Prediction

Table 25: MTBF Prediction

| Laird Part Number | Environment | Test Result 40 °C (Hours) |
|-------------------|-----------------------------|----------------------------|
| 453-00142R | | |
| 453-00142C | | |
| 453-00145R | Ground, Fixed, Uncontrolled | 17,000,000 |
| 453-00145C | | |
| 453-00148R | | |
| 453-00148C | | |
| Laird Part Number | Environment | Test Result 105 °C (Hours) |
| 453-00142R | | |
| 453-00142C | | |
| 453-00145R | Ground, Fixed, Uncontrolled | 900,000 |
| 453-00145C | | |
| 453-00148R | | |
| 453-00148C | | |

13 REGULATORY

13.1 Regulatory information

Note: For complete regulatory information, refer to the Lyra 24P Regulatory Information document (coming soon) which will be available from the [Lyra 24 Series Bluetooth 5.3 Solution Product page](#).

The Lyra 24P holds current certifications in the following countries:

Table 26: Lyra 24P Regulatory Information

| Country/Region | Regulatory ID |
|-------------------|---|
| USA (FCC) | SQG-LYRA24P |
| Canada (ISED) | 3147A-LYRA24P |
| UK (UKCA) | N/A |
| EU | N/A |
| Japan (MIC) | 201-220655 (+10 dBm) / 201-220774 (+20 dBm) |
| Korea (KC) | R-C-L8C-LYRA24P |
| Australia (AS) | N/A |
| New Zealand (NZS) | N/A |

13.2 Maximum Regulatory Certified RF TX Power per Country (TBD)

AT firmware implements maximum RF TX power settings per country highlighted below.

Customers developing with **C Code** – Full software development with Silicon Labs SDK and Toolchain, MUST implement the maximum RF TX power settings per country and other parameters mentioned in this section.

To be defined.

14 BLUETOOTH SIG QUALIFICATION

14.1 Overview

The Lyra 24P Series module is listed on the Bluetooth SIG website as a qualified End Product, using the combination of a RF-PHY, LL and Host Stack Components.

Table 27: Bluetooth SIG Qualification

| Design Name | Owner | Declaration ID | Reference QDID | Link to listing on the SIG website |
|-------------|--------------------|----------------|----------------|------------------------------------|
| Lyra 24P | Laird Connectivity | TBD | TBD | TBD |

14.1.1 Referenced Qualified Components

Table 28: Referenced Qualified Components

| Design Name | Owner | Reference QDID | Link to listing on the SIG website |
|--------------------------------|----------------------|----------------|------------------------------------|
| EFR32BG24 and EFR32MG42 RF-PHY | Silicon Laboratories | TBD | TBD |
| Wireless Gecko Link Layer | Silicon Laboratories | TBD | TBD |
| Wireless Gecko Host | Silicon Laboratories | TBD | TBD |

It is a mandatory requirement of the Bluetooth Special Interest Group (SIG) that every product implementing Bluetooth technology has a Declaration ID. Every Bluetooth design is required to go through the qualification process, even when referencing a Bluetooth Design that already has its own Declaration ID. The Qualification Process requires each company to register as a member of the Bluetooth SIG – <https://www.bluetooth.com/>

The following link provides a link to the Bluetooth Registration page: <https://www.bluetooth.org/login/register/>

For each Bluetooth Design, it is necessary to purchase a Declaration ID. This can be done before starting the new qualification, either through invoicing or credit card payment. The fees for the Declaration ID will depend on your membership status, please refer to the following webpage:

<https://www.bluetooth.com/develop-with-bluetooth/qualification-listing/qualification-listing-fees/>

For a detailed procedure of how to obtain a new Declaration ID for your design, please refer to the following SIG document:

https://www.bluetooth.org/DocMan/handlers/DownloadDoc.ashx?doc_id=283698&vId=317486

14.2 Qualification Steps When Referencing on End Product Listing

For this qualification, follow these steps:

1. To start a listing, go to: https://www.bluetooth.org/tpg/QLI_SDoc.cfm
2. Select Start the Bluetooth Qualification Process with **No Required Testing**.
3. Project Basics:
 - Enter the Project Name (this can be the product name or the Bluetooth Design name).
 - For Referenced Qualified Designs, enter QDID **XXXX**
4. Product Declaration:
 - Enter the Listing Date (this can any date ranging from the date of entry up to 90 days after submission) – Your design is qualified immediately but the listing does not go public until the specified date.
5. Add End Product(s) – Each end product that uses the Qualified Design (without modification) can be added in this section. The Bluetooth SIG requires that you add each individual model number separately.
6. Declaration ID:
 - Select a Declaration ID from the list.

Important! To complete this step, you must have already paid your Bluetooth SIG Declaration ID fee. If you have not, refer to the Bluetooth SIG Qualification Overview section for instructions. You also have the option of clicking **Pay Declaration Fee** accessible from this step of the Bluetooth SIG Qualification process.

7. Review and Submit – With this, some automatic checks occur to ensure all sections are complete.
 - Review all entered information and make corrections, if needed.
 - Once you have reviewed your information, tick all of the check boxes and add your name to the signature page.
 - Click **Signature Confirmed – Complete Project & Submit Product(s) for Qualification**.
(You will be asked to confirm to proceed with the final listing one more time)
8. Once the listing is confirmed please download the SDoC and place a copy in the compliance folder.

For further information, please refer to the following webpage:

<https://www.bluetooth.com/develop-with-bluetooth/qualification-listing/>

15 ADDITIONAL INFORMATION

Please contact your local sales representative or our support team for further assistance:

| | |
|-------------------|--|
| Headquarters | Laird Connectivity 50 S. Main St. Suite 1100 Akron, OH 44308 USA |
| Phone | Americas: +1-800-492-2320 Europe: +44-1628-858-940 Hong Kong: +852-2762-4823 |
| Website | www.lairdconnect.com/ |
| Technical Support | www.lairdconnect.com/resources/support |
| Sales Contact | www.lairdconnect.com/contact |

Note: Information contained in this document is subject to change.

Laird Connectivity's products are subject to standard [Terms & Conditions](#).

www.lairdconnect.com

© Copyright 2023 Laird Connectivity. All Rights Reserved. Patent pending. Any information furnished by Laird Connectivity and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Connectivity materials or products rests with the end user since Laird Connectivity and its agents cannot be aware of all potential uses. Laird Connectivity makes no warranties as to non-infringement nor as to the fitness, merchantability, or sustainability of any Laird Connectivity materials or products for any specific or general uses. Laird Connectivity or any of its affiliates or agents shall not be liable for incidental or consequential damages of any kind. All Laird Connectivity products are sold pursuant to the Laird Connectivity Terms and Conditions of Sale in effect from time to time, a copy of which will be furnished upon request. Nothing herein provides a license under any Laird Connectivity or any third-party intellectual property right.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

IMPORTANT NOTE:

Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Country Code selection feature to be disabled for products marketed to the US/CANADA

Integration instructions for host product manufacturers

Applicable FCC rules to module

FCC Part 15.247

Summarize the specific operational use conditions

The module is must be installed in mobile device.

This device is intended only for OEM integrators under the following conditions:

- 1) The antenna must be installed such that 20 cm is maintained between the antenna and users, and
- 2) The transmitter module may not be co-located with any other transmitter or antenna

As long as 2 conditions above are met, further transmitter test will not be required. However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed.

IMPORTANT NOTE: In the event that these conditions can not be met (for example certain laptop configurations or co-location with another transmitter), then the FCC authorization is no longer considered valid and the FCC ID can not be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC authorization. The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module.

The end user manual shall include all required regulatory information/warning as show in this manual.

Limited module procedures

Not applicable

Trace antenna designs

Not applicable

RF exposure considerations

Co-located issue shall be met as mentioned in "Summarize the specific operational use conditions".

Product manufacturer shall provide below text in end-product manual

"Radiation Exposure Statement:

The product comply with the US portable RF exposure limit set forth for an uncontrolled environment and are safe for intended operation as described in this manual. The further RF exposure reduction can be achieved if the product can be kept as far as possible from the user body or set the device to lower output power if such function is available.."

Antennas

| Brand | Model | Type | Connector | 2400-2500MHz | Cable loss (dB) |
|------------|----------------------------|------------|-----------|--------------|-----------------|
| | | | | Gain (dBi) | |
| Laird | NanoBlue | PCB Dipole | IPEX MHF4 | 2 | N/A |
| Laird | FlexPIFA | PCB Dipole | IPEX MHF4 | 2 | N/A |
| Mag.Layers | EDA-8709-2G4C1-B27-CY | Dipole | IPEX MHF4 | 2.32 | 0.7 |
| Laird | mFlexPIFA | PIFA | IPEX MHF4 | 2 | N/A |
| Laird | Lyra 24P PCB Trace Antenna | PCB Trace | --- | 1.82 | N/A |

Label and Compliance Information

Product manufacturers need to provide a physical or e-label stating
"Contains FCC ID: SQG-LYRA24P" with finished product

Information on Test Modes and Additional Testing Requirements

Test tool: Simplicity Studio

Additional Testing, Part 15 Subpart B Disclaimer

The module is only FCC authorized for the specific rule parts listed on the grant, and that the host product manufacturer is responsible for compliance to any other FCC rules that apply to the host not covered by the modular transmitter grant of certification. The final host product still requires Part 15 Subpart B compliance testing with the modular transmitter installed

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference*
- (2) This device must accept any interference, including interference that may cause undesired operation of the device*

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) L'appareil ne doit pas produire de brouillage;*
- (2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.*

This radio transmitter [IC: 3147A-LYRA24P] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain

greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Le présent émetteur radio [IC: 3147A-LYRA24P] a été approuvé par Innovation, Sciences et Développement économique Canada pour fonctionner avec les types d'antenne énumérés ci-dessous et ayant un gain admissible maximal. Les types d'antenne non inclus dans cette liste, et dont le gain est supérieur au gain maximal indiqué pour tout type figurant sur la liste, sont strictement interdits pour l'exploitation de l'émetteur.

| Brand | Model | Type | Connector | 2400-2500MHz | Cable loss (dB) |
|------------|----------------------------|------------|-----------|--------------|-----------------|
| | | | | Gain (dBi) | |
| Laird | NanoBlue | PCB Dipole | IPEX MHF4 | 2 | N/A |
| Laird | FlexPIFA | PCB Dipole | IPEX MHF4 | 2 | N/A |
| Mag.Layers | EDA-8709-2G4C1-B27-CY | Dipole | IPEX MHF4 | 2.32 | 0.7 |
| Laird | mFlexPIFA | PIFA | IPEX MHF4 | 2 | N/A |
| Laird | Lyra 24P PCB Trace Antenna | PCB Trace | --- | 1.82 | N/A |

Radiation Exposure Statement:

This equipment complies with Canada radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Déclaration d'exposition aux radiations:
Cet équipement est conforme Canada limites d'exposition aux radiations dans un environnement non contrôlé. Cet équipement doit être installé et utilisé à distance minimum de 20cm entre le radiateur et votre corps.

1) The transmitter module may not be co-located with any other transmitter or antenna.

As long as 1 condition above are met, further transmitter test will not be required. However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed.

1) Le module émetteur peut ne pas être coïmplanté avec un autre émetteur ou antenne.

Tant que les 1 condition ci-dessus sont remplies, des essais supplémentaires sur l'émetteur ne seront pas nécessaires. Toutefois, l'intégrateur OEM est toujours responsable des essais sur son produit final pour toutes exigences de conformité supplémentaires requis pour ce module installé.

IMPORTANT NOTE:

In the event that these conditions can not be met (for example certain laptop configurations or co-location with another transmitter), then the Canada authorization is no longer considered valid and the IC ID can not be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate Canada authorization.

NOTE IMPORTANTE:

Dans le cas où ces conditions ne peuvent être satisfaites (par exemple pour certaines configurations d'ordinateur portable ou de certaines co-localisation avec un autre émetteur), l'autorisation du Canada n'est plus considéré comme valide et l'ID IC ne peut pas être utilisé sur le produit final. Dans ces circonstances, l'intégrateur OEM sera chargé de réévaluer le produit final (y compris l'émetteur) et l'obtention d'une autorisation distincte au Canada.

End Product Labeling

The final end product must be labeled in a visible area with the following: "Contains IC: 3147A-LYRA24P.

Plaque signalétique du produit final

Le produit final doit être étiqueté dans un endroit visible avec l'inscription suivante: "Contient des IC: 3147A-LYRA24P.

Manual Information To the End User

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module.

The end user manual shall include all required regulatory information/warning as show in this manual.

Manuel d'information à l'utilisateur final

L'intégrateur OEM doit être conscient de ne pas fournir des informations à l'utilisateur final quant à la façon d'installer ou de supprimer ce module RF dans le manuel de l'utilisateur du produit final qui intègre ce module. Le manuel de l'utilisateur final doit inclure toutes les informations réglementaires requises et avertissements comme indiqué dans ce manuel.