

User Manual

MODEL No. : BR-25

1. Charging before use

Please charge by using USB or DC adaptor(optional).

Charging : The **motion LED** alternates between a green light and a red light.

Charging complete : **Motion LED** turns off.

Check ! The remaining battery can be checked by pressing and holding the VOL+,- key while waiting for playback or recording..

	Battery remains	Operation
	Enough : 70 ~ 100%	Green LED is turned on for 5 seconds
	Usual : 30 ~ 70 %	Green LED blinks for 5 seconds
	Short : less than 30%	No indication

2. Turning on power

1) Connecting to bluetooth device(pairing)

- A. For pairing, mobile device starts Bluetooth search.
- B. Move the **mode switch** to **Bluetooth**.
- C. Press the **Talk/Power** button until the blue LED flashes rapidly. (5 seconds)
- D. Select **BR-25** which mobile device has searched.

	Function	Operation
	Power On/Off	Until blue LED is turned on/of, press the button of talk/power for 1 second.
	Answering/ending call	Press the button of talk/power .
	Rejecting talk	Press the button of talk/power two times rapidly.
	Adjusting volume	Press the button of volume + or - on the side during call or playback.

2) Recording call

- A. Pair with mobile device by pressing the button of **talk/power**. (refer to "Connecting to bluetooth device")
- B. Move the **mode switch** to **Bluetooth**.
- C. When you receive a call or make a call, recording starts automatically and recording ends when call is finished.
- D. **Motion LED** is turned on in red during recording.

Caution ! In case talking time is less than 10 seconds, recording might not start.

3) General recording

- A. Move mode switch to **recording**.
- B. To turn on the power, press and hold the **Talk/Power** button until it vibrates.
- C. After showing current **battery remains**, the **Motion LED** lights up red and recording starts.
- D. Press and hold the **Talk/Power** button to end recording and turn off power.

4) Playing back


- A. Move mode switch to **VOICE playback** (○)
- B. To turn on the power, press and hold the **Talk/Power** button until it vibrates.
- C. Press the **PLAY/STOP(▶/■)** button.
- D. **Play** the recorded file if it exists..
- E. During playback, it is possible to **move files** by pressing the button of **previous file(◀◀) or next file(▶▶)**.
- F. Press the **PLAY/STOP(▶/■)** button again to stop.

5) Connecting to a PC

- A. Remove the product's L-channel (left) earphone and connect the **USB cable** to the terminal..
- B. Connect the opposite cable to your **PC**.
- C. Connect to your **PC** as a removable disk.
- D. **Removable disk ->VOICE folder** contains recorded files and can be played and deleted.

Caution ! Deleted files can not be recovered. Delete the files after checking them carefully.

3. Name of each part

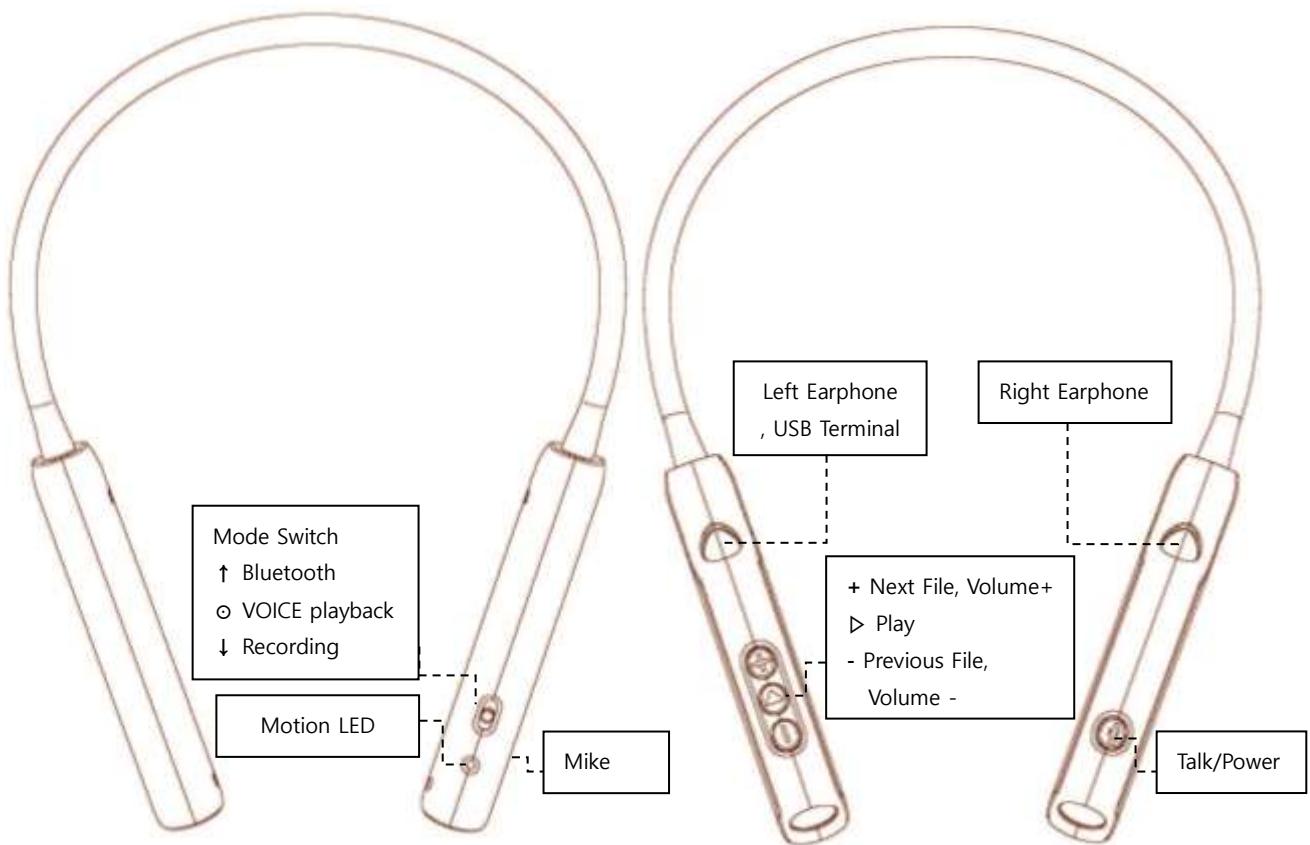

4. Specification

	Model No.	BR-25
	Bluetooth version	V 4.0
	Supported profiles	HFP, HSP, A2DP
	Usage Distance	Max. 10m
	Range of frequency	2402-2480 MHz
	Recording a call/Standby time	about 10 hours / about 25 days
	General recording time	XHQ about 25 hours / HQ about 30 hours
	Charging time	about 2.5 hours
	Rechargeable Battery	230mAh Lithium Polymer

5. Cautions

- 1) In case there are no battery remains, recording is not possible. Please use it after charging all the time.
- 2) If you remove it from PC in using, contents could be lost and please be sure to use the USB safety removal.
- 3) Please undergo a backup for the files saved in internal memory all the time.

FCC notice to users and product statements

Caution : Any changes or modifications in construction of this device which are not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

European CE notice to users and product statements

Caution

RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE.

DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.



A/S TEL : 070-4015-7114~6

Address : 2fl., 10-19, 166 beongil, LS-ro, Gunpo-si, Gyeonggi-do, Korea 15807

Homepage : <http://www.esonic.co.kr>