

产品规格书

Product specification book



规格编号	20220914008
生效日期	2022/9/14

Customer name	Dongguan Jiajiaotong plastic mould Co., LTD
Product type	Apple Watch coil
Boya material num	HBV20220914008- Watch coil 3300 Gauss L=80MM
CUST P/N	

【☒新版发行, ☐版本修订】 【本规范含目录共 3页】 【RoHS Compliant Parts】

编制 establishment	审核 examine	批准 APPROVED BY
刘峰丽	肖树芳	朱辉

Anfu Hui Boya Electronics Co., LTD
Jiangxi Province. Anfu County Xuettian next Hui Boya Electronics
Co., LTD

本承认书在客户收到30天内, 请务必签章返回, 逾期视为生产时按此承认书的标准执行。This acknowledgement must be signed and returned within 30 days after the customer receives it, and overdue production shall be regarded as following the standards of this acknowledgement.

【客户核准】

日期:

承认状态: ☐完全承认 ☐条件承认 ☐拒绝承认

批准 APPROVED BY	审核 examine	复检 recheck	检查 Inspect

说明:

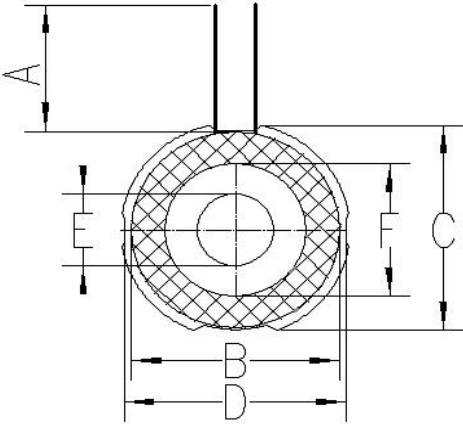


产品规格书
Product specification book

Customer name	Dongguan Jiajiatong plastic mould Co., LTD	CUST P/N:	
Hui Boya material number	HBY20220914008- Watch coil 3300 Gauss L=80MM	Specification number	20220914008
发行/修订记录 Issuance/revision records			
版本 Rev.	生效日期 Effective date	变更内容/原因 Content/Reason for change	核准 Examine and approve
01	2022--9-14	新规格发行/New specification issue	
编制 establishment		审核 examine	批准 APPROVED BY
刘峰丽		肖树芳	朱辉

产品规格书

Product specification book

Customer name	Dongguan Jiajiaotong plastic mould Co., LTD			CUST P/N:			
Hui Boya material number	HBY20220914008- Watch coil 3300 Gauss L=80MM			Specification number	20220914008	版本/edition	01
◆、外形尺寸/Overall dimension 						(单位unit: mm)	
						A	80.0 ±1.0
						B	20.1 ±1.0
						C	22.5 ±0.5
						D	24.5 ±1.0
						E	7.5 *2.2
						F	13.5 ±1.0
						I	2.5 ±1.0(磁片厚度)
						I	2.5 ±1.0(disc thickness)
						(1)线径: 0.08*24P丝包线 (1) Wire diameter: 0.08*24P silk-covered wire	
						(2)绕线圈数:14TS (2) Winding number :14TS	
						(3)起尾线是否交叉: 是 (3) Whether the starting and ending lines cross: Yes	
						(4)线圈与磁片需粘贴居中 (4) The coil and magnetic disc need to be pasted in the center	
(5)磁片背19MM圆3M胶 (5) magnetic disc back 19MM round 3M glue							
◆、电气特性/Electrical characteristic:							
argument	specification		Test condition	Testing instrument			
L0	8.1 ±0.2%	μH	100KHz/1V	■TH1816B			
Q	>30	min	100KHz/1V	■TH1816B			
DCR	<50	mΩ	@ 25℃	■CH-502BC			
◆、温度等级/Temperature class:							
操作温度 Operating temperature	-40℃~ 125℃						
◆、材料清单/Bill of materials:							
序号 NO.	品名描述 Description	材料名称 Material name	供应商 supplier	备注 remark			
1	磁片/Magnetic sheet	24.5*22.5*2.5软磁		PC95猛锌 PC95 Zinc			
2	铜线/Copper wire	0.08*24		丙铜丝包线 Acrylic copper silk-covered wire			
3	磁铁高斯/Magnet gauss	2400-2900高斯		环保胶带 Eco-friendly adhesive tape			
4	锡/tin	107H		千岛环保锡 Thousand island environmental tin			
5	胶/glue	定制白胶 Custom white glue		环保胶水 Eco-friendly glue			
6	胶/glue	3M胶		环保 Environmental protection			
编制 establishment		审核 examine			批准 APPROVED BY		
刘峰丽		肖树芳			朱辉		