

产品规格书



specification number	20220902006
Effective date	2022/9/2

customer name	佳家通塑胶模具有限公司 Dongguan Jiajiatong Plastic Mould Co., Ltd
product type	8346小模具双线圈 8346 small mold double coil
material number	HBV20220902006-9T-L80
Customer Material Number	20220902-8346

【☒新版发行, ☐版本修订】 【本规范含目录共 3 页】 【RoHS Compliant Parts】

authorized strength	audit	ratify
王海琼	/	朱辉

安福县辉博雅电子有限公司
Anfu Hui Boya Electronics Co., LTD

工厂地址: 江西省. 安福县学府春天旁辉博雅电子有限公司
Factory address: Jiangxi Province. Anfu County university spring next to Hui Boya electronics Co., LTD
电话: 13576651594

本承认书在客户收到30天内, 请务必签章返回, 逾期视为生产时按此承认书的标准执行。This acknowledgement must be signed and returned within 30 days after the customer receives it, and overdue production shall be regarded as following the standards of this acknowledgement.

【客户核准】

日期:

承认状态: ☐完全承认 ☐条件承认 ☐拒绝承认

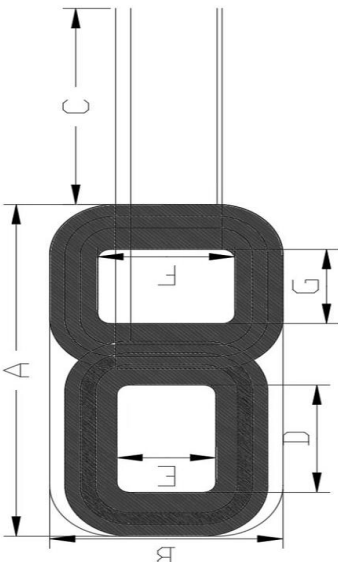
audit	ratify	recheck	examine

说明:

产品规格书

客户名称 customer name	佳家通塑胶模具有限公司 Dongguan Jiajiatong Plastic Mould Co., Ltd	客户料号 Customer Material Number	8646小模具双雪狼谷
料号 P/N(Part Number)	HBV20220902006-9T-L80	规格编号 specification number	20220902006
发行/修订记录/Issuance/revision records			
版本 versions	生效日期 effective date	变更内容/原因 Content/Reason for change	核准 examine and approve
01	2022/9/2	新规格发行/New specification issue	
编制		审核	批准
王海琼			朱 辉

产品规格书PRODUCT SPECIFICATION

客户名称 customer name		东莞市佳家通塑胶模具有限公司 Dongguan Jiajiaotong Plastic Mould Co., Ltd		客户料号 Customer Material Number		8646小模具 8646 small molds				
料号P/N		HBY20220902006-9T-L80		规格编号 specification		20220902006	版本 versions	01		
◆、外形尺寸/bol 							(单位: mm)			
							A	46.0 ±1		
							B	83.0 ±1		
							C	80.0 ±1		
							D	27 ±0.5		
							E	19.5 ±0.5		
							F	19.0 ±0.5		
							G	19.0 ±0.5		
备注remark										
(1)线径: 0.08*105P丝包线 (1) Wire diameter: 0.08*105P silk-covered wire										
(2)绕线圈数:9TS (2) Winding number :9TS										
(3)起尾线是否交叉: W1是;W2不是 (3) Whether the starting and ending lines cross: W1 Yes; W2 is not										
(4)磁片底部贴双面胶 (4) Double-sided tape is affixed to the bottom of the magnetic disc										
(5) 线圈居磁片中间位置贴 (5) The coil is placed in the middle of the magnetic disc										
◆、电气特性/Electrical characteristic:										
参数 parameter		规格/specification		测试条件 test condition		测试仪器 test instrument				
L(W1)		6.8 ±10% μH		100KHz/1V		■TH1816B				
L(W2)		6.8 ±10% μH		100KHz/1V		■TH1817B				
DCR(W1)		41.8 Max mΩ		@ 25℃		■CH-502BC				
DCR(W2)		44 Max mΩ		@ 25℃		■CH-502BC				
◆、温度等级/temperature grade										
操作温度 operating temperature		-40℃~ 125℃								
材料清单/bill of materials										
序号 serial number	品名 description	材料规格 material specification		供应商 supplier	备注 remark					
1	磁片/magnetic sheet	8346*0.8			PC40猛锌隔磁片 PC40 zinc barrier magnetic disc					
2	铜线 copper wire	0.08*105P			标配丙铜丝包线 Standard with acrylic copper wire					
3	高温胶带 high-temperature tape	8MM			环保胶纸 Eco-friendly adhesive paper					
4	锡/tin	107H			环保胶带 Eco-friendly adhesive tape					
5	胶/glue	双面胶			千岛环保锡 Thousand island environmental tin					
编制 authorized strength			审核 audit			批准 ratify				
王海琼						朱辉				