

产品规格书/Product specification book



specification number	20220829004
Effective date	2022/8/29

客户名称	东莞市佳家通塑胶模具有限公司 Dongguan Jiajiatong Plastic Mould Co., Ltd
产品类型	A11线圈/A11 coil
辉博雅料号	TX-HBY20220829004-45开双槽12TS L= TX-HBY20220829004-45 Double slot 12TS L=
客户料号	

【☒新版发行, ☐版本修订】 【本规范含目录共 3页】 【RoHS Compliant Parts】

authorized strength	audit	ratify

安福县辉博雅电子有限公司
Anfu Hui Boya Electronics Co., LTD

本承认书在客户收到30天内, 请务必签章返回, 逾期视为生产时按此承认书的标准执行。This acknowledgement must be signed and returned within 30 days after the customer receives it, and overdue production shall be regarded as following the standards of this acknowledgement.

【客户核准】

日期:

承认状态: ☐完全承认 ☐条件承认 ☐拒绝承认

audit	ratify	recheck	examine

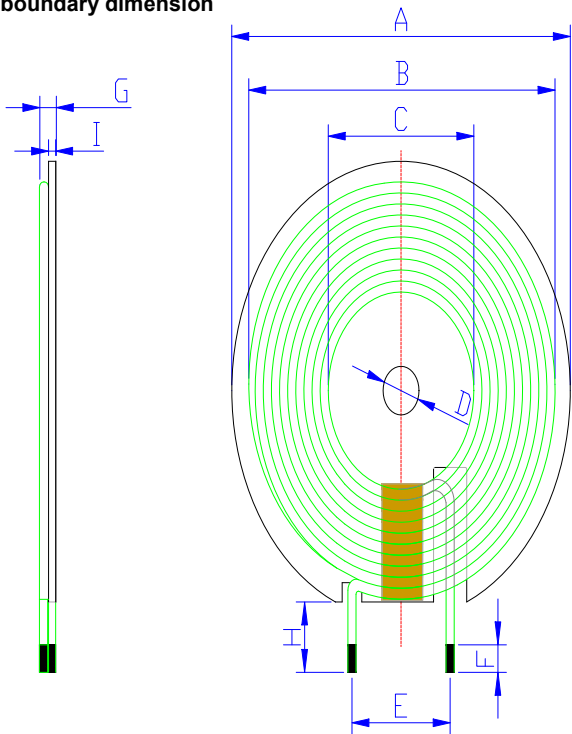
说明:

产品规格书/Product specification book

客户名称 customer name	东莞市佳家通塑胶模具有限公司 Dongguan Jiajiaotong Plastic Mould Co., Ltd	客户料号 Customer Material Number	
辉博雅料号 Hui Boya material number	TX-HBY20220829004-45开双槽12TS L= TX-HBY20220829004-45 Double slot 12TS L=	规格编号 specification number	20220829004
发行/修订记录/Issuance/revision records			
版本 versions	生效日期 effective date	变更内容/原因 Content/Reason for change	核准 examine and approve
01	2022/8/29	新规格发行/New specification issue	
编制		审核	批准

--	--	--	--

产品规格书/Product specification

客户名称 Dongguan Jiajiatong Plastic Mould Co., Ltd		客户料号 Customer Material Number				
辉博雅料号		规格编号 specification number		20220829004	版本 versions	01
◆、外形尺寸/boundary dimension 				(单位: mm)		
				A	43.4 ±0.3	
				B	40.0 ±0.5	
				C	13.5 ±0.5	
				D	5.3Ref ±0.5	
				E	10.0 Ref	
				F	3.0 ±1.0	
				G	2.2 ±0.5	
				H	40.0 ±1.0	
				I	0.8 ±0.1(磁片厚度)	
				(1)线径: 0.08*105P丝包线 (1) Wire diameter: 0.08*105P silk-covered wire		
				(2)绕线圈数:12TS (2) Winding number :12TS		
				(3)起尾线是否交叉: 是 (3) Whether the starting and ending lines cross: Yes		
				(4)线圈包8mm宽高温胶带 (4) Coil package 8mm wide high-temperature tape		
(5)线圈与磁片需粘贴居中 (5) The coil and magnetic disc need to be pasted in the center						
(6)磁片背43双槽圆双面胶 (6) Magnetic disc back 43 double slot circular double-sided tape						
◆、电气特性/Electrical characteristic:						
参数 parameter	规格/specification	测试条件 test condition	测试仪器 test instrument			
L0	6.6 ±5% μH	100KHz/1V	■TH1816B			
Q	>60 min	100KHz/1V	■TH1816B			
DCR	<50 mΩ	@ 25℃	■CH-502BC			
◆、温度等级/temperature grade						
操作温度 operating temperature	-40℃~ 125℃					
◆、材料清单/bill of materials						
序号 serial number	品名 description	材料规格 material specification	供应商 supplier	备注 remark		
1	磁片/magnetic sheet	43.5*0.8*10T 开双槽		PC95猛锌 PC95 Zinc		
2	铜线 copper wire	0.08*105P		丙铜丝包线 Acrylic copper silk-covered		
3	高温胶带 high-temperature	8MM		环保胶带 Eco-friendly adhesive tape		
4	锡/tin	107H		千岛环保锡 Thousand island		
5	胶/glue	黄胶/Yellow gum		环保胶水/eco-friendly adhesive		
6	胶/glue	43双槽圆双面胶 43 Double groove circular double-		环保 environmental protection		
编制 authorized strength		审核 audit		批准 ratify		