

TEST REPORT

Applicant: Shanghai Xiangcheng Communication Technology Co., Ltd

Address: 6th Floor, Building 10, No.3000, Longdong Avenue, Pudong New District, Shanghai

Equipment Type: Smart Electronic Cash Register

Model Name: D8

Brand Name: KOZEN

FCC ID: 2A2UU-D8

Test Standard: 47 CFR Part 15 Subpart B
ANSI C63.4-2014

Sample Arrival Date: Sep. 12, 2024

Test Date: Oct. 12, 2024

Date of Issue: Nov. 27, 2024

ISSUED BY:

Shanghai Tejet Communications Technology Co., Ltd. Testing Center

Tested by: Wu Dejun

Wu Dejun

Checked by: Huang Chengkun

Huang Chengkun

Approved by: Chen Zidong
(Technical Director)

Chen Zidong

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Nov. 27, 2024</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1 GENERAL INFORMATION	4
1.1 Test Laboratory	4
1.2 Test Location	4
2 PRODUCT INFORMATION	5
2.1 Applicant Information	5
2.2 Manufacturer Information	5
2.3 General Description for Equipment under Test (EUT)	5
2.4 Ancillary Equipment	6
2.5 Technical Information	6
3 SUMMARY OF TEST RESULTS	7
3.1 Test Standards	7
3.2 Verdict	7
3.3 Decision Rule	7
3.4 Test Uncertainty	7
4 GENERAL TEST CONFIGURATIONS	8
4.1 Test Enclosure List	8
4.2 Test Configurations	8
4.3 Test Setups	9
5 TEST ITEMS	11
5.1 Emission Tests	11
5.1.1 Radiated emission	11
5.1.2 Conducted emission	13
ANNEX A TEST RESULTS AND TEST EQUIPMENT LIST	14
A.1 Radiated emission	14
A.2 Conducted emission	21

ANNEX B TEST SETUP PHOTOS	25
ANNEX C EUT EXTERNAL PHOTOS	25
ANNEX D EUT INTERNAL PHOTOS	25

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shanghai Tejet Communications Technology Co., Ltd. Testing Center
Address	1st to 2nd floors, Building 1, No. 222 Xuanlan Road, Xuanqiao Town, Pudong New District, Shanghai

1.2 Test Location

Name	Shanghai Tejet Communications Technology Co., Ltd. Testing Center
Location	1st to 2nd floors, Building 1, No. 222 Xuanlan Road, Xuanqiao Town, Pudong New District, Shanghai
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1352.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Shanghai Xiangcheng Communication Technology Co., Ltd
Address	6th Floor, Building 10, No.3000, Longdong Avenue, Pudong New District, Shanghai

2.2 Manufacturer Information

Manufacturer	Shanghai Xiangcheng Communication Technology Co., Ltd
Address	6th Floor, Building 10, No.3000, Longdong Avenue, Pudong New District, Shanghai

2.3 General Description for Equipment under Test (EUT)

Equipment Type	Smart Electronic Cash Register
Model Name Under Test	D8
Series Model Name	N/A
Description of Model Name Differentiation	N/A
Hardware Version	D0861_A0_MB_V1.0
Software Version	d0861_kozen_combo_
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Ancillary Equipment

Ancillary Equipment 1	D0861_EU Adapter	
	Brand Name	FLYPOWER
	Model No.	PS36F240K1500ED
	Serial No.	N/A
	Rated Input	100-240 V~ 50/60 Hz, 1.0A
	Rated Output	24 V= 1.5 A, 36.0W
Ancillary Equipment 2	Smart Electronic Cash Register	
	Brand Name	KOZEN
	Model No.	D8C
Ancillary Equipment 3	A0215_Kozen_Handset_WHITE	
	Model No.	KZA411
	Length (Approx.)	1.0 m

2.5 Technical Information

Network and wireless connectivity	2G Network GPRS/EDGE 850/1900MHz 3G Network WCDMA Band 2/4/5 4G Network LTE FDD Band 2/4/5/7 LTE TDD Band 38/41(120M) Bluetooth 5.1 2.4G WIFI 802.11b, 802.11g, 802.11n(HT20/40) 5G WIFI 802.11a, 802.11n(HT20/40), 802.11ac(VHT20/40/80) 5.8G SRD, GPS, GLONASS, BDS
Classification of equipment	Class B
The Highest internal frequency of EUT	5850 MHz

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B	Unintentional Radiators
2	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

3.2 Verdict

No.	Description	FCC Rule	Test Verdict	Remark
1	Radiated Emission	15.109	Pass	--
2	Conducted Emission, AC Ports	15.107	Pass	--

3.3 Decision Rule

- ☐ No Need
- ☒ Use General conformity decision rule (Consider uncertainty or not ☒ No ☐ Yes)
- ☐ Use Special Conformity Decision Rule (Consider uncertainty or not ☐ No ☐ Yes)

3.4 Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Conducted emissions (150 kHz-30 MHz)-AMN	2.6 dB
Radiated emissions (30 MHz-1 GHz)-966#1	4.4 dB
Radiated emissions (1 GHz-18 GHz) -966#1	5.2 dB

4 GENERAL TEST CONFIGURATIONS

4.1 Test Enclosure List

Description	Manufacturer	Model	Serial No.	Length	Description	Use
WiFi Router	XIAOMI	AC1200	N/A	N/A	N/A	☒
Laptop	DELL	Vostro14-3400	N/A	N/A	N/A	☒
Cash Register	MAJET	405C	N/A	N/A	N/A	☒
Hard Disk	N/A	N/A	N/A	N/A	N/A	☒

4.2 Test Configurations

All test modes of EUT are listed in the table below.


Test Mode Configuration	Description
Mode 1	<u>The Full System Test Mode</u> EUT + Adapter + Smart Electronic Cash Register + A0215_Kozen_Handset_WHITE + Hard Disk + RJ45 Cable + Laptop + Cash Register
Mode 2	<u>The Video Play Test Mode</u> EUT + Adapter + Smart Electronic Cash Register + A0215_Kozen_Handset_WHITE + Hard Disk + RJ45 Cable + Laptop + Cash Register
Mode 3	<u>The USB Test Mode</u> EUT + USB Cable + Smart Electronic Cash Register + Laptop

Test Case	Test Mode Configuration	Worst Mode
Radiated emission	Mode 1~Mode 3	1
Conducted emission	Mode 1~Mode 3	1


Note: Based on client request, all normal using modes of the normal function were tested, but only data of the worst mode (if test case has) was reported in this report.

4.3 Test Setups


Test Setup 1

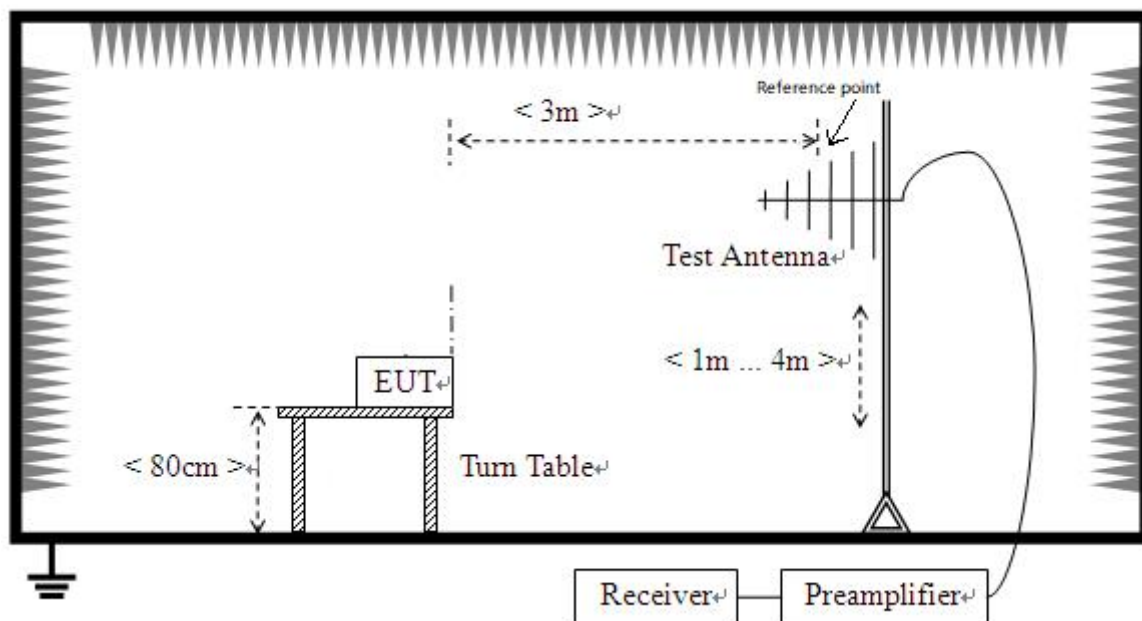

Radiated Emission (30 MHz-1 GHz)

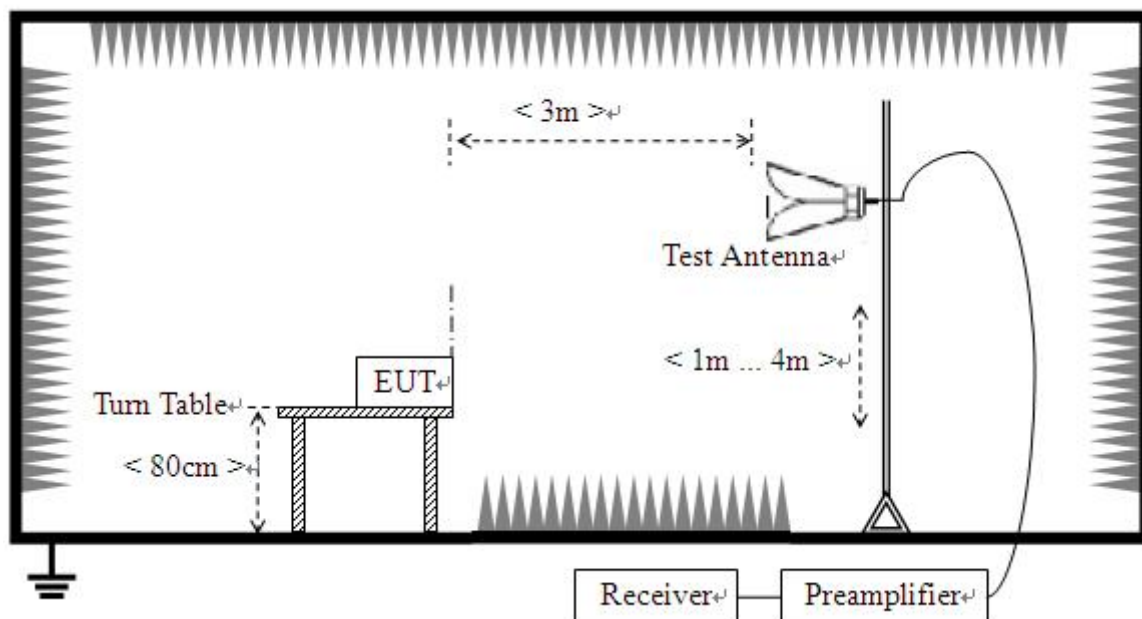

Radiated Emission (above 1 GHz)

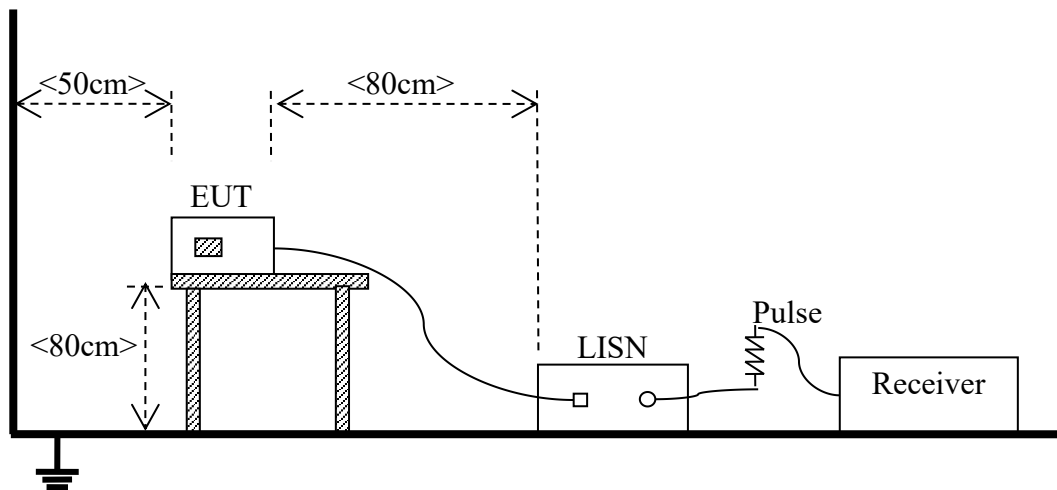Test Setup 2

Conducted emission, AC ports

5 TEST ITEMS

5.1 Emission Tests

5.1.1 Radiated emission

5.1.1.1 Limit

Frequency range (MHz)	Class B (at 3 m)		Class A (at 3 m)
	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)
30 - 88	100	40	49.5
88 - 216	150	43.5	54
216 - 960	200	46	56.9
Above 960	500	54	60

Note:

- 1) Field Strength (dB $\mu\text{V/m}$) = $20 \cdot \log [\text{Field Strength } (\mu\text{V/m})]$.
- 2) In the emission tables above, the tighter limit applies at the band edges.
- 3) The limits using ANSI C63.4-2014.
- 4) For 30-1000 MHz, the CISPR quasi-peak is employed.

For above 1000 MHz, according to the requirements of FCC 15.35, unless otherwise specified, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

Frequency range (GHz)	Class B (at 3 m)			Class A (at 3 m)	
	Field Strength ($\mu\text{V/m}$)	Field Strength Average (dB $\mu\text{V/m}$)	Field Strength Peak (dB $\mu\text{V/m}$)	Field Strength Average (dB $\mu\text{V/m}$)	Field Strength Peak (dB $\mu\text{V/m}$)
1 - F_M	500	54	74	60	80

Note 1: The highest measurement frequency, F_M , in GHz, shall be determined as next Table.

Note 2: Average Class A limit at 3m L_{3m} is determined by the following conversion formula:

$$L_{3m} = L_{10m} + 20 \cdot \log(d_{10m}/d_{3m})$$
Where:
 L_{3m} is Average Class A limit at 3m;
 L_{10m} is Average Class A limit at 10m;
 d_{10m} is Measurement distance in 10m;
 d_{3m} is Measurement distance in 3m.
For this case: $L_{3m} = 49.5 + 20 \cdot \log(10/3) = 60$ (dB $\mu\text{V/m}$).

Highest internal frequency (F_X)	Highest measurement frequency (F_M)
$F_X \leq 108 \text{ MHz}$	1 GHz
$108 \text{ MHz} \leq F_X \leq 500 \text{ MHz}$	2 GHz
$500 \text{ MHz} \leq F_X \leq 1 \text{ GHz}$	5 GHz
$F_X \geq 1 \text{ GHz}$	$5 * F_X$ or 40 GHz, whichever is lower.
Note: F_X is Highest frequency generated or used in the device or on which the device operates or tunes.	

5.1.1.2 Test setup

Please refer to 4.2 section description of test setup of test setup 1. The photo of test setup please refer to ANNEX B.

5.1.1.3 Test procedure

1. The test employing the methods of measurement described in the publication referenced in Section 3(b) (ANSI C63.4);
2. All Radiated Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.
3. An initial pre-scan was performed in the chamber using the EMI Receiver in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bi-Log antenna with 2 orthogonal polarities.
4. The measurement frequency range is from 30 MHz to the 5th harmonic of the maximum frequency of the EUT internal source. The Turn Table is actuated to turn from 0° to 360° , and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.
5. Use the following spectrum analyzer settings:
 Span = wide enough to fully capture the emission being measured
 RBW = 1 MHz for $f \geq 1 \text{ GHz}$, 100 kHz for $f < 1 \text{ GHz}$
 VBW $\geq$ RBW
 Sweep = auto
 Detector function = peak for $f < 1 \text{ GHz}$, peak & RMS Average for $f \geq 1 \text{ GHz}$
 Trace = max hold

5.1.1.4 Test result and test equipment list

Please refer to ANNEX A.1.

Note:

1. Results (dB μ V/m) = Reading (dB μ V/m) + Factor (dB/m)

The reading level is calculated by software which is not shown in the sheet

2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain (dB)
3. Margin = Limit – Results

5.1.2 Conducted emission

5.1.2.1 Limit

Frequency range (MHz)	Class A		Class B	
	Quasi-peak (dB μ V)	Average (dB μ V)	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	79	66	66 to 56	56 to 46
0.50 - 5	73	60	56	46
5 - 30	73	60	60	50

Note:

- 1) The lower limit shall apply at the band edges.
- 2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50 MHz.
- 3) The limit using ANSI C63.4.

5.1.2.2 Test setup

Please refer to 4.2 section description of test setup of test setup 2. The photo of test setup please refer to ANNEX B.

5.1.2.3 Test procedure

1. The test employing the methods of measurement described in the publication referenced in Section 3(b) (ANSI C63.4);
2. The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.
3. Use the following spectrum analyzer settings:
 RBW = 9 kHz
 VBW $\geq$ RBW
 Sweep = 10ms
 Detector function = Peak & Average
 Trace = max hold

5.1.2.4 Test result and test equipment list

Please refer to ANNEX A.2.

Note:

1. Results (dB μ V) = Reading (dB μ V) + Factor (dB)

The reading level is calculated by software which is not shown in the sheet

2. Factor = Insertion loss + Cable loss

3. Margin = Limit – Results

ANNEX A TEST RESULTS AND TEST EQUIPMENT LIST

A.1 Radiated emission

Note 1: Measurements shall be made with a quasi-peak measuring receiver in the frequency range 30 MHz to 1000 MHz. To reduce the testing time, a peak measuring receiver may be used instead of a quasi-peak measuring receiver. In case of dispute, measurement with a quasi-peak measuring receiver will take precedence.


Note 2: The Radiated Emission is required to be investigated to the upper frequency of 5th harmonic of the highest internal frequency of EUT or 40 GHz, whichever is lower. The test results above 18GHz are only noise and are not recorded in the report.

Sample No.	SC-SH2490014-S03	Temperature	20.3°C
Humidity	49%RH	Test Voltage	AC 120V/60Hz
Test Engineer	Hao Longda	Test Date	2024.10.12

Test Mode 1

A.1.1 Test Antenna Vertical, 30 MHz – 1 GHz


RE Test case_FCC Part 15B_FCC Part 15B Class B 30MHz-1GHz

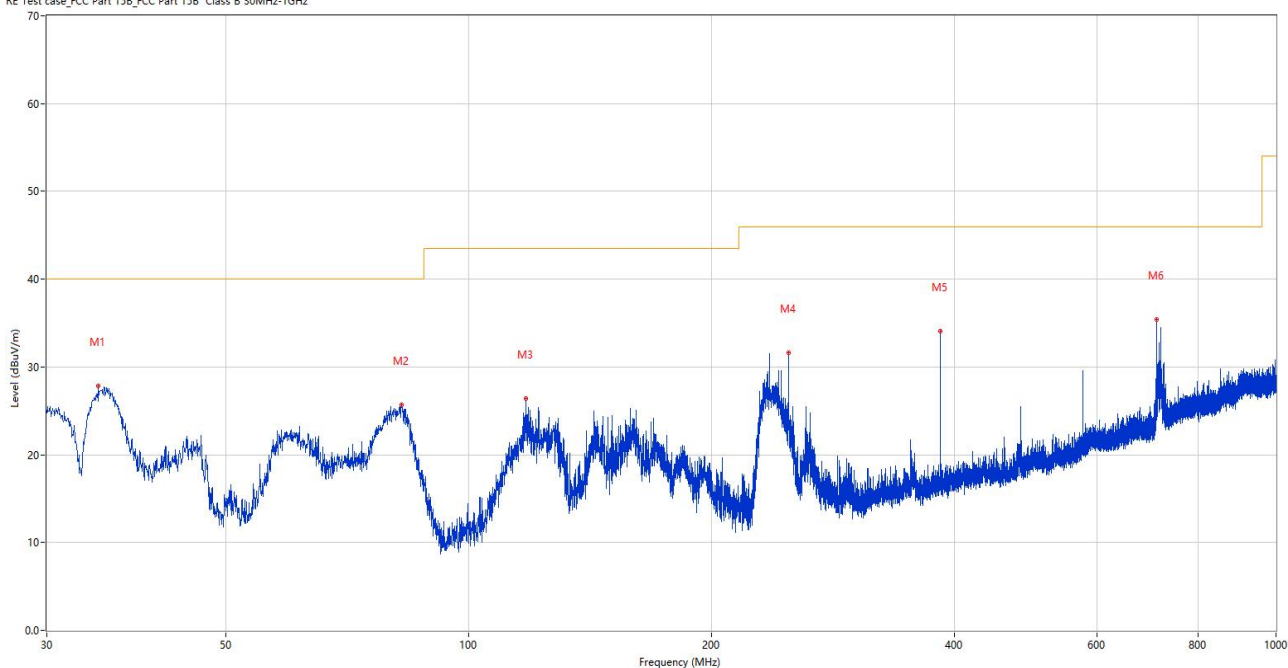

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	34.753	27.80	-29.16	40.0	12.20	Peak	151.00	100	Vertical	Pass
2	82.525	25.71	-31.45	40.0	14.29	Peak	248.00	100	Vertical	Pass
3	117.591	26.39	-28.45	43.5	17.11	Peak	106.00	100	Vertical	Pass
4	248.832	31.66	-24.84	46.0	14.34	Peak	192.00	100	Vertical	Pass
5	384.002	34.13	-21.50	46.0	11.87	Peak	302.00	100	Vertical	Pass
6	711.813	35.37	-14.47	46.0	10.63	Peak	0.00	100	Vertical	Pass

A.1.2 Test Antenna Horizontal, 30 MHz – 1 GHz

RE Test case_FCC Part 15B_FCC Part 15B Class B 30MHz-1GHz

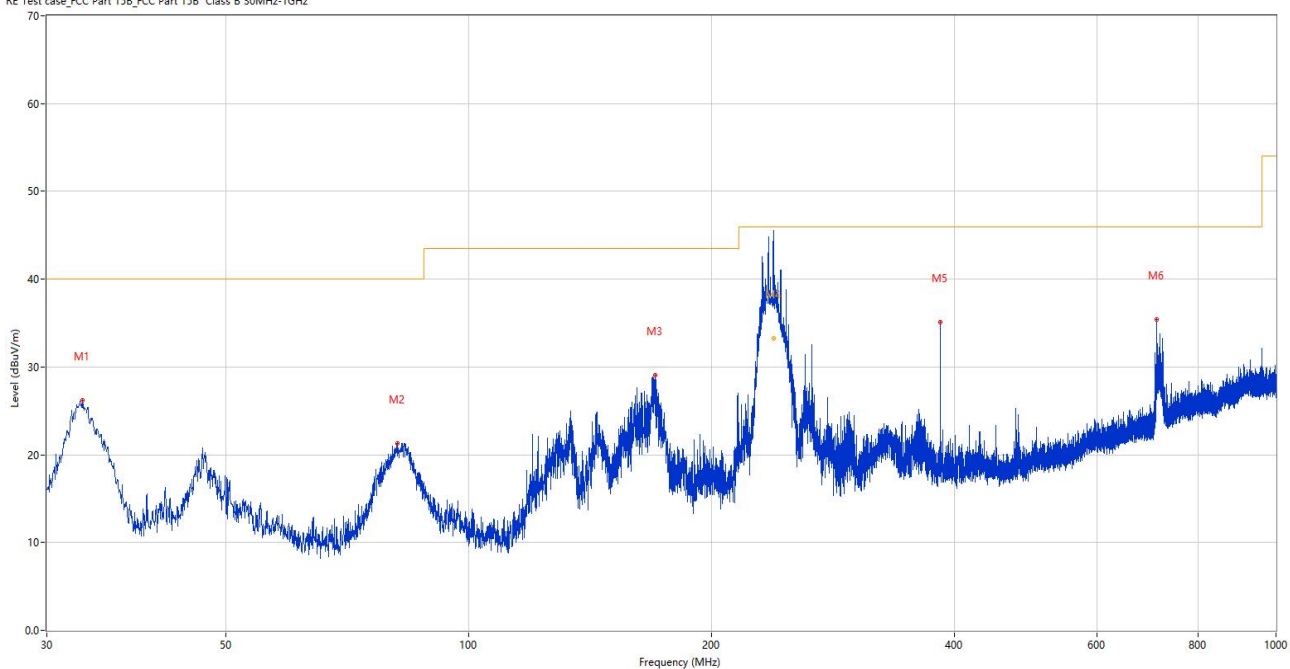

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	33.249	26.23	-29.63	40.0	13.77	Peak	171.00	100	Horizontal	Pass
2	81.652	21.30	-31.63	40.0	18.70	Peak	154.00	200	Horizontal	Pass
3	170.359	29.07	-29.19	43.5	14.43	Peak	207.00	100	Horizontal	Pass
4	238.344	44.56	-25.43	46.0	1.44	Peak	252.00	117	Horizontal	N/A
4*	238.344	33.27	-25.43	46.0	12.73	QP	252.00	117	Horizontal	Pass
5	384.002	35.09	-21.50	46.0	10.91	Peak	75.00	100	Horizontal	Pass
6	711.037	35.42	-14.49	46.0	10.58	Peak	46.00	200	Horizontal	Pass


Equipment Information						
Equipment Name	Manufacturer	Model	Equipment No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9038A	BH-EMC-L015	2024.07.09	2025.07.08	☒
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9163	BH-EMC-L008	2024.03.11	2027.03.10	☒
Anechoic Chamber	YiHeng	9m*6m*6m	BH-EMC-L001	2024.04.18	2027.04.17	☒
Description	Manufacturer	Name	Version	/		Use
Test Software	BALUN	BL410-E	V21.919	/		☒

Sample No.	SC-SH2490014-S03	Temperature	20.3°C
Humidity	49%RH	Test Voltage	AC 120V/60Hz
Test Engineer	Hao Longda	Test Date	2024.10.12

Test Mode 1

A.1.3 Test Antenna Vertical, 1 GHz – 18 GHz


RE Test case_FCC Part 15B_FCC Part 15B Class B 1GHz-18GHz

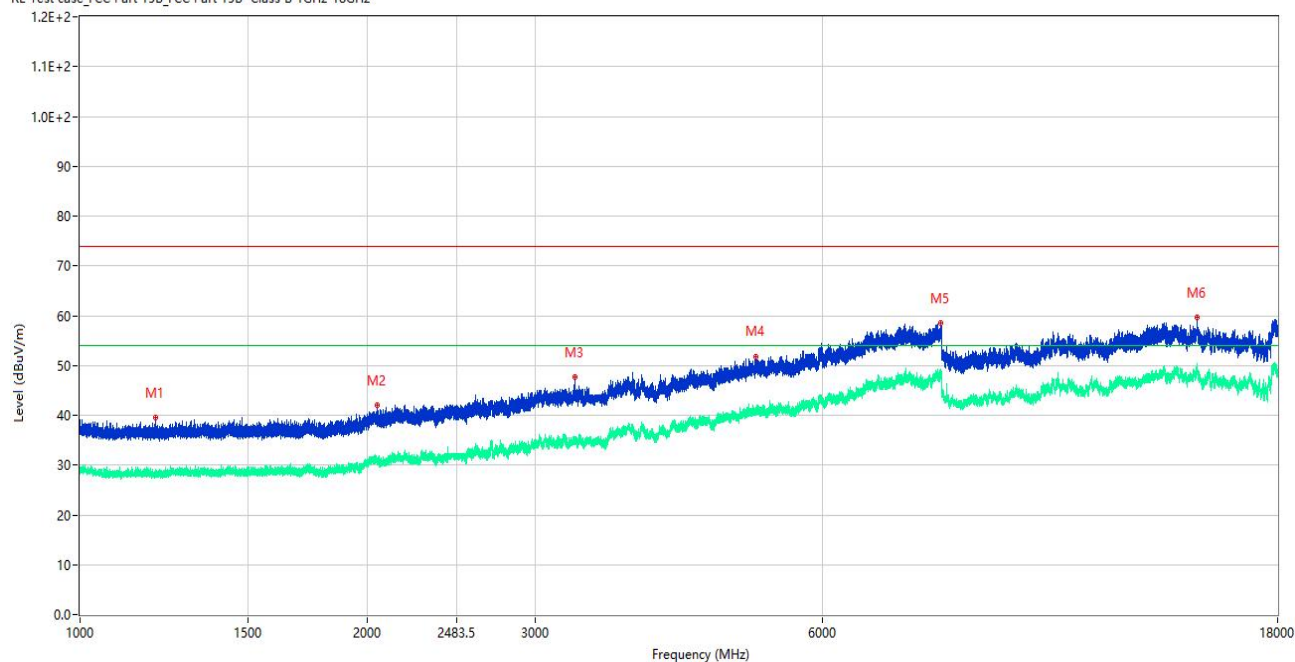

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1199.800	39.55	-16.02	74.0	34.45	Peak	343.00	100	Vertical	Pass
1**	1199.800	28.67	-16.02	54.0	25.33	AV	343.00	100	Vertical	Pass
2	2047.600	41.95	-13.45	74.0	32.05	Peak	76.00	100	Vertical	Pass
2**	2047.600	31.14	-13.45	54.0	22.86	AV	76.00	100	Vertical	Pass
3	3298.750	47.58	-6.31	74.0	26.42	Peak	95.00	100	Vertical	Pass
3**	3298.750	34.74	-6.31	54.0	19.26	AV	95.00	100	Vertical	Pass
4	5110.250	51.85	-0.50	74.0	22.15	Peak	129.00	100	Vertical	Pass
4**	5110.250	40.30	-0.50	54.0	13.70	AV	129.00	100	Vertical	Pass
5	7979.250	58.57	7.16	74.0	15.43	Peak	125.00	100	Vertical	Pass
5**	7979.250	47.89	7.16	54.0	6.11	AV	125.00	100	Vertical	Pass
6	14830.500	59.71	9.11	74.0	14.29	Peak	230.00	100	Vertical	Pass
6**	14830.500	49.37	9.11	54.0	4.63	AV	230.00	100	Vertical	Pass

A.1.4 Test Antenna Horizontal, 1 GHz – 18 GHz

RE Test case_FCC Part 15B_FCC Part 15B Class B 1GHz-18GHz

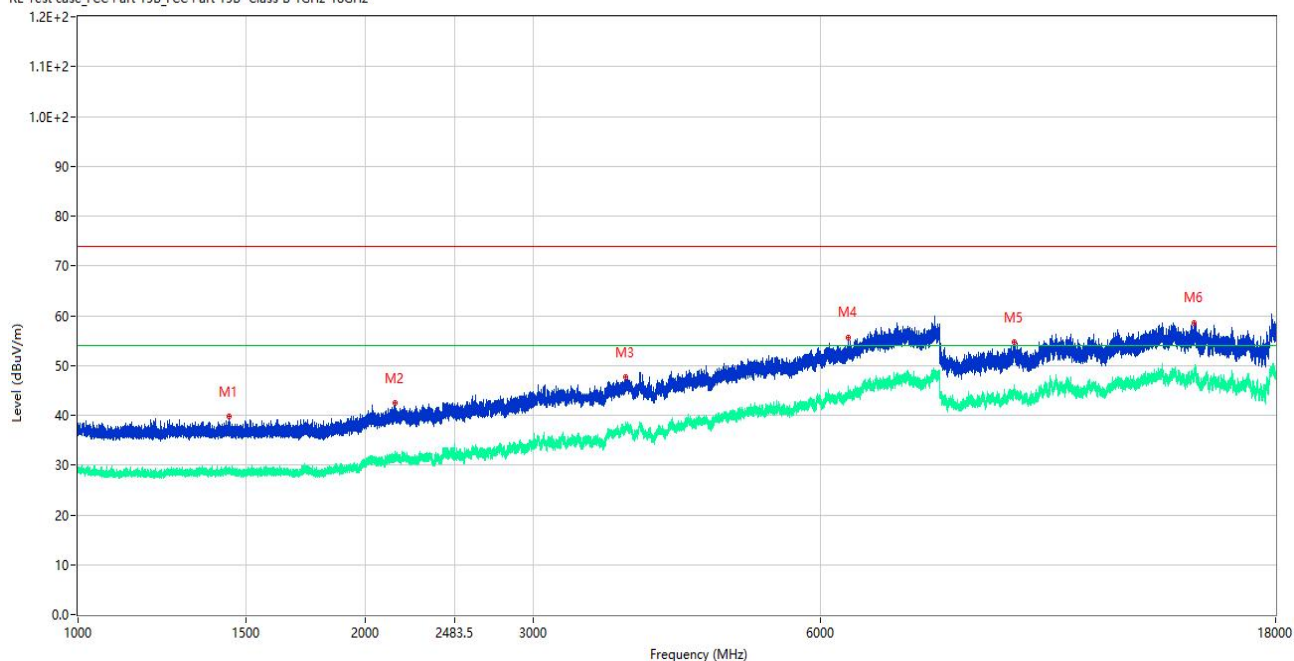

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1440.000	39.79	-15.86	74.0	34.21	Peak	224.00	100	Horizontal	Pass
1**	1440.000	28.98	-15.86	54.0	25.02	AV	224.00	100	Horizontal	Pass
2	2150.000	42.41	-13.03	74.0	31.59	Peak	233.00	100	Horizontal	Pass
2**	2150.000	32.69	-13.03	54.0	21.31	AV	233.00	100	Horizontal	Pass
3	3746.750	47.78	-3.35	74.0	26.22	Peak	205.00	100	Horizontal	Pass
3**	3746.750	37.32	-3.35	54.0	16.68	AV	205.00	100	Horizontal	Pass
4	6410.250	55.51	2.53	74.0	18.49	Peak	197.00	100	Horizontal	Pass
4**	6410.250	44.59	2.53	54.0	9.41	AV	197.00	100	Horizontal	Pass
5	9573.000	54.75	3.18	74.0	19.25	Peak	0.00	100	Horizontal	Pass
5**	9573.000	44.61	3.18	54.0	9.39	AV	0.00	100	Horizontal	Pass
6	14779.000	58.62	9.09	74.0	15.38	Peak	6.00	100	Horizontal	Pass
6**	14779.000	47.44	9.09	54.0	6.56	AV	6.00	100	Horizontal	Pass

Equipment Information						
Equipment Name	Manufacturer	Model	Equipment No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9038A	BH-EMC-L015	2024.07.09	2025.07.08	☒
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	BH-EMC-L044	2024.03.11	2027.03.10	☒
Anechoic Chamber	YiHeng	9m*6m*6m	BH-EMC-L001	2024.04.18	2027.04.17	☒
Description	Manufacturer	Name	Version	/		Use
Test Software	BALUN	BL410-E	V21.919	/		☒

A.2 Conducted emission


Note: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Sample No.	SC-SH2490014-S03	Temperature	24.4°C
Humidity	55%RH	Test Voltage	AC 120V/60Hz
Test Engineer	Wu Dejun	Test Date	2024.10.12

Test Mode 1


A.2.1 AC ports - L Phase

CE Test case_FCC_CE_FCC PART 15B_Class B

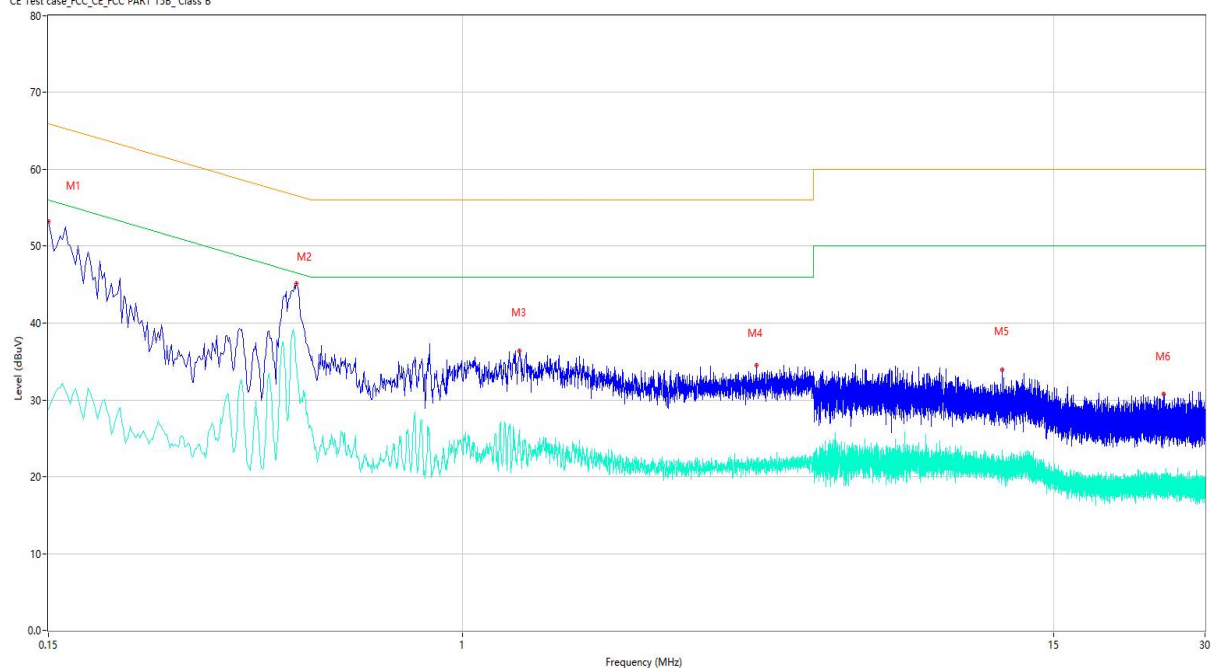

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.150	53.17	9.75	66.00	12.83	Peak	L	Pass
1**	0.150	28.75	9.75	56.00	27.25	AV	L	Pass
2	0.468	45.12	9.74	56.55	11.43	Peak	L	Pass
2**	0.468	34.59	9.74	46.55	11.96	AV	L	Pass
3	1.298	36.39	9.70	56.00	19.61	Peak	L	Pass
3**	1.298	25.39	9.70	46.00	20.61	AV	L	Pass
4	3.840	34.50	9.65	56.00	21.50	Peak	L	Pass
4**	3.840	21.97	9.65	46.00	24.03	AV	L	Pass
5	11.870	33.96	9.40	60.00	26.04	Peak	L	Pass
5**	11.870	23.55	9.40	50.00	26.45	AV	L	Pass
6	24.812	30.72	8.85	60.00	29.28	Peak	L	Pass
6**	24.812	19.14	8.85	50.00	30.86	AV	L	Pass

A.2.2 AC ports - N Phase

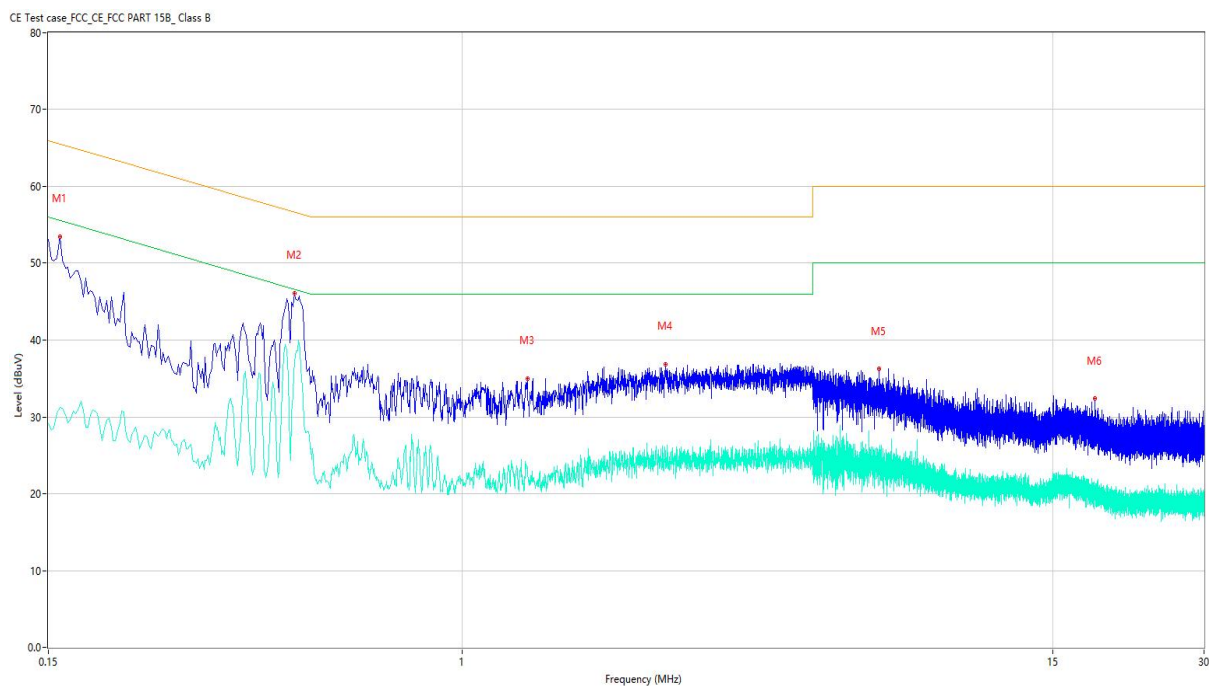

No.	Frequency (MHz)	Results (dBUV)	Factor (dB)	Limit (dBUV)	Margin (dB)	Detector	Line	Verdict
1	0.158	53.47	9.70	65.57	12.10	Peak	N	Pass
1**	0.158	31.26	9.70	55.57	24.31	AV	N	Pass
2	0.464	46.11	9.79	56.62	10.51	Peak	N	Pass
2**	0.464	37.19	9.79	46.62	9.43	AV	N	Pass
3	1.348	34.97	9.86	56.00	21.03	Peak	N	Pass
3**	1.348	23.46	9.86	46.00	22.54	AV	N	Pass
4	2.540	36.85	9.86	56.00	19.15	Peak	N	Pass
4**	2.540	24.40	9.86	46.00	21.60	AV	N	Pass
5	6.754	36.22	9.81	60.00	23.78	Peak	N	Pass
5**	6.754	24.71	9.81	50.00	25.29	AV	N	Pass
6	18.220	32.36	9.27	60.00	27.64	Peak	N	Pass
6**	18.220	20.47	9.27	50.00	29.53	AV	N	Pass

Equipment Information						
Equipment Name	Manufacturer	Model	Equipment No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9038A	BH-EMC-L127	2024.02.19	2025.02.18	☒
LISN	SCHWARZBECK	NSLK 8127	BH-EMC-L011	2024.02.25	2025.02.24	☒
10dB Limiter	SCHWARZBECK	VTSD 9561-F	BH-EMC-L014	2024.02.19	2025.02.18	☒
Shielded Room	YiHeng	4.1m*4.0m*3.2m	BH-EMC-L006	2024.02.22	2027.02.21	☒
Description	Manufacturer	Name	Version	/		Use
Test Software	BALUN	BL410-E	V21.919	/		☒

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SH2490661-AE.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SH2490661-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SH2490661-AI.PDF”.

Statement

1. The Testing Center guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. For the report with Accreditation Symbol, the items marked with "☆" are not within the accredited scope.
3. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the test report stamp.
4. The test data and results are only valid for the tested samples provided by the customer.
5. This report shall not be partially reproduced without the written permission of the Testing Center.
6. Any objection shall be raised to the Testing Center within 30 days after receiving the report.

--END OF REPORT--