


REVISION			
ZONE	REV	DESCRIPTION	DATE
	V1.0	初版	2024.11.14
	V1.1	更新印刷和折叠方式	2024.11.22
	V1.2	更新印刷	2024.11.25

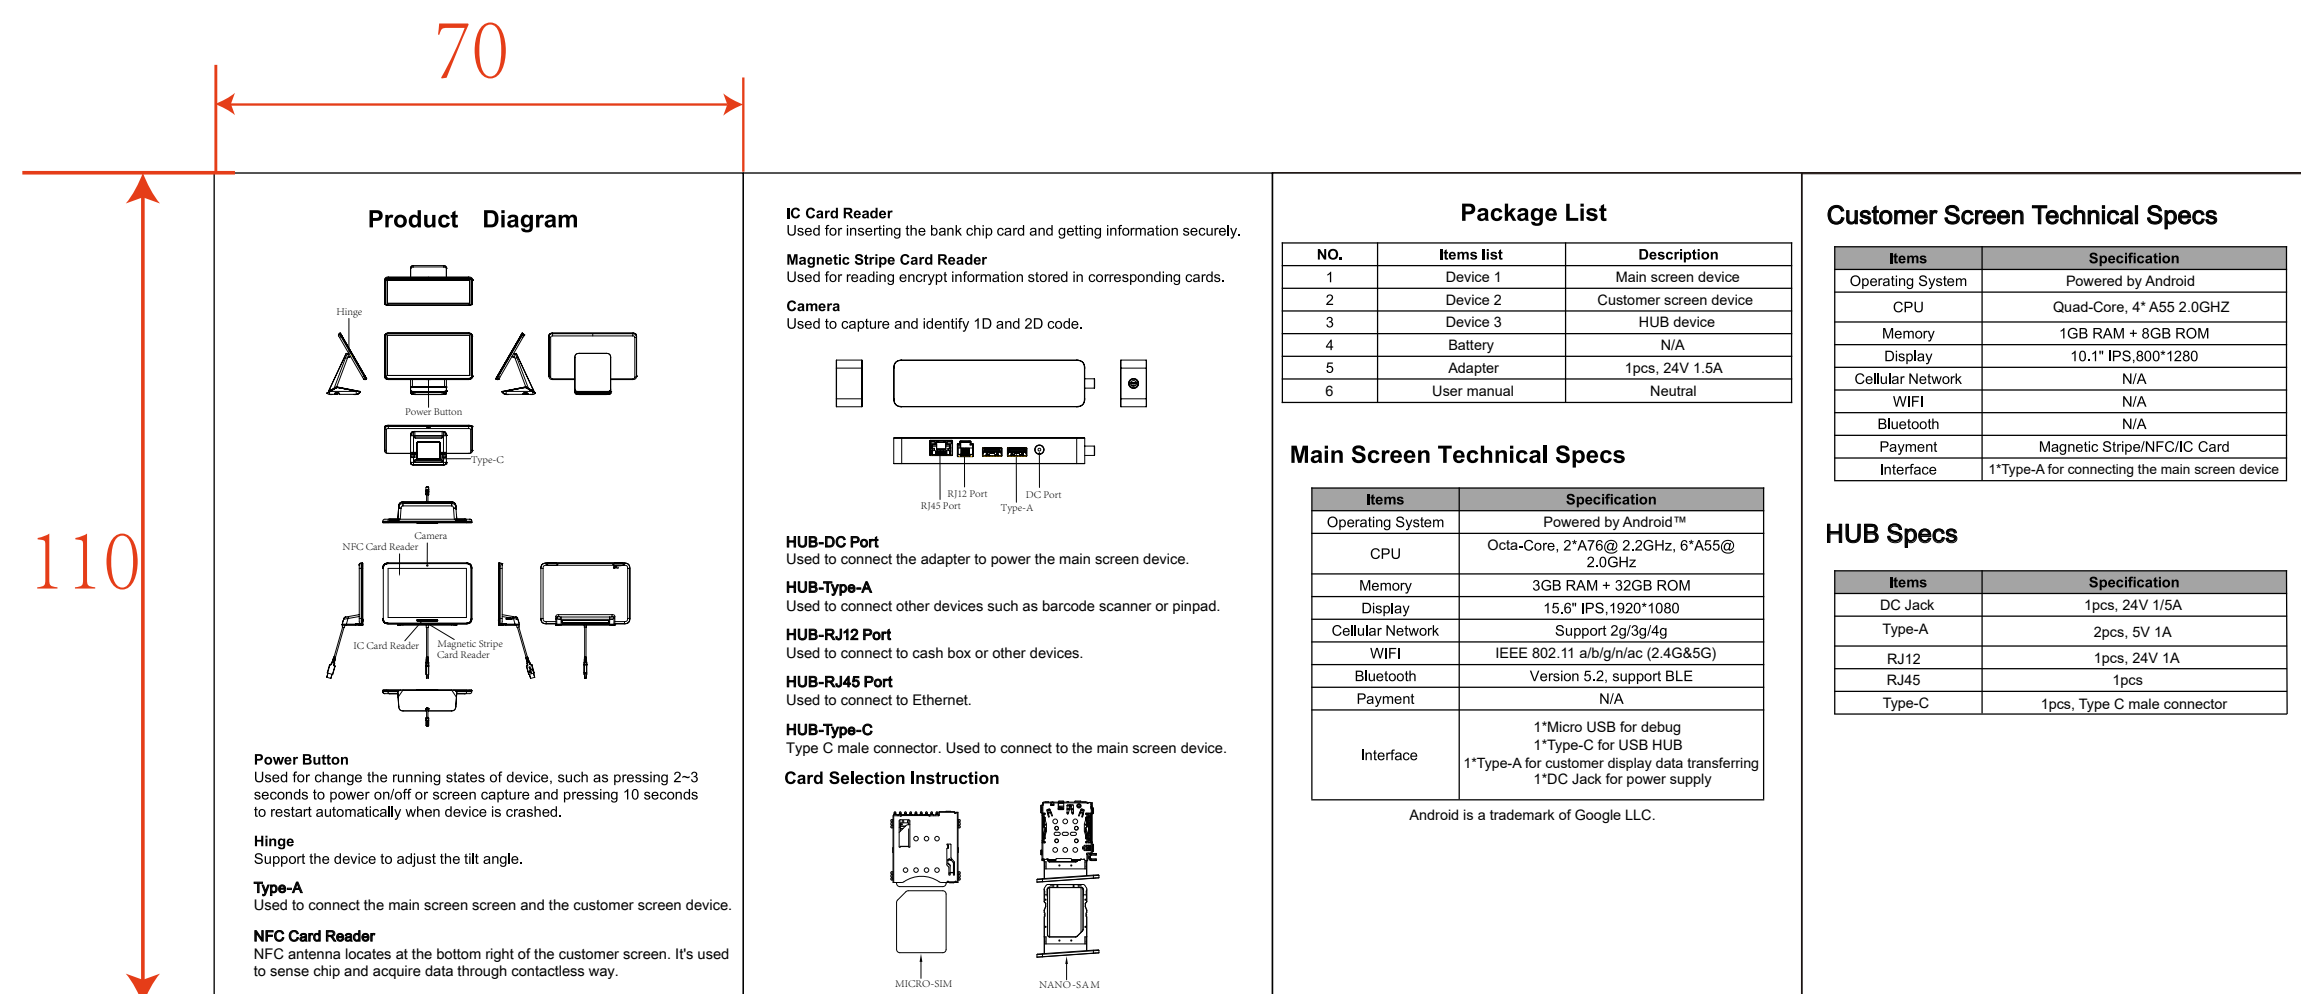

NO.	Items list	Description
1	Device 1	Main screen device
2	Device 2	Customer screen device
3	Device 3	HUB device
4	Battery	N/A
5	Adapter	1pcs, 24V 1.5A
6	User manual	Neutral

Items	Specification
Operating System	Powered by Android™
CPU	Octa-Core, 2*A76@2.2GHz, 6*A55@2.0GHz
Memory	3GB RAM + 32GB ROM
Display	15.6" IPS, 1920*1080
Cellular Network	Support 2g/3g/4g
WiFi	IEEE 802.11 a/b/g/n/ac (2.4G&5G)
Bluetooth	Version 5.2, support BLE
Payment	N/A
Interface	1*Micro USB for debug 1*Type-C for USB HUB 1*Type-A for customer display data transferring 1*DC Jack for power supply

Customer Screen Technical Specs

Items	Specification
Operating System	Powered by Android
CPU	Quad-Core, 4* A55 2.0GHZ
Memory	1GB RAM + 8GB ROM
Display	10.1" IPS, 800*1280
Cellular Network	N/A
WIFI	N/A
Bluetooth	N/A
Payment	Magnetic Stripe/NFC/IC Card
Interface	1*Type-A for connecting the main screen device

HUB Specs

Items	Specification
DC Jack	1pcs, 24V 1/5A
Type-A	2pcs, 5V 1A
RJ12	1pcs, 24V 1A
RJ45	1pcs
Type-C	1pcs, Type C male connector

ATTENTION

Statement

- The equipment damaged caused by natural disasters, falling, self destructing and other reasons during the operation specifications is not covered by the warranty.
- Some details of this document may be inconsistent with the real object due to the update iteration of the product. Please take the real object as the standard, and your company reserves the right to interpret this document.

RF Exposure Information and Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed or operated with minimum distance of 20 cm between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Precaution statement:

- RF Exposure Information: The Maximum Permissible Exposure (MPE) level has been calculated based on a distance of >20 cm between the device and the human body. To maintain compliance with RF exposure requirements, use product that maintain a 20cm distance between the device and human body.

FCC E15.19

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC E15.21

Note: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

FCC E15.105

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.
- This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter.

Warning

The limit operating ambient temperature of the device declared by the manufacturer is -10~45°C.

- Operating temperature : 40℃（with adapter）, 45℃（without adapter）： When the customer purchases the adapter themselves, they should select one that can operate at a temperature of at least 45℃.

RF output power:

GSM850/900: 33±2dBm
GSM 1900/1800: 30±2dBm
WCDMA BAND III/U/VII/VIII: 23±2dBm
LTE BAND 12(345)/6(78)/20(28)/38(40)/(41)(22);20±2dBm
Blue tooth: 13±1dB (EIRP)
WiFi 2.4G: +17+1dB(EIRP)
WiFi5 19GHz-5.25 GHz: 14±1dBm
WiFi6 25GHz-5.35 GHz: 13±1 dBm
WiFi7 25GHz-5.875GHz:13±1dBm
NFC-B3.92V/mV/m3m

- Declaration of Conformity
- Hereby, Shanghai Xiangchen Communication Technology Co.,Ltd declares that the radio equipment type D8&D9 is in compliance with Directive 2014/53/EU.
- The full text of the EU declaration of conformity is available at the following internet address:
<https://cczn.attestation.net/wirelessMaterial.do?yZCvqczgZTgNgGO MWcENzYVnZrHtNMxMFzNTQ>

5G WFI statement

- The device is restricted to indoor use when operated in FDD/NR-TDD<SSB-MTC> to reduce the potential for interference.



AT	BE	BG	CH	CY	CZ	DE
DK	EE	EL	ES	FI	FR	HR
HU	IE	IS	IT	LJ	LT	LU
LV	MT	NL	NO	PL	PT	RO
SE	SI	SK	TR	UK(N)		



KF192082A

RF output power:

- GSM850/900: 33±2dBm
- GSM1800/1900: 30±2dBm
- WCDMA BAND I/II/IV/V/III: 23±2dBm
- LTE BAND 1/2/3/4/5/7/8/20/28/38/40/41(120M): 22±2dBm
- Blue tooth: 13±1dB (CIRP)
- WiFi 2.4G :17±1dB(EIRP)
- WiFi5.15 GHz:5-25 GHz: 14±1dBm
- WiFi5.25 GHz:5-35 GHz: 13±1 dBm
- WiFi5.47 GHz:5-725 GHz: 13±1 dBm
- WiFi5.725 GHz:5-875 GHz: 13±1dBm
- NFC:63.82duV/m@3cm

- Declaration of Conformity
- Hereby, Shanghai Xiangcheng Communication Technology Co.,Ltd declares that the radio equipment type D8&D8C is in compliance with Directive 2014/53/EU.
- The full text of the EU declaration of conformity is available at the following internet address:
<https://kozen.attnnews.com/wiki/external/MzJhY2QwNjcZTg3NGQ0MWEvZWVNTmN1b2FmZmZlNTQ0>

5G WIFI statement

- The device is restricted to indoor use when operated in 5150MHz-5350MHz to reduce the potential for interference.

	AT	BE	BG	CH	CY	CZ	DE
	DK	EE	EL	ES	FI	FR	HR
	HU	IE	IS	IT	LI	LT	LU
	LV	MT	NL	NO	PL	PT	RO
	SE	SI	SK	TR	UK(NI)		

D8

Quick Guide

折叠后正面

折叠后背面

注：1.材质：128g铜版纸
2.展开尺寸：280*110mm;成品尺寸：70*110mm
3.印刷：单黑正反印刷
4.边缘要整齐，不允许破损、污渍，风琴折
5.公差：±2mm

SIZE	/	DRAWING	申依婷	PART NO.	K7612000463LA		
UNIT	mm			TITLE	D0861_Kozen_快速指南BASE2		
SCALE	1:1	CHECKED	毕蒙	Vender	立德宝		
SHEET	1 of 1	APPR.		DATE	2024.11.25	REV	V1.2
3rd ANGLE PROJECTION							
							