

Meas1.Bodyworn&Hotspot Right Side 10mm GSM850 Ch190

Date: 2025/5/7

Communication System Band: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 40.959$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(9.99, 9.99, 9.99); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch190/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.492 W/kg


Ch190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.26 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.552 W/kg

SAR(1 g) = 0.357 W/kg; SAR(10 g) = 0.224 W/kg

Maximum value of SAR (measured) = 0.488 W/kg

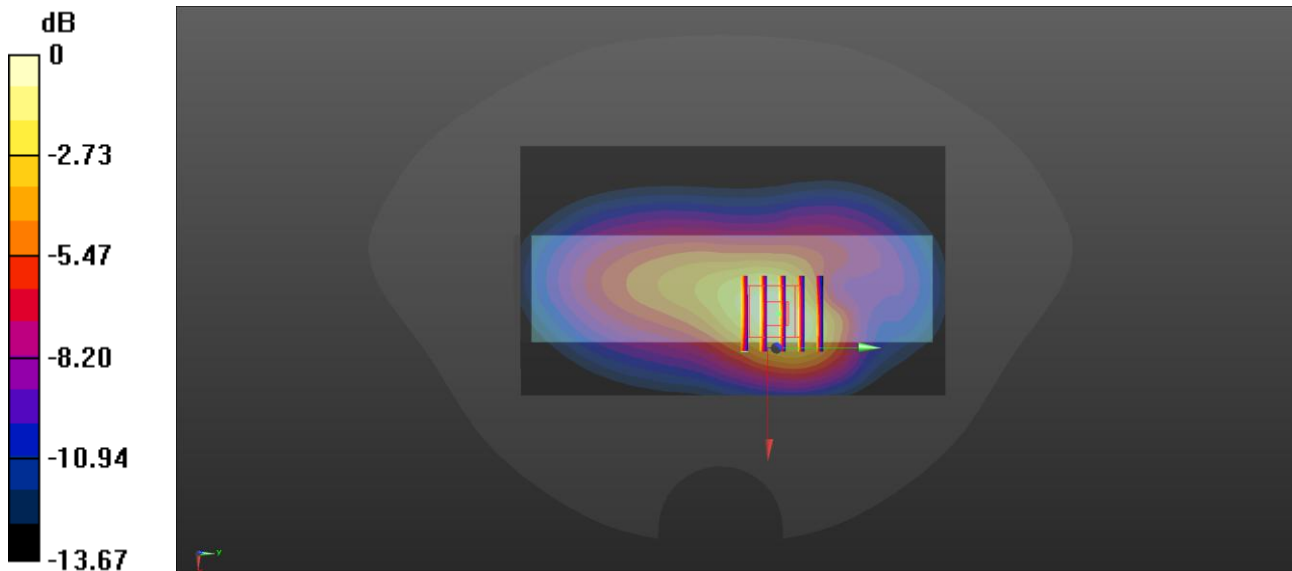

0 dB = 0.488 W/kg

Meas2.Extremity Right Side 0mm GSM850 Ch190

Date: 2025/5/7

Communication System Band: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 40.959$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(9.99, 9.99, 9.99); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch190/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.28 W/kg


Ch190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.70 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.43 W/kg

SAR(1 g) = 1.17 W/kg; SAR(10 g) = 0.675 W/kg

Maximum value of SAR (measured) = 1.73 W/kg

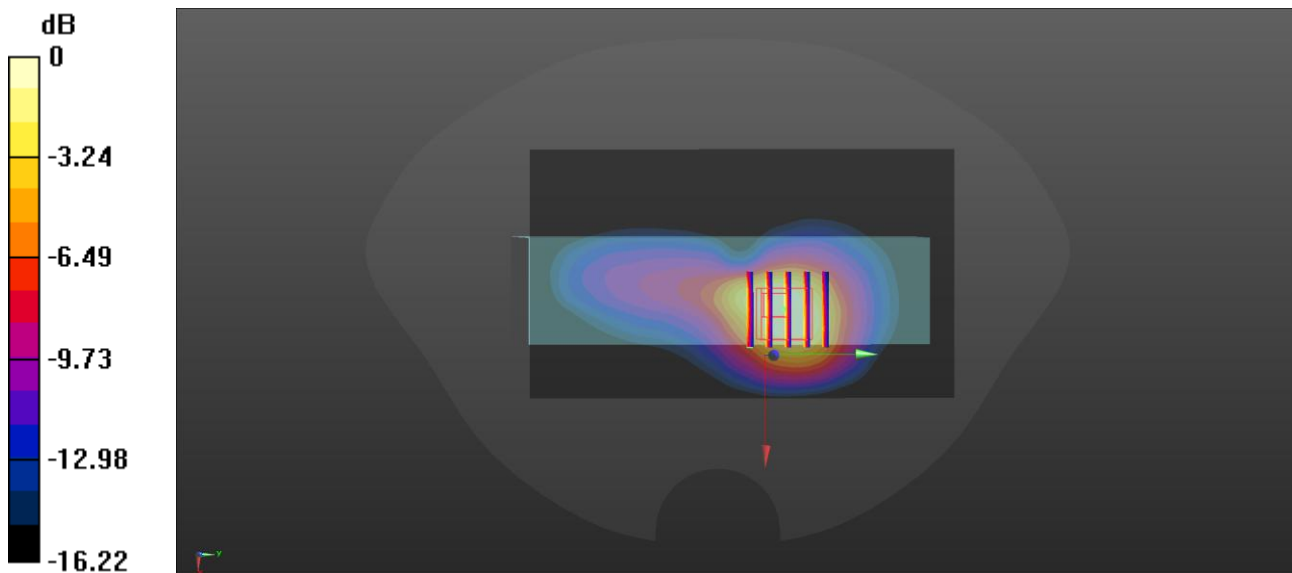

0 dB = 1.73 W/kg

Meas3.Bodyworn&Hotspot Right Side 10mm GSM1900 Ch810

Date: 2025/5/8

Communication System Band: GPRS 1900; Frequency: 1908.8 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1908.8$ MHz; $\sigma = 1.449$ S/m; $\epsilon_r = 39.343$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.33, 8.33, 8.33); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch810/Area Scan (71x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.27 W/kg


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 15.17 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.845 W/kg; SAR(10 g) = 0.446 W/kg

Maximum value of SAR (measured) = 1.27 W/kg

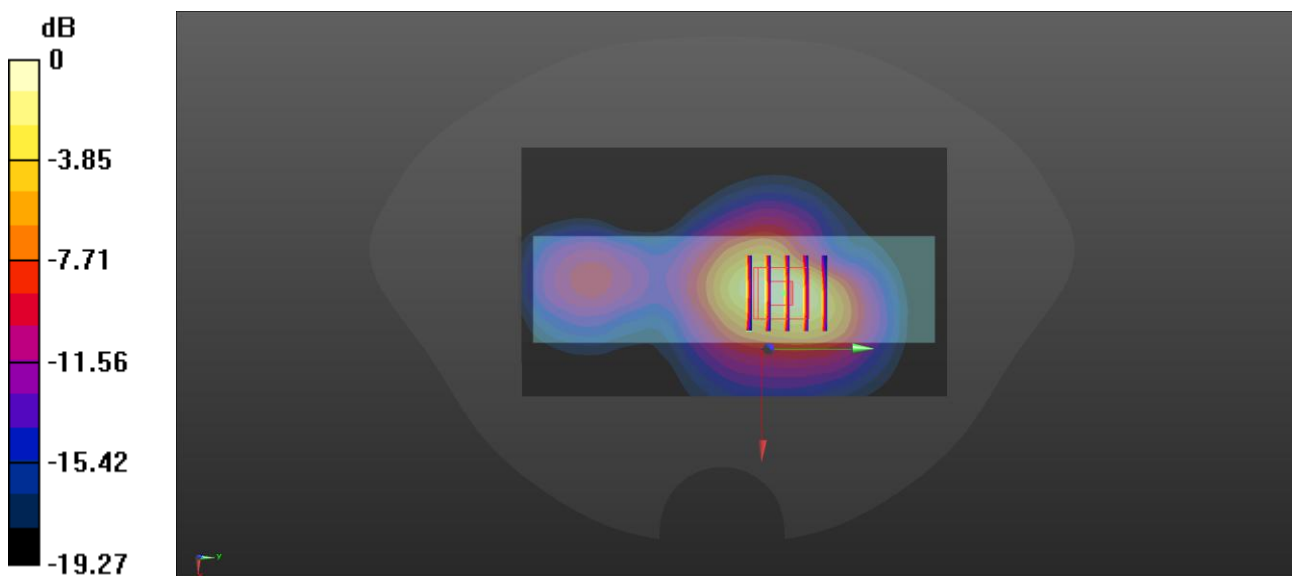

0 dB = 1.27 W/kg

Meas4.Extremity Right Side 0mm GSM1900 Ch810

Date: 2025/5/8

Communication System Band: GPRS 1900; Frequency: 1908.8 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1908.8$ MHz; $\sigma = 1.449$ S/m; $\epsilon_r = 39.343$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.33, 8.33, 8.33); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch810/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 6.04 W/kg


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.58 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 6.82 W/kg

SAR(1 g) = 3.36 W/kg; SAR(10 g) = 1.48 W/kg

Maximum value of SAR (measured) = 5.22 W/kg

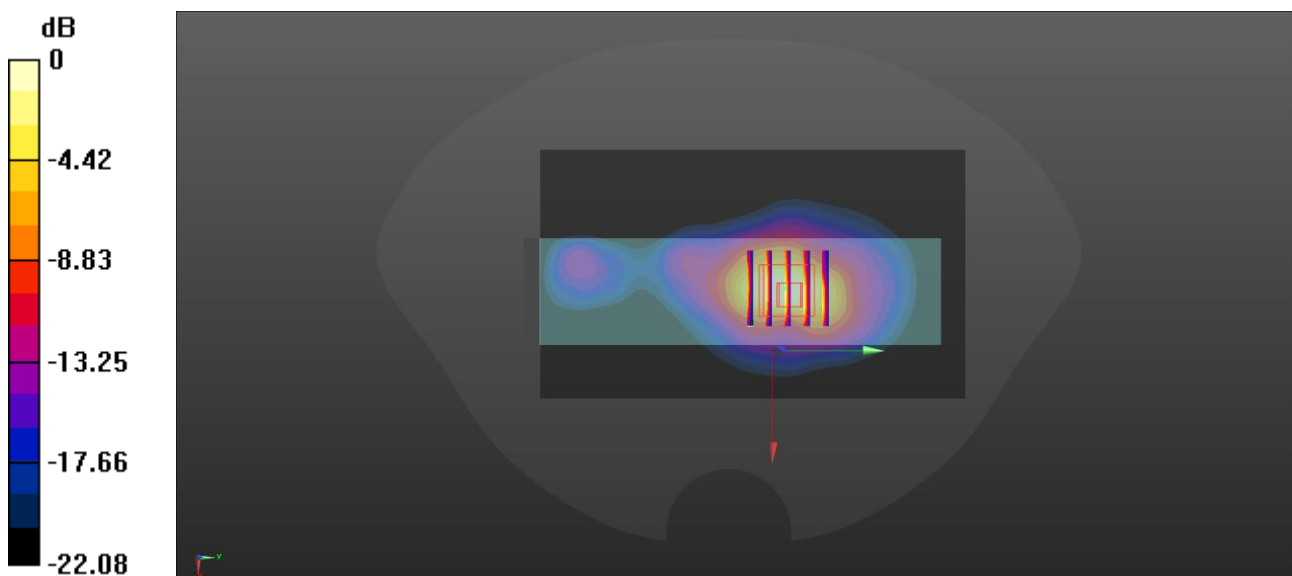

0 dB = 5.22 W/kg

Meas5.Bodyworn&Hotspot Right Side 10mm WCDMA B2 Ch9538

Date: 2025/5/8

Communication System Band: II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.448$ S/m; $\epsilon_r = 39.312$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.33, 8.33, 8.33); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch9538/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.25 W/kg


Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.351 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 0.860 W/kg; SAR(10 g) = 0.473 W/kg

Maximum value of SAR (measured) = 1.25 W/kg

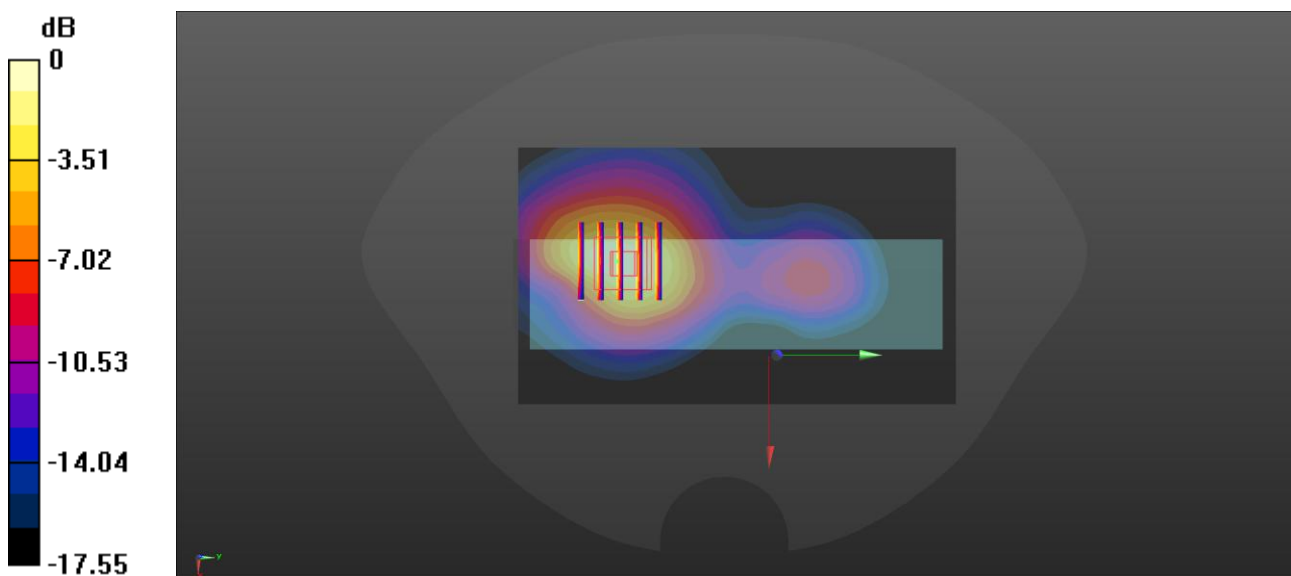

0 dB = 1.25 W/kg

Meas6.Extremity Right Side 0mm WCDMA B2 Ch9538

Date: 2025/5/8

Communication System Band: II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.448$ S/m; $\epsilon_r = 39.312$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.33, 8.33, 8.33); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch9538/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 5.08 W/kg


Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.05 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 6.27 W/kg

SAR(1 g) = 3.12 W/kg; SAR(10 g) = 1.47 W/kg

Maximum value of SAR (measured) = 5.05 W/kg

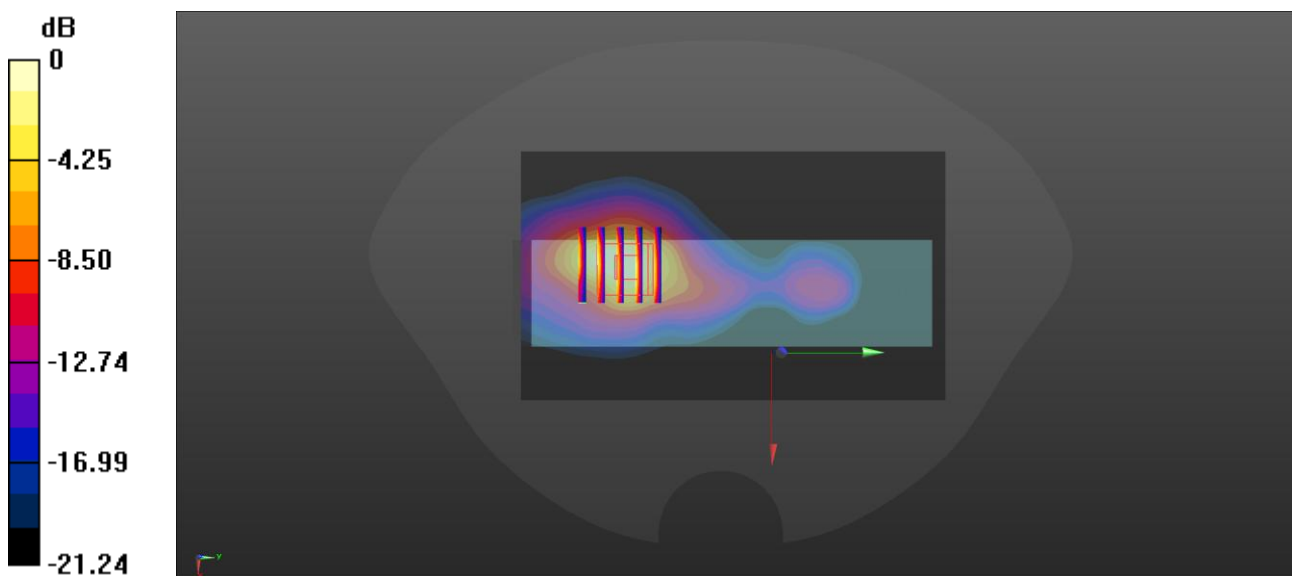

0 dB = 5.05 W/kg

Meas7.Bodyworn&Hotspot Right Side 10mm WCDMA B4 Ch1413

Date: 2025/5/7

Communication System Band: IV; Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 39.288$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.67, 8.67, 8.67); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch1413/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.532 W/kg


Ch1413/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.14 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.611 W/kg

SAR(1 g) = 0.353 W/kg; SAR(10 g) = 0.195 W/kg

Maximum value of SAR (measured) = 0.519 W/kg

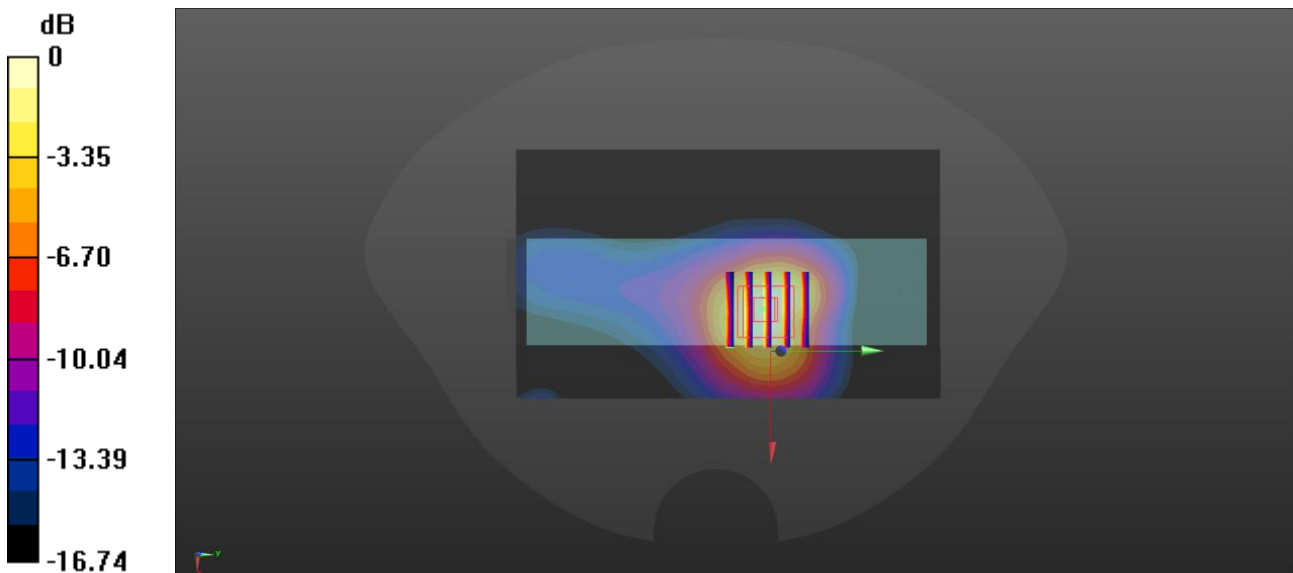

0 dB = 0.519 W/kg

Meas8.Extremity Right Side 0mm WCDMA B4 Ch1513

Date: 2025/5/7

Communication System Band: IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.415$ S/m; $\epsilon_r = 39.281$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.67, 8.67, 8.67); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch1513/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.97 W/kg


Ch1513/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.476 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 5.23 W/kg

SAR(1 g) = 2.38 W/kg; SAR(10 g) = 1.1 W/kg

Maximum value of SAR (measured) = 3.86 W/kg

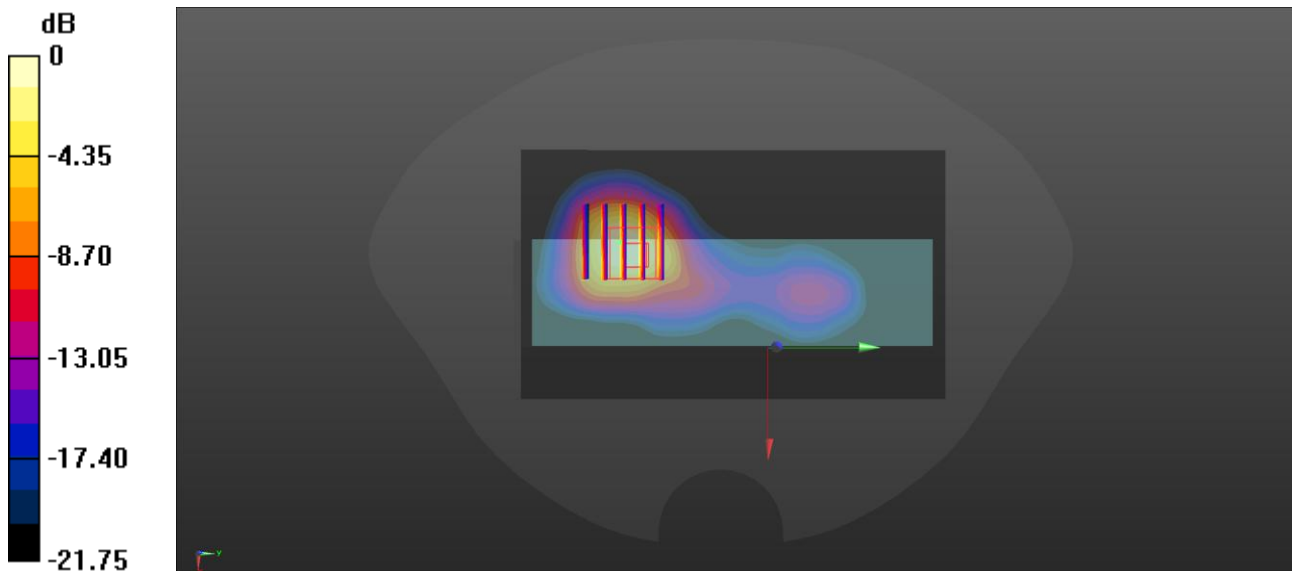

0 dB = 3.86 W/kg

Meas9.Bodyworn&Hotspot Right Side 10mm WCDMA B5 Ch4182

Date: 2025/5/7

Communication System Band: V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 40.961$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(9.99, 9.99, 9.99); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch4182/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.548 W/kg


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.41 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.600 W/kg

SAR(1 g) = 0.393 W/kg; SAR(10 g) = 0.249 W/kg

Maximum value of SAR (measured) = 0.532 W/kg

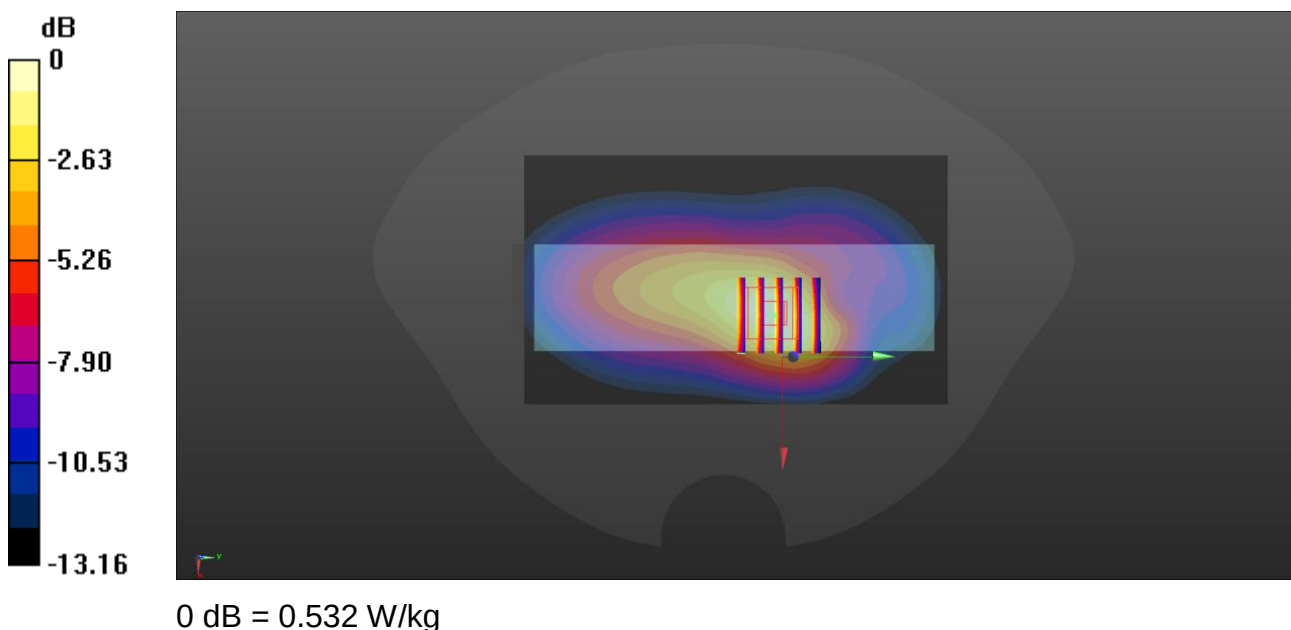

Meas10.Extremity Right Side 0mm WCDMA B5 Ch4132

Date: 2025/5/7

Communication System Band: V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.899$ S/m; $\epsilon_r = 41.028$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(9.99, 9.99, 9.99); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch4132/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.31 W/kg


Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.98 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 2.65 W/kg

SAR(1 g) = 1.31 W/kg; SAR(10 g) = 0.765 W/kg

Maximum value of SAR (measured) = 1.80 W/kg

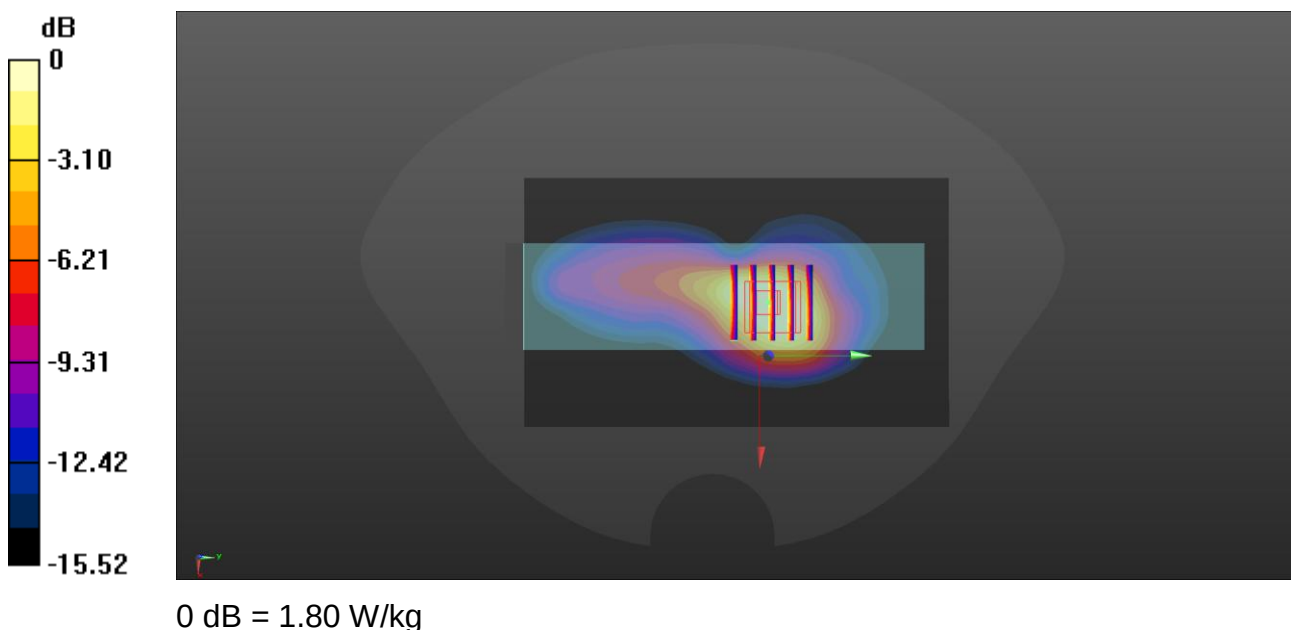

Meas11.Bodyworn&Hotspot Right Side 10mm LTE B25 Ch26590

Date: 2025/5/8

Communication System Band: Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1905 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1905$ MHz; $\sigma = 1.435$ S/m; $\epsilon_r = 39.185$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.33, 8.33, 8.33); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch26590/Area Scan (71x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.11 W/kg


Ch26590/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.78 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.775 W/kg; SAR(10 g) = 0.437 W/kg

Maximum value of SAR (measured) = 1.12 W/kg

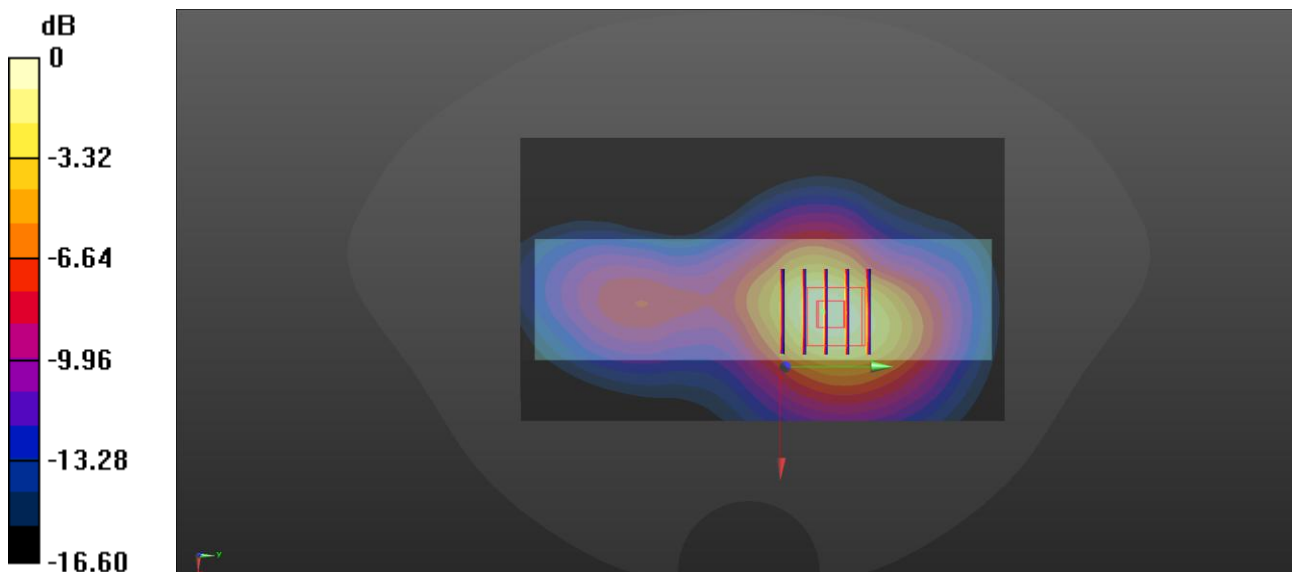

0 dB = 1.12 W/kg

Meas12.Extremity Right Side 0mm LTE B22 Ch26590

Date: 2025/5/8

Communication System Band: Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1905 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1905$ MHz; $\sigma = 1.444$ S/m; $\epsilon_r = 39.116$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.33, 8.33, 8.33); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch26590/Area Scan (71x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 4.75 W/kg


Ch26590/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 16.65 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 6.16 W/kg

SAR(1 g) = 3.11 W/kg; SAR(10 g) = 1.46 W/kg

Maximum value of SAR (measured) = 5.06 W/kg

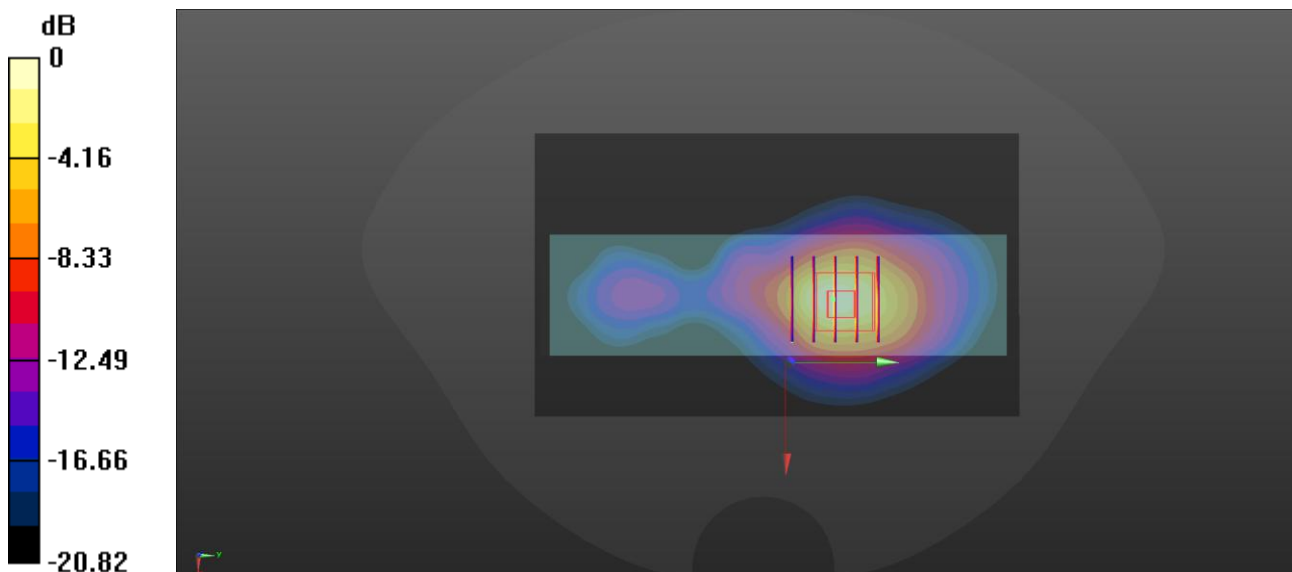

0 dB = 5.06 W/kg

Meas13.Bodyworn&Hotspot Right Side 10mm LTE B66 Ch132322

Date: 2025/5/7

Communication System Band: Band 66, E-UTRA/FDD (1710.0 - 1780.0 MHz); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 39.288$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.67, 8.67, 8.67); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch132322/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.701 W/kg


Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.389 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.833 W/kg

SAR(1 g) = 0.470 W/kg; SAR(10 g) = 0.255 W/kg

Maximum value of SAR (measured) = 0.697 W/kg

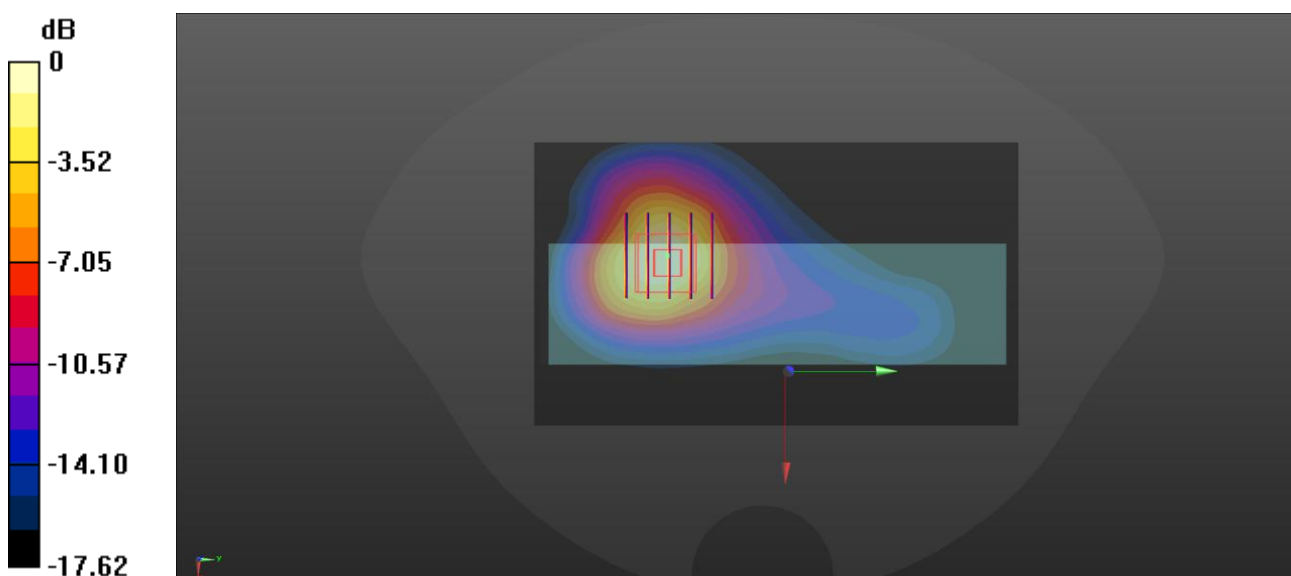

Meas14.Extremity Right Side 0mm LTE B66 Ch132572

Date: 2025/5/7

Communication System Band: Band 66, E-UTRA/FDD (1710.0 - 1780.0 MHz); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1770$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 39.283$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.67, 8.67, 8.67); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch132572/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 4.21 W/kg


Ch132572/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.55 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 4.39 W/kg

SAR(1 g) = 2.12 W/kg; SAR(10 g) = 1.02 W/kg

Maximum value of SAR (measured) = 3.17 W/kg

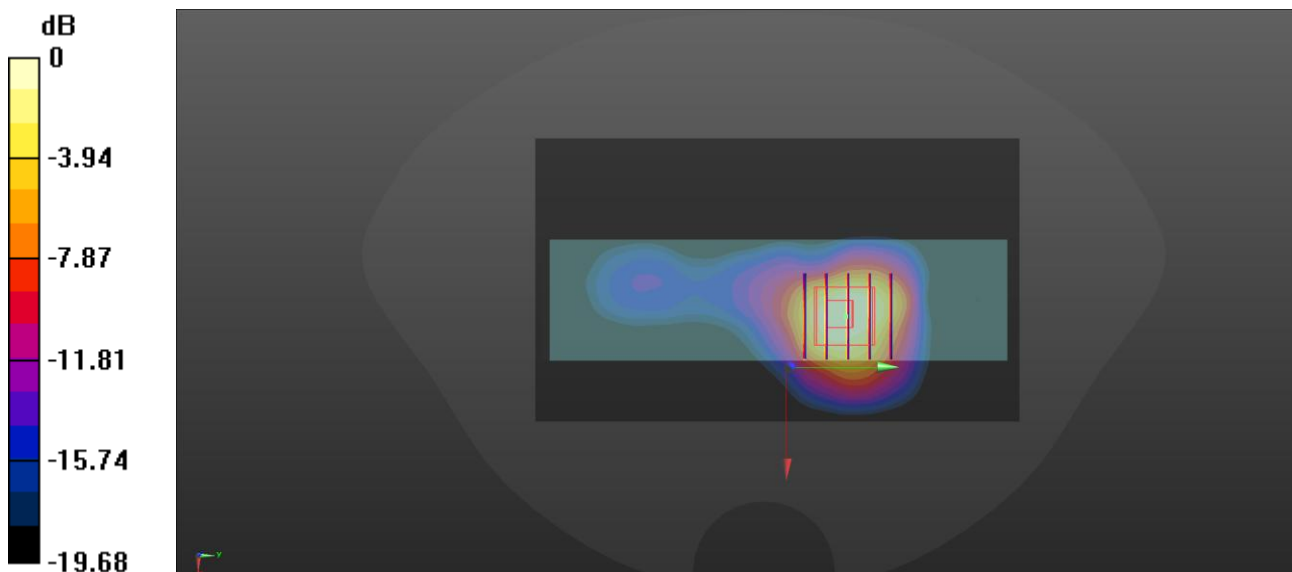

0 dB = 3.17 W/kg

Meas15.Bodyworn&Hotspot Right Side 10mm LTE B26 Ch26865

Date: 2025/5/7

Communication System Band: Band 26, E-UTRA/FDD (811.5 - 851.5 MHz); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 40.96$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(9.99, 9.99, 9.99); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch26865/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.756 W/kg


Ch26865/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.77 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.832 W/kg

SAR(1 g) = 0.551 W/kg; SAR(10 g) = 0.349 W/kg

Maximum value of SAR (measured) = 0.738 W/kg

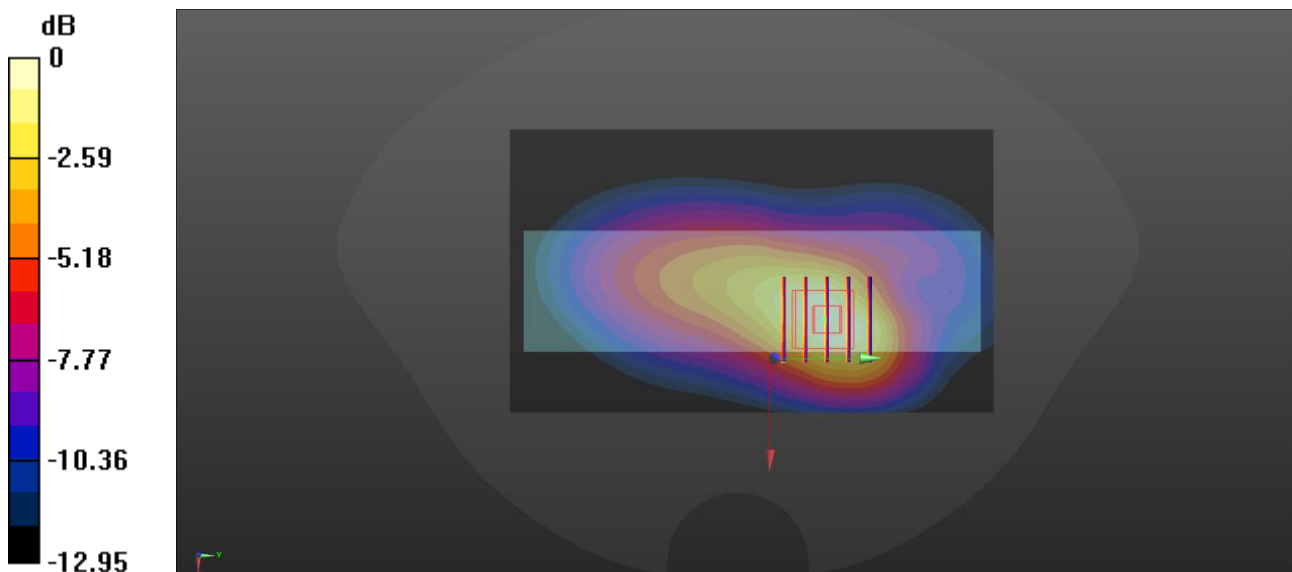

0 dB = 0.738 W/kg

Meas16.Extremity Right Side 0mm LTE B26 Ch26765

Date: 2025/5/7

Communication System Band: Band 26, E-UTRA/FDD (811.5 - 851.5 MHz); Frequency: 821.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 821.5$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 41.012$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(9.99, 9.99, 9.99); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch26765/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.17 W/kg


Ch26765/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.49 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 3.49 W/kg

SAR(1 g) = 1.76 W/kg; SAR(10 g) = 1.04 W/kg

Maximum value of SAR (measured) = 2.50 W/kg

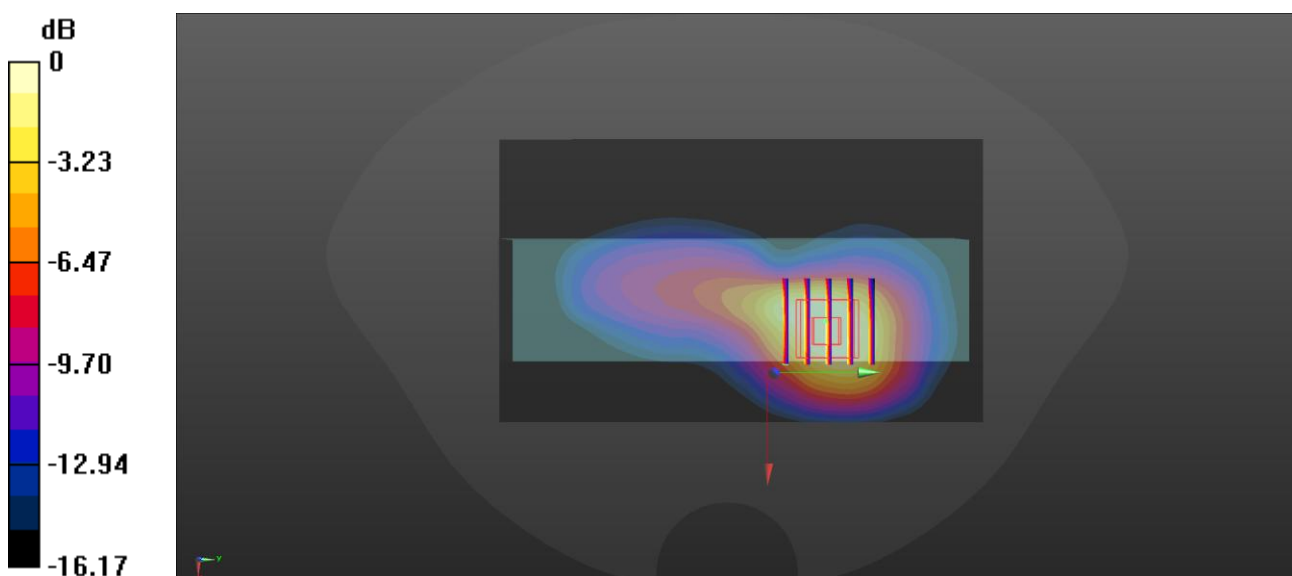

0 dB = 2.50 W/kg

Meas17.Bodyworn&Hotspot Right Side 10mm LTE B7 Ch21350

Date: 2025/5/9

Communication System Band: Band 7, E-UTRA/FDD (2500.0 - 2570.0 MHz); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.97$ S/m; $\epsilon_r = 38.087$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.59, 7.59, 7.59); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch21350/Area Scan (91x151x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.12 W/kg


Ch21350/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.023 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.766 W/kg; SAR(10 g) = 0.394 W/kg

Maximum value of SAR (measured) = 1.19 W/kg

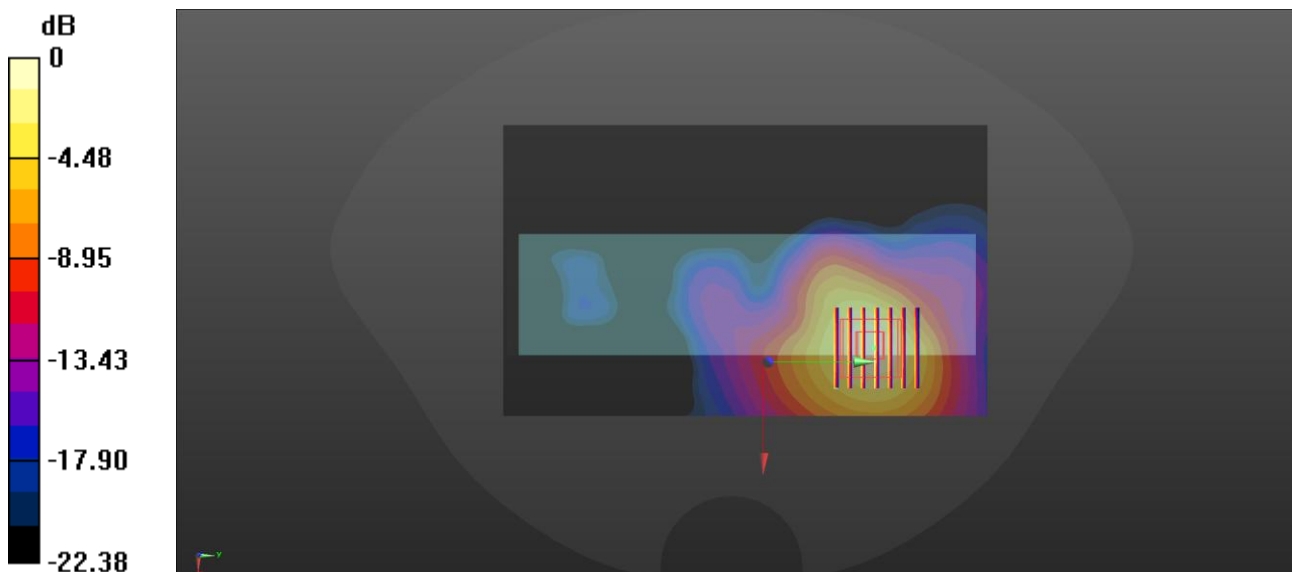

0 dB = 1.19 W/kg

Meas18.Extremity Right Side 0mm LTE B7 Ch21350

Date: 2025/5/9

Communication System Band: Band 7, E-UTRA/FDD (2500.0 - 2570.0 MHz); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.97$ S/m; $\epsilon_r = 38.087$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.59, 7.59, 7.59); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch21350/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.43 W/kg


Ch21350/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.14 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 6.88 W/kg

SAR(1 g) = 3.09 W/kg; SAR(10 g) = 1.38 W/kg

Maximum value of SAR (measured) = 5.45 W/kg

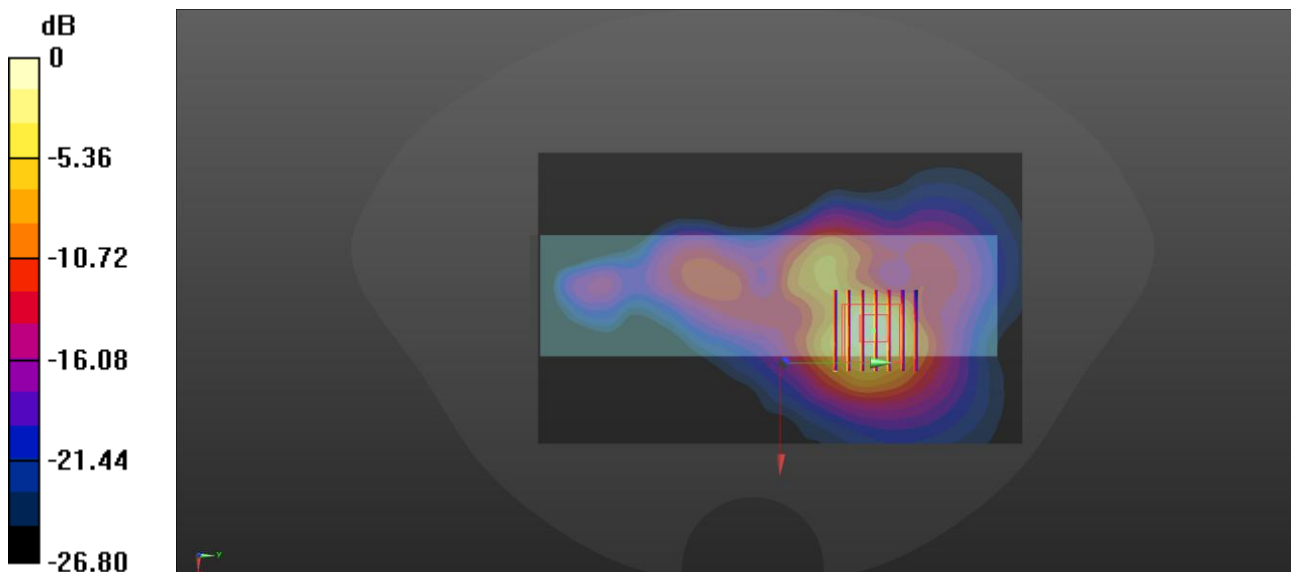

0 dB = 5.45 W/kg

Meas19.Bodyworn&Hotspot Right Side 10mm LTE B12 Ch23095

Date: 2025/5/7

Communication System Band: Band 12, E-UTRA/FDD (694.0 - 721.0 MHz); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.872$ S/m; $\epsilon_r = 41.509$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(10.29, 10.29, 10.29); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch23095/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.305 W/kg


Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.35 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.334 W/kg

SAR(1 g) = 0.217 W/kg; SAR(10 g) = 0.137 W/kg

Maximum value of SAR (measured) = 0.294 W/kg

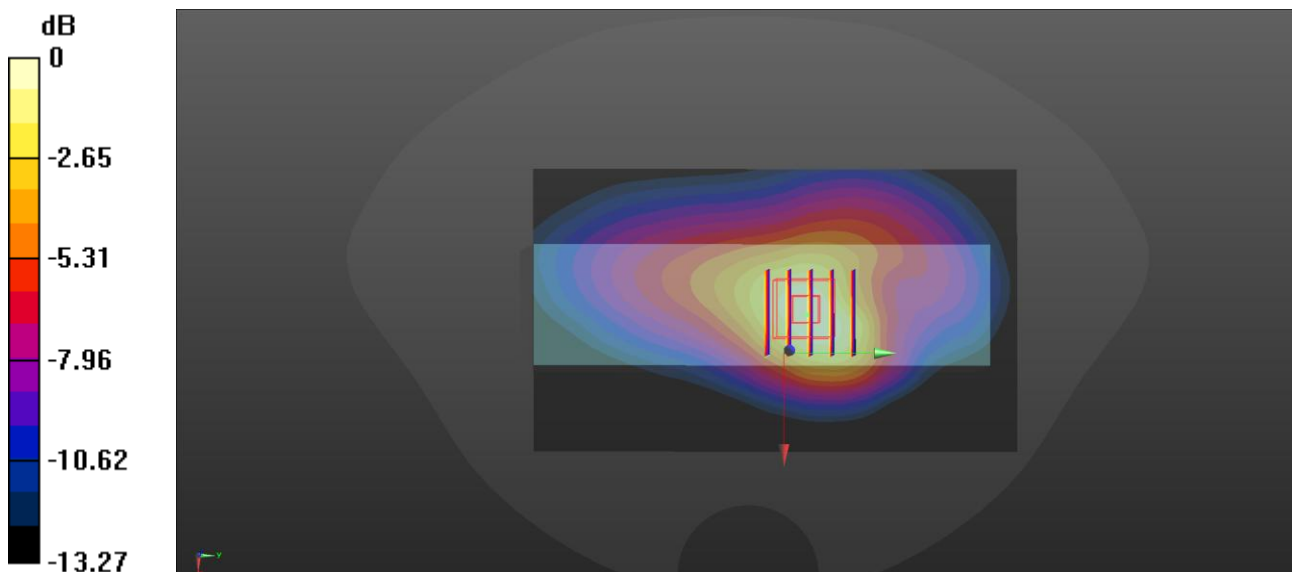

0 dB = 0.294 W/kg

Meas20.Extremity Right Side 0mm LTE B12 Ch23130

Date: 2025/5/7

Communication System Band: Band 12, E-UTRA/FDD (694.0 - 721.0 MHz); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711$ MHz; $\sigma = 0.872$ S/m; $\epsilon_r = 41.503$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(10.29, 10.29, 10.29); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch23130/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.00 W/kg


Ch23130/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.54 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 2.34 W/kg

SAR(1 g) = 1.22 W/kg; SAR(10 g) = 0.694 W/kg

Maximum value of SAR (measured) = 1.78 W/kg

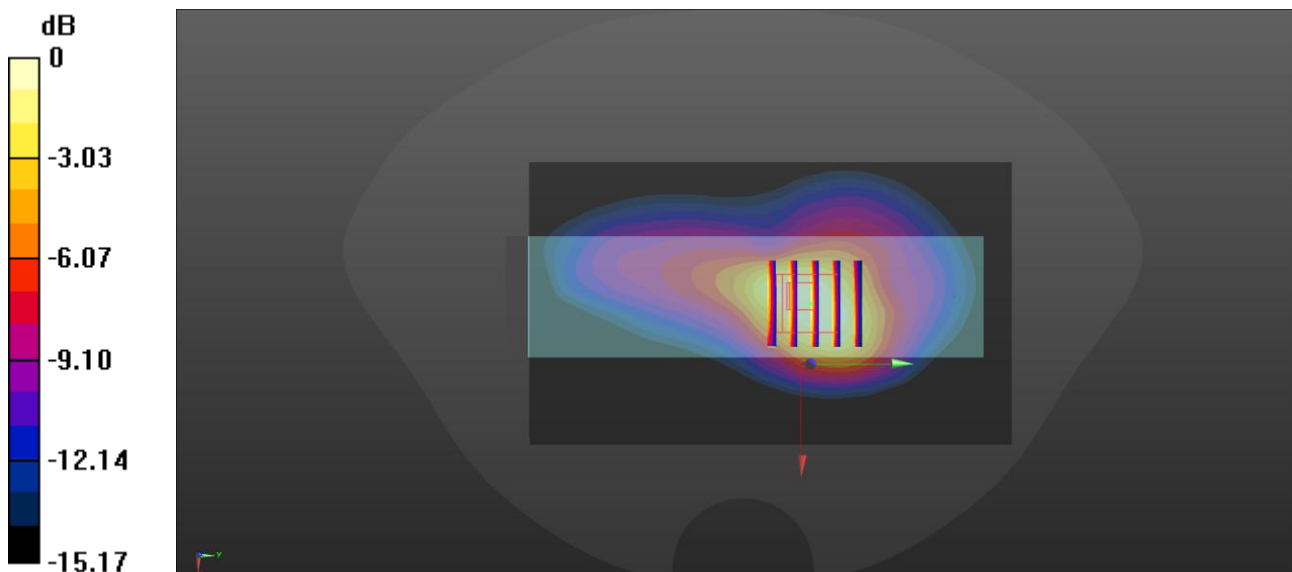

0 dB = 1.78 W/kg

Meas21.Bodyworn&Hotspot Right Side 10mm LTE B38 Ch38000

Date: 2025/5/9

Communication System Band: Band 38, E-UTRA/TDD (2570.0 - 2620.0 MHz); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 2.003$ S/m; $\epsilon_r = 38.01$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.59, 7.59, 7.59); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch38000/Area Scan (91x151x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.726 W/kg


Ch38000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.696 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.872 W/kg

SAR(1 g) = 0.453 W/kg; SAR(10 g) = 0.231 W/kg

Maximum value of SAR (measured) = 0.715 W/kg

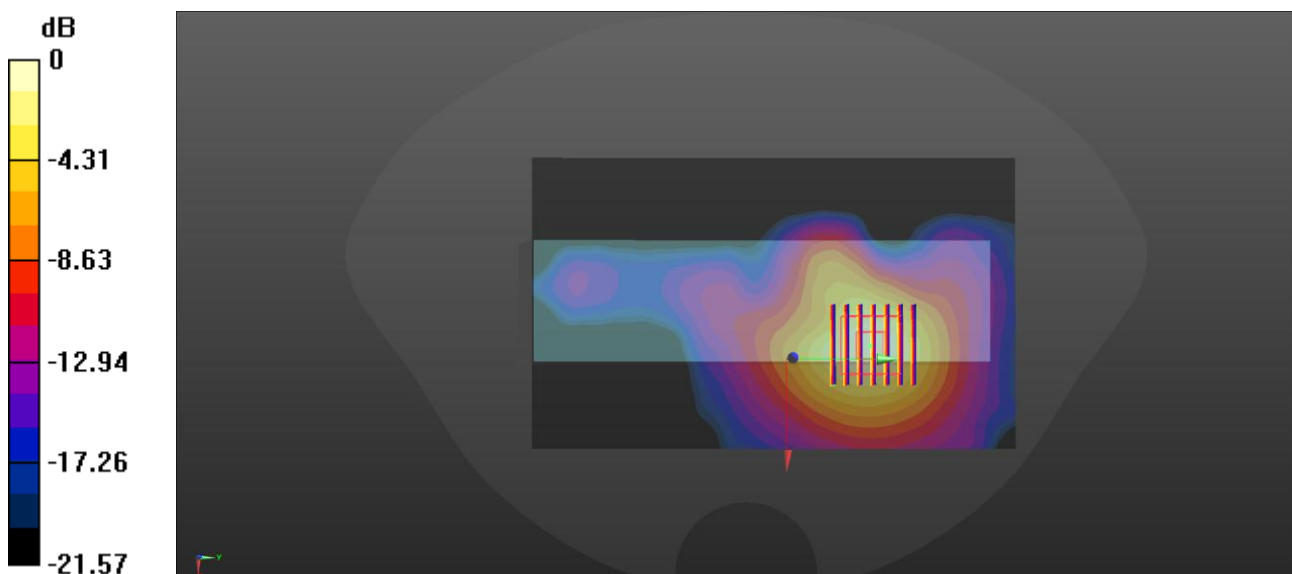

0 dB = 0.715 W/kg

Meas22.Extremity Right Side 0mm LTE B38 Ch38150

Date: 2025/5/9

Communication System Band: Band 38, E-UTRA/TDD (2570.0 - 2620.0 MHz); Frequency: 2610 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2610$ MHz; $\sigma = 2.02$ S/m; $\epsilon_r = 37.993$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.59, 7.59, 7.59); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch38150/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 3.80 W/kg


Ch38150/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.00 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 4.22 W/kg

SAR(1 g) = 2 W/kg; SAR(10 g) = 0.897 W/kg

Maximum value of SAR (measured) = 3.37 W/kg

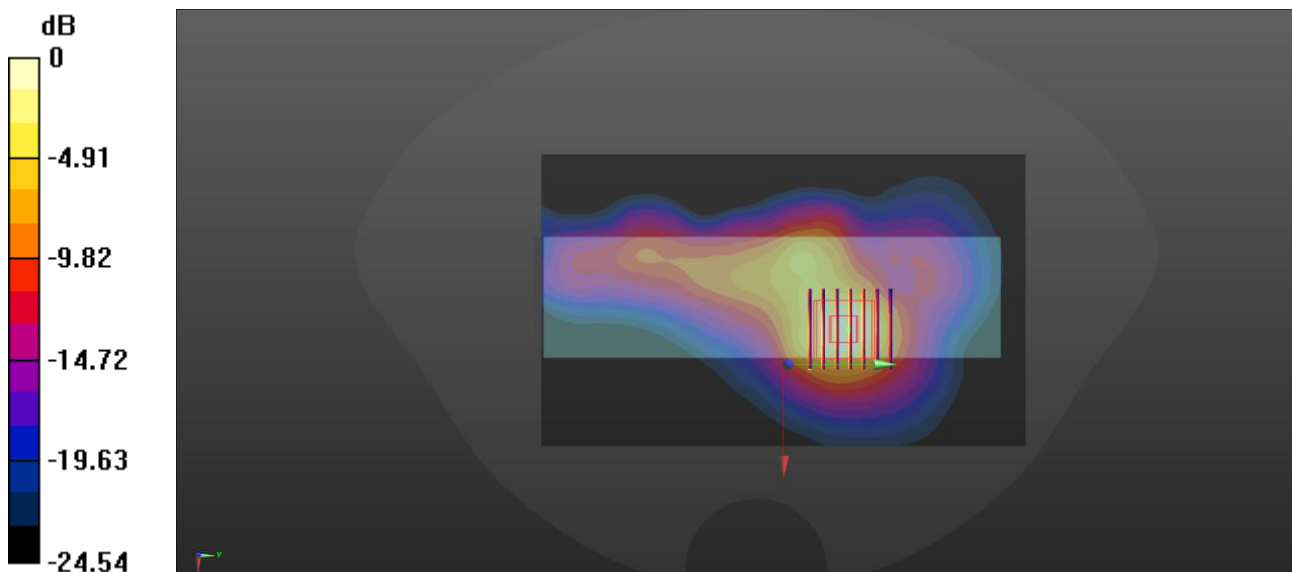

0 dB = 3.37 W/kg

Meas23.Bodyworn&Hotspot Right Side 10mm LTE B41 Ch40640

Date: 2025/5/8

Communication System Band: Band 41, E-UTRA/TDD (2496.0 - 2690.0 MHz); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 2.003$ S/m; $\epsilon_r = 38.01$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.59, 7.59, 7.59); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch40640/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.634 W/kg


Ch40640/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.821 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.600 W/kg

SAR(1 g) = 0.308 W/kg; SAR(10 g) = 0.145 W/kg

Maximum value of SAR (measured) = 0.489 W/kg

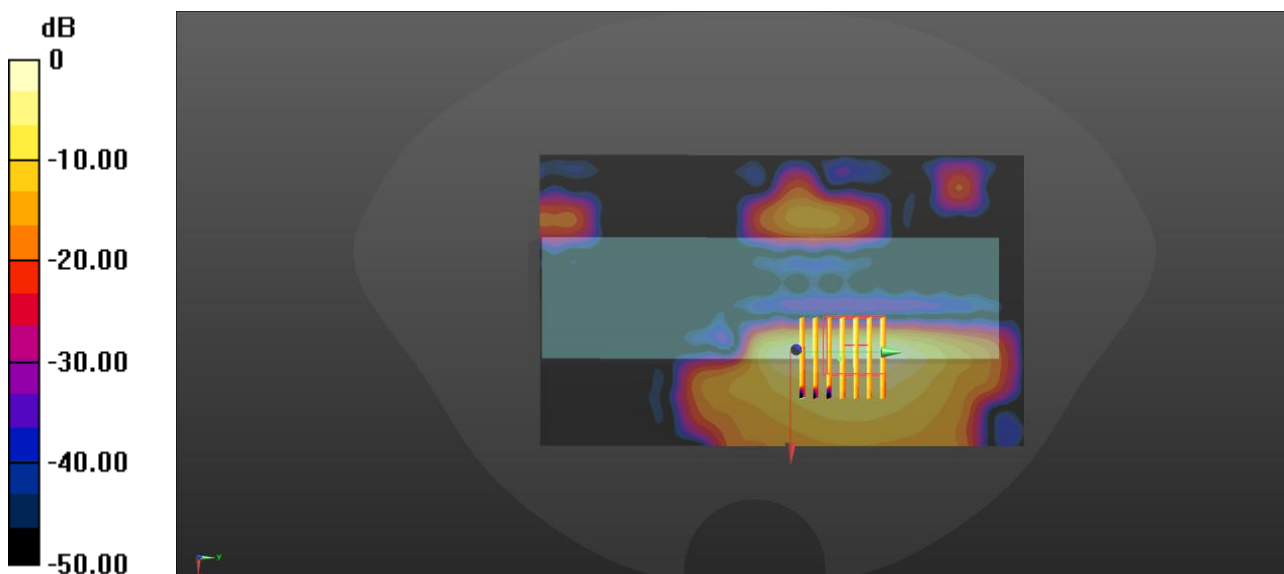

0 dB = 0.489 W/kg

Meas24.Extremity Right Side 0mm LTE B41 Ch40640

Date: 2025/5/8

Communication System Band: Band 41, E-UTRA/TDD (2496.0 - 2690.0 MHz); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 2.003$ S/m; $\epsilon_r = 38.01$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.59, 7.59, 7.59); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch40640/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 2.59 W/kg


Ch40640/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.14 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.86 W/kg

SAR(1 g) = 1.32 W/kg; SAR(10 g) = 0.592 W/kg

Maximum value of SAR (measured) = 2.24 W/kg

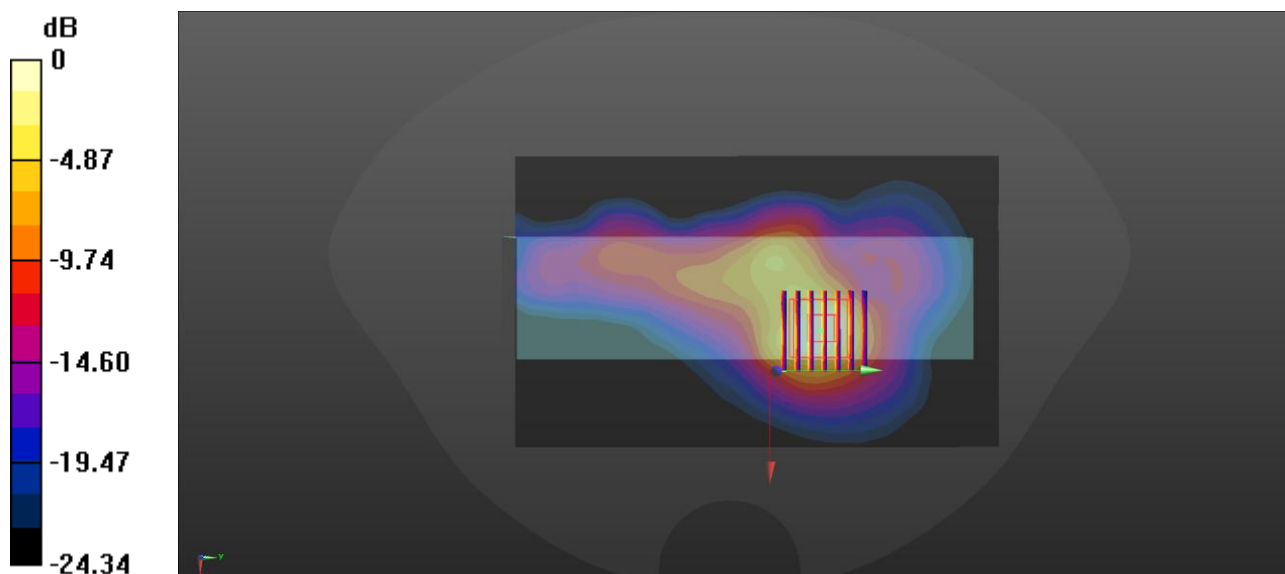

Meas25.Bodyworn&Hotspot Left Side 10mm BT Ch0

Date: 2025/5/8

Communication System Band: BT; Frequency: 2402 MHz; Duty Cycle: 1:1.30

Medium parameters used: $f = 2402$ MHz; $\sigma = 1.812$ S/m; $\epsilon_r = 38.449$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.75, 7.75, 7.75); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch0/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0213 W/kg


Ch0/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.307 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0290 W/kg

SAR(1 g) = 0.015 W/kg; SAR(10 g) = 0.008 W/kg

Maximum value of SAR (measured) = 0.0233 W/kg

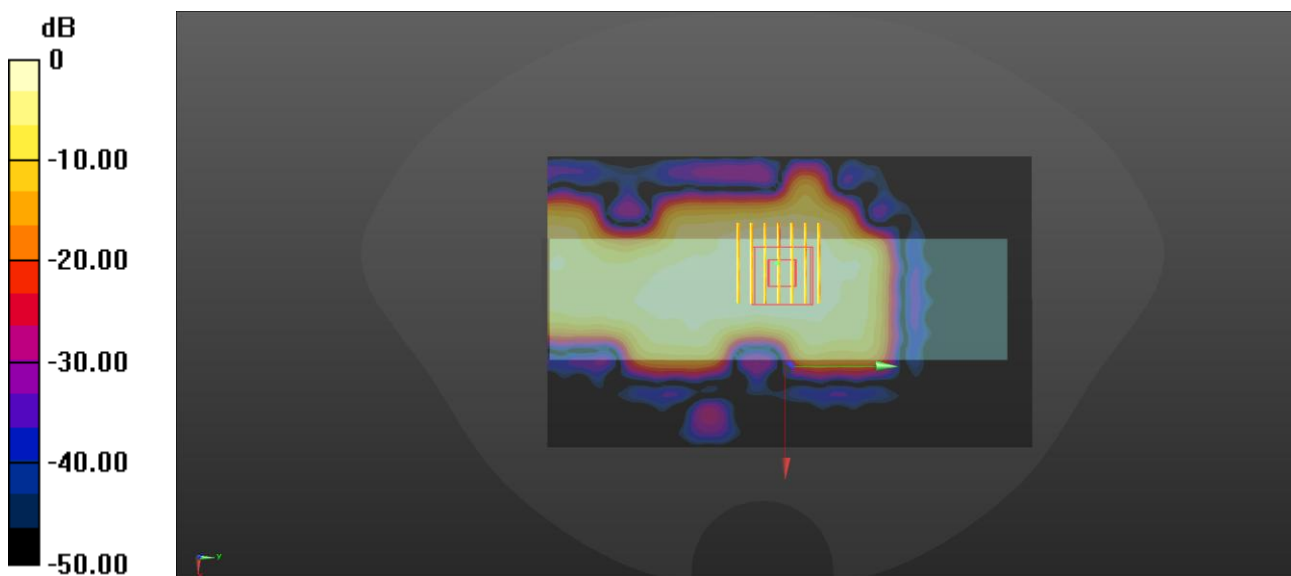

0 dB = 0.0233 W/kg

Meas26.Extremity Left Side 0mm BT Ch0

Date: 2025/5/8

Communication System Band: BT; Frequency: 2402 MHz; Duty Cycle: 1:1.30

Medium parameters used: $f = 2402$ MHz; $\sigma = 1.812$ S/m; $\epsilon_r = 38.449$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.75, 7.75, 7.75); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch0/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0973 W/kg


Ch0/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.178 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.119 W/kg

SAR(1 g) = 0.060 W/kg; SAR(10 g) = 0.030 W/kg

Maximum value of SAR (measured) = 0.0938 W/kg

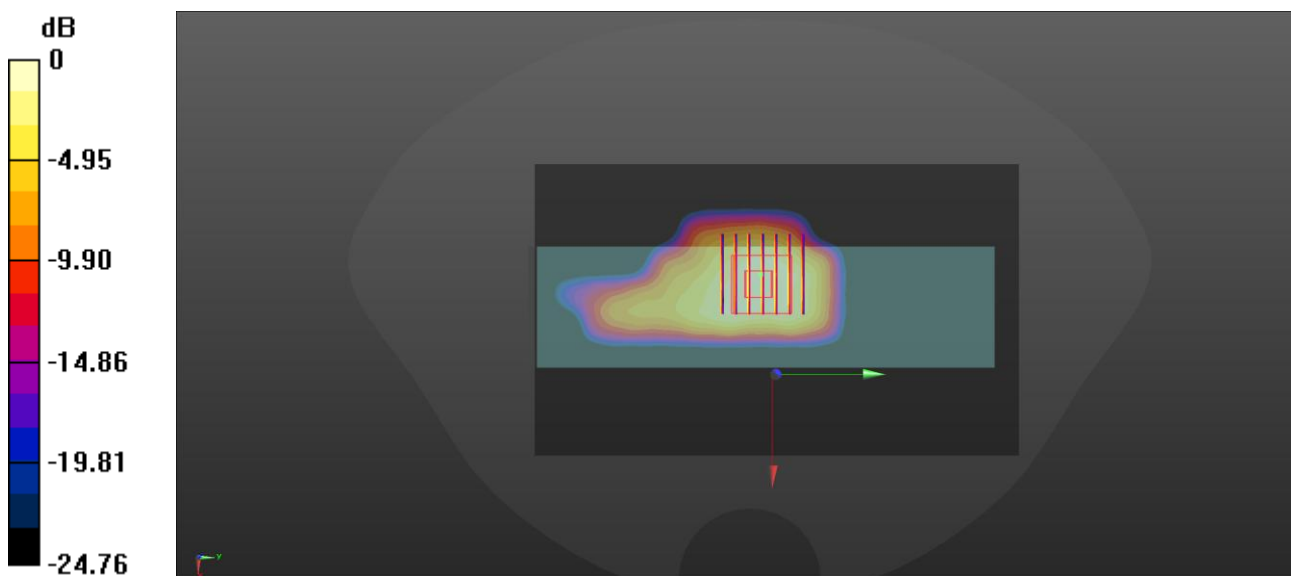

0 dB = 0.0938 W/kg

Meas27.Bodyworn&Hotspot Left Side 10mm WLAN 2.4 Ch6

Date: 2025/5/8

Communication System Band: WLAN(b); Frequency: 2437 MHz;Duty Cycle: 1:1.01

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.838$ S/m; $\epsilon_r = 38.375$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.6°C Liquid Temperature:21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.75, 7.75, 7.75); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch6/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.159 W/kg


Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.233 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.191 W/kg

SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.056 W/kg

Maximum value of SAR (measured) = 0.159 W/kg

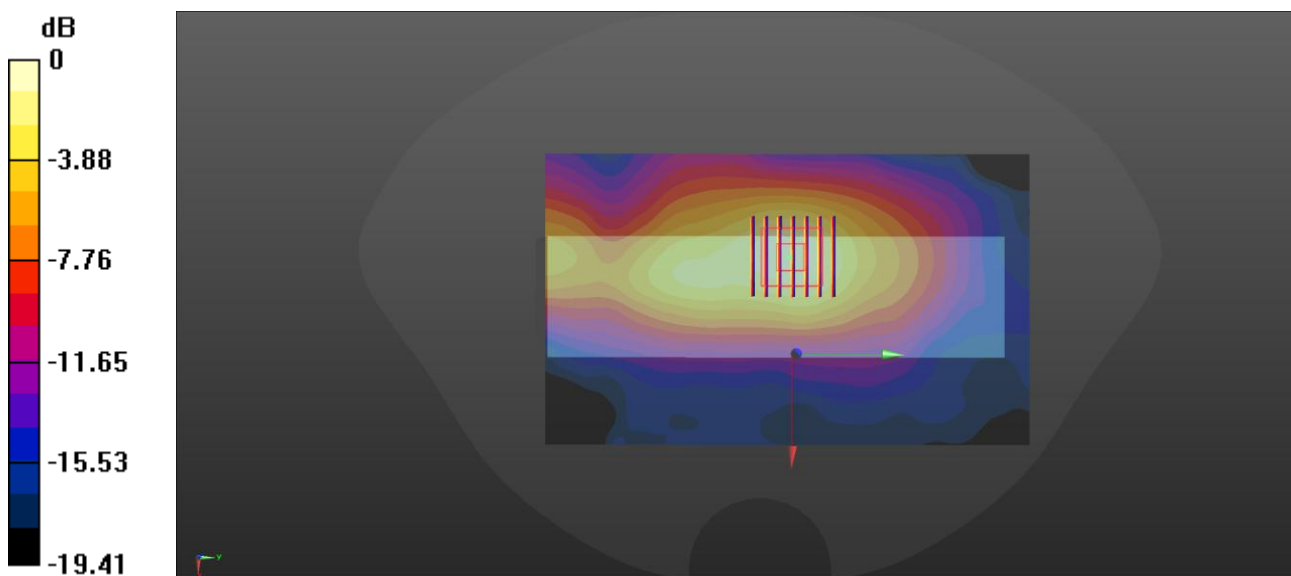

0 dB = 0.159 W/kg

Meas28.Extremity Left Side 0mm WLAN 2.4 Ch6

Date: 2025/5/8

Communication System Band: WLAN(b); Frequency: 2437 MHz; Duty Cycle: 1:1.01

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.838$ S/m; $\epsilon_r = 38.375$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.75, 7.75, 7.75); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch6/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.804 W/kg


Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.00 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.973 W/kg

SAR(1 g) = 0.490 W/kg; SAR(10 g) = 0.244 W/kg

Maximum value of SAR (measured) = 0.782 W/kg

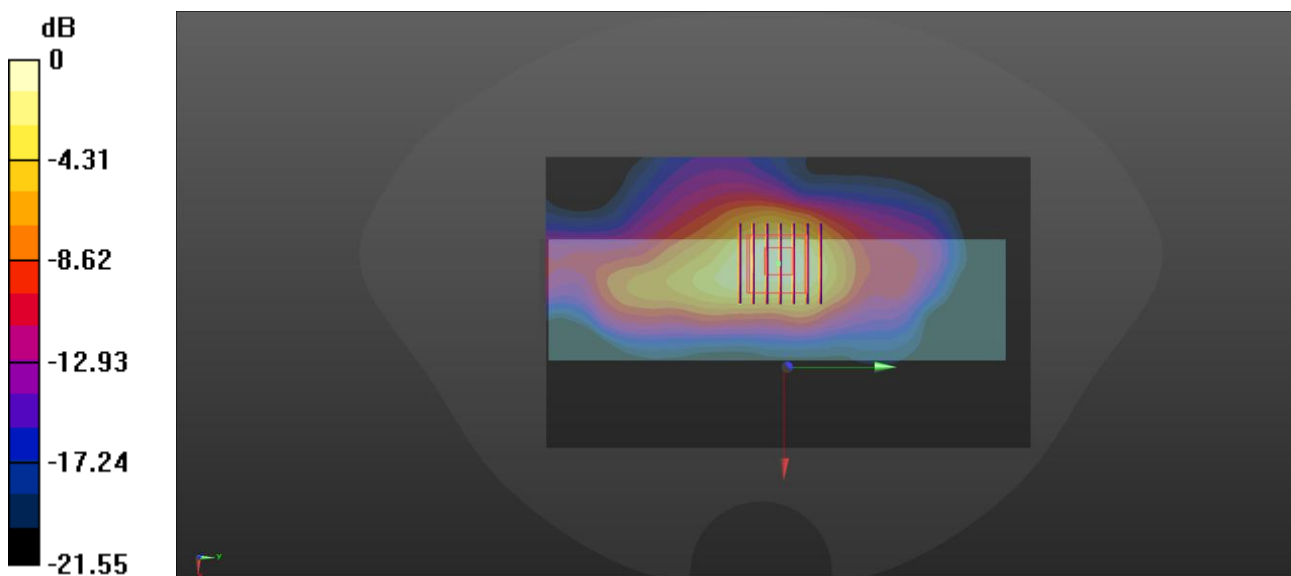

0 dB = 0.782 W/kg

Meas29.Bodyworn&Hotspot Back Side 10mm WLAN 5.2G Ch36

Date: 2025/5/10

Communication System Band: WLAN(a); Frequency: 5180 MHz; Duty Cycle: 1:1.04

Medium parameters used: $f = 5180$ MHz; $\sigma = 4.713$ S/m; $\epsilon_r = 34.87$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.74, 5.74, 5.74); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch36/Area Scan (111x191x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.351 W/kg


Ch36/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 2.666 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.522 W/kg

SAR(1 g) = 0.160 W/kg; SAR(10 g) = 0.069 W/kg

Maximum value of SAR (measured) = 0.333 W/kg

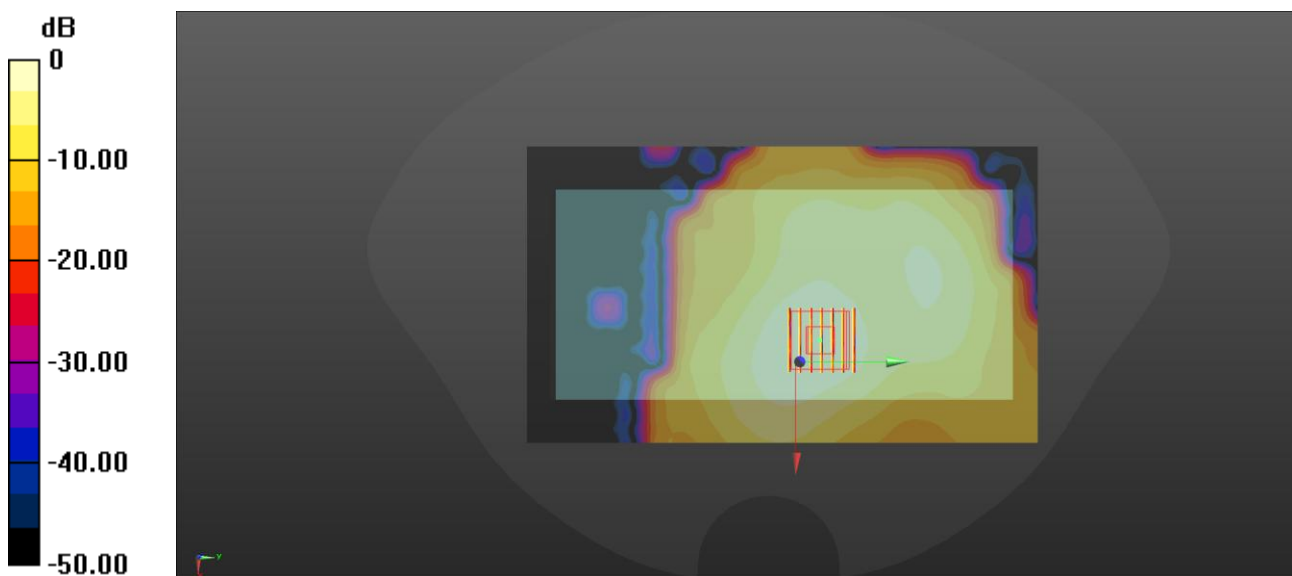

0 dB = 0.333 W/kg

Meas30.Extremity Left Side 0mm WLAN 5.2G Ch36

Date: 2025/5/10

Communication System Band: WLAN(a); Frequency: 5180 MHz; Duty Cycle: 1:1.04

Medium parameters used: $f = 5180$ MHz; $\sigma = 4.713$ S/m; $\epsilon_r = 34.87$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.74, 5.74, 5.74); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch36/Area Scan (101x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.69 W/kg


Ch36/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 8.842 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.75 W/kg

SAR(1 g) = 0.731 W/kg; SAR(10 g) = 0.238 W/kg

Maximum value of SAR (measured) = 1.70 W/kg

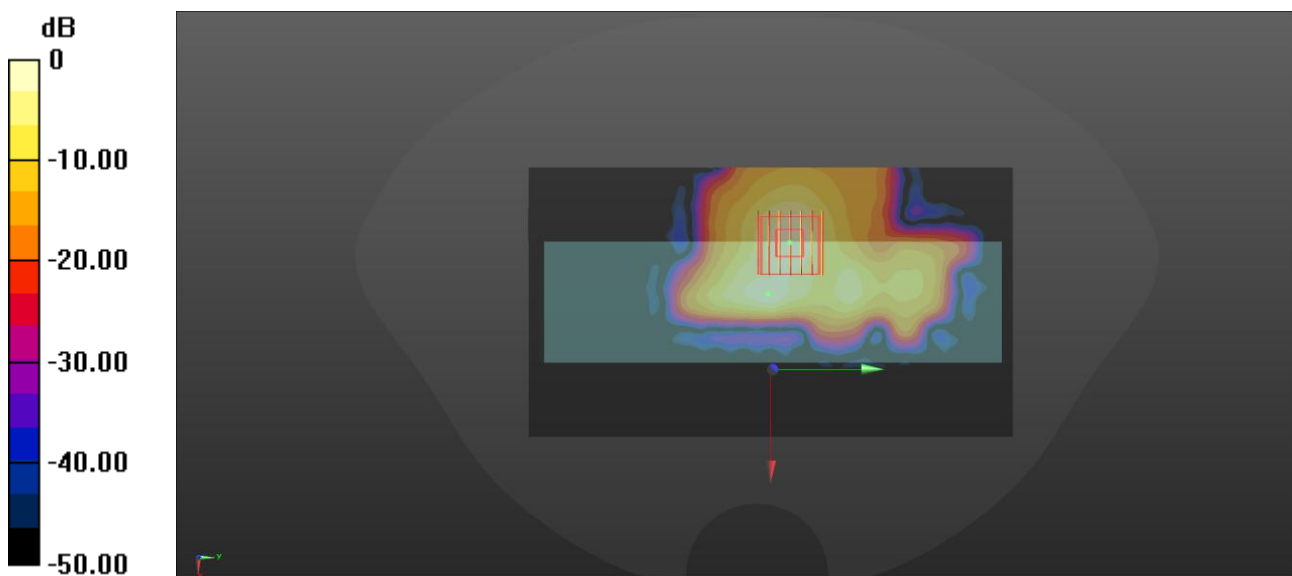

0 dB = 1.70 W/kg

Meas31.Bodyworn&Hotspot Back Side 10mm WLAN 5.3G Ch52

Date: 2025/5/10

Communication System Band: WLAN(a); Frequency: 5260 MHz; Duty Cycle: 1:1.04

Medium parameters used: $f = 5260$ MHz; $\sigma = 4.794$ S/m; $\epsilon_r = 34.837$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.50, 5.50, 5.50); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch52/Area Scan (111x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.333 W/kg


Ch52/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.644 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.531 W/kg

SAR(1 g) = 0.157 W/kg; SAR(10 g) = 0.067 W/kg

Maximum value of SAR (measured) = 0.332 W/kg

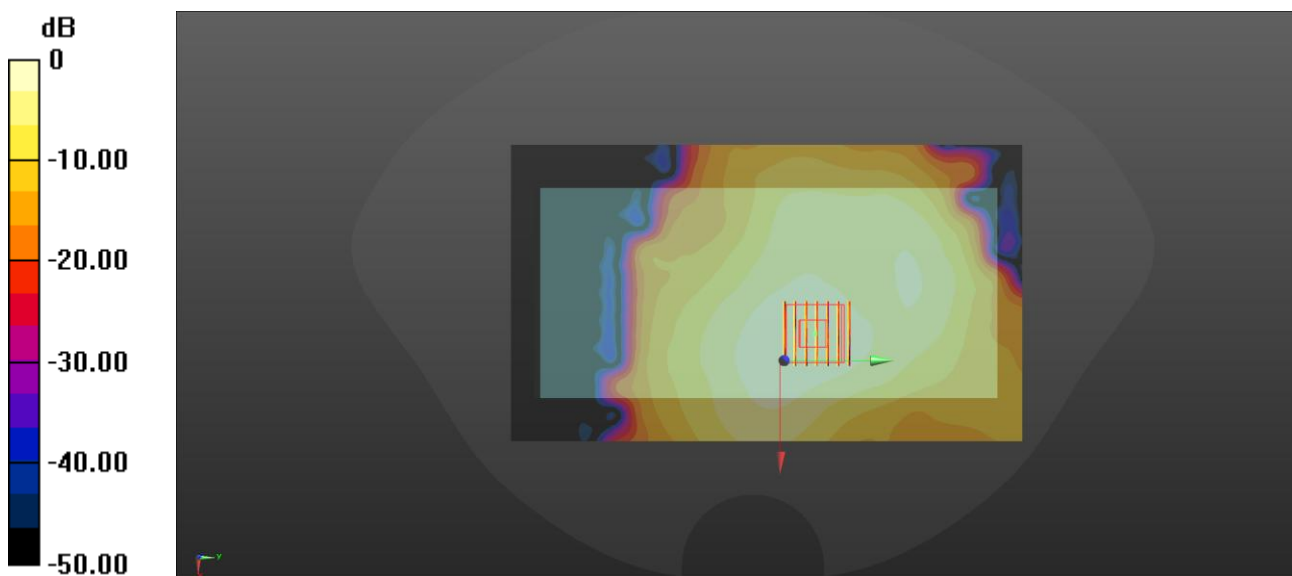

0 dB = 0.332 W/kg

Meas32.Extremity Left Side 0mm WLAN 5.3G Ch52

Date: 2025/5/10

Communication System Band: WLAN(a); Frequency: 5260 MHz; Duty Cycle: 1:1.04

Medium parameters used: $f = 5260$ MHz; $\sigma = 4.794$ S/m; $\epsilon_r = 34.837$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.50, 5.50, 5.50); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch52/Area Scan (101x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.84 W/kg


Ch52/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.003 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 2.94 W/kg

SAR(1 g) = 0.762 W/kg; SAR(10 g) = 0.245 W/kg

Maximum value of SAR (measured) = 1.80 W/kg

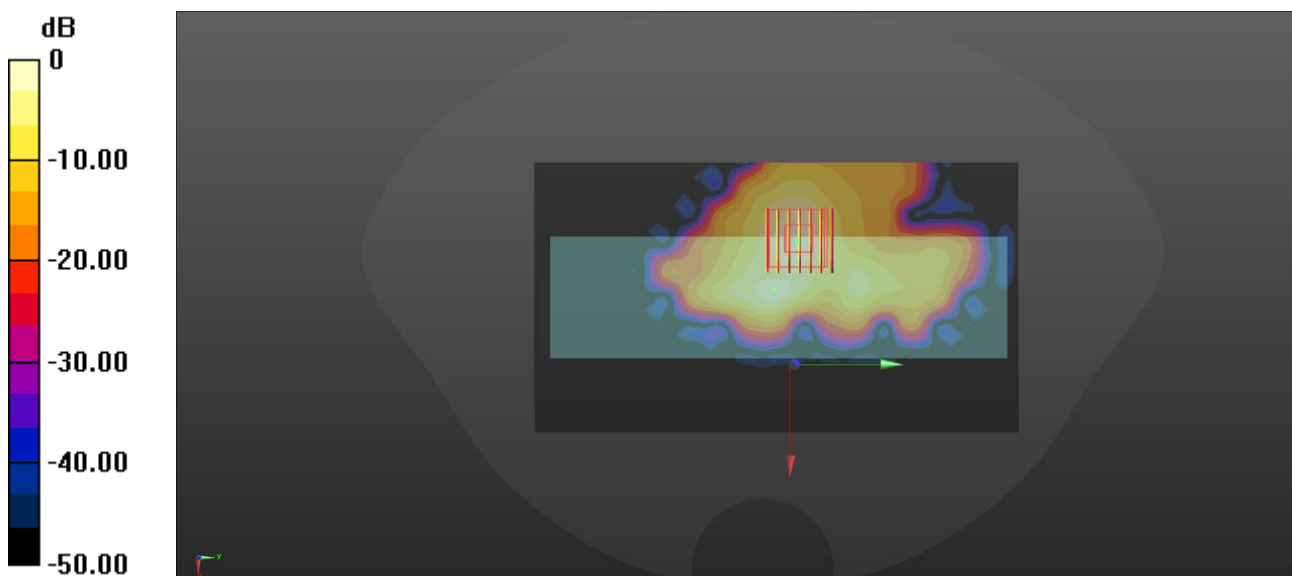

0 dB = 1.80 W/kg

Meas33.Bodyworn&Hotspot Left Side 10mm WLAN 5.6G Ch122

Date: 2025/5/11

Communication System Band: WLAN(ac) 80Mhz; Frequency: 5610 MHz;Duty Cycle: 1:1.14

Medium parameters used: $f = 5610$ MHz; $\sigma = 5.231$ S/m; $\epsilon_r = 34.325$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.5°C Liquid Temperature:21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.00, 5.00, 5.00); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch122/Area Scan (101x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.400 W/kg


Ch122/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.645 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.622 W/kg

SAR(1 g) = 0.164 W/kg; SAR(10 g) = 0.062 W/kg

Maximum value of SAR (measured) = 0.375 W/kg

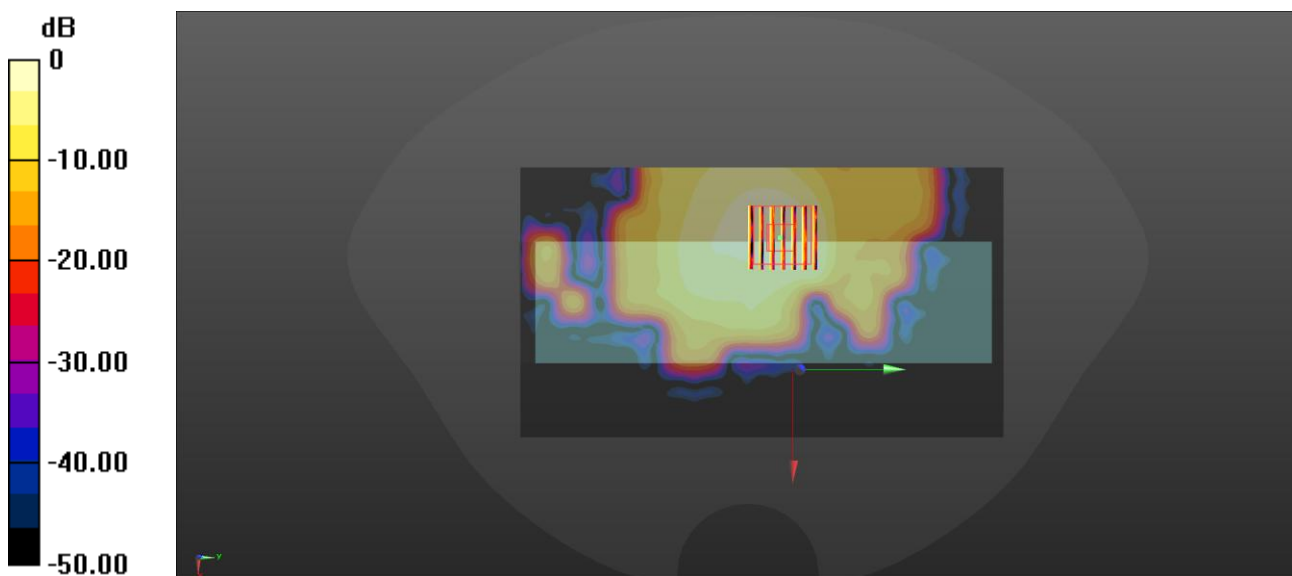

0 dB = 0.375 W/kg

Meas34.Extremity Back Side 0mm WLAN 5.6G Ch122

Date: 2025/5/11

Communication System Band: WLAN(ac) 80Mhz; Frequency: 5610 MHz;Duty Cycle: 1:1.14

Medium parameters used: $f = 5610$ MHz; $\sigma = 5.231$ S/m; $\epsilon_r = 34.325$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.5°C Liquid Temperature:21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.00, 5.00, 5.00); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch122/Area Scan (111x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.51 W/kg


Ch122/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.8250 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 2.42 W/kg

SAR(1 g) = 0.667 W/kg; SAR(10 g) = 0.247 W/kg

Maximum value of SAR (measured) = 1.49 W/kg

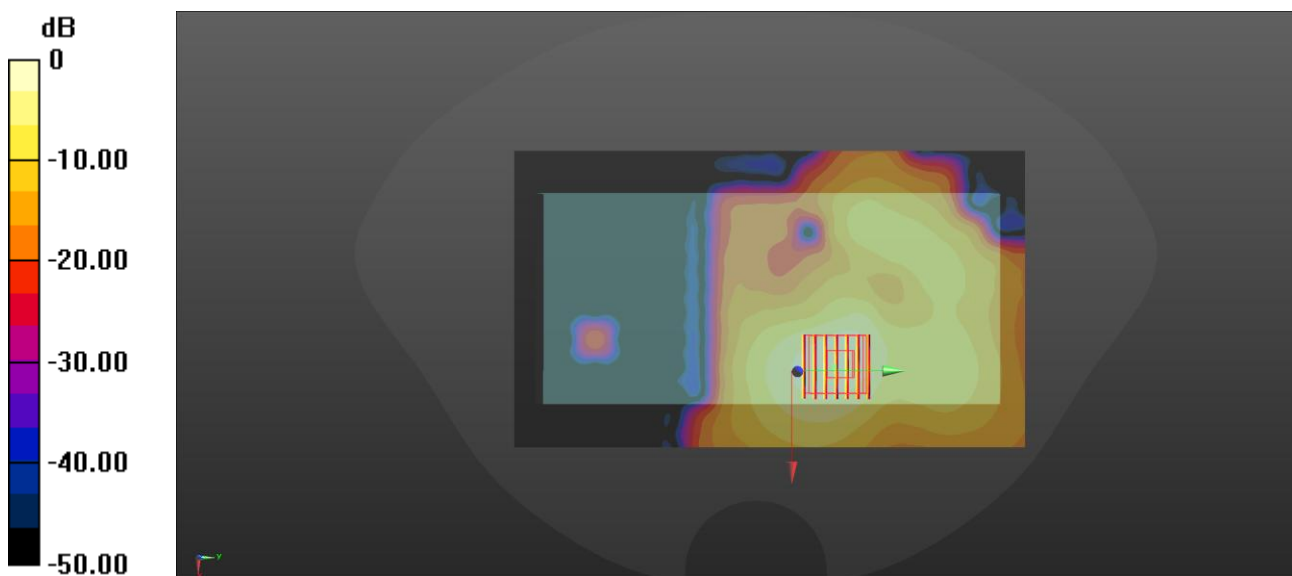

0 dB = 1.49 W/kg

Meas35.Bodyworn&Hotspot Left Side 10mm WLAN 5.8G Ch157

Date: 2025/5/11

Communication System Band: WLAN(a); Frequency: 5785 MHz; Duty Cycle: 1:1.04

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 5.349$ S/m; $\epsilon_r = 34.261$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.04, 5.04, 5.04); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch157/Area Scan (101x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.559 W/kg


Ch157/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.697 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.923 W/kg

SAR(1 g) = 0.231 W/kg; SAR(10 g) = 0.088 W/kg

Maximum value of SAR (measured) = 0.534 W/kg

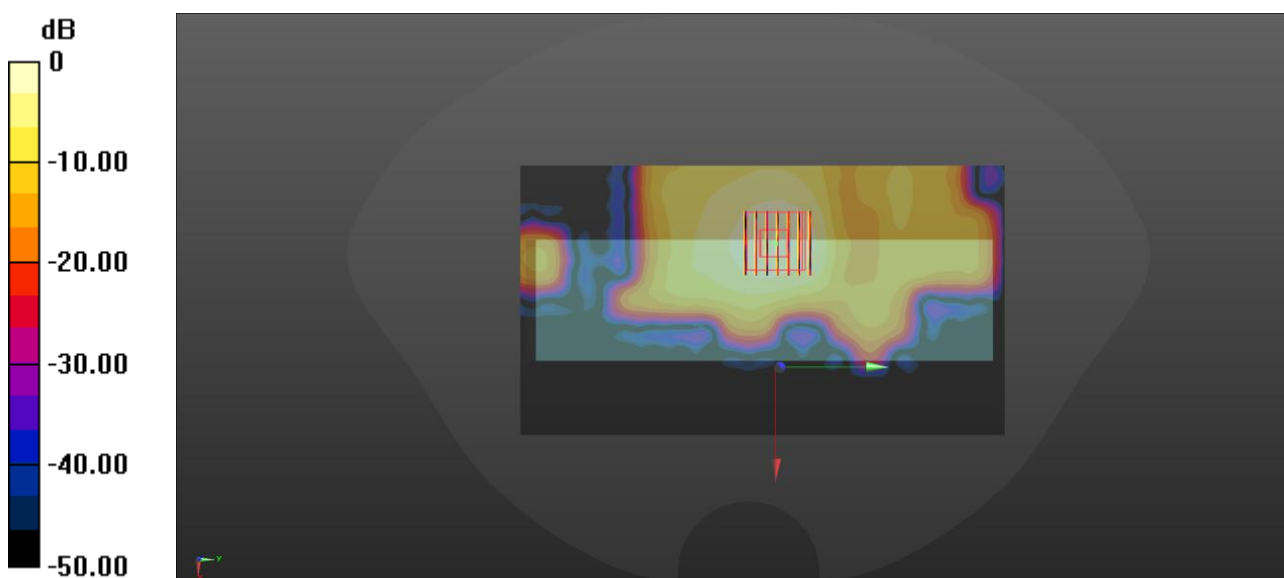

0 dB = 0.534 W/kg

Meas36.Extremity Left Side 0mm WLAN 5.8G Ch157

Date: 2025/5/11

Communication System Band: WLAN(a); Frequency: 5785 MHz; Duty Cycle: 1:1.04

Medium parameters used: $f = 5785$ MHz; $\sigma = 5.349$ S/m; $\epsilon_r = 34.261$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.04, 5.04, 5.04); Calibrated: 2024/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2025/1/20
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch157/Area Scan (101x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.13 W/kg


Ch157/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.753 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 4.22 W/kg

SAR(1 g) = 0.888 W/kg; SAR(10 g) = 0.261 W/kg

Maximum value of SAR (measured) = 2.39 W/kg

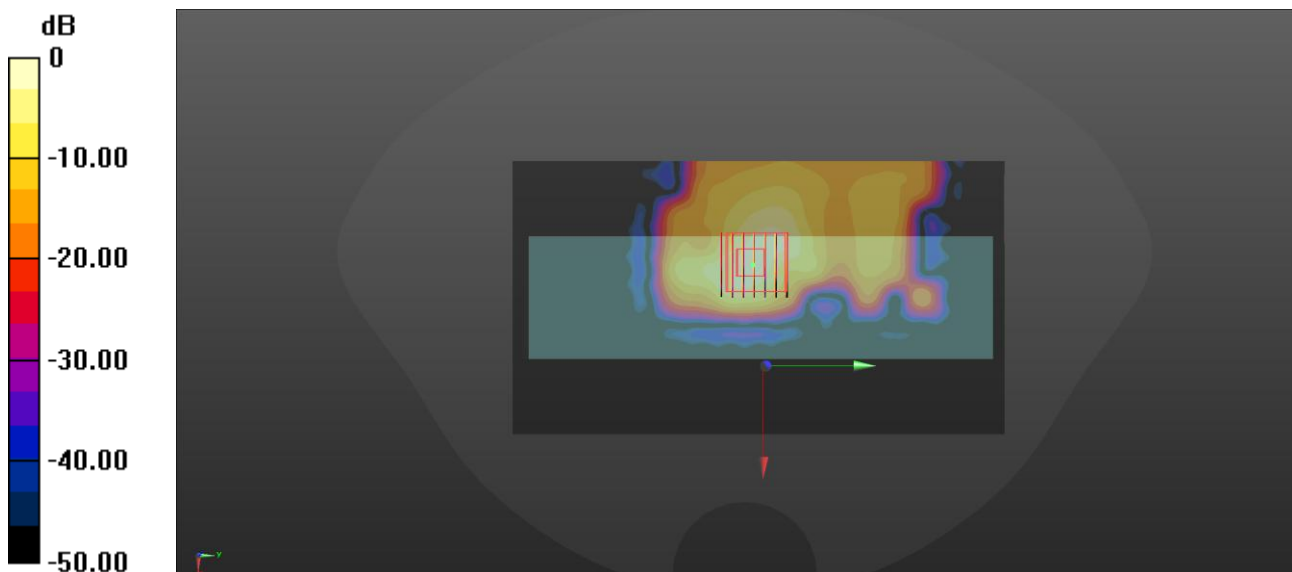

0 dB = 2.39 W/kg