

Test Plot*#: LTE Band 66_Body Left_50%RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=1745$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 40.601$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.125 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.312 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 0.212 W/kg

SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.075 W/kg

Maximum value of SAR (measured) = 0.139 W/kg

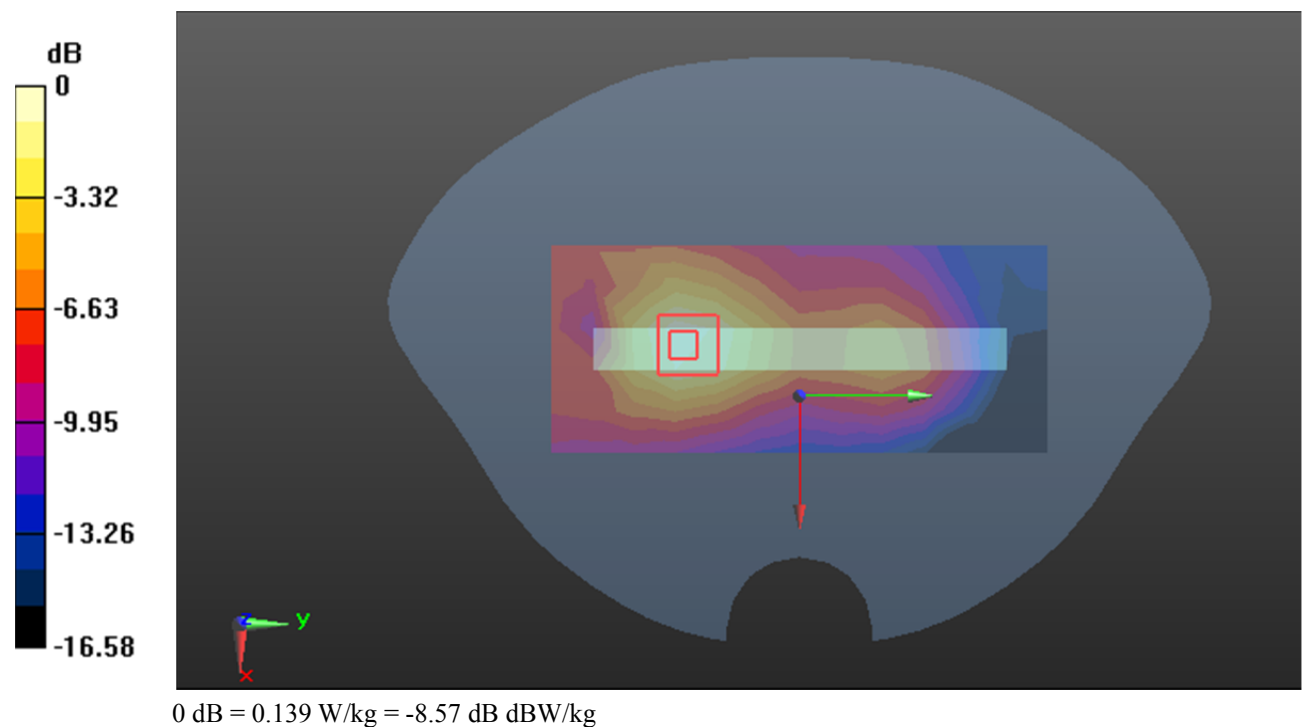

Test Plot*#: LTE Band 66_Body Right_1RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=1745$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 40.601$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.110 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.205 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.177 W/kg

SAR(1 g) = 0.111 W/kg; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.120 W/kg

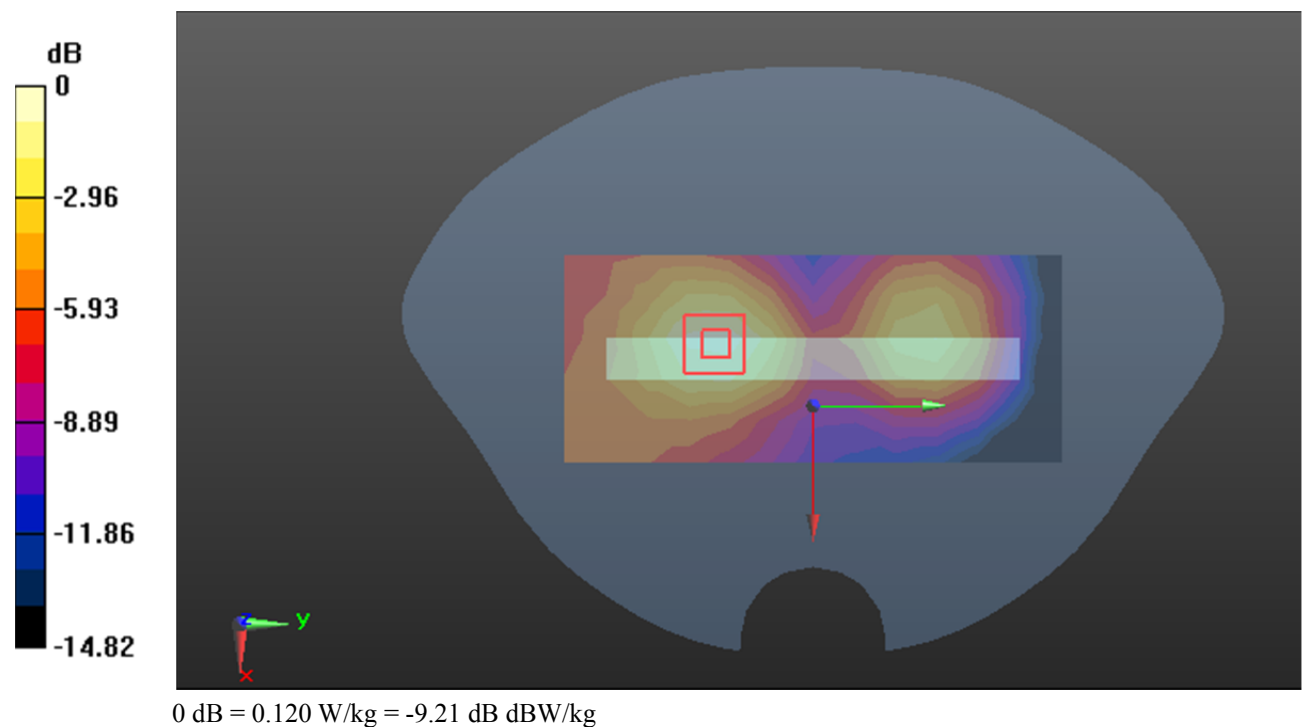

Test Plot*#: LTE Band 66_Body Right_50%RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=1745$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 40.601$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0925 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.241 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.139 W/kg

SAR(1 g) = 0.087 W/kg; SAR(10 g) = 0.053 W/kg

Maximum value of SAR (measured) = 0.0945 W/kg

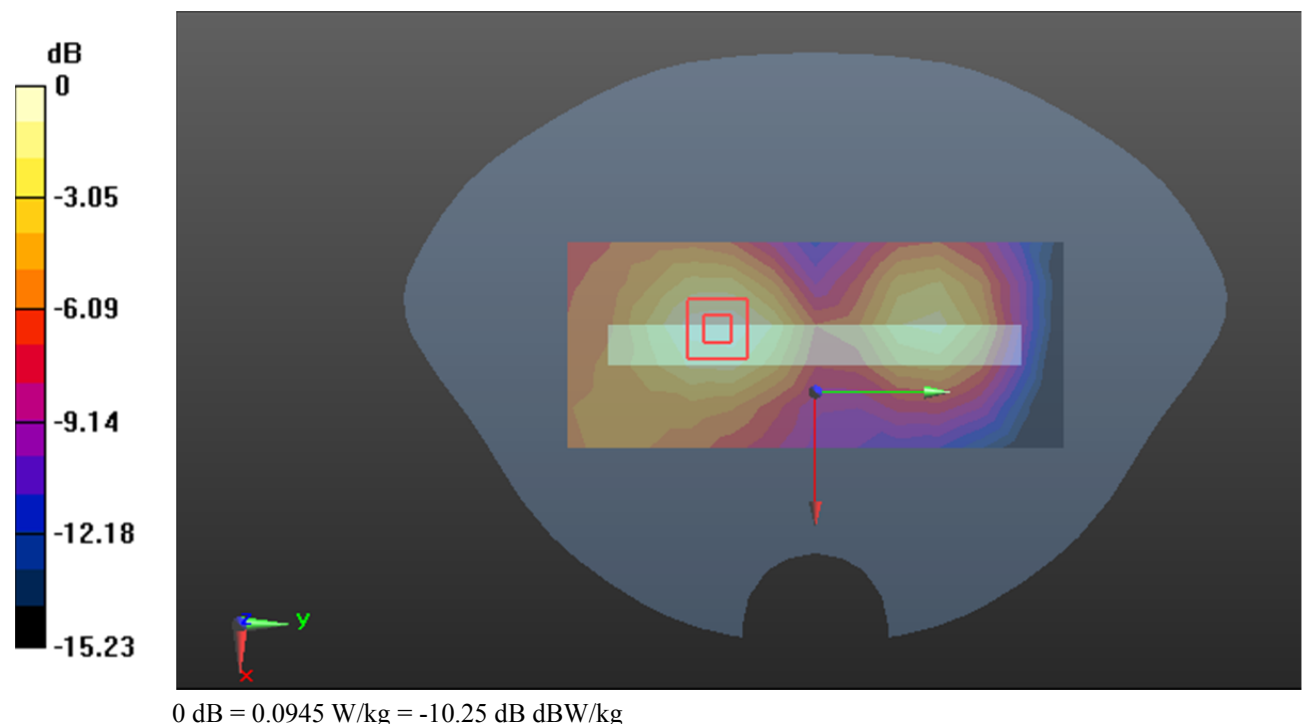

Test Plot*#: LTE Band 66_Body Bottom_1RB_Low**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1
Medium parameters used: $f=1720$ MHz; $\sigma = 1.319$ S/m; $\epsilon_r = 40.983$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1720 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.666 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.15 V/m; Power Drift = -00 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.674 W/kg; SAR(10 g) = 0.378 W/kg

Maximum value of SAR (measured) = 0.750 W/kg

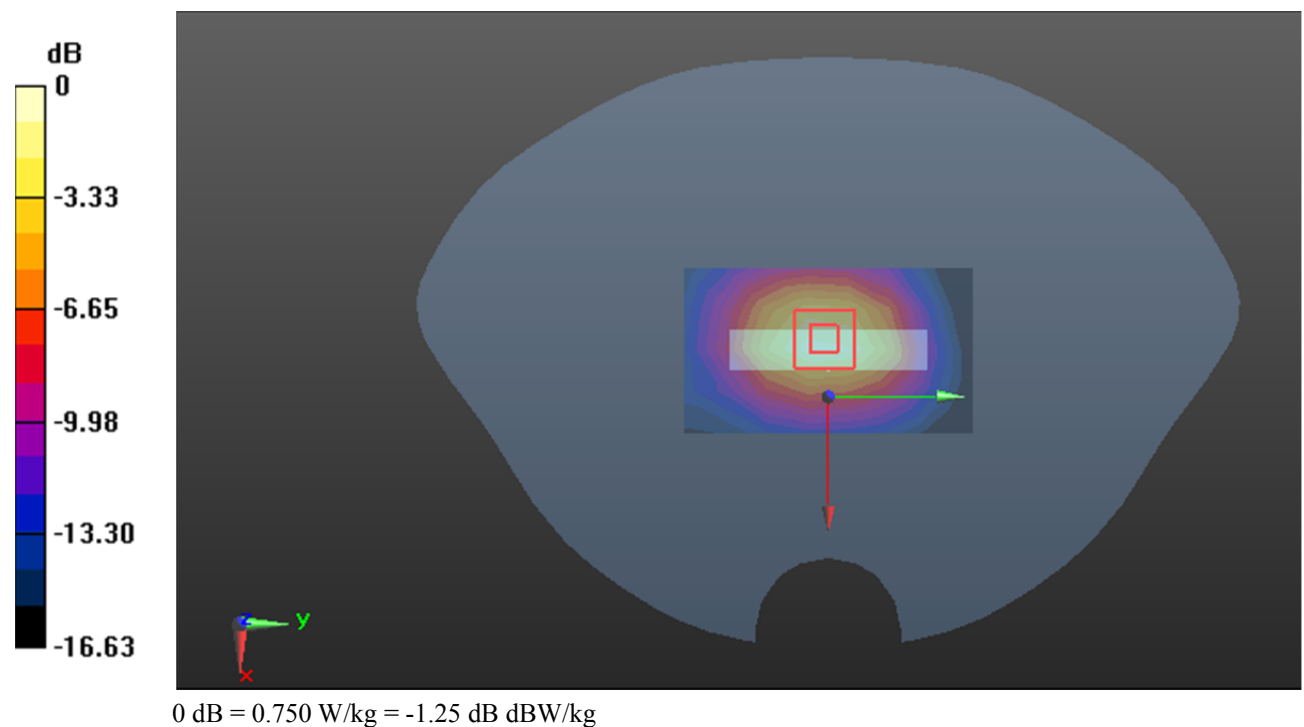

Test Plot*#: LTE Band 66_Body Bottom_1RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=1745$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 40.601$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.796 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.43 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.792 W/kg; SAR(10 g) = 0.444 W/kg

Maximum value of SAR (measured) = 0.875 W/kg

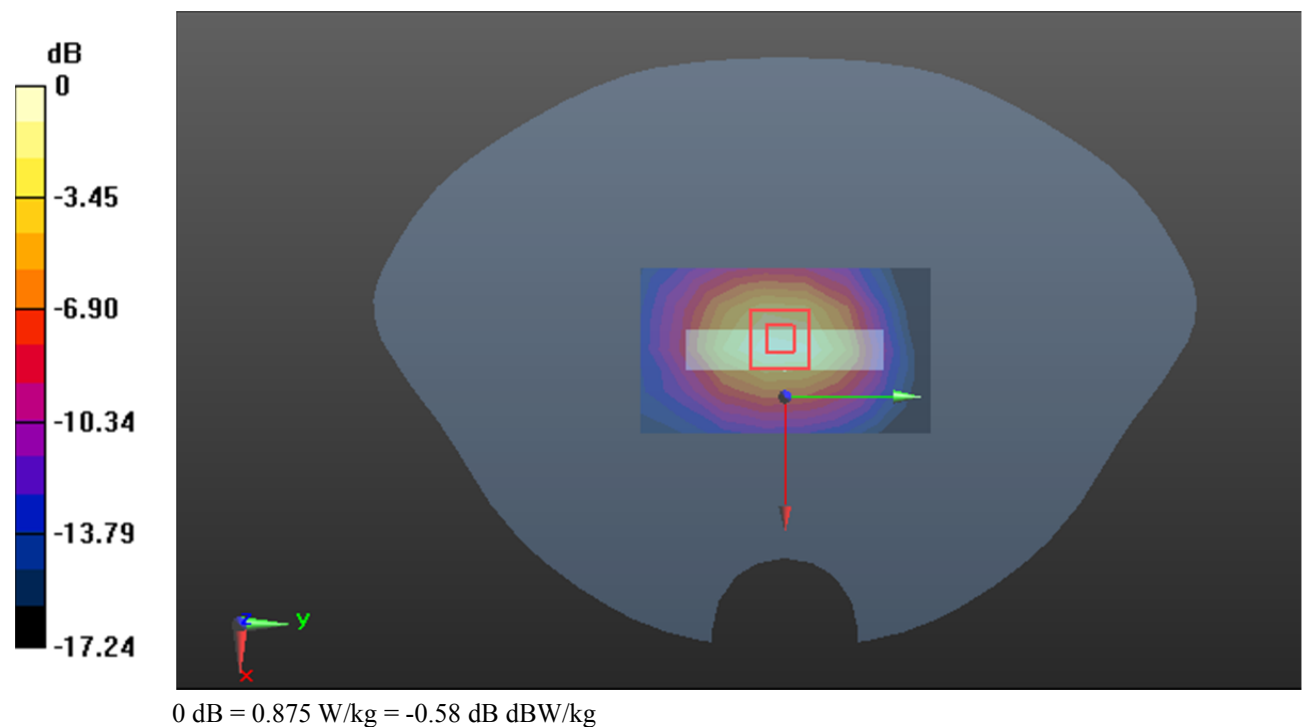

Test Plot*#: LTE Band 66_Body Bottom_1RB_High**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 1770 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=1770$ MHz; $\sigma = 1.379$ S/m; $\epsilon_r = 40.300$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1770 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.885 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.63 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.905 W/kg; SAR(10 g) = 0.507 W/kg

Maximum value of SAR (measured) = 1.00 W/kg

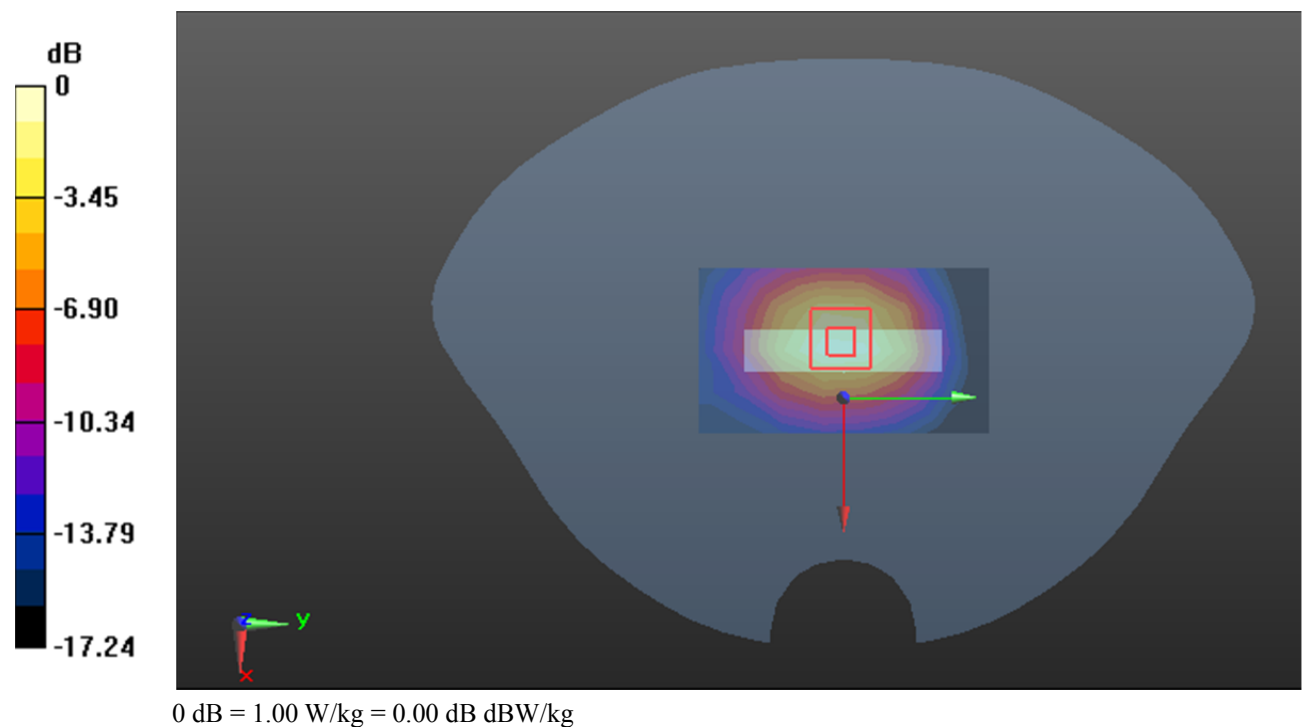

Test Plot*#: LTE Band 66_Body Bottom_50%RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=1745$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 40.601$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.654 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.75 V/m; Power Drift = 0 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.654 W/kg; SAR(10 g) = 0.366 W/kg

Maximum value of SAR (measured) = 0.728 W/kg

