

Test Plot*#: LTE Band 26_Body Left_1RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f=831.5$ MHz; $\sigma=0.937$ S/m; $\epsilon_r=41.532$; $\rho=1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @831.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0194 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.021 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0300 W/kg

SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.012 W/kg

Maximum value of SAR (measured) = 0.0213 W/kg

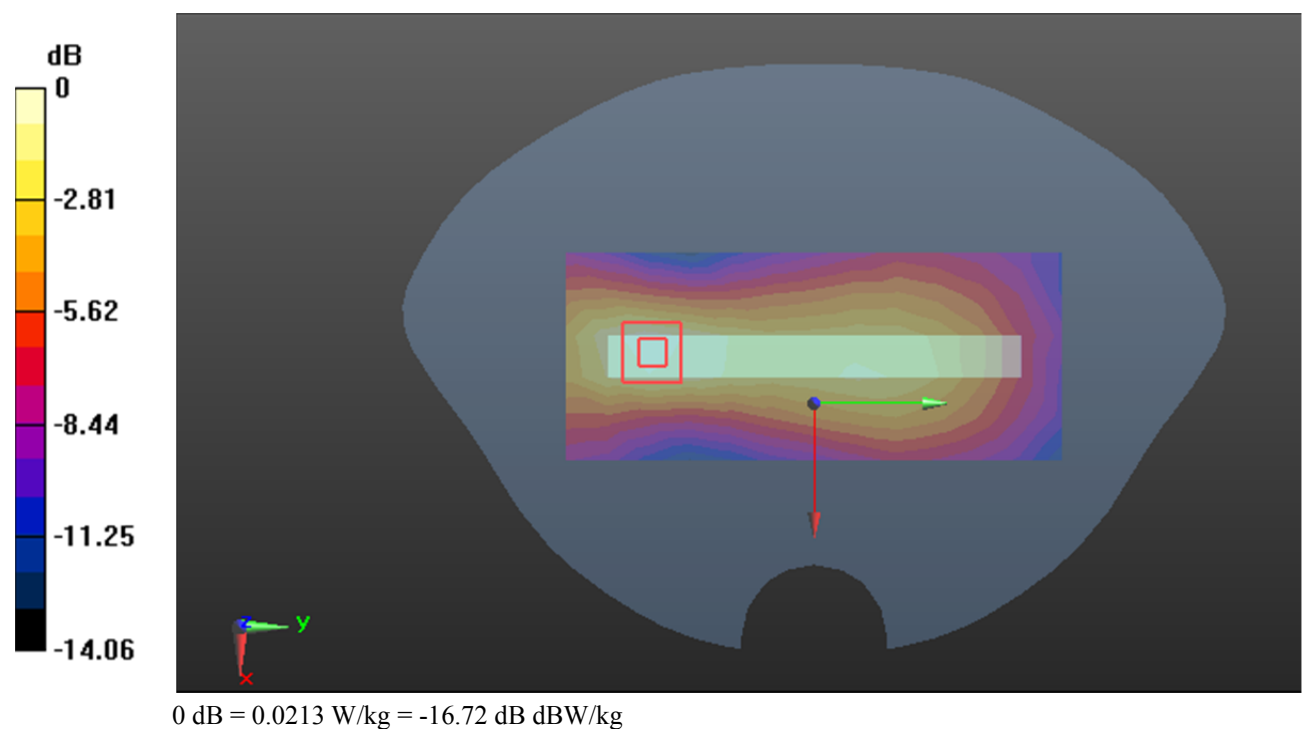

Test Plot*#: LTE Band 26_Body Left_50%RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f=831.5$ MHz; $\sigma=0.937$ S/m; $\epsilon_r=41.532$; $\rho=1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @831.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0156 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.525 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.0250 W/kg

SAR(1 g) = 0.016 W/kg; SAR(10 g) = 0.010 W/kg

Maximum value of SAR (measured) = 0.0173 W/kg

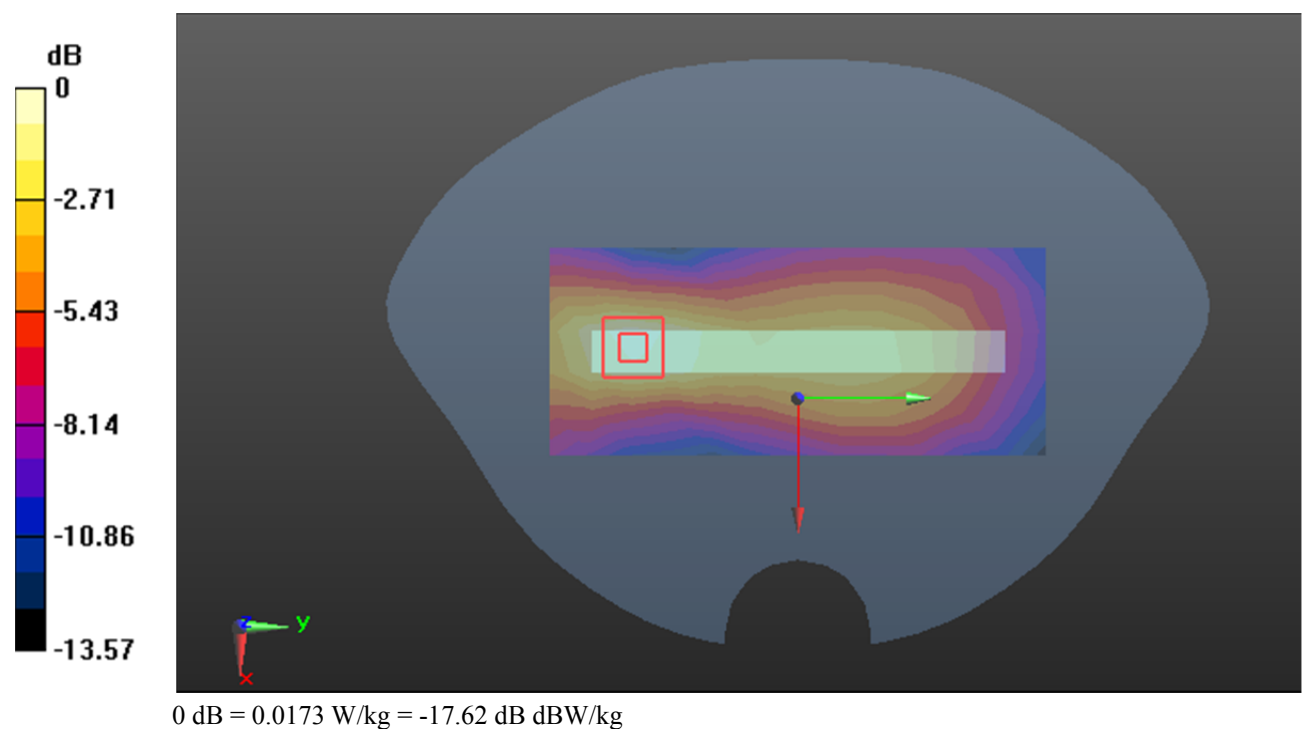

Test Plot*#: LTE Band 26_Body Right_1RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f=831.5$ MHz; $\sigma=0.937$ S/m; $\epsilon_r=41.532$; $\rho=1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @831.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.00970 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.312 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.0130 W/kg

SAR(1 g) = 0.00918 W/kg; SAR(10 g) = 0.00622 W/kg

Maximum value of SAR (measured) = 0.00980 W/kg

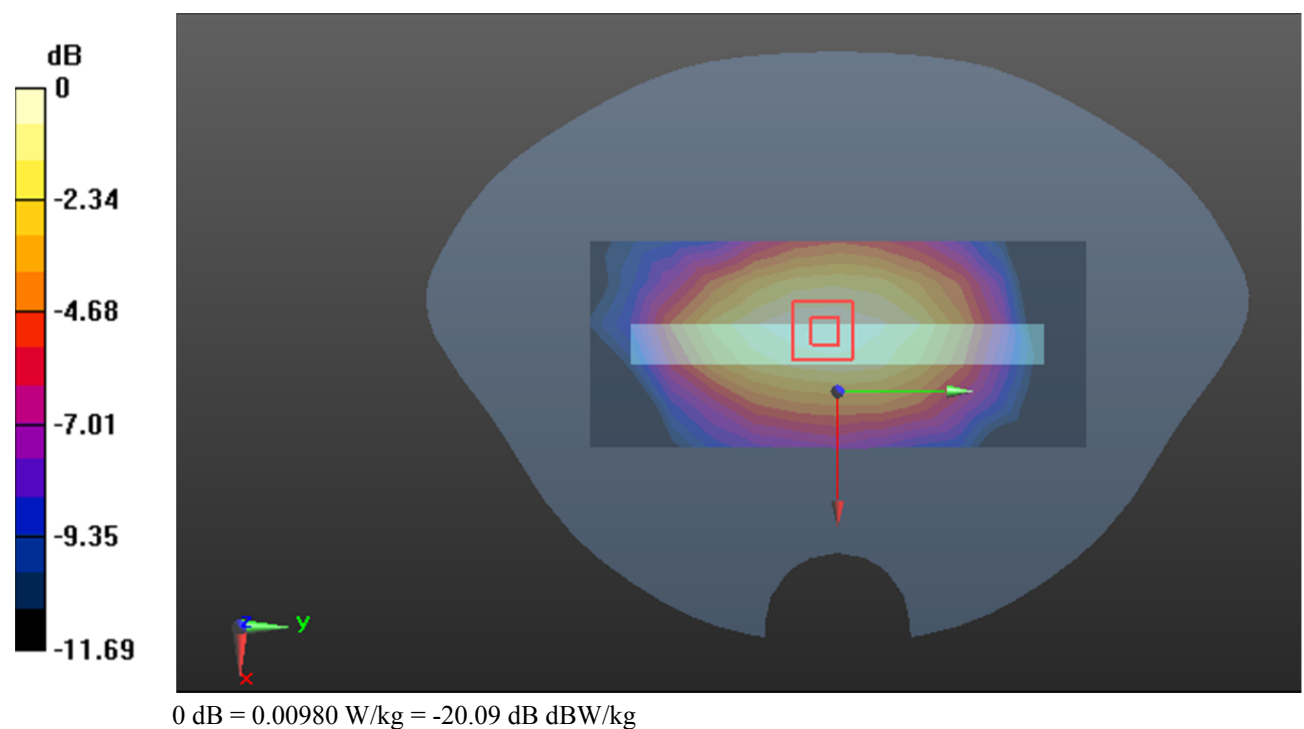

Test Plot*#: LTE Band 26_Body Right_50%RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=831.5$ MHz; $\sigma=0.937$ S/m; $\epsilon_r=41.532$; $\rho=1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @831.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.00717 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.803 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.00984 W/kg

SAR(1 g) = 0.00673 W/kg; SAR(10 g) = 0.00463 W/kg

Maximum value of SAR (measured) = 0.00730 W/kg

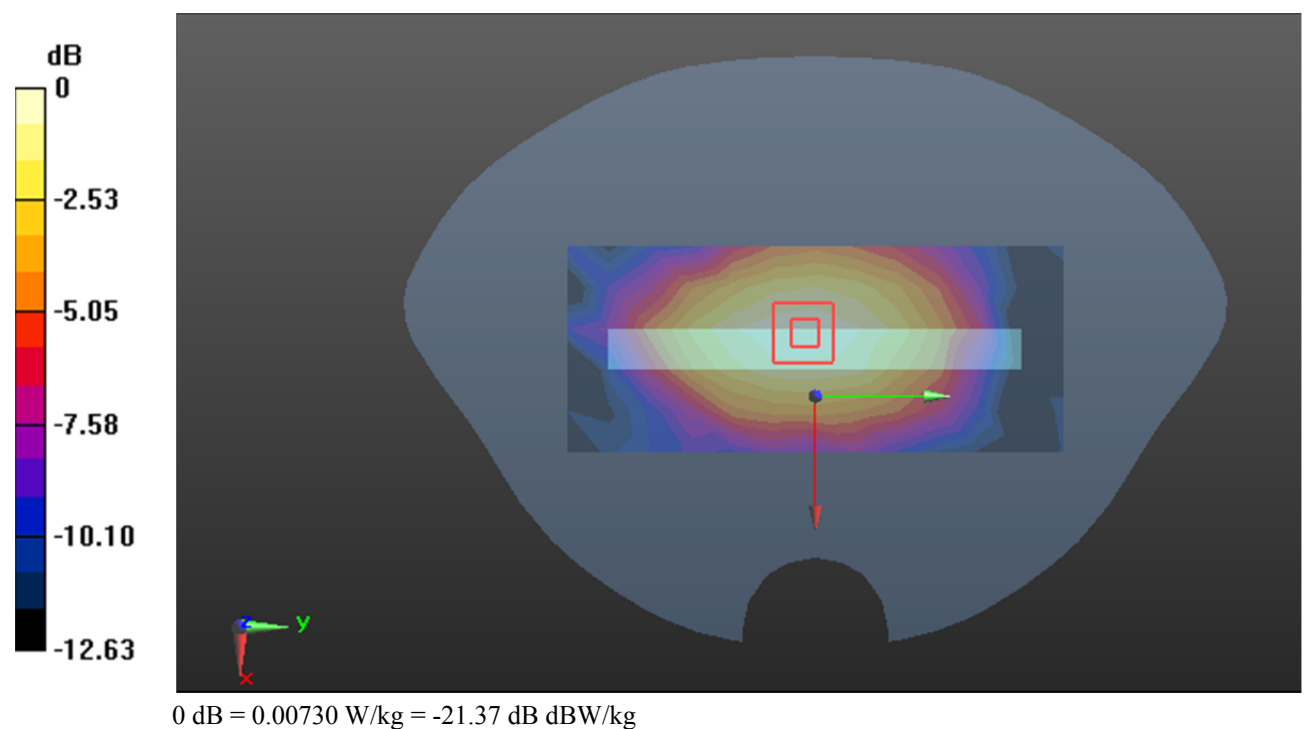

Test Plot*#: LTE Band 26_Body Bottom_1RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f=831.5$ MHz; $\sigma=0.937$ S/m; $\epsilon_r=41.532$; $\rho=1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @831.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.107 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.928 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.239 W/kg

SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.064 W/kg

Maximum value of SAR (measured) = 0.142 W/kg

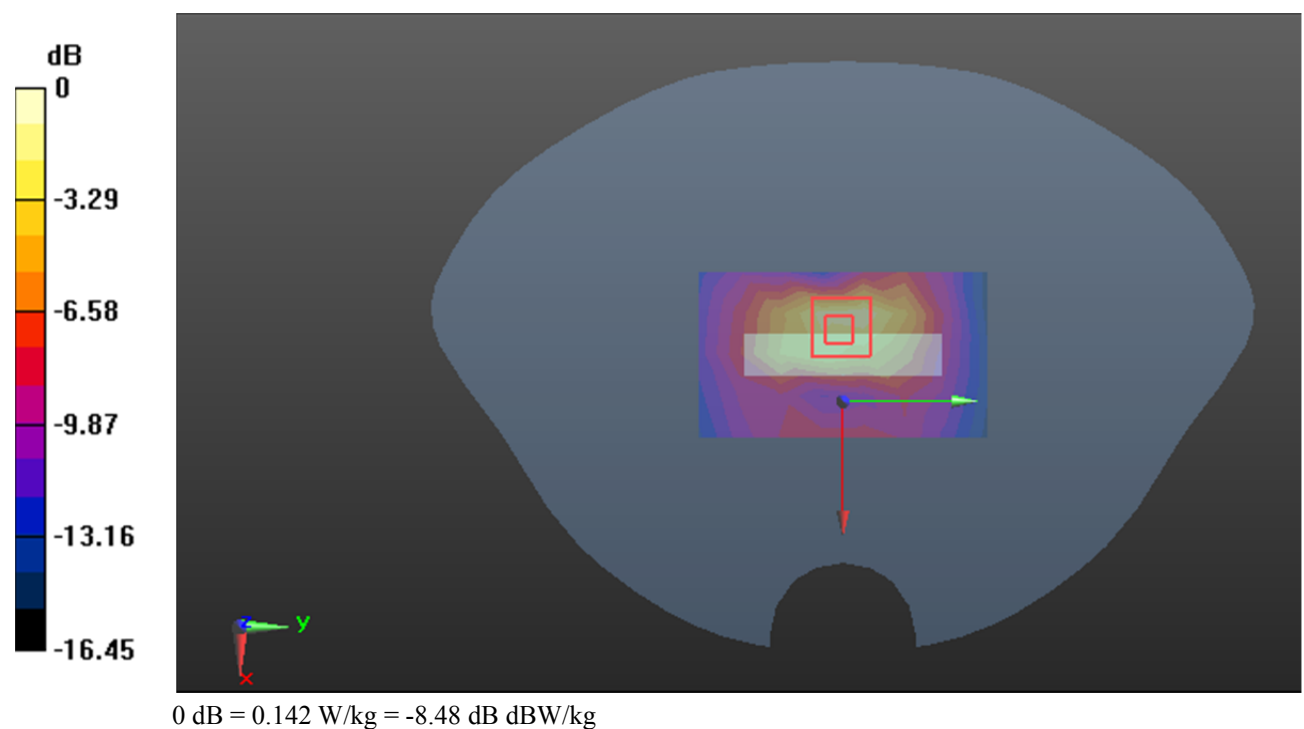

Test Plot*#: LTE Band 26_Body Bottom_50%RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=831.5$ MHz; $\sigma=0.937$ S/m; $\epsilon_r=41.532$; $\rho=1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @831.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0851 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.075 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.191 W/kg

SAR(1 g) = 0.102 W/kg; SAR(10 g) = 0.052 W/kg

Maximum value of SAR (measured) = 0.114 W/kg

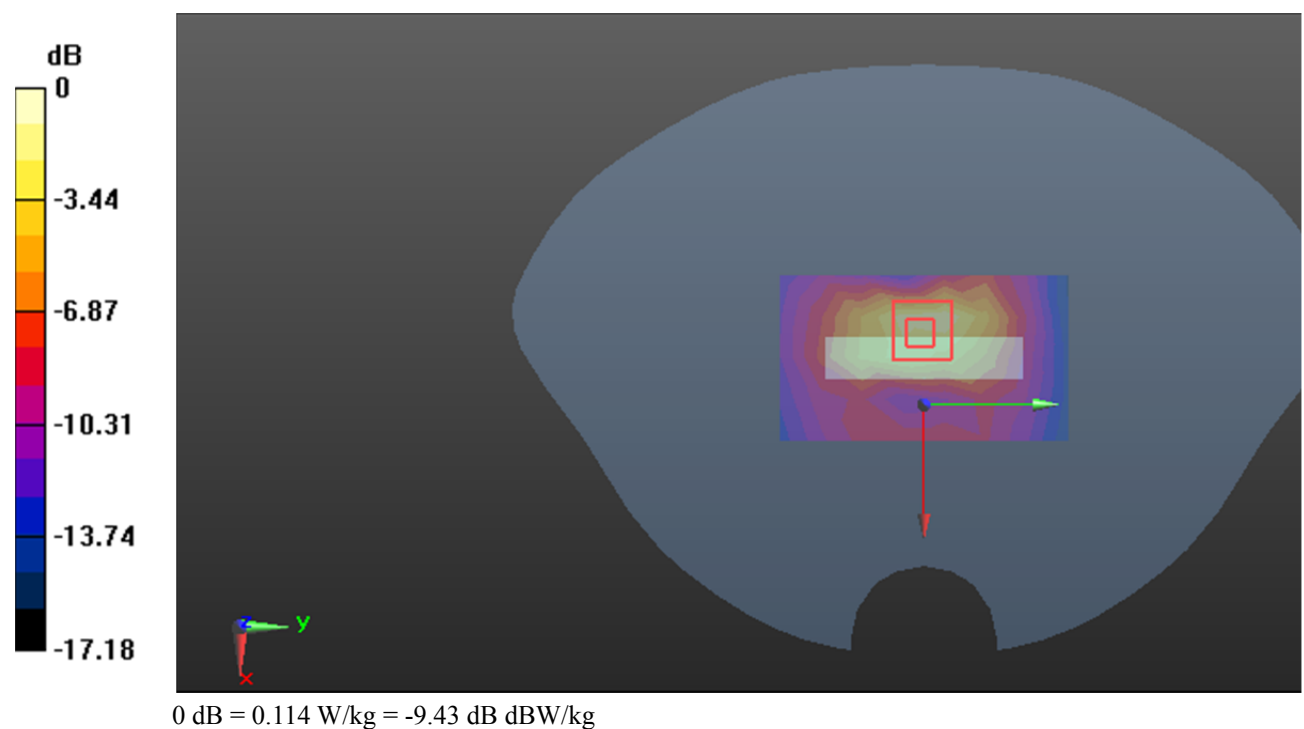

Test Plot*#: LTE Band 41_Head Left Cheek_1RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used (interpolated): $f=2593$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 38.903$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2593 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.162 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.475 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.284 W/kg

SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.094 W/kg

Maximum value of SAR (measured) = 0.164 W/kg

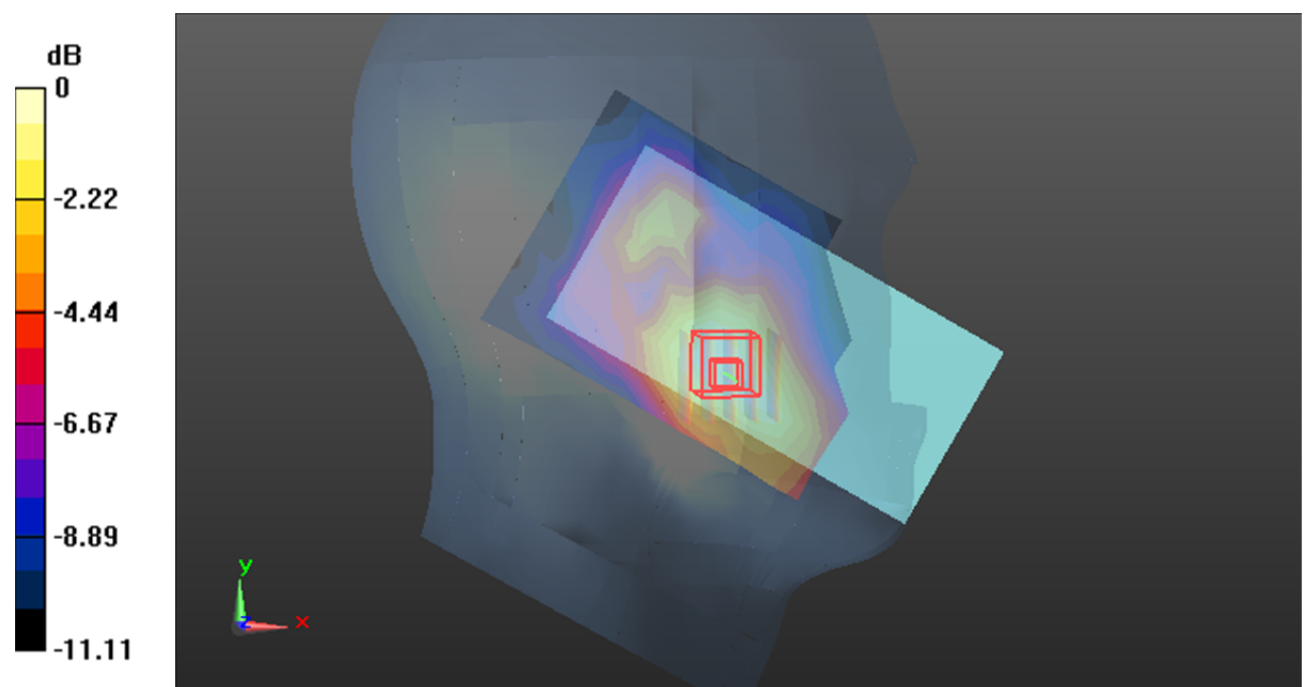

0 dB = 0.164 W/kg = -7.85 dB dBW/kg

Test Plot*#: LTE Band 41_Head Left Cheek_50%RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used (interpolated): $f=2593$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 38.903$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2593 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.130 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.299 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.225 W/kg

SAR(1 g) = 0.125 W/kg; SAR(10 g) = 0.077 W/kg

Maximum value of SAR (measured) = 0.133 W/kg

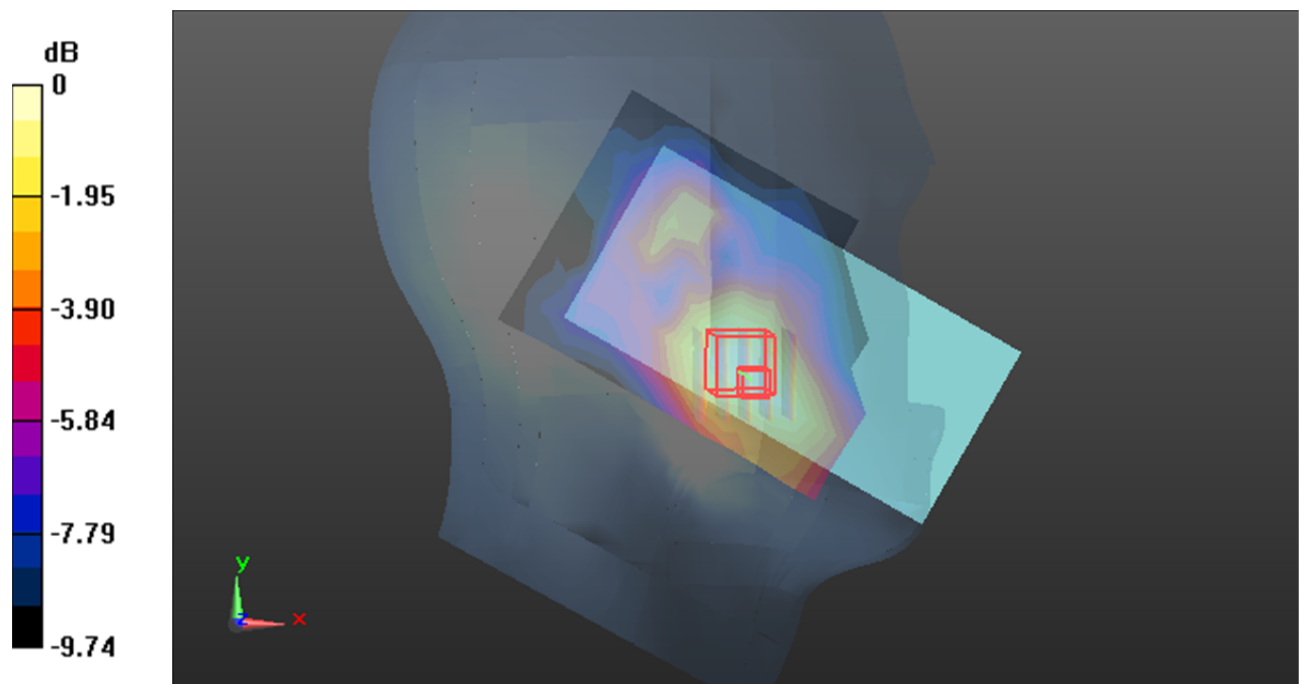

0 dB = 0.133 W/kg = -8.76 dB dBW/kg

Test Plot*#: LTE Band 41_Head Left Tilt_1RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used (interpolated): $f=2593$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 38.903$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2593 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.0601 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.215 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.115 W/kg

SAR(1 g) = 0.062 W/kg; SAR(10 g) = 0.036 W/kg

Maximum value of SAR (measured) = 0.0682 W/kg

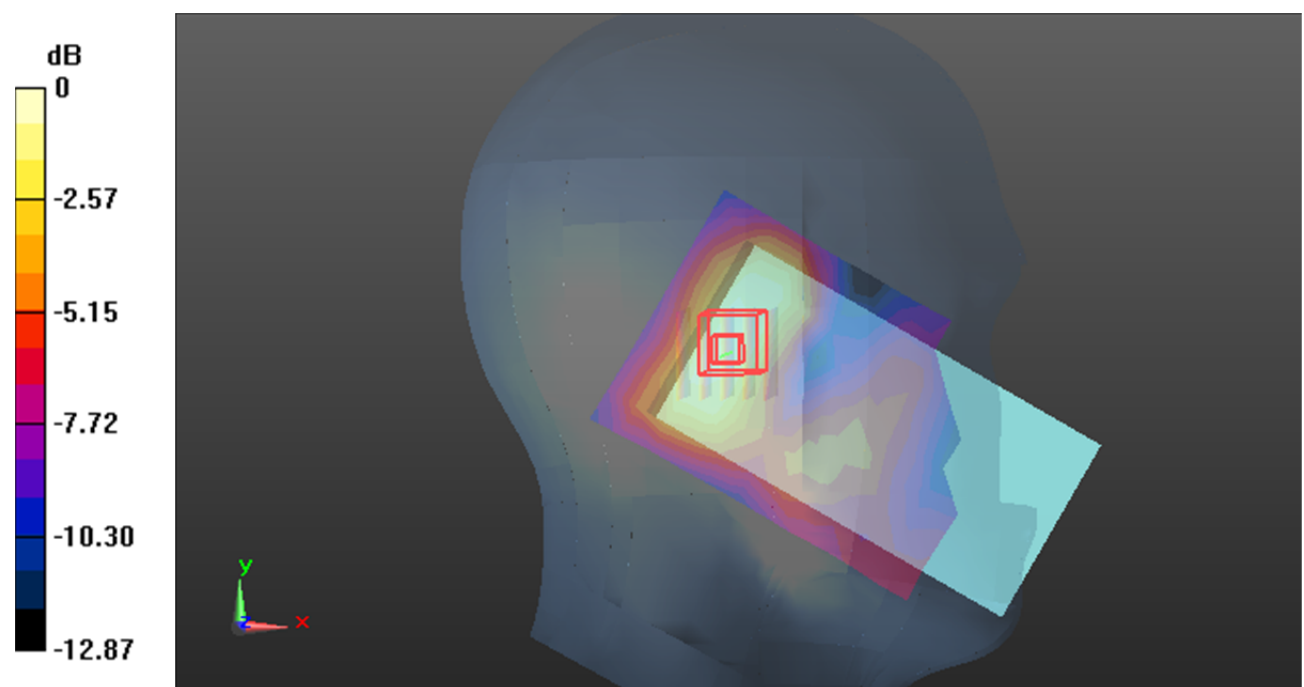

0 dB = 0.0682 W/kg = -11.66 dB dBW/kg

Test Plot*#: LTE Band 41_Head Left Tilt_50%RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used (interpolated): $f=2593$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 38.903$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2593 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.0492 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.757 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.0950 W/kg

SAR(1 g) = 0.051 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.0554 W/kg

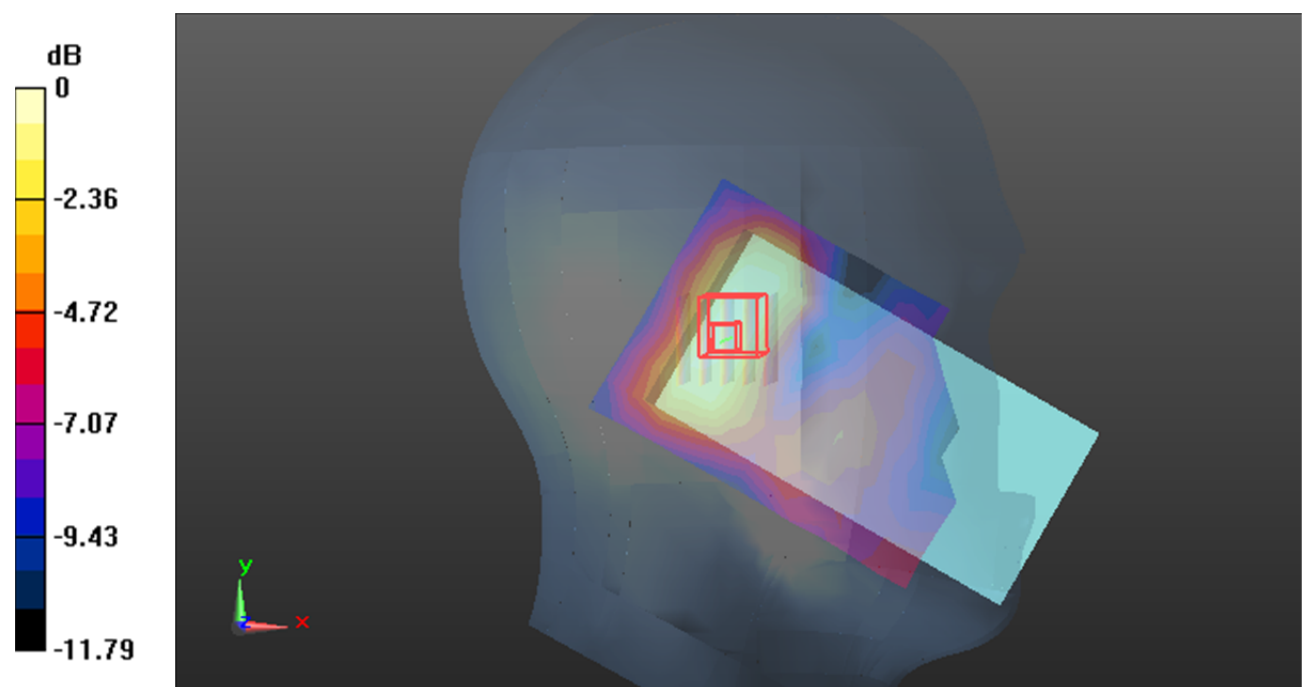

0 dB = 0.0554 W/kg = -12.56 dB dBW/kg

Test Plot*#: LTE Band 41_Head Right Cheek_1RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used (interpolated): $f=2593$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 38.903$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2593 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.0858 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.919 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.150 W/kg

SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.0871 W/kg

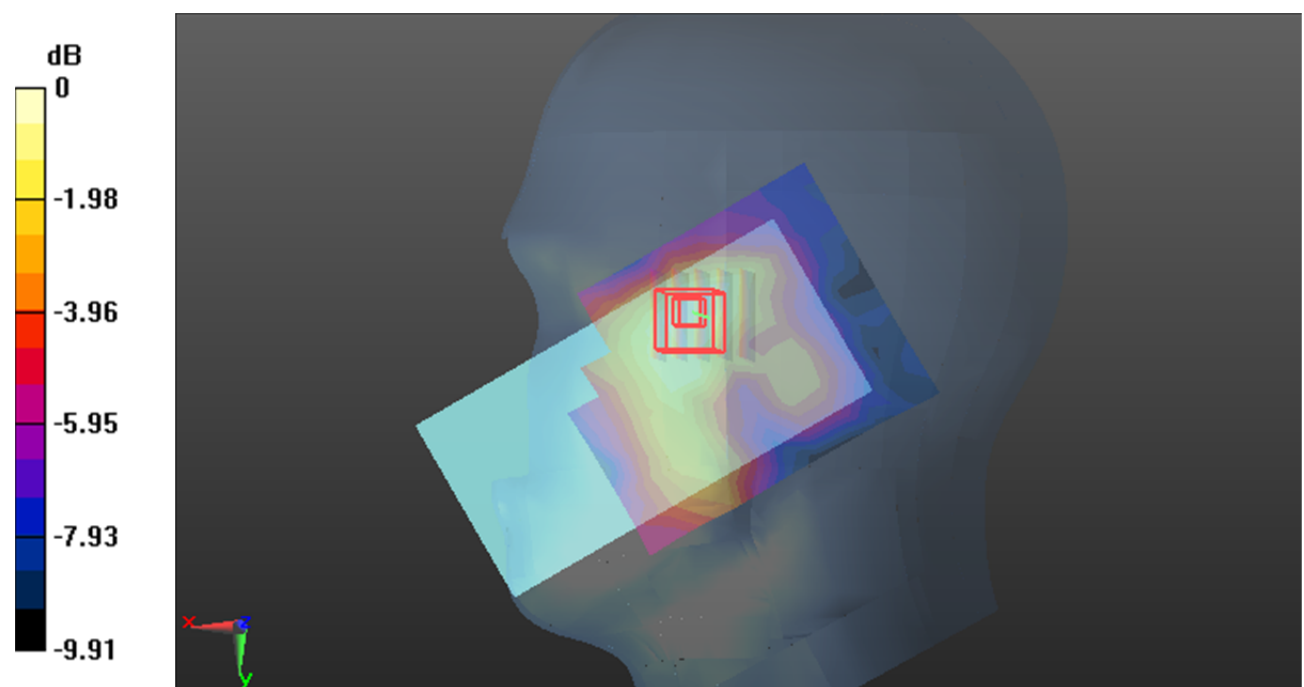

0 dB = 0.0871 W/kg = -10.60 dB dBW/kg

Test Plot*#: LTE Band 41_Head Right Cheek_50%RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used (interpolated): $f=2593$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 38.903$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2593 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.0731 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.946 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.114 W/kg

SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.0701 W/kg

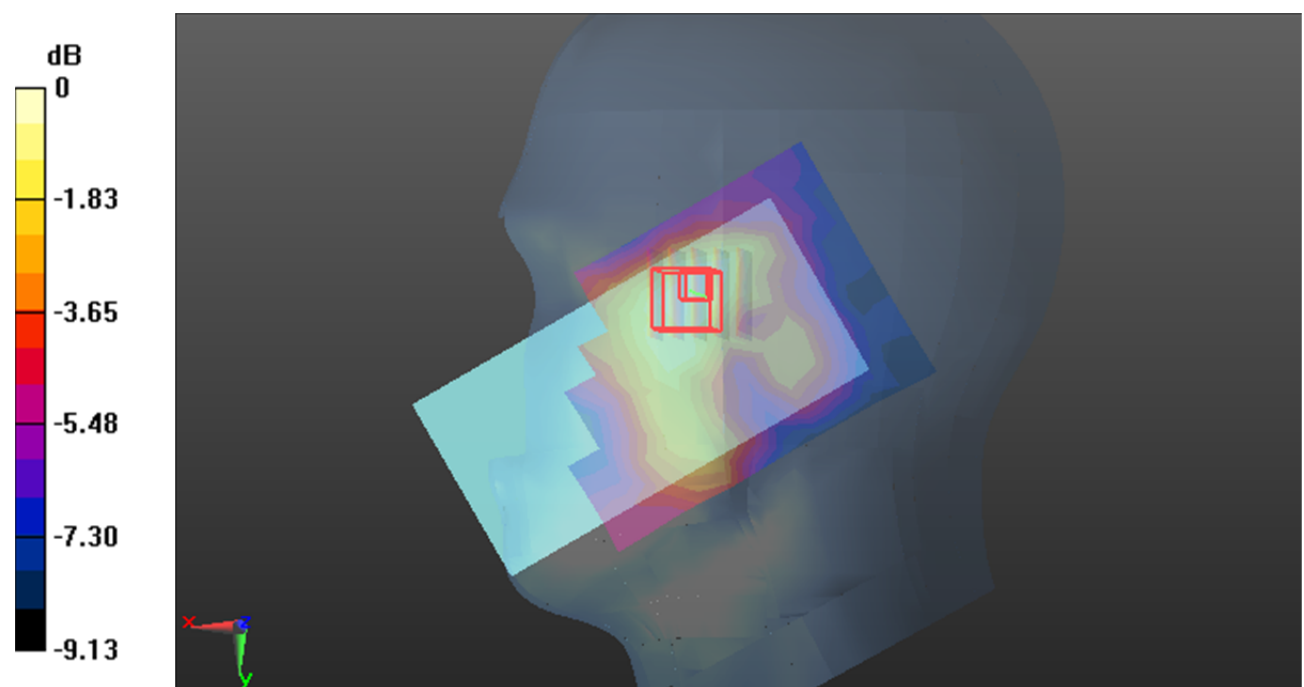

0 dB = 0.0701 W/kg = -11.54 dB dBW/kg

Test Plot*#: LTE Band 41_Head Right Tilt_1RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used (interpolated): $f=2593$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 38.903$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2593 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.0791 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.988 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.133 W/kg

SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.040 W/kg

Maximum value of SAR (measured) = 0.0776 W/kg

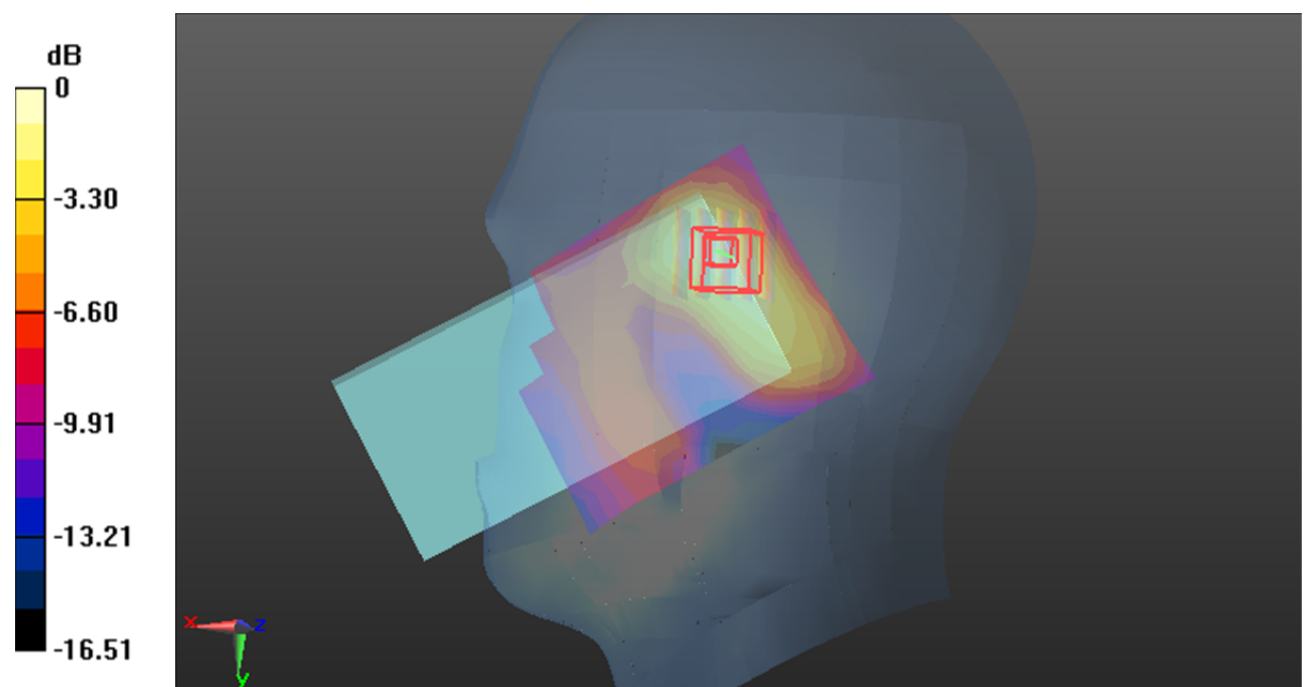

0 dB = 0.0776 W/kg = -11.10 dB dBW/kg

Test Plot*#: LTE Band 41_Head Right Tilt_50%RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used (interpolated): $f=2593$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 38.903$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2593 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.0595 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.431 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.110 W/kg

SAR(1 g) = 0.058 W/kg; SAR(10 g) = 0.032 W/kg

Maximum value of SAR (measured) = 0.0620 W/kg

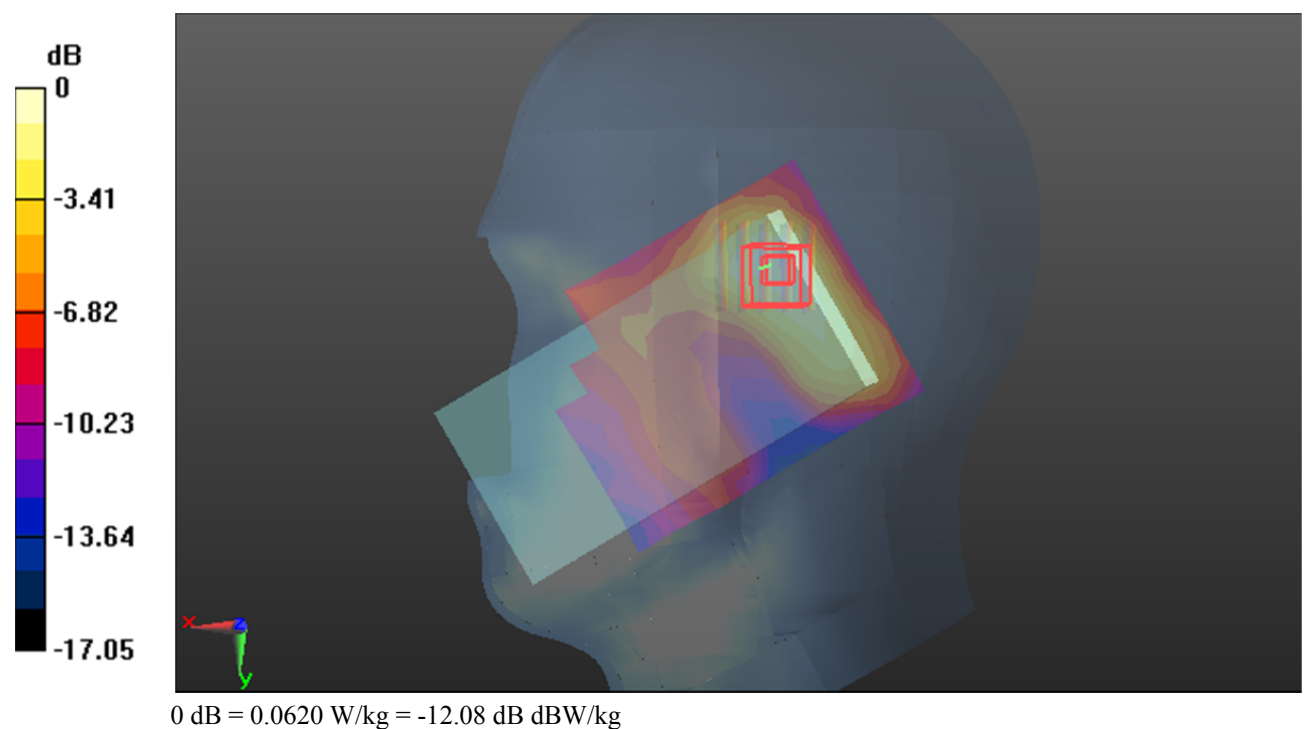

Test Plot*#: LTE Band 41_Body Front_1RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used (interpolated): $f=2593$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 38.903$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2593 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.144 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.521 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.271 W/kg

SAR(1 g) = 0.135 W/kg; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.152 W/kg

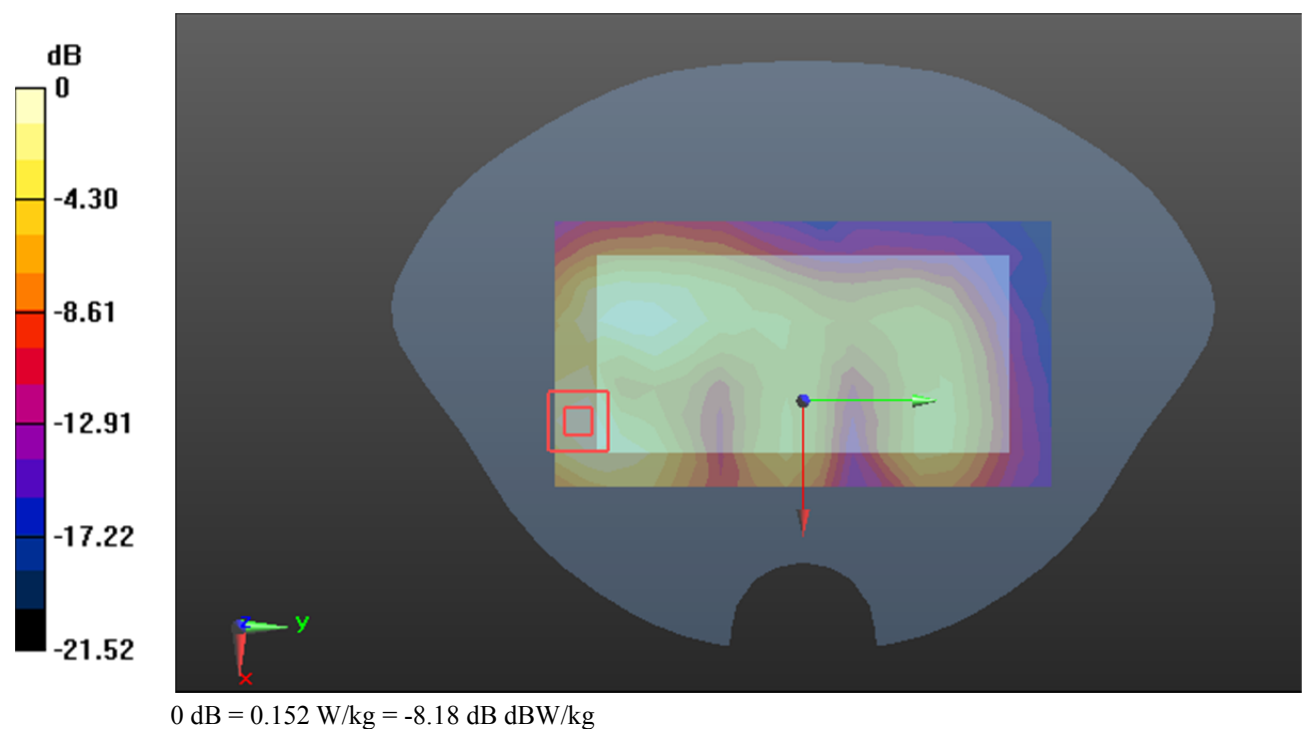

Test Plot*#: LTE Band 41_Body Front_50%RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used (interpolated): $f=2593$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 38.903$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2593 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.110 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.104 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.215 W/kg

SAR(1 g) = 0.110 W/kg; SAR(10 g) = 0.056 W/kg

Maximum value of SAR (measured) = 0.122 W/kg

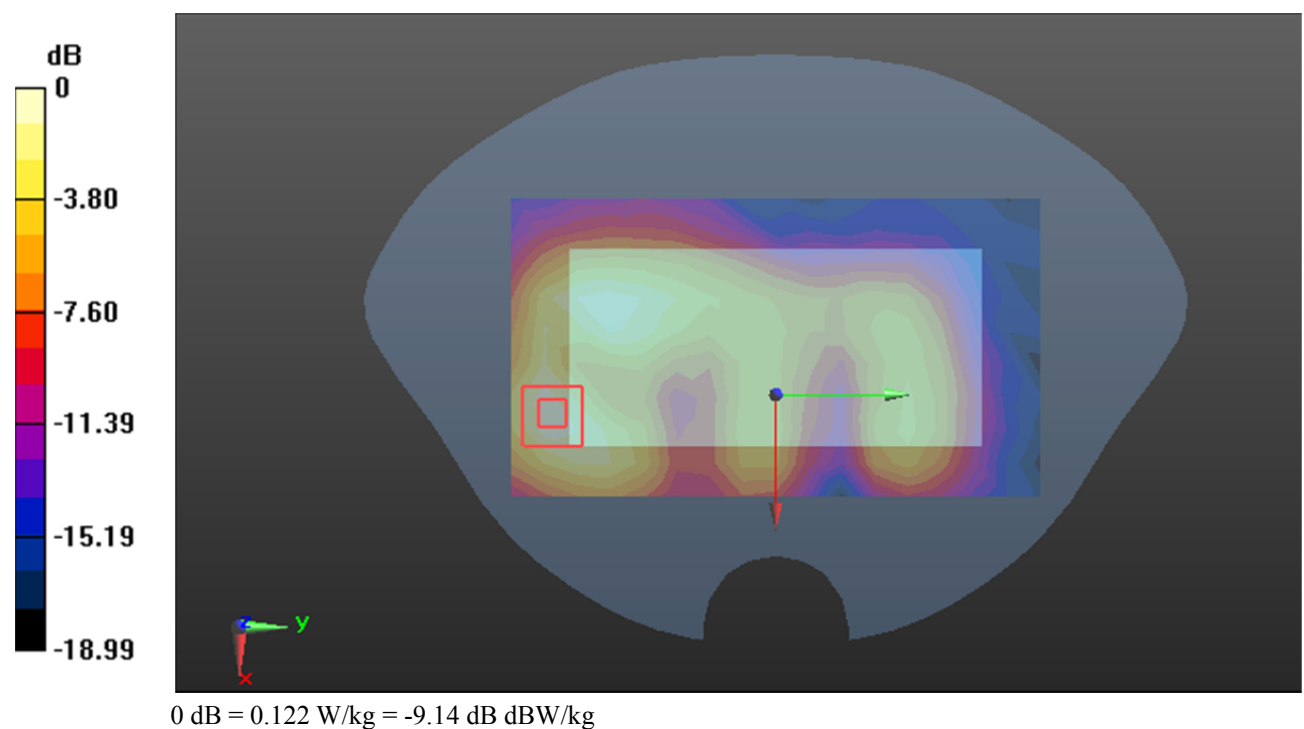

Test Plot#: LTE Band 41_Body Back_1RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used (interpolated): $f=2593$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 38.903$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2593 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.148 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.318 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.275 W/kg

SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.075 W/kg

Maximum value of SAR (measured) = 0.156 W/kg

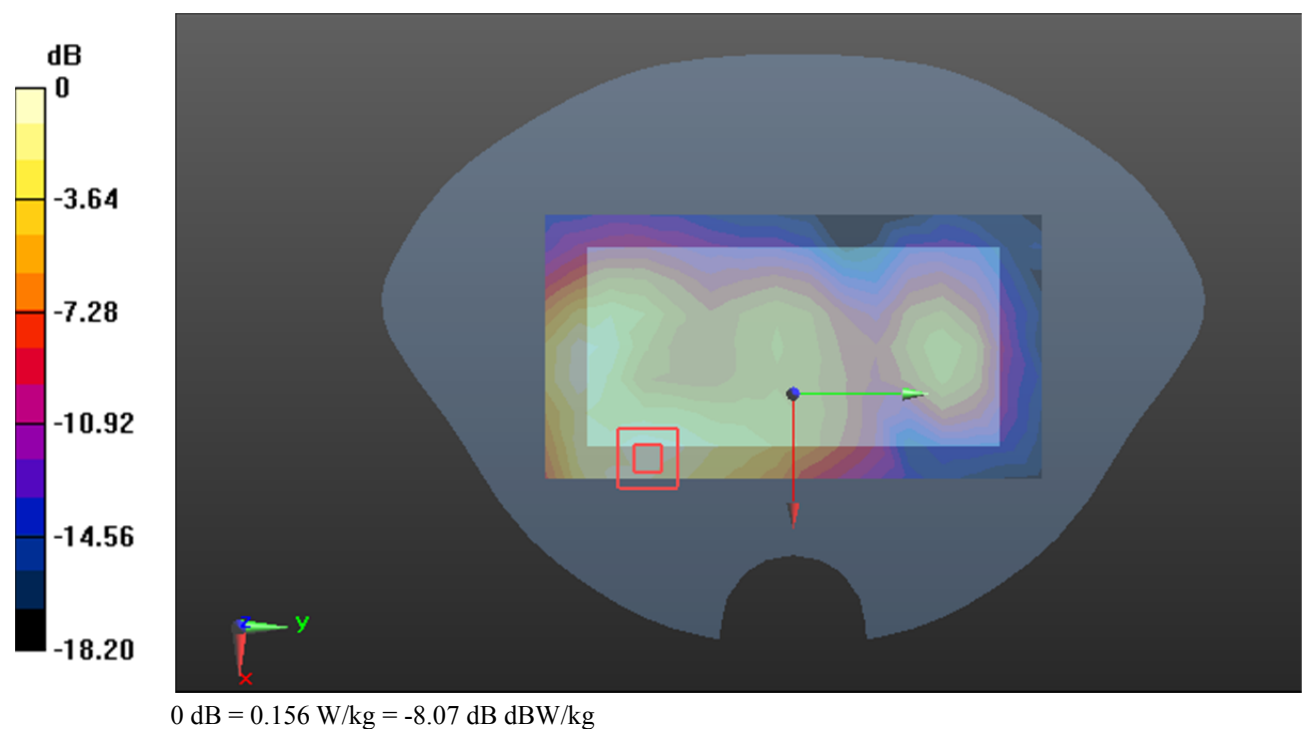

Test Plot*#: LTE Band 41_Body Back_50%RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used (interpolated): $f=2593$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 38.903$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2593 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.120 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.795 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.225 W/kg

SAR(1 g) = 0.116 W/kg; SAR(10 g) = 0.061 W/kg

Maximum value of SAR (measured) = 0.126 W/kg

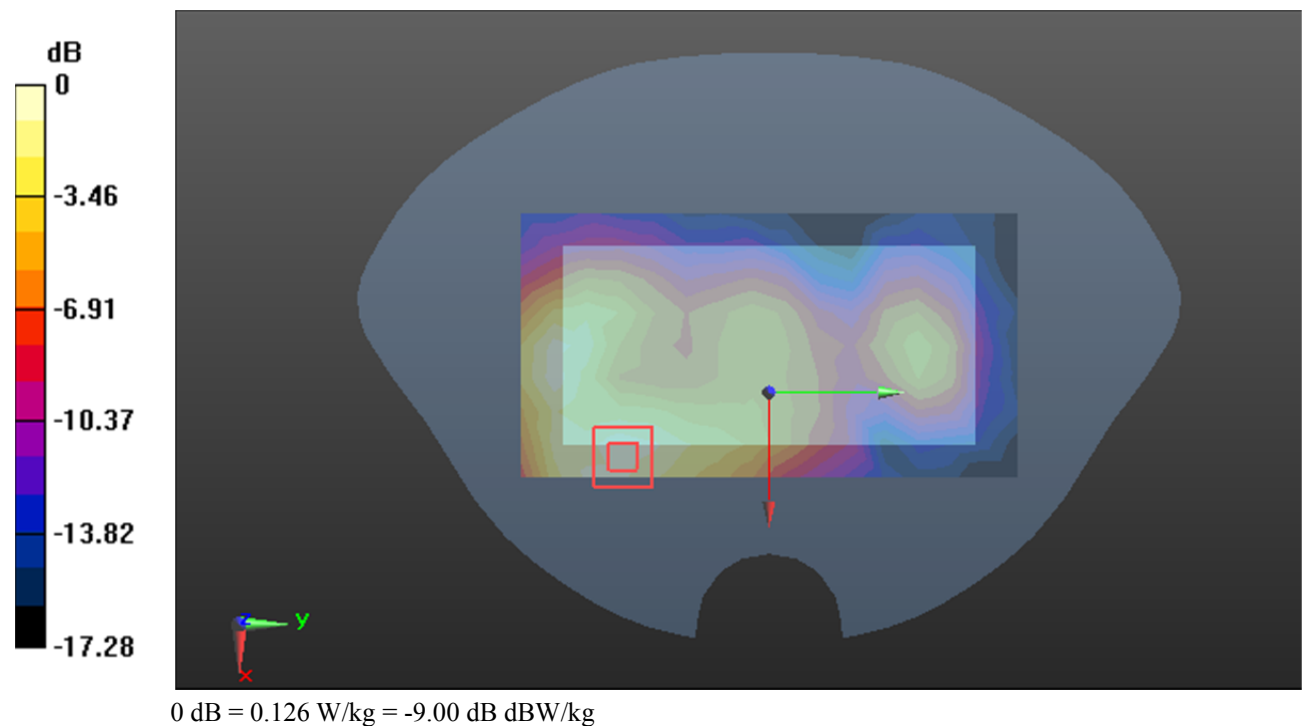

Test Plot*#: LTE Band 41_Body Left_1RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used (interpolated): $f=2593$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 38.903$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2593 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.0234 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.018 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.0460 W/kg

SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.012 W/kg

Maximum value of SAR (measured) = 0.0249 W/kg

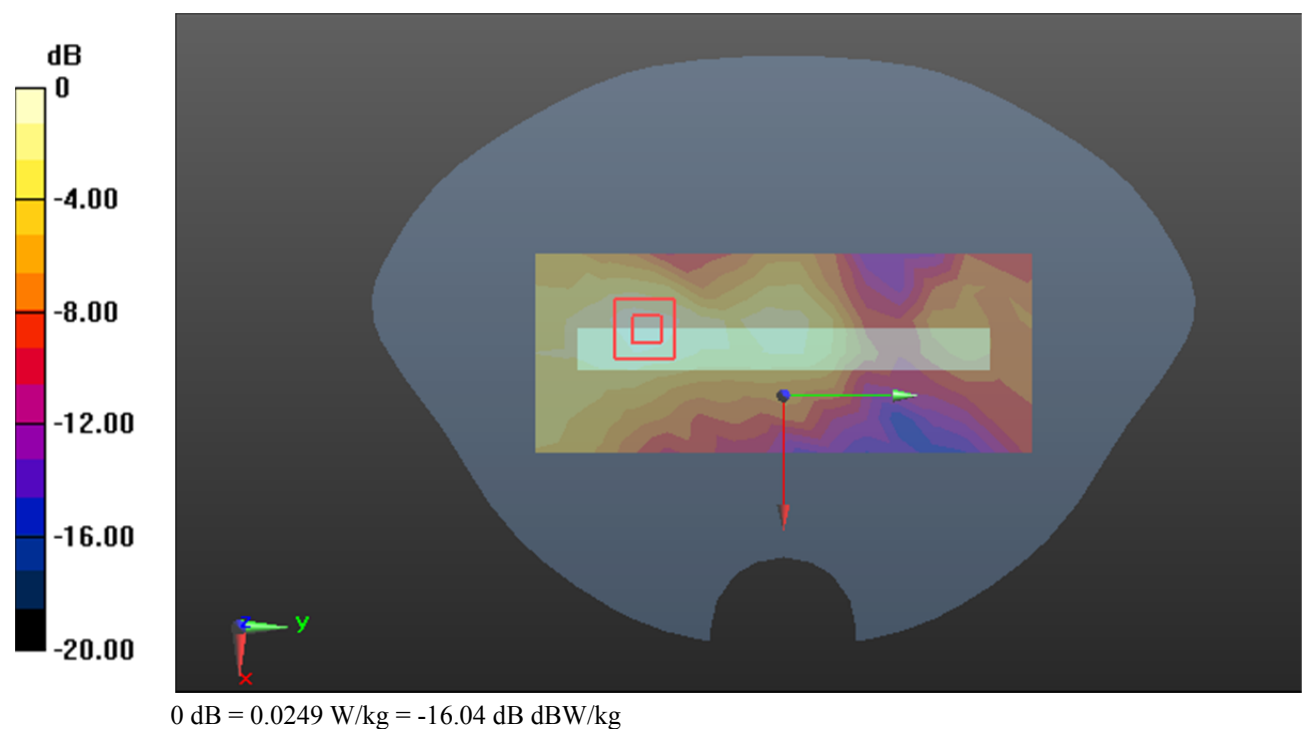

Test Plot*#: LTE Band 41_Body Left_50%RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
 Medium parameters used (interpolated): $f=2593$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 38.903$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2593 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.0177 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.717 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.0350 W/kg

SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.00927 W/kg

Maximum value of SAR (measured) = 0.0191 W/kg

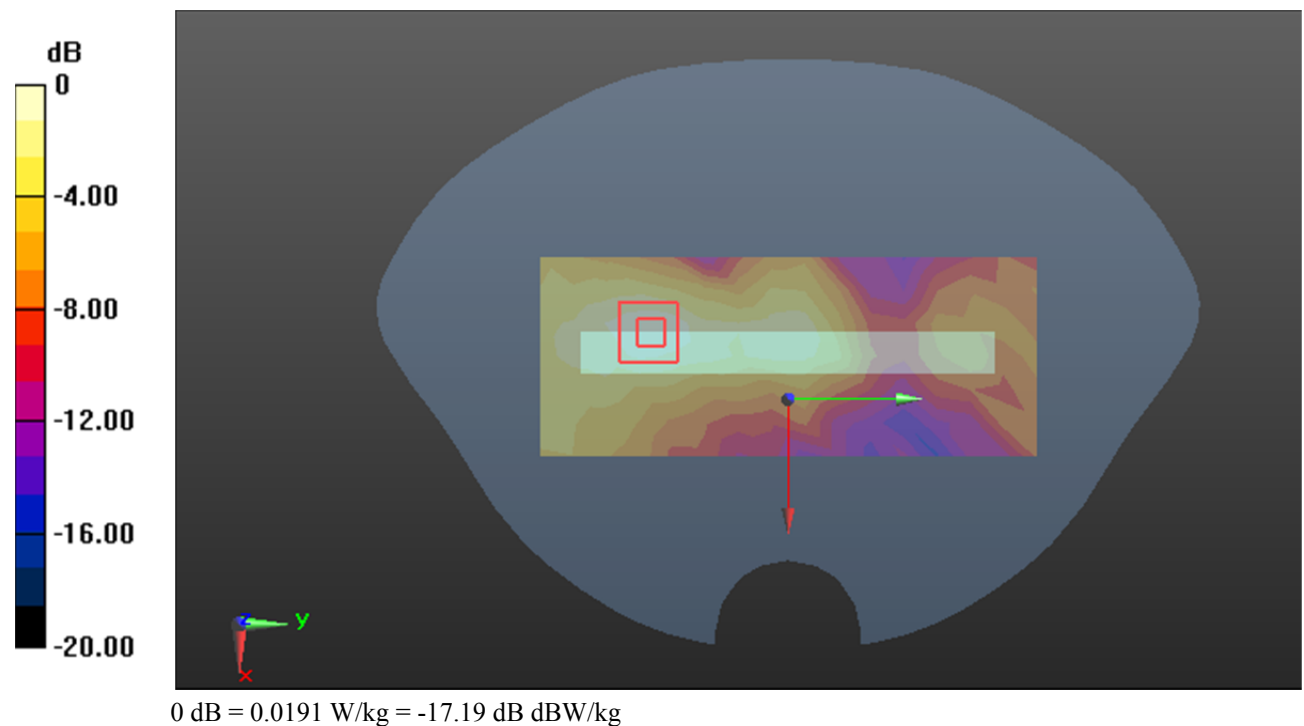

Test Plot*#: LTE Band 41_Body Right_1RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
 Medium parameters used (interpolated): $f=2593$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 38.903$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2593 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.113 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.843 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.203 W/kg

SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.117 W/kg

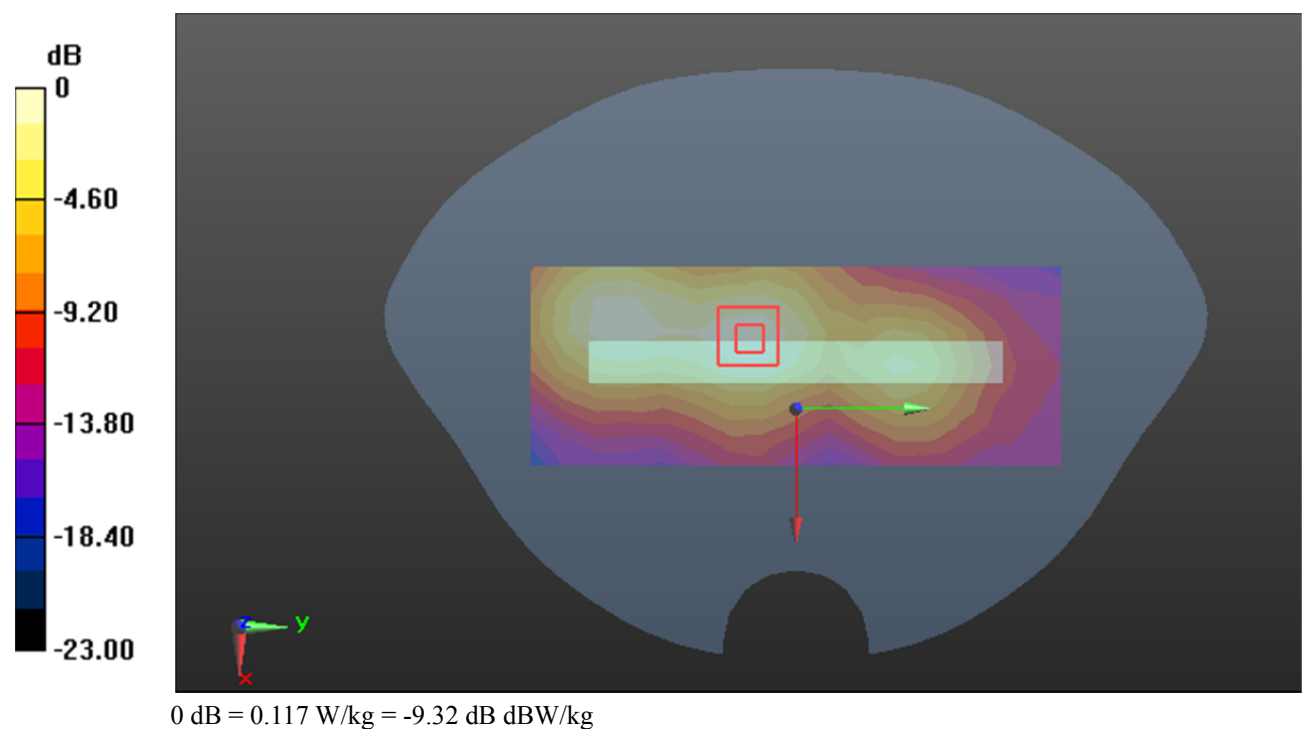

Test Plot*#: LTE Band 41_Body Right_50%RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used (interpolated): $f=2593$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 38.903$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2593 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.0912 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.264 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.168 W/kg

SAR(1 g) = 0.087 W/kg; SAR(10 g) = 0.047 W/kg

Maximum value of SAR (measured) = 0.0952 W/kg

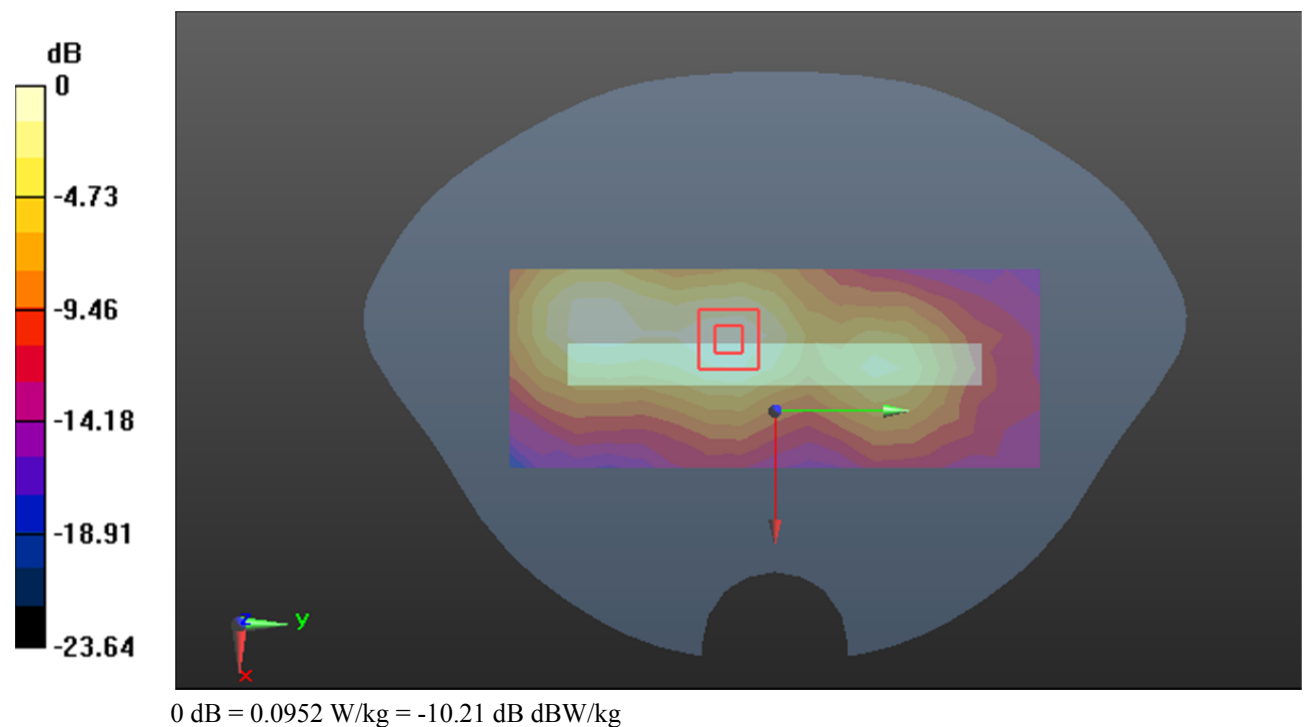

Test Plot*#: LTE Band 41_Body Top_1RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used (interpolated): $f=2593$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 38.903$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2593 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.364 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.82 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.813 W/kg

SAR(1 g) = 0.389 W/kg; SAR(10 g) = 0.177 W/kg

Maximum value of SAR (measured) = 0.439 W/kg

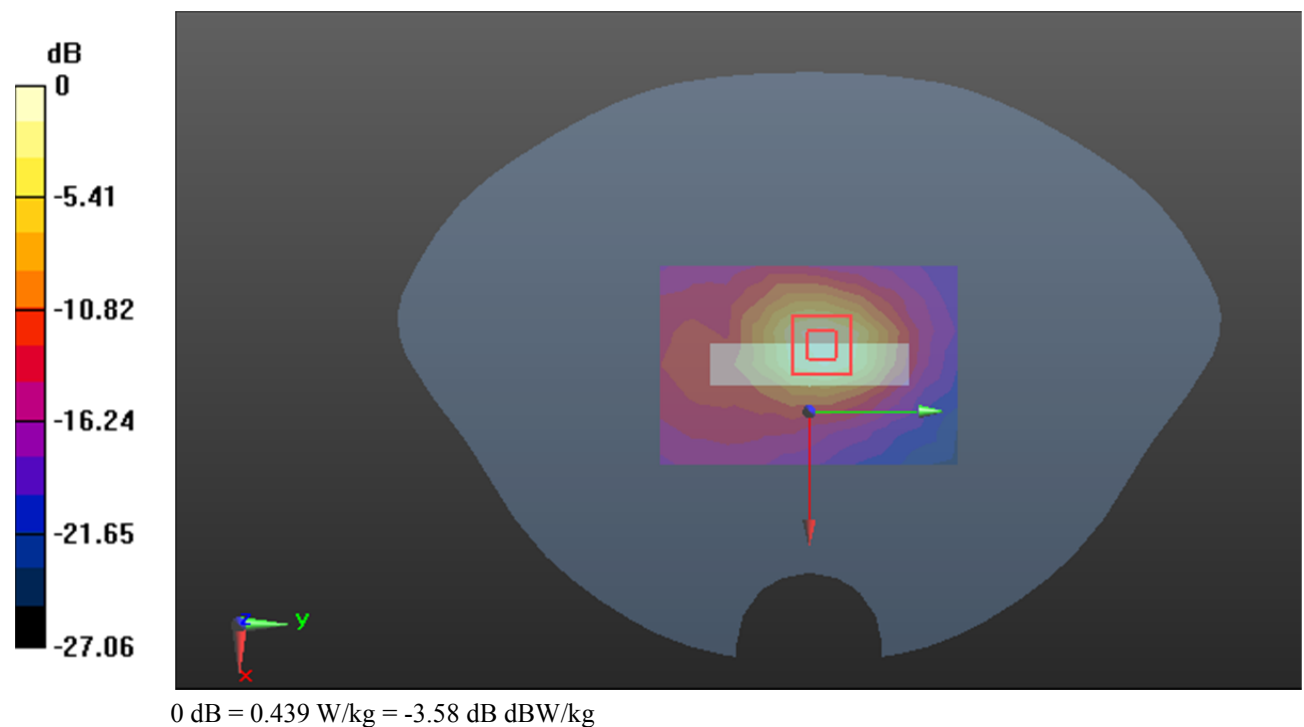

Test Plot*#: LTE Band 41_Body Top_50%RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used (interpolated): $f=2593$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 38.903$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2593 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.300 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.49 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.679 W/kg

SAR(1 g) = 0.320 W/kg; SAR(10 g) = 0.145 W/kg

Maximum value of SAR (measured) = 0.362 W/kg

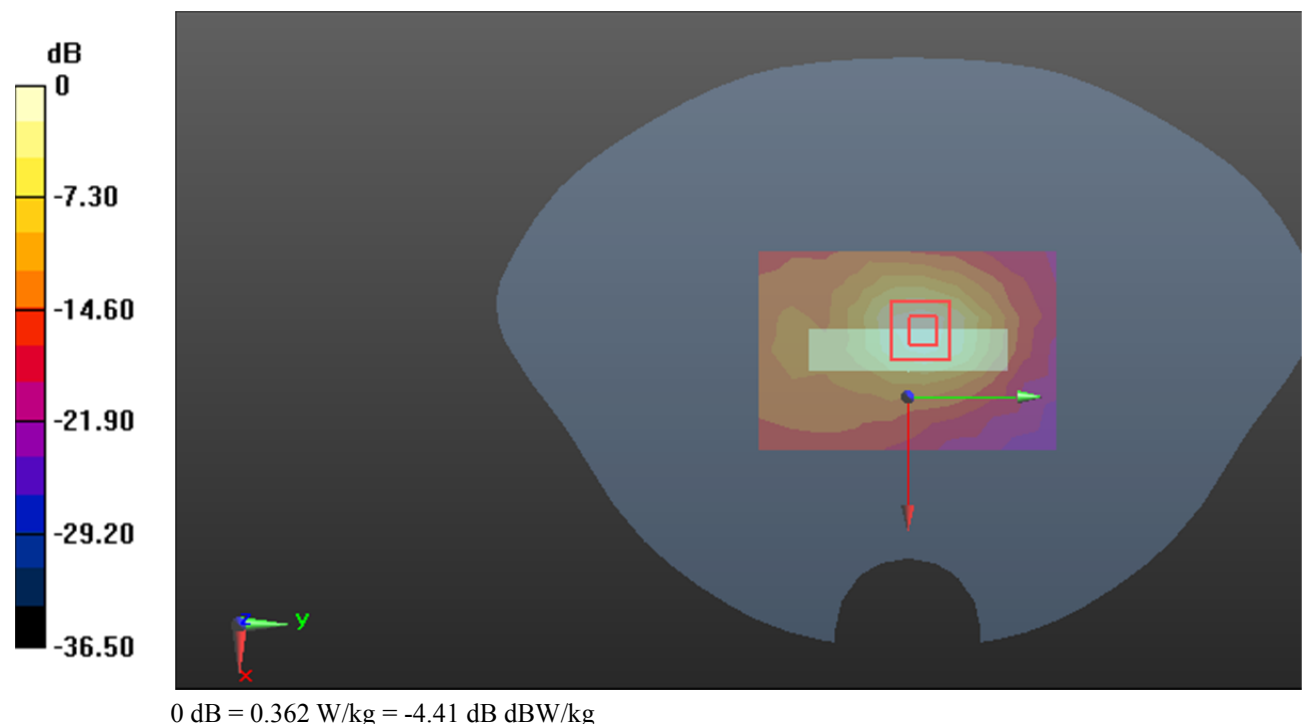

Test Plot*#: LTE Band 66_Head Left Cheek_1RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=1745$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 40.601$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.130 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.212 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.188 W/kg

SAR(1 g) = 0.122 W/kg; SAR(10 g) = 0.079 W/kg

Maximum value of SAR (measured) = 0.131 W/kg

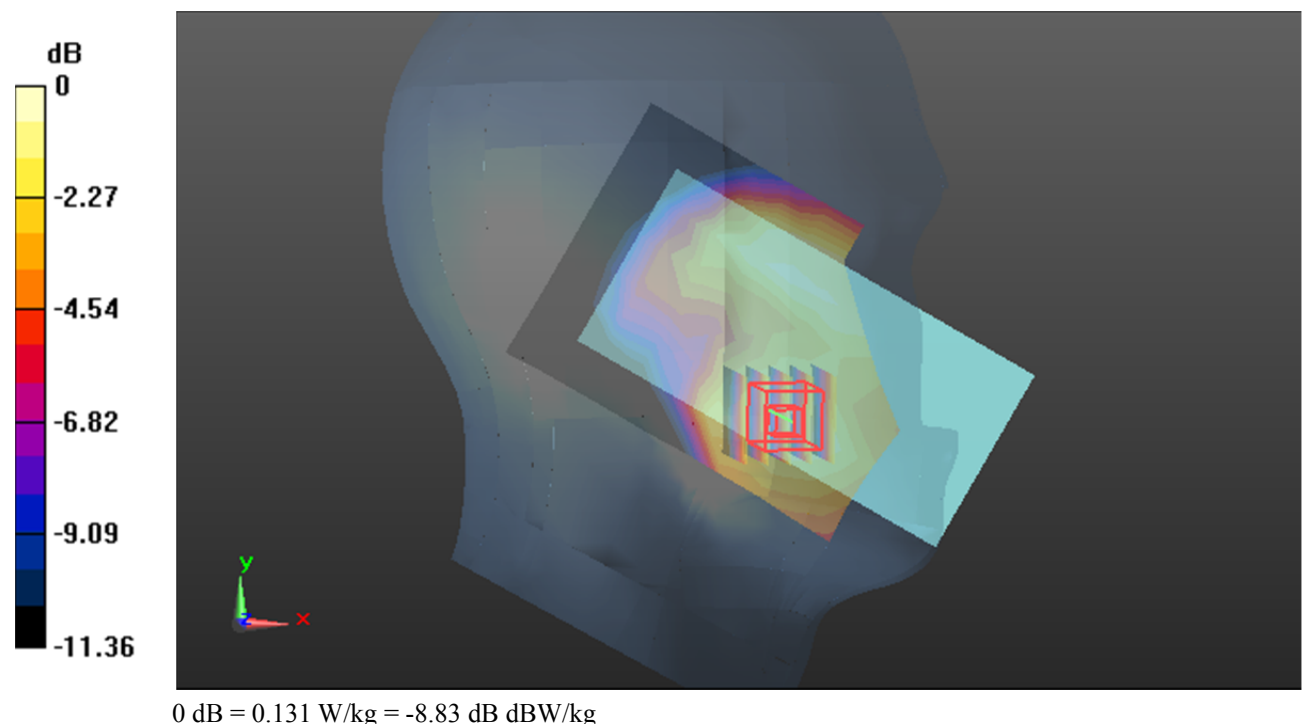

Test Plot*#: LTE Band 66_Head Left Cheek_50%RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=1745$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 40.601$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.118 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.006 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.170 W/kg

SAR(1 g) = 0.110 W/kg; SAR(10 g) = 0.071 W/kg

Maximum value of SAR (measured) = 0.119 W/kg

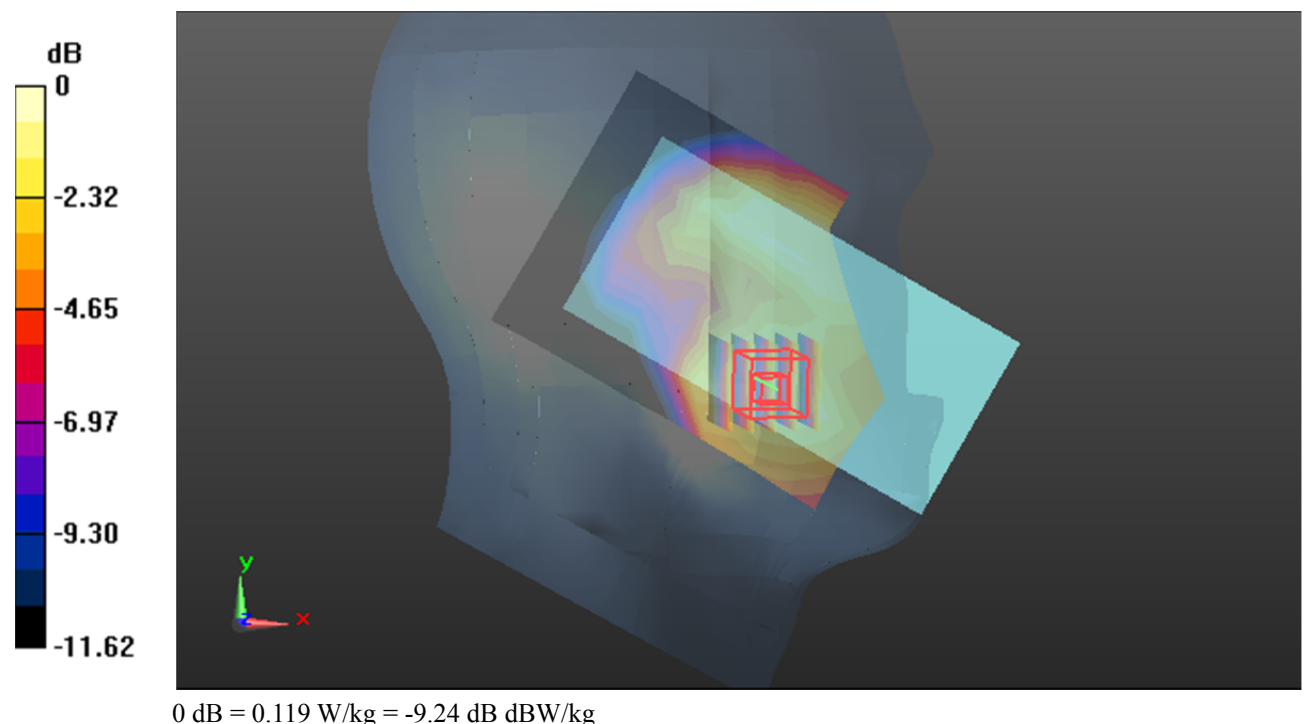

Test Plot*#: LTE Band 66_Head Left Tilt_1RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=1745$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 40.601$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0694 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.633 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0980 W/kg

SAR(1 g) = 0.067 W/kg; SAR(10 g) = 0.043 W/kg

Maximum value of SAR (measured) = 0.0724 W/kg

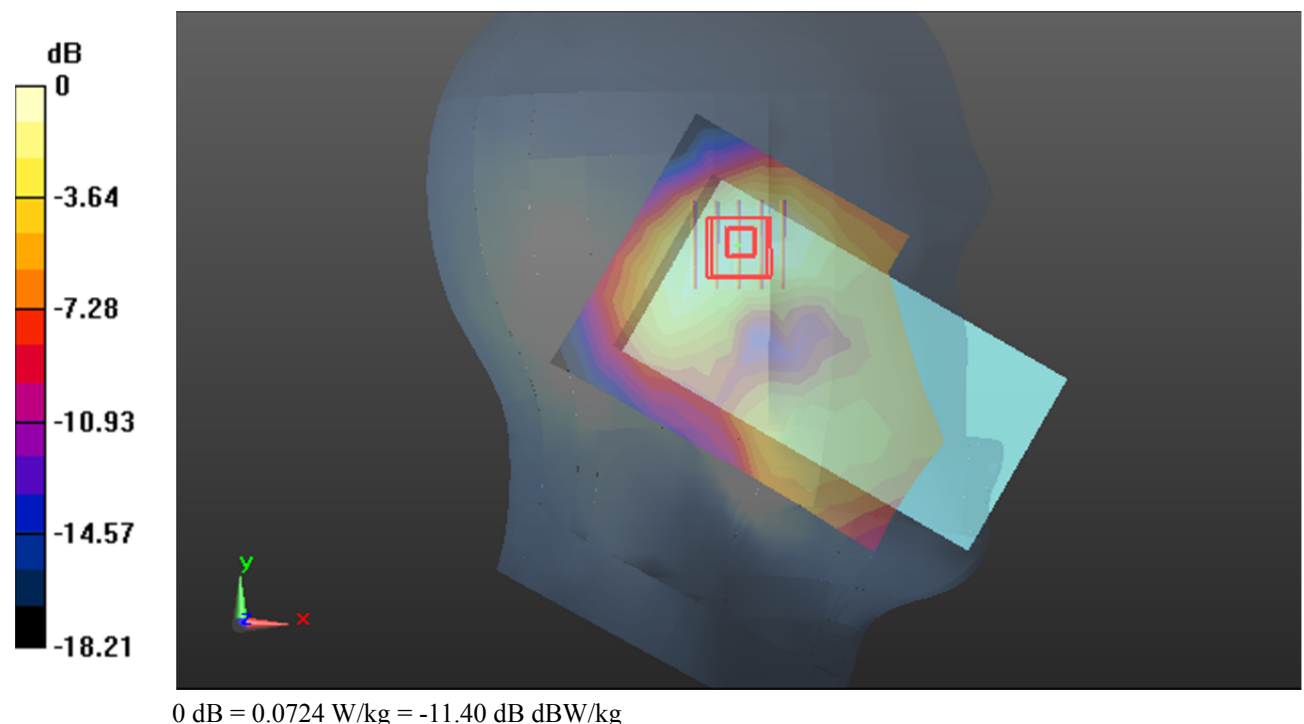

Test Plot*#: LTE Band 66_Head Left Tilt_50%RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=1745$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 40.601$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0643 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.129 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0910 W/kg

SAR(1 g) = 0.062 W/kg; SAR(10 g) = 0.040 W/kg

Maximum value of SAR (measured) = 0.0668 W/kg

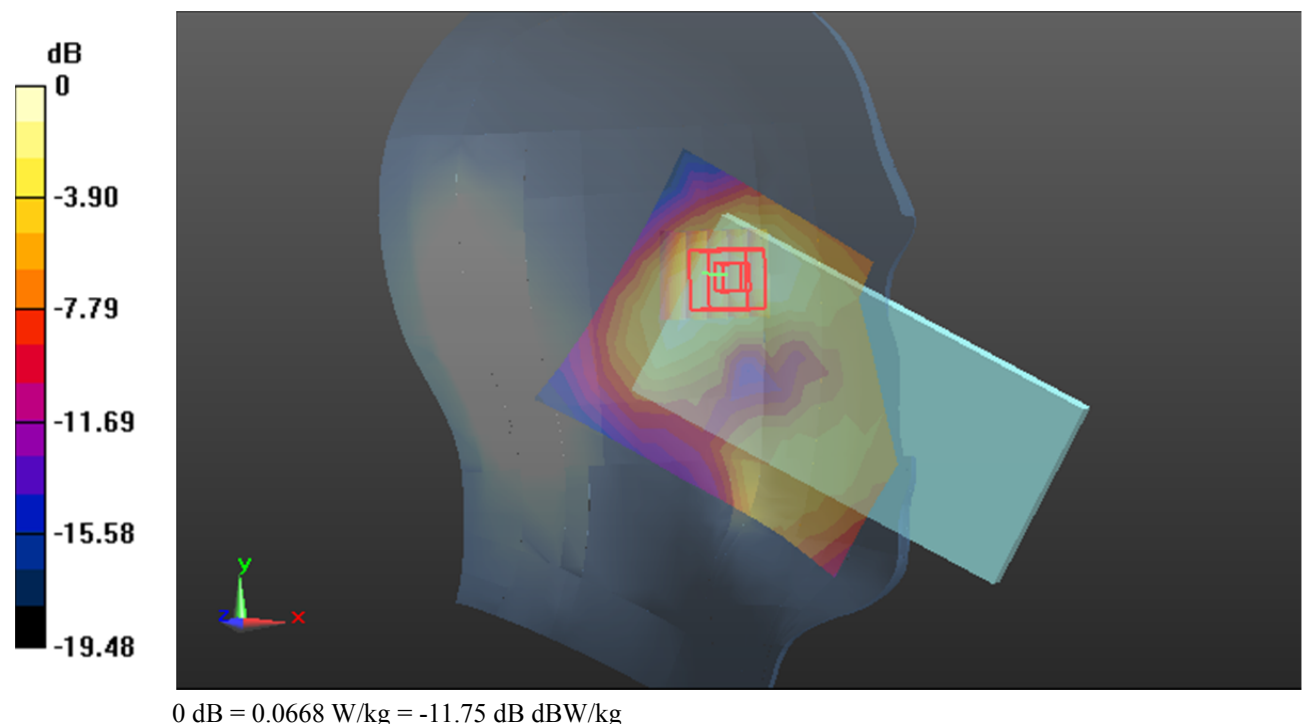

Test Plot*#: LTE Band 66_Head Right Cheek_1RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=1745$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 40.601$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.142 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.042 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.206 W/kg

SAR(1 g) = 0.137 W/kg; SAR(10 g) = 0.095 W/kg

Maximum value of SAR (measured) = 0.158 W/kg

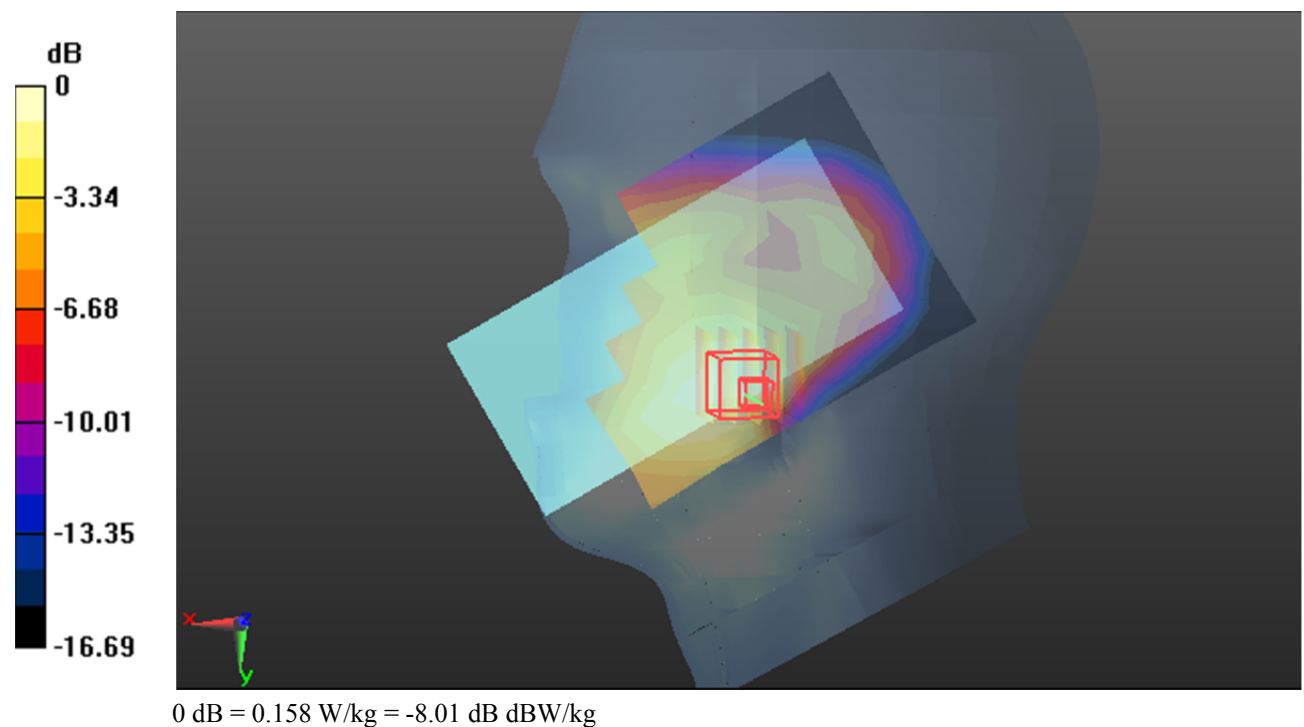

Test Plot*#: LTE Band 66_Head Right Cheek_50%RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=1745$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 40.601$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.117 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.326 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.173 W/kg

SAR(1 g) = 0.118 W/kg; SAR(10 g) = 0.084 W/kg

Maximum value of SAR (measured) = 0.130 W/kg

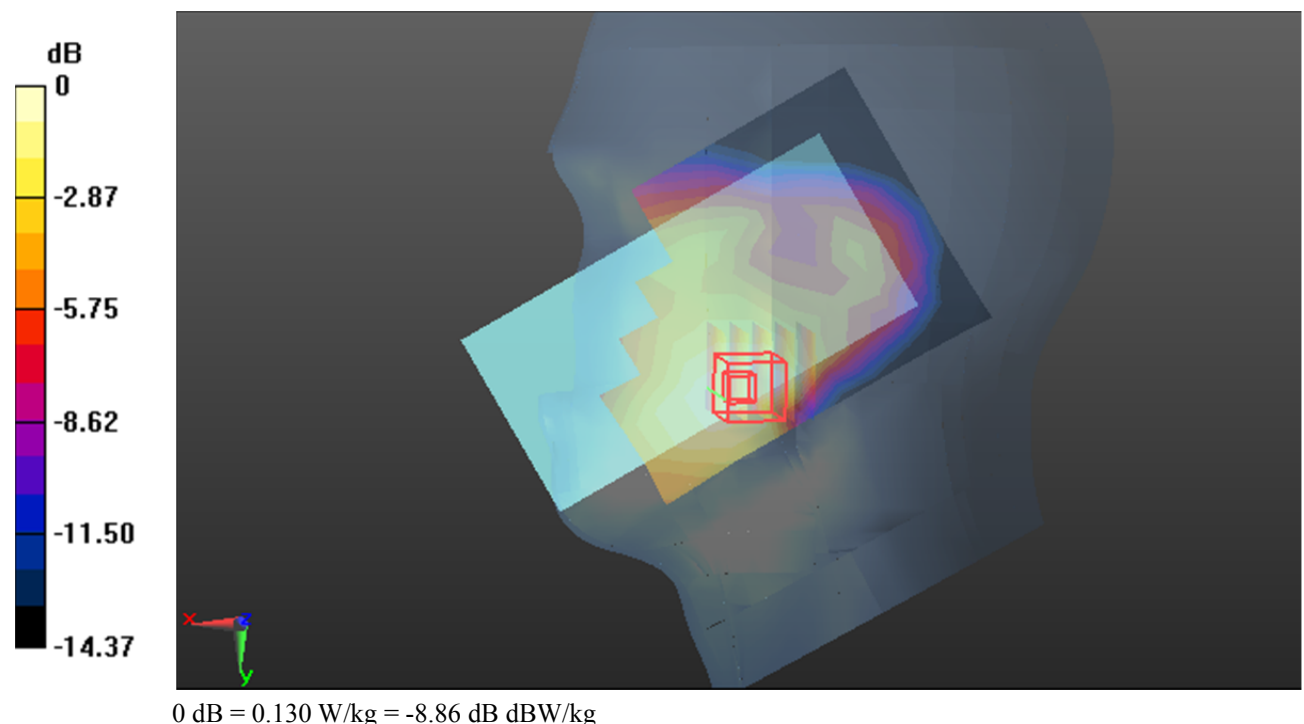

Test Plot*#: LTE Band 66_Head Right Tilt_1RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=1745$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 40.601$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0659 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.782 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.101 W/kg

SAR(1 g) = 0.064 W/kg; SAR(10 g) = 0.039 W/kg

Maximum value of SAR (measured) = 0.0690 W/kg

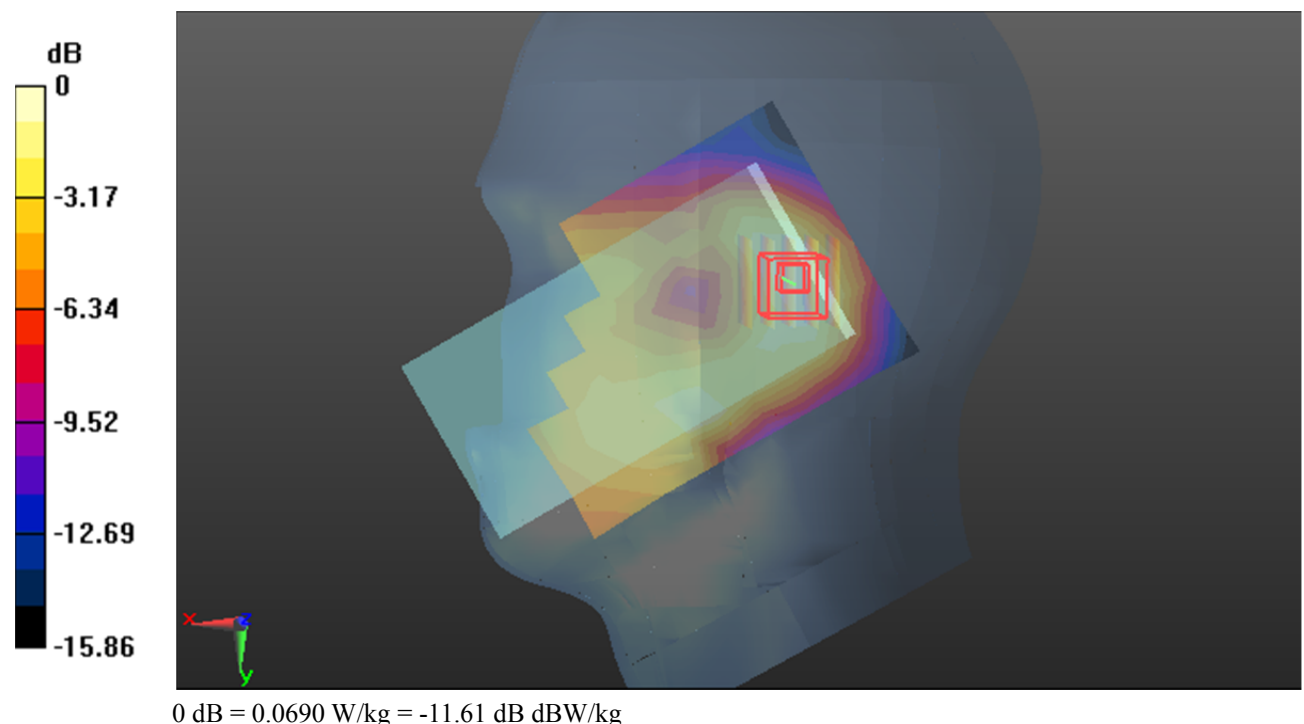

Test Plot*#: LTE Band 66_Head Right Tilt_50%\$RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=1745$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 40.601$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0538 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.195 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.0850 W/kg

SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.033 W/kg

Maximum value of SAR (measured) = 0.0575 W/kg

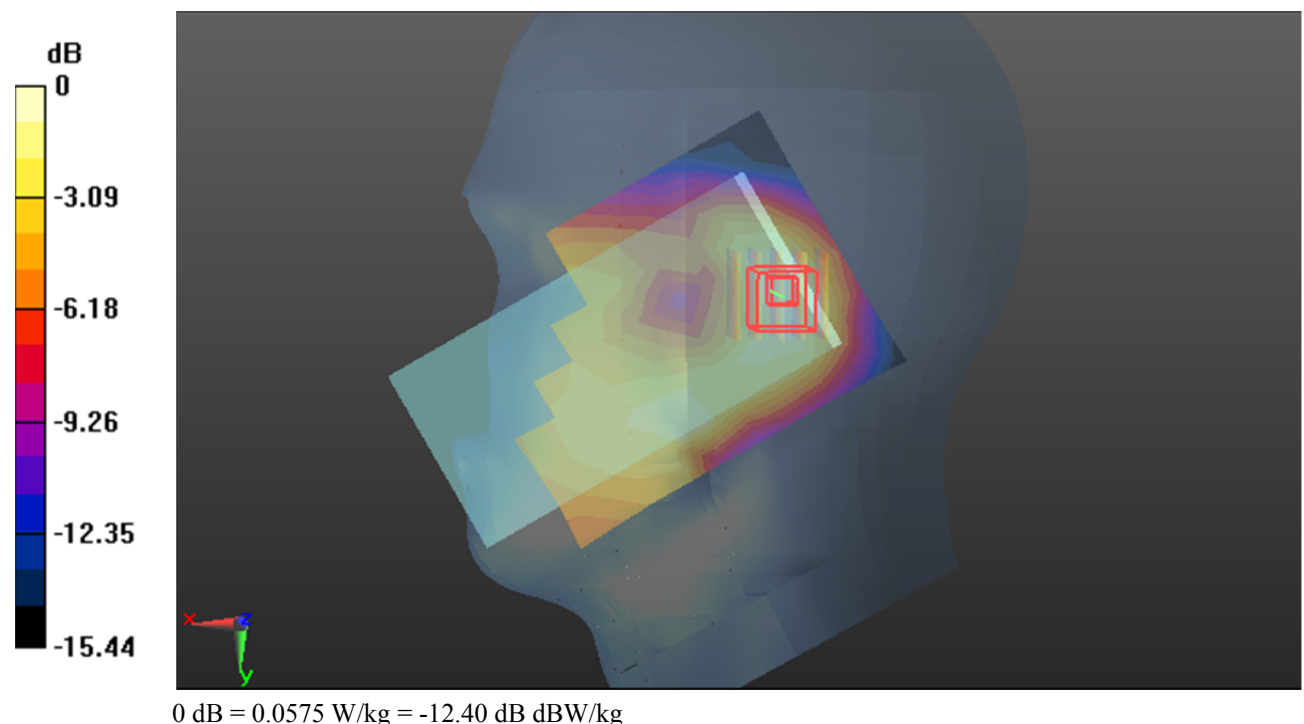

Test Plot*#: LTE Band 66_Body Front_1RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f=1745$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 40.601$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.354 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.176 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.602 W/kg

SAR(1 g) = 0.356 W/kg; SAR(10 g) = 0.201 W/kg

Maximum value of SAR (measured) = 0.395 W/kg

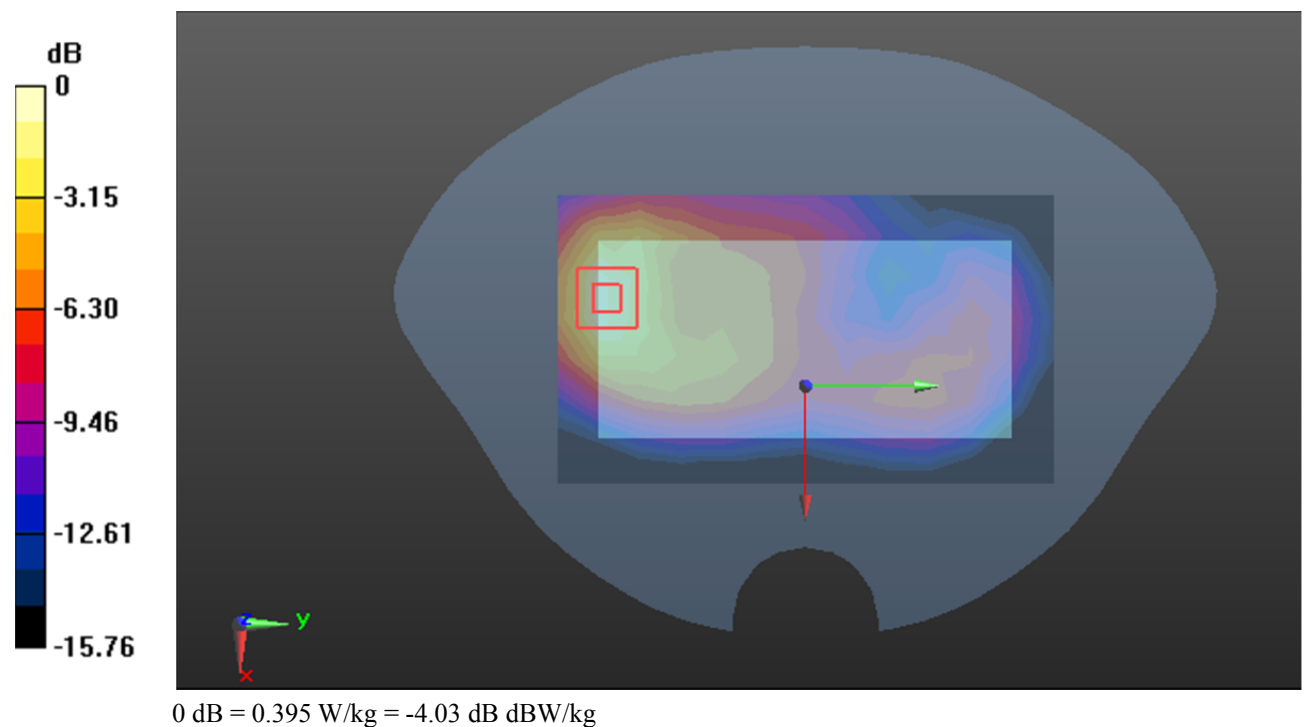

Test Plot*#: LTE Band 66_Body Front_50%RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=1745$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 40.601$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.331 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.497 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.605 W/kg

SAR(1 g) = 0.359 W/kg; SAR(10 g) = 0.203 W/kg

Maximum value of SAR (measured) = 0.398 W/kg

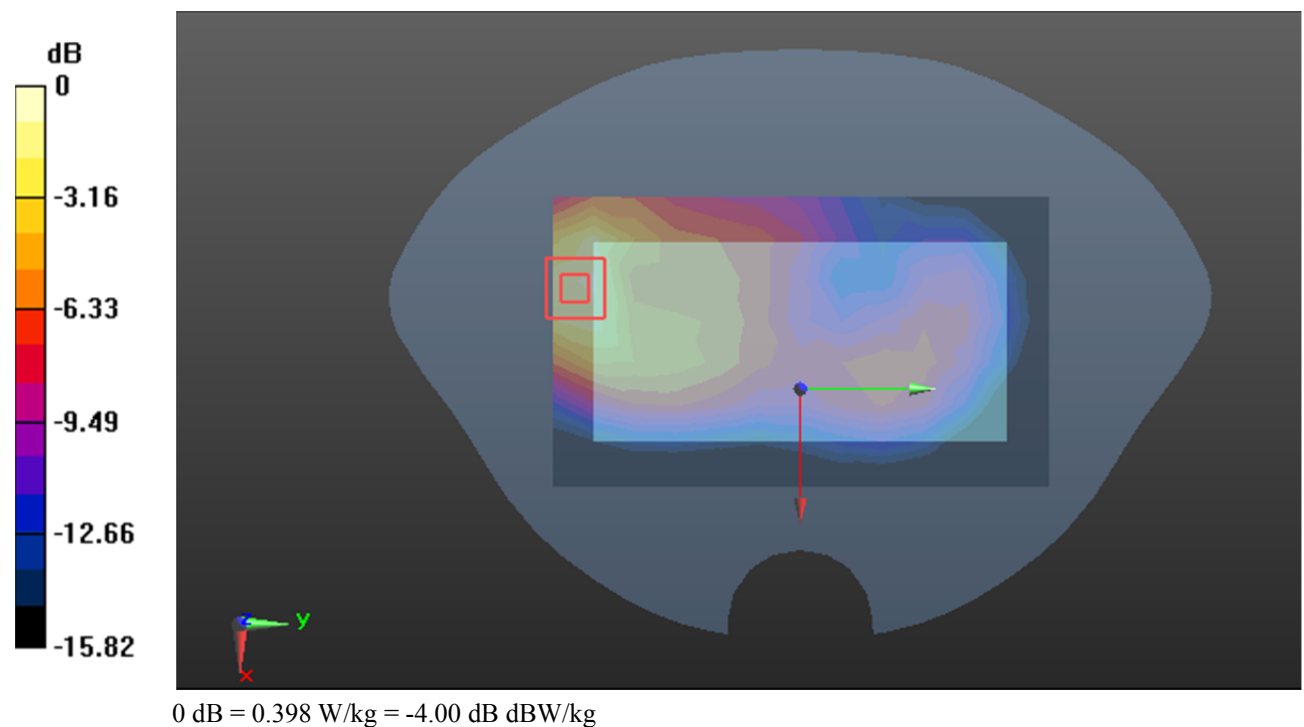

Test Plot*#: LTE Band 66_Body Back_1RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f=1745$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 40.601$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.382 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.165 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.672 W/kg

SAR(1 g) = 0.425 W/kg; SAR(10 g) = 0.257 W/kg

Maximum value of SAR (measured) = 0.469 W/kg

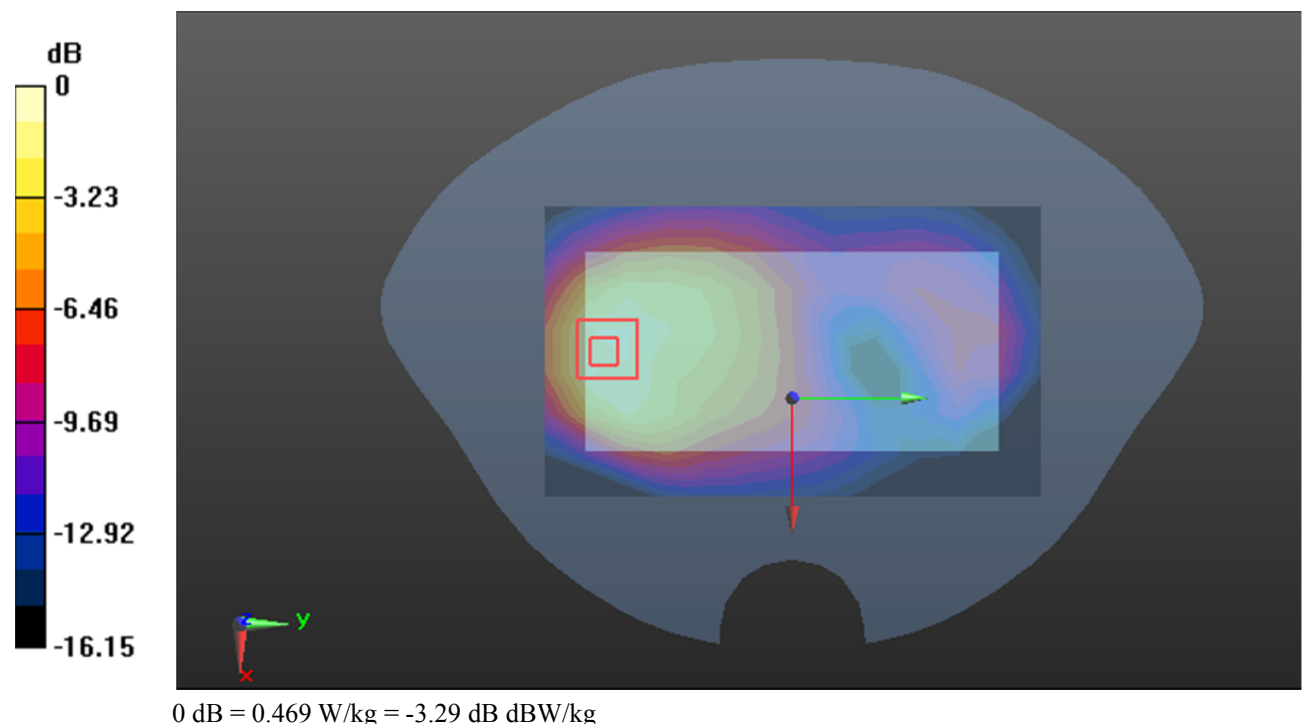

Test Plot*#: LTE Band 66_Body Back_50%RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=1745$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 40.601$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.350 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.850 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.610 W/kg

SAR(1 g) = 0.387 W/kg; SAR(10 g) = 0.234 W/kg

Maximum value of SAR (measured) = 0.427 W/kg

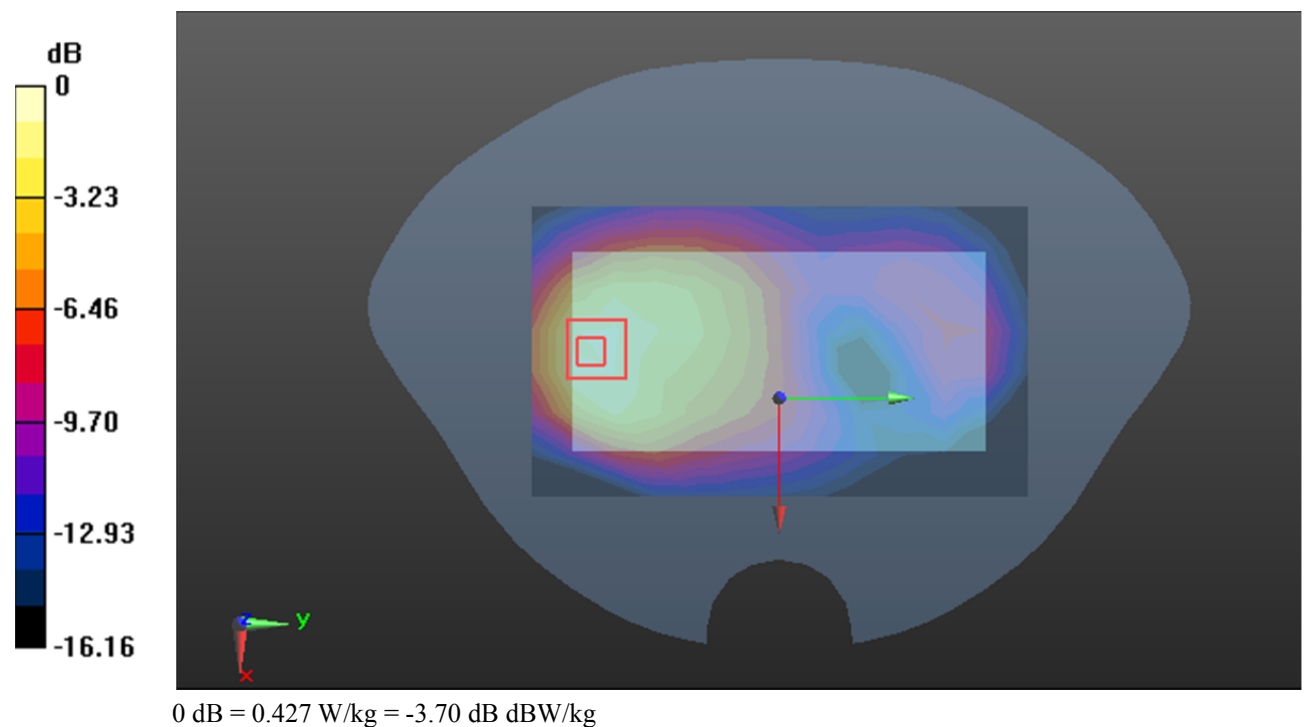

Test Plot*#: LTE Band 66_Body Left_1RB_Middle**DUT: INTELLIGENT MOBILE DATA CAPTURE TERMINAL; Type: T15; Serial: 2A5C-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f=1745$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 40.601$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.144 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.959 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.239 W/kg

SAR(1 g) = 0.145 W/kg; SAR(10 g) = 0.085 W/kg

Maximum value of SAR (measured) = 0.158 W/kg

