

USER GUIDE
RFID LOCKER LOCK
(MODEL : BLE100)



Table of Contents


| | |
|--|---|
| 1. BLE Module Spec | 3 |
| 1.1 Overview..... | 3 |
| 1.2 Composition..... | 3 |
| 1.3 Specification | 4 |
| 1.4 Communication Protocol And Packet..... | 4 |

1. BLE Module Spec

1.1 Overview

- This module performs the function of connecting the locks by Passtech with BLE 4.1 or its more recent versions.

1.2 Composition

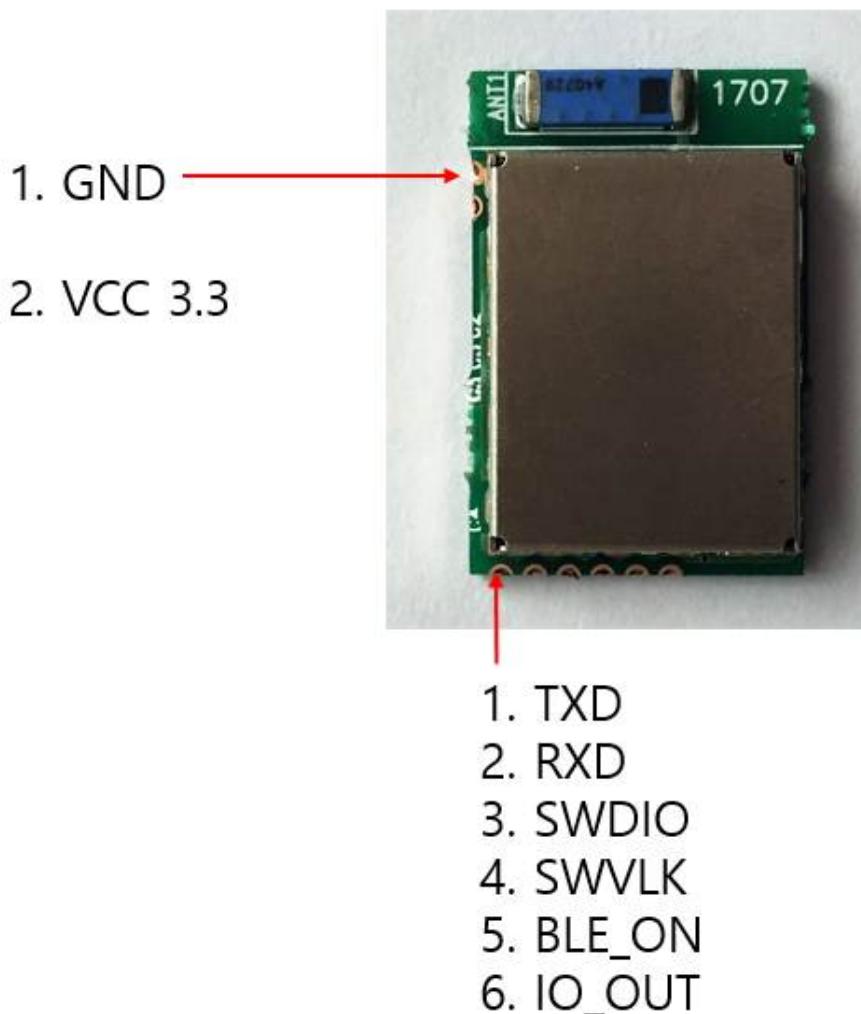

1.3 Specification

- Operating Frequency : 2.4~2.4835Ghz
- -93dBm sensitivity in Bluetooth® low energy mode : BLE 4.1
- 250 kbps, 1 Mbps, 2 Mbps supported data rates
- TX Power -20 to +4 dBm in 4 dB steps
- RSSI (1 dB resolution)
- ARM® Cortex™-M0 32 bit processor
- 256 kB embedded flash program memory
- 16 kB RAM
- Serial Wire Debug (SWD)
- Operation Voltage DC 3.3V
- UART 38400bps Interface
- Wake up I/O 2EA

1.4 Communication Protocol And Packet

- 1) Data Flow
- Advertising Start

| 등록 | | | | |
|--------------------------|----|-----------------------|----|-----------------------|
| Mobile Phone | | Front | | Main |
| | | | | Wake up |
| | | | ↔↔ | "M" + "I" + locker ID |
| ADV start with locker ID | ↔↔ | "M" + "I" + locker ID | | |

- Card Registration

| 등록 | | | | |
|----------------------|----|-----------------------|----|-----------------------|
| Mobile Phone | | Front | | Main |
| m' + 'r' + phone srn | →→ | | | |
| | ↔↔ | ACK/NAK (BCC) | | |
| | | "m" + 'r' + phone srn | →→ | |
| | | | ↔↔ | "M" + 'R' + Card Data |
| | ↔↔ | "M" + 'R' + Card Data | | |
| ACK/NAK | →→ | | | |

- BLE Phone use

| 열기 | | | | |
|----------------------|----|-----------------------------------|----|-----------------------------------|
| Mobile Phone | | Front | | Main |
| m' + 'i' + phone srn | →→ | | | |
| | ←← | ACK/NAK (BCC) | | |
| | | "m" + 'i' + phone srn | →→ | |
| | | | ←← | "M" + 'O' - Card Data request cmd |
| | ←← | "M" + 'O' - Card Data request cmd | | |
| ACK/NAK | →→ | | | |
| Mobile Phone | | Front | | Main |
| m' + "o" + Card Data | ←← | ACK/NAK | →→ | |
| | →→ | "m" + 'o' + Card Data | →→ | |
| | | | ←← | "M" + "O" + OK/NG + Locker |
| ACK/NAK | →→ | "M" + "O" + OK/NG + Locker | | |

2) Packet Format

| STX | LEN | CMD | DATA | ETX | BCC |
|---------|------------|--------|-----------|---------|---------|
| 0x02(1) | DATALEN(1) | CMD(1) | DATA(LEN) | 0x03(1) | 0xHH(1) |

STX (1) : 0x02

LEN (1) : 0x00~0xFF

CMD (1) : Command Code

DATA (LEN) : Data


ETX (1) : 0x03

BCC (1) : STX ~ ETX 까지 ^ (Exclusive OR) Value

3) IC Control Command

- ADVERTISING START

CMD (1) : I

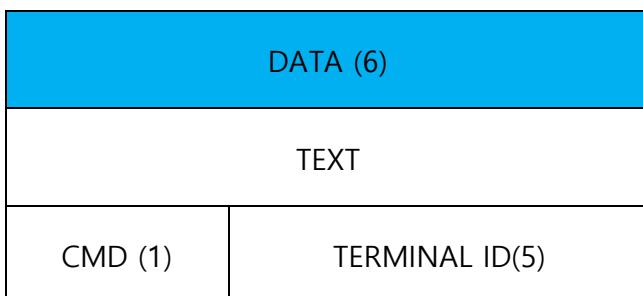


NORMAL MODE : TERMINAL ID = LOCKER ID

REGISTER MODE : TERMINAL ID = "REGIS"

- BLE CHIP POWER ON/OFF

CMD (1) : P

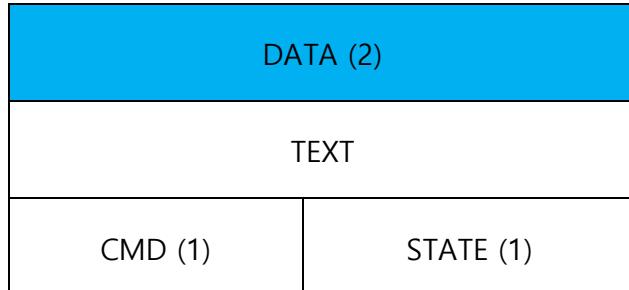

STATE (1) – ON "1" OFF "2"

- BLE SETTING CMD

CMD (1) : S



종류 : A

STATE (1) – T (stop)

4) Card Data Command

- CARD REGISTER REQUEST

CMD (1) : R

| DATA(195) | | | | | | | | | | |
|-----------|---------------|-------------|-----------------------|------------------------------|---------------|---------------|-----------|-------------|----------|-------------------------|
| TEXT | | | | | | CIPHERTEXT | | | | TEXT |
| CMD (1) | from date(10) | to date(10) | Assign Locker ID (25) | Free Locker ID (25) 아직 추가 안함 | lockerinx (1) | 카드 데이터 (48*2) | 폰 시리얼(16) | 카드 시리얼(7*2) | AID(4*2) | KEY B(6*2) reserved (2) |
| | | | | | | | | | | |

- CARD DATA RESPONSE

CMD (1) : o

| DATA(162) | | | | | | | | |
|-----------|-----------|------------|---------------|-----------|-------------|----------|------------|-----------------|
| TEXT | | CIPHERTEXT | | | | | | TEXT |
| CMD (1) | 폰 시리얼(16) | 현재시간 (12) | 카드 데이터 (48*2) | 폰 시리얼(16) | 카드 시리얼(7*2) | AID(4*2) | KEY B(6*2) | reserved (3) |

- CARD REGISTER RESPONSE

CMD (1) : r

| DATA (17) | |
|-----------|-----------|
| TEXT | |
| CMD (1) | 폰 시리얼(16) |

- CARD DATA REQUEST

CMD (1) : O

| DATA (15) | |
|-----------|-----------|
| TEXT | |
| CMD (1) | 0x20 (14) |

| DATA (15) | | | |
|-----------|-----------|---------------|----------|
| TEXT | | | |
| CMD (1) | OK/NG (2) | Locker ID (5) | 0x20 (7) |

FCC compliance Information

FCC Information to User

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution

Modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC Compliance Information : This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation including interference that may cause undesired operation. Modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment under FCC rules. To satisfy FCC exterior labeling requirements, the following text must be placed on the exterior of the end product.

Contains Transmitter Module FCC ID : W6YBLE100

CAUTION : This device and its antenna(s) must not be co-located or operated in conjunction with any other antenna or transmitter. End users cannot modify this transmitter device. Any unauthorized modification could void the user's authority to operate this device.

IMPORTANT NOTE:

FCC RF Radiation Exposure Statement:

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

This device is intended only for OEM integrators under the following conditions:

- 1)The transmitter module may not be co-located with any other transmitter or antenna,
- 2)OEM shall not supply any tool or info to the end-user regarding to Regulatory Domain change.

As long as 2 conditions above are met, further transmitter test will not be required. However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed (for example, digital device emissions, PC peripheral requirements, etc.).

IMPORTANT NOTE: In the event that these conditions can not be met (for example certain laptop configurations or co-location with another transmitter), then the FCC authorization is no longer considered valid and the FCC ID can not be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC authorization.

Manual Information To the End User The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module. The end user manual shall include all required regulatory information/warning as shown in this manual.