


Handheld Two Way Radio

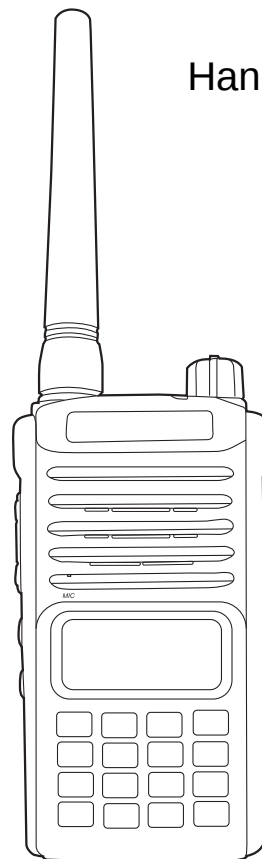

Model:HC-5256V
Brand:Havoc
FCC ID:WRYHC-5256V

User's Manual

Unpacking and Checking Equipment

Welcome to use radios, before using we suggest you:

- Please check the packing box of this product and see if there are signs of damage.
- Please open the packing box carefully. We recommend that you identify the items listed in the following packing list. if you find that our product and its accessories in handling are lost or damaged during the shipment. Please immediately contact dealers.

Parts List

Item	Quantity
Rubber Antenna	1
Li-ion Battery Pack	1
Desktop Charger	1
Power Adapter	1
Belt Clip	1
Users' Manual	1

Preparation

■ Charging the Battery

1. Using the battery

The battery is not completely charged at the factory, please charge it fully before using.

To extend the battery life time, please power off the battery when you don't use two way radio, and save battery in a cool (temperature less than 25 °C) and dry place.

2. Precautions of Charging Equipment

- 1) Do not expose the charger to rain or snow.
- 2) Do not operate the charger if it has received a sharp blow, or has been dropped or damaged in any way.
- 3) Do not disassemble the charger if it has received a sharp blow, or has been dropped or damaged in any way.
- 4) Never alter the AC cord or plug provided with the unit. If the plug will not fit the outlet, have the proper outlet installed by a qualified electrician. An improper condition can result in a risk of electric shock.
- 5) To reduce the risk of damage to the cord or plug, pull the plug rather than the cord when disconnecting the charger from the AC receptacle.
- 6) To reduce the risk of electric shock, unplug the charger from the outlet before attempting any maintenance or cleaning.
- 7) Use of an attachment not recommended or sold by manufacturers may result in a risk of fire, electric shock, or personal injury.
- 8) Make sure the cord is located so it will not be stepped on, tripped over, or subjected to damage or stress.
- 9) An extension cord should not be used unless absolutely necessary. Use of an improper extension cord could result in a risk of fire and/or

electric shock. If an extension cord must be used, make sure that:

- The pins on the plug of the extension cord are the same number, size, and shape as those on the plug of the charger.
- The extension cord is properly wired and in good electrical condition.
- The cord size is 18 AWG for lengths up to 100 feet, and 16 AWG for lengths up to 150feet.

10. Do not replace charger's power cord. If the power cord damages, you must stop using charger immediately.

3. Charging the Battery

Please use the battery charger designated to charge battery. After purchase or extended storage (more than two months), the first time to charge battery cannot make battery reach its normal operating capacity. After repeating charge /discharge it two or three times, the operating capacity will increase to its normal capacity.

4. Please Charge the Radio According to Operation Steps as Follows:



- 1) Insert power adapter into power supply socket.
- 2) Insert output terminal of power adapter into DC jack behind the charging kit, now the charging orange indicator lights about 2 seconds then goes out.
- 3) Insert the battery or radio equipped with battery into the charging kit.
- 4) Confirm the battery and charging kit terminal contact reliably, when charging indicator light turns into red and charging starts.
- 5) After completion of charge (charging time about 5 hours), light turns to be green.

5. Indicators Display as Following:

Status	Indicator
Power Connected	Orange light is on about 2 seconds then goes out
No battery(temperature end judges)	
Charge normally	All go out
The battery is fully charged	Red light is on
Fault (over temperature, battery short circuit or over discharge state)	Green light is on
	Red light flashes

Note: Before charging, please turn off radio power equipped with battery. When charging, using radio will interfere with normal charge of battery and transceiver effect.

GETTING ACQUAINTED

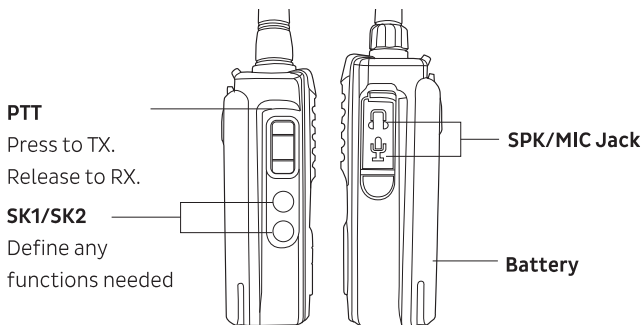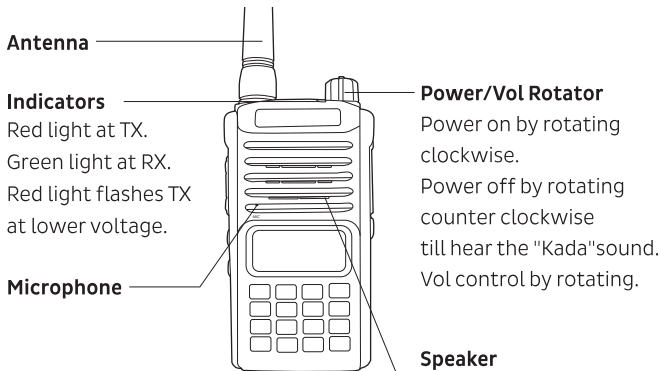

Note: Please refer to the following description to define SK1-SK2 by program software.

Basic Operations

■ Power On/Off



Turn the power switch knob clockwise to turn on radio power; to turn it off, turn the power switch knob counter-clockwise.



■ Volume Control



Turn the volume switch knob clockwise to increase volume; to decrease the volume, rotate the volume switch knob counter-clockwise.



■ TX

1. According to different settings of monitor, please monitor the radio for some while. Ensure there is no radio transmitting at the chosen channel.

2. Press PTT and face to microphone talking.

1) Please make the distance between your lip and microphone at 2.5 cm, and talk as usual to get the best voice quality.

2) Press and hold PTT, LED red light is on.

3) Release PTT to receive information.

3. When using earphone with VOX function, users can hands-free talking.

4. Also users can active the IVOX function which no need to use earphone.

■ RX

When radio receiving information ,green LED lights .

- 1) Only same signaling and CTCSS setting can receive information .
- 2) May not receive any calling if radio is at lower signal and set high level SQL.
- 3) Local dealer maybe program your radio with CTCSS/DCS . Users can receive the same signaling information if chosen channel with CTCSS/DCS . Or it can not get any calling .

Radio with CTCSS/DCS will help you to ignore ineffective calling. Although there seems special channel for CTCSS/DCS ,radio also can communicate with other radio which programmed the same CTCSS /DCS .

Program Settings

Channel Information

■ Radio Basic Information

1) Frequency

Please type in desired frequency value.

2) Back to factory default settings

You can initialize factory default settings by program software.

3) Delete Channel Group

You can delete the chosen channel by program software .

4) Turn On SP

Turn on speaker, you can hear sound from radio when it receives correct signaling.

Function 1

■ Optional Items

1) TOT

This function can prevent someone to occupy the present channel for long time and limit TX time, meanwhile prevent radio from damage by long time transmitting .

2) Alarm before TOT

You can set an alert tone sounds from the speaker before TOT is cut.

3) Back Light

Choose to turn on/off backlight and set lighting duration.

4) Beeper of Radio Power On

Choose desired beeper to sound when turn on the radio .

5) SQL

The purpose of the squelch is to mute the speaker when no signals are present. With the squelch level (0-9) correctly set , you will hear sound only while actually receiving signal. The higher the selected squelch level, the stronger the signals must be when receive. The appropriate squelch level depends on ambient RF noise conditions.

6) Key Lock

1. Long press this key with lock icon .
2. Auto-lock: Set time to active auto-lock .It will be invalid when turn on radio again .
3. Auto-lock + memory : Set time to active auto-lock .It will be valid when turn on radio again.

7) Group A/B Working Mode

Frequency: LCD display frequency value.

Channel: LCD display channel No.

Frequency +Channel: LCD display both modes .

8) Tail Elimination

Users can eliminate tail by reversed CTCSS/DCS Signal or phases state after ending transmitting with CTCSS/DCS signal .

Item	Description
FRE	Tail elimination by frequency
120FRE	Tail elimination by 120 degree phasing+ Frequency
180FRE	Tail elimination by 180 degree phasing + Frequency
240FRE	Tail elimination by 240 degree phasing + Frequency

Item	Description
OFF	NO tail elimination
120	Tail elimination by 120 degree phasing
180	Tail elimination by 180 degree phasing
240	Tail elimination by 240 degree phasing

9) Priority TX Channel

Automatically-Select: your radio can automatically change to desired channel after receiving signaling .

Assigned Channel : you can transmit information by chosen channel.

Busy Channel: choose previous communicated channel as priority channel to transmit.

Channel Group A: choose group A as priority channel to transmit. (be available TX and RX by frequency group B)

Channel Group B: choose group B as priority channel to transmit. (be available TX and RX by frequency group A)

11) Adjusting Volume

User can adjust desired volume level by increasing or decreasing.

12) Channel Name Display

Only available at channel mode .

Tick √: Display

Not tick √: No Display

13) Beeper

Turn beeper on/off . If turn off beeper ,key tone and power on tone will not be available .

14) End-of-Transmission Tone

Turn End-of-Transmission tone on/off . If enabled ,your two way radio will transmit a tone when you finish transmitting .

15) Monitor End-of- Transmission Tone

If enabled this monitor function ,you can hear the indicating sound.

16) Decode Tail Elimination by Frequency Without CTCSS/DCS Decode

Tail tone elimination by frequency at channel without CTCSS/DCS decode .

17) Encode Tail Elimination by Frequency Without CTCSS/DCS Encode

Tail tone elimination by frequency at channel without CTCSS/DCS encode .

18) Both A/B Standby Mode

Enable Group A and Group B standby for RX.

19) Key Lock

Enable the key lock function.

20) UP/DOWN Lock

Enable UP/DOWN lock function.

21) Support Non-standard CTCSS and DCS

Your radio can set any desired non-standard CTCSS and DCS

22) Voice Annunciation

Choose desired annunciation for reporting:None,Chinese,English.

VOX

■ VOX Level

Set desired VOX level

■ VOX Level Comparing Value

You can choose 0-180 branch setting in every VOX level for your radio.

■ VOX Delay Time

This function helps you to make fluent communication by avoiding quickly back to TX mode without transmitting the last sentence .

■ No VOX During RX

When radio is receiving , VOX/IVOX are not available .

■ iVOX (Available Without earphone)

You can hands-freely communicate with others if active this function.

Scan

■ Scan Mode

According to chosen scan mode ,radio stops or continues to scan.

- 1) Time Mode: Your radio stops scanning when detecting a signal for some while(approximately 5 seconds).and then continues to scan even if the signal is still present.
- 2) Carrier Mode: Your radio stops scanning when detecting a signal and remains on the same channel until the signal drops out.
- 3) Search Mode : Radio stops at the scanned frequency or channel when detecting a signal.

■ Delay Time Between RX and Scanning

You can set the time of radio automatically back to scanning after RX .

■ Delay Time Between TX and Scanning

You can set the time of radio automatically back to scanning after TX.

■ Priority Scan Channel No. Of Group A

You can set desired channel no .from group A as priority scan channel.

■ Priority Scan Channel No. Of Group B

You can set desired channel no .from group B as priority scan channel.

■ Scan Indicator

Turn on green light flashes when scanning.

Battery

■ Battery Save

The battery saver function decreases the amount of power used when a signal is not being received and no operations are being performed (no keys are being and no switches are being turned). But when your radio receives information first time ,the delay time will be longer .

■ Low Battery Beeper Type

You can choose the desired beeper for low battery alert.

■ Low Battery Alert Interval

Set the interval by every low battery alert .

■ APO

Radio will automatically turn off power if there is no operation within 5 minutes and alarm at interval time before APO .Under APO mode, user can active radio by operating it again.

Off : Turn off APO function

APO Time : Turn on this function and set the time to auto power off as requested .

■ Low Battery Voice Report

Radio will report low battery state if active this function.

■ Low Power Orange Indicator

Orange indicator lights when TX at low power.

■ TX Available at Lower Battery

Set the certain voltage value to enable radio TX at lower battery (if battery lower than certain value ,radio turns off power automatically)

■ APO at High Voltage

Radio automatically power off if the voltage higher than pre-set voltage value.

■ APO at Low Voltage

Radio automatically power off if the voltage lower than pre-set voltage value.

Function 1

■ Emergency Call

1) Emergency Call Type

Local Emergency : Alert from radio .

Local Emergency + Remote Emergency: Alert from radio, same as other radios with the same frequency and same signaling .

2) Local Emergency Time

Continuous : Keep alerting

Limited time setting :Choose the desired time

3) Remote Emergency TX Time

Continuous : Keep alerting

Limited time setting :Choose the desired time

4) Remote Emergency RX Time

Continuous : Keep alerting

Limited time setting :Choose the desired time

5) Emergency Call Circle Time

Choose desired circle time to make emergency call.

6) Channel Select

Assigned Channel : Suppose assigned at Channel 3 ,no matter what the present channel is ,alarm always goes from Channel 3.

Present Channel: Suppose present channel is No.5 ,alarm from Channel 5.
Present channel is No.6 ,alarm goes from Channel 6.

7) Emergency Channel No.

Choose desired channel number from Group A and Group B as emergency channel.

■ Power On Settings

1) Display Information

Off: Display all functions' icon.

Voltage :only display voltage value

Display Information :edited by user

2) Power On Message

Please edit the desired information by program for Group A and Group B.

3) Password to Power on

Radio default is to be no password. Users can freely set.

4) Password to Reset All Settings

Enable this function, radio will back to pre-set state .

First/Short-Cut Channel

◆ First Channel: for group A

Choose desired channel from group A as first channel

◆ First Channel: for group B

Choose desired channel from group B as first channel

◆ Short-Cut Channel : for group A

Choose desired channel from group A as short-cut channel

◆ Short-Cut Channel : for group B

Choose desired channel from group B as short-cut channel

FM Radio

1) Monitor at FM Radio

Tick: RX available during FM radio working

No tick: No RX available during FM radio working

Note: Radio can monitor group A and group B at same time while listening to FM radio .

2) Working Mode

Full Frequency :makes FM radio work in Full frequency .

Channel: makes FM radio work in memorial channel .

3) FM SQL

Choose desired SQ level :1-32

4) FM VOL

Adjust desired FM Volume

5) FM Present Channel

Set the default channel when turn on FM radio

Input Information

This function allow radio input and store at most 16 letters or numbers , Chinese words. It also can be used to store SN-code, identification for Program ID ,ID and so on .

DTMF Settings

Encode DTMF

■ Pre-carrier Frequency Duration :

Set sending pre-carrier frequency duration before sending DTMF ,so that you can get more accurate and stable information .Choose desired duration from 0-5100 ms.

■ DTMF Code Continuous Duration:

Set TX continuous duration for every DTMF code. Choose desired duration from 80-2450 ms.

■ DTMF Code Interval :

Set interval between ending sent DTMF and next DTMF , Choose desired interval from 80-2450 ms.

■PTT ID at the begin of TX

You can input at most 16 digits DTMF code to send as PTT ID before transmitting.

■PTT ID at the end of TX

You can input at most 16 digits DTMF code to send as PTT ID after transmitting.

■Side Tone

This tone is for checking if the DTMF code sent by using radio.

■ DTMF Key Lock

You can lock the desired DTMF key

Decode DTMF

■ID Code

The ID code is consisted of 1-10 digits .Radio decodes right DTMF when receiving matched radio with programmed DTMF signaling .

■ Auto Reset Timer

If there is no communication after decoding DTMF code, DTMF code will be reset and make the speaker quiet .Timer starts counting from stopping receiving carrier signal.

■ID Group Calling

Define a universal group code by DTMF character A,B,C,D, *, #. Radio can decode if receiving right ID code and one or all code will be replaced by this universal code .

For example :

Group C

	Station 1	Station 2	Station 3	Station 4
Code	123	223	235	355
Calling C23	Station 1 and 2 called			
Calling CC5	Station 3 and 4 called			
Calling CCC	All Station Called			

■ **Calling Alert**

Indicator alert when receiving matched signaling.

■ **Calling Alert Beeper**

Beeper alter when receiving matched signaling.

■ **ANI**

Active this function to display the sender's ID .

You can choose desired function :turn on/turn off.

■ **Contact List**

Edit and name sender's ID on the log by programming software. You can choose desired function :turn on/turn off.

Stun/Kill

■ **Kill Code**

Kill radio when it receives assigned code .Decode unless receive kill decode Stun+#.

■ **Kill Group Code**

Similar as ID Group Code

For example :

Group C

	Station 1	Station 2	Station 3	Station 4
Code	123	223	235	355
Base sending Kill Code C23	Station 1 and 2 called			
Base sending Kill Code CC5	Station 3 and 4 called			
Base sending Kill Code CCC	All Station Called			

■ **Stun/Kill Type**

You can stun desired radio to disable transmission until receiving decode code
Or kill desired radio to disable transmission and receiving until receiving decode code.

Note: Whatever radio power on again or not ,radio still memory the stun/kill function.

Automatically Dial List

Set DTMF code for every auto dial list .

Phone Book

Before dialing ,user input DTMF code which matched with desired person ,
then quick to find out desired person's number.

Two Tone

■ **Two Tone List**

Set value for every two tone group.

■ **Pre-carrier Frequency Duration**

Set sending pre-carrier frequency duration before two tone code sending ,

so that users can get more accurate and stable information .

■ Adjusting Volume for Two Tone ,End Tone and DTMF

You can choose desired volume level for two tone ,end tone and DTMF.

■ Auto Reset Timer

If there is no communication after decoding two tone code, The two tone code will be reset and make the speaker quiet .Timer starts counting from stopping receiving carrier signal.

■ Side Tone

Enable radio reports when sending two tone.

Key Settings

■ Key Instructions




1. In CH or CH/VFO mode, you can input three numbers to change present channel. If channel numbers have stored frequency in radio channel, then it turns to desired channel ; if not ,back to the original channel .

For example : CH1 (input 001) CH 98 (input 098)
CH123 (input 123)

2. In VFO mode, you can input numbers to change frequency. After inputting 6 digits frequency value, radio will work at desired frequency. If not, back to the original working frequency .

Manual operation :

Choosing corresponding frequency step by checking setting value 0 or 5 .The minimum input value is 2.5K . It will be invalid if exceed 2.5K .



Short-Cut Operation

■ Short-Cut Operation

Press **MENU** and then press number keys 0-9 to make quick operation and use radio conveniently .

◆ ANI

Press **MENU** and then press **0 ANI** ,LCD displays **0 ANI OFF** , Press **MENU** and **▲ ▼** to choose :①OFF: turn off PTT ID display function ;②ON :display PTT ID .Press **→** to confirm . Press **←** to back first menu*press **→** to quit setting.

◆ SQL

Press **MENU** and then press **1 SQL** ,LCD displays **01 SQL 05** . Press **MENU** again and use **▲ ▼** key to choose desired level . Press **MENU** to confirm .Press **0 ANI** to back first menu, press *** LOCK** to quit setting.

◆ Reverse Frequency

Press **MENU** and then press **3 REV**, LCD displays **03 REV T*R**. Press **MENU** to confirm setting. Operate the above steps if want to quit setting.

◆ Back Light

Press **MENU** and then press **4 LED**, LCD displays **04 LED AUTO 10**. Press **MENU** again and use **▲ ▼** key to chose: ① OFF: turn off back light ; ② ON: turn on back light ; ③ AUTO: choose desired lighting time . Press **0 AM** to back first menu, press *** LOCK** to quit setting.

◆ VOX

Press **MENU** and then press **5 VOX**, LCD displays **05 VOX SWI OFF**. Press **MENU** again and use **▲ ▼** key to choose : ① OFF: turn off VOX function ; ② ON: turn on VOX function . Press **MENU** to confirm . Press **0 AM** to back first Menu, press *** LOCK** to quit setting.

Note : VOX function only available for present working frequency group and channel .

◆ Scanning

Press **MENU** and then press **6 SCN**, LCD display **06 SCAN**. Press **MENU** to confirm and start to scan, press **MENU** again to quit scanning.

◆ Key Tone

Press **MENU** and then press **7 BEEP**, LCD display **07 BEEP OFF**, Press **MENU** again and use **▲ ▼** key to choose : ① OFF: turn off key tone. ② ON: turn on key tone . Press **MENU** to confirm . Press **0 AM** to back first menu, press *** LOCK** to quit setting.

◆ FM Radio

Press **MENU** and then press **8 FM**, LCD displays **08 FM RAD OFF**. Press **MENU** and **▲ ▼** to choose : ① OFF: turn off FM radio. ② ON: turn on FM radio . Press **MENU** to confirm . By pressing **▲ ▼** to choose desired frequency or input directly FM radio frequency value or press **A/B** to search available

signal. Once radio receives signal ,it will stop scanning FM radio.

Operates again the above steps to turn off FM radio .

◆ Frequency Step

Press **MENU** and then press **9 STEP** , LCD displays

09 STEP
OFF

 . Press **MENU** again and **▲ ▼** to choose desired frequency step. Press **MENU** to confirm . Press **Q ANI** to back, press **Ⓚ LOCK** to quit setting.

◆ Group A and B Exchange

Press **A/B** to choose desired channel A/B

◆ VFO /VFO+CH Mode Exchange

Press **F V/M** to exchange VFO /VFO+CH mode. Press **▲ ▼** key to choose desired frequency or channel.

◆ Key Lock

Long press **Ⓚ LOCK** to lock/unlock radio keypad .

Side-Keys Programming Function

There are four operating methods to be programmed by PC software.

SK1	Short Press
	Long Press
SK2	Short Press
	Long Press

See following side-key functions:

English	Details
OFF	No function available
DIAL	"Dial" is applicable for choosing pre-set code and call someone by DTMF code. Press "Dial" or PTT, then press "dial" to send DTMF code .
CALL	Choose desired number in the list and make call . Press 0-9 to choose desired list .
SCAN	Scanning frequency/memorial channel, press any key except [▲]/[▼] to quit scanning .
VOX	Turn on/off VOX
MONITOR	Stop/Start monitor the QT or DQT, meanwhile radio automatically turn on SQL when receives carrier signal.
POWER	Power on/off
ALARM	Turn on emergency call function. Press PTT to turn off emergency call.
DTMF IN	Input DTMF code ,then press PTT to send out DTMF code .
FM RADIO	Turn on/off FM radio
VOL INC	Increase volume
VOL DEC	Decrease volume
FIR CH	exchange to the first channel

SEC CH	exchange to quick channel
SQL OFF	Turn on SQL and while receive carrier signal ,radio speaker actives.
SQL MOM	Active this SQ , and keep at SQ state when radio receives carrier wave (Short press is invalid for this function)

Function Operation Instructions

Function Quick key instructions

- 1) Press **MENU** to get menu setting
- 2) Press **▲ ▼** or directly input key number To choose desired one.
- 3) Press **MENU** again to get branch menu.
- 4) Press **▲ ▼** to choose desired function
- 5) Press **MENU** to confirm /quit setting

Function Setting Instructions

Function menu 00-09 is same as short-cut menu settings.

◆ RX CTCSS/DCS

Press **MENU** and then press **▲**, LCD displays . Press **MENU** again and ***LOCK**, then displays ①OFF: turn off CTCSS/DCS; ②67.0-254.1; ③D023N-D7541I. Press **▲ ▼** to choose desired CTCSS/DCS. Press **MENU** to confirm. Press **Q AM** to back first menu, press ***LOCK** to quit setting.

◆ TX CTCSS/DCS

Press **MENU** and then press **▲**, LCD displays . Press **MENU** again and ***LOCK**, then displays :①OFF: turn off CTCSS/DCS ; ②67.0-254.1; ③D023N-D7541I. Press **▲ ▼** to choose desired CTCSS/DCS. Press **MENU** to confirm. Press **Q AM** to back first menu, press ***LOCK** to quit setting.

◆ Frequency Offset Direction

Press **MENU** and **▲**, LCD displays . Press **MENU** and **▲ ▼** to choose : ①OFF: TX Frequency Value=RX Frequency Value ; ②: Present frequency value -frequency difference ; ③+: Present frequency value + frequency

difference . Press **MENU** to confirm. Press **◀** to back first menu, press ***LOCK** to quit setting.

◆ Offset

Press **MENU** and **▲**, LCD displays **OFFSET 0.000**. Press **MENU** and **▲ ▼** to choose desired value. Press **MENU** to confirm. Press **◀** to back first Menu, press ***LOCK** to quit setting.

◆ Channel Name Display

Press **MENU** and **▲**, LCD displays **DIS.NM ON**. Press **MENU** and **▲ ▼** to choose :

① OFF: turn off channel name display function; ② ON: display channel name.

Press **MENU** to confirm . Press **◀** to back first menu, press ***LOCK** to quit setting.

Channel Name Editing

◆ Memory Channel

Press **MENU** and **▲**, LCD displays **MEM CH**. Press **MENU** and **▲ ▼** to choose desired channel NO. Press **MENU** twice to confirm . Press **◀** to back first menu, press ***LOCK** to quit setting.

◆ Delete Channel

Press **MENU** and press **▲**, LCD display **DEL CH**. Press **MENU** and **▲ ▼** to choose desired delete channel No. Press **MENU** twice to confirm. Press **◀** to back first Menu, press ***LOCK** to quit setting.

◆ TX Channel Select

Press **MENU** and **▲**, LCD displays **TX.SEL**. Press **MENU** and **▲ ▼** to choose :

① EDIT:present channel; ② BUSY: previous communicating channel

as TX channel ; ③ Group A to TX ; ④ Group B to TX ; ⑤ AUTO: the channel

receiving signal . Press **MENU** to confirm. Press **◀** to back first Menu, press ***LOCK** to quit setting.

◆ Standby Switch

Press **MENU** and **▲**, LCD displays **D.WAIT ON**. Press **MENU** and **▲ ▼** to choose :

① ON: Group A and B work simultaneously ; ② OFF: A icon lights means group A no working . B icon lights means group B no working ; ③ Group A to TX . Press **MENU** to confirm . Press **◀** to back first menu, press ***LOCK** to quit setting.

◆ VOX

Press **MENU** and **▲** , LCD displays **VOX 0** . Press **MENU** and **▲ ▼** to choose desired VOX level . Press **MENU** to confirm. Press **◀** to back first menu, press ***LOCK** to quit setting.

◆ ROGER

Press **MENU** and **▲** , LCD displays **ROGER NO** . Press **MENU** and **▲ ▼** to choose :
① ON: turn on roger. ② OFF: turn off roger . Press **MENU** to confirm. Press **◀** to back first menu, press ***LOCK** to quit setting.

◆ TOT

Press **MENU** and **▲** , LCD displays **TOT 0** . Press **MENU** and **▲ ▼** to choose desired time (To avoid long time transmitting) . Press **MENU** to confirm. Press **◀** to back first menu, press ***LOCK** to quit setting.

◆ APO

Press **MENU** and **▲** , LCD display **APD OFF** . Press **MENU** and **▲ ▼** to choose :
① OFF: turn off APO; ② 1HOUR....24HOUR: choose desired hours to active APO. Press **MENU** to confirm. Press **◀** to back first menu, press ***LOCK** to quit setting.

◆ Add Scanning

With your radio in frequency and channel mode , Press **MENU** and **▲** , LCD displays **SCAN AD DEL** . Press **MENU** and **▲ ▼** to choose : ① DEL: delete scanning channel ; ② ADD: add scanning channel . Press **MENU** to confirm. Press **◀** to back first Menu, press ***LOCK** to quit setting.

◆ Key Lock

Press **MENU** and **▲** , LCD displays **AUTO LK MANU** . Press **MENU** and **▲ ▼** to choose :
① MANU: lock by manual ; ② AUTO 5.....AUTO 30: choose desired lock time

after no operation ,but radio does not memory the setting when power off ;

③ AUTOS 5.....AUTOS 30, choose desired lock time after no operation ,and radio does memory the setting when power off . Press **MENU** to confirm. Press **O ANI** to back first menu, press *** LOCK** to quit setting.

◆ Power On Message

Press **MENU** and **▲**, LCD displays **POW.MSG OFF** . Press **MENU** and **▲ ▼** to choose:

① OFF:Full displays all icons ; ② DC:only display voltage value ; ③ MSG: display programmed characters . Press **MENU** to confirm. Press **O ANI** to back first menu, press *** LOCK** to quit setting.

◆ Battery Voltage

Press **MENU** and **▲**, LCD displays **DC.VOLT 7.7V** , Press **MENU** to confirm . Press **O ANI** to back first menu, press *** LOCK** to quit setting.

◆ Monitor

Press **MENU** and **▲**, LCD displays **ON OFF** , Press **MENU** and **▲ ▼** to choose :

① OFF:turn off monitor function when listen to FM radio; ② ON:monitor when listen to FM radio. Press **MENU** to confirm . Press **O ANI** to back first menu, press *** LOCK** to quit setting.

◆ Channel Display A

Press **MENU** and **▲**, LCD displays **NOF-R VFO.CH** , Press **MENU** and **▲ ▼** to choose :

① VFO:Full frequency mode; ② CHANNEL:channel mode ; ③ VFO.CH: frequency +channel . Press **MENU** to confirm . Press **O ANI** to back first menu,press *** LOCK** to quit setting.

◆ Channel Display B

press **MENU** and **▲**, LCD display **NOF-B VFO.CH** , Press **MENU** and **▲ ▼** to choose :

① VFO:Full frequency mode; ② CHANNEL:channel mode ; ③ VFO.CH: frequency +channel . Press **MENU** to confirm . Press **O ANI** to back first menu,press *** LOCK** to quit setting.

◆PTT ID

With radio turning on DTMF and 2 TONE , press **MENU** and **▲**, LCD displays **PTT.ID** . Press **MENU** and **▲ ▼** to choose: ①OFF:no sending PTT ID ; ②BOT: Send PTT ID at beginning of TX; ③EOT: send PTT ID after ending TX; ④BOTH: send PTT ID at beginning and end of TX . Press **MENU** to confirm . Press **◀▶** to back first menu, press ***LOCK** to quit setting.

◆Reset

Press **MENU** and **▲**, LCD displays **RESET VFO** , Press **MENU** again and **▲ ▼** to choose: ①VFO: Restore initialization except memorial channels ; ②FULL:All restore initialization and back to original setting , the password is 0000000. Press **MENU** to confirm .Press **◀▶** to back first menu, press ***LOCK** to quit setting.

Troubleshooting

Symptom	Try This
No power	● Battery power may have run out, please update battery or recharge it. ● Battery may not be properly installed, please take it off and re-install.
Battery lasts a short time after charge	● The battery life is over, please replace new battery.
Can not talk to other members of your group.	● Verify transmitting is within effective operating range. ● Verify channel, frequency and code settings are correct.
Hearing other conversation on a channel (not group members")	● Please change code settings, including all two way radio settings of your group.

Specifications

General Specification	
Model Name	HC-5256V
Frequency Range	136-174MHz
Output Power	5w
Channel	2*128 channels
Channel Spacing	12.5KHz
CTCSS/DCS	50 CTCSS / 105 DCS
Antenna Impedance	50 ohm
Working Temperature	-20 °C +50 °C
Working Voltage	DC7.4v
Battery Type	Li-ion battery
Dimension(antenna excluding)	112.5(H)x59(W) x37(D)mm
Weight (include antenna, battery)	About 230g

Warranty Card

Contact:_____

Company Name:_____

ADD:_____

Post Code:_____

Tel:_____

Mob.: _____

Fax:_____

Email: _____

Ordered:_____

Model:_____

Ordered No.:_____

Purchased Date:_____

S/N: _____

(EAN)_____

Warranty Card No.:_____

Trouble Description:

Terms and Conditions

1)This warranty is provided only for product purchased from authorized dealer of Juston Electronic Equipment Co.Ltd (hereinafter called) .

2) Warrants this product to be free from manufacturer's defects for a specified period .

3)Within the specified warranty period , will repair or replace non consumable parts (excluding casing ,accessories ,batteries ,cable and consumable) that are damaged under normal use (by judgement of) at no additional charge .

4)The warranty will not be covered under the following conditions.

A, Out-of-warranty products .

B , The product is modified without approval.

C ,Obvious attack of appearance whatever it is .

D ,The product is subjected to unusual physical or electrical stress , including physical damage ,burnt components and broken connectors, watered radio.

E ,The serial number label is removed or altered .

5)This warranty card must be presented together with dealer's invoice when the defective product is returned for repair .

Otherwise , reserve the right of not providing free warranty during the warranty period .

6)The customer is responsible for returning the defective product at his own expense .

7)Your warrant period is calculated from the date of invoice of this product .

SAFETY TRAINING INFORMATION



Your EKL Imports radio generates RF electromagnetic energy during transmit mode. This radio is designed for and classified as “Occupational Use Only”, meaning it must be used only during the course of employment by individuals aware of the hazards, and the ways to minimize such hazards. This radio is NOT intended for use by the “General Population” in an uncontrolled environment.

This radio has been tested and complies with the FCC RF exposure limits for “Occupational Use Only”. In addition, your EKL Imports radio complies with the following Standards and Guidelines with regard to RF energy and electromagnetic energy levels and evaluation of such levels for exposure to humans:

- ▮ FCC OET Bulletin 65 Edition 97-01 Supplement C, Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields.
- ▮ American National Standards Institute (C95.1-1992), IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.
- ▮ American National Standards Institute (C95.3-1992), IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields— RF and Microwave.



The information listed above provides the user with the information needed to make him or her aware of RF exposure, and what to do to assure that this radio operates with the FCC RF exposure limits of this radio.

Electromagnetic Interference/Compatibility

During transmissions, your EKL Imports radio generates RF energy that can possibly cause interference with other devices or systems. To avoid such interference, turn off the radio in areas where signs are posted to do so. **DO NOT** operate the transmitter in areas that are sensitive to electromagnetic radiation such as hospitals, aircraft, and blasting sites.

Occupational/Controlled Use

The radio transmitter is used in situations in which persons are exposed as consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure.

Attention:

This radio complies with IEEE and ICNIRP exposure limits for occupational/controlled RF exposure environment at operating duty factors of up to 50% and is authorized by the FCC for occupational use only. An appropriate warning label is affixed to all units. In order to comply with RF exposure requirements, a minimum distance of 2.5cm must be maintained when held-to-face, and body-worn operations are restricted to the approved original accessories (belt clip).

Do not use this device when antenna shows obvious damages