

# EMC TEST REPORT

**Applicant** Shanghai Xiangcheng  
Communication Technology Co., Ltd

**FCC ID** 2A2UU-PEGASUS1

**Product** Pegasus1

**Model** Pegasus1

**Report No.** EFTA25040240-IE-06-E1V2

**Issue Date** June 23, 2025

Eurofins TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC Code CFR47 Part15B (2024)/ ANSI C63.4-2014**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

---

*Prepared by: Liu Wei*

*Approved by: Xu Kai*

---

## Eurofins TA Technology (Shanghai) Co., Ltd.

*Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China*

*TEL: +86-021-50791141/2/3*

*FAX: +86-021-50791141/2/3-8000*

## Table of Contents

1	Test Laboratory .....	5
1.1	Notes of the Test Report.....	5
1.2	Test Facility.....	5
1.3	Testing Location.....	5
2	General Description of Equipment Under Test .....	6
2.1	Applicant and Manufacturer Information .....	6
2.2	General Information .....	6
2.3	Applied Standards .....	8
2.4	Test Mode .....	9
3	Test Case Results .....	10
3.1	Radiated Emission.....	10
3.2	Conducted Emission.....	15
4	Uncertainty Measurement.....	18
5	Main Test Instruments .....	19
	ANNEX A: The EUT Appearance .....	20
	ANNEX B: Test Setup Photos .....	21

Version	Revision Description	Issue Date
Rev.0	Initial issue of report.	June 4, 2025
Rev.1	Updated information.	June 17, 2025
Rev.2	Updated description.	June 23, 2025

Note: This revised report (Report No.: EFTA25040240-IE-06-E1V2) supersedes and replaces the previously issued report (Report No.: EFTA25040240-IE-06-E1V1). Please discard or destroy the previously issued report and dispose of it accordingly.

## Summary of measurement results

Number	Test Case	Clause in FCC Rules	Conclusion
1	Radiated Emission	FCC Part15.109, ANSI C63.4-2014	PASS
2	Conducted Emission	FCC Part15.107, ANSI C63.4-2014	PASS
Date of Testing: April 27, 2025			
Date of Sample Received: April 25, 2025			
<p>Note:</p> <p>1. All indications of Pass/Fail in this report are opinions expressed by Eurofins TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results.</p> <p>Measurement Uncertainties were not taken into account and are published for informational purposes only.</p>			

## 1 Test Laboratory

### 1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **Eurofins TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

### 1.2 Test Facility

#### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

#### **A2LA (Certificate Number: 3857.01)**

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

### 1.3 Testing Location

Company: Eurofins TA Technology (Shanghai) Co., Ltd.  
Address: Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <https://www.eurofins.com/electrical-and-electronics>  
E-mail: Kain.Xu@cpt.eurofinscn.com

## 2 General Description of Equipment Under Test

### 2.1 Applicant and Manufacturer Information

Applicant	Shanghai Xiangcheng Communication Technology Co., Ltd
Applicant address	6th Floor, Building 10, No.3000 Longdong Avenue, Pudong New District, Shanghai, China
Manufacturer	Shanghai Xiangcheng Communication Technology Co., Ltd
Manufacturer address	6th Floor, Building 10, No.3000 Longdong Avenue, Pudong New District, Shanghai, China

### 2.2 General Information

EUT Description			
Device Type	Movable Device		
Model	Pegasus1		
SN	K0161A1X253UD20128		
HW Version	V1.0		
SW Version	V1.0		
Power Rating	DC 24V		
Connecting I/O Port(s)	Please refer to the User's Manual.		
Antenna Type	PCB Antenna		
Frequency	Band	Tx (MHz)	Rx (MHz)
	WCDMA Band II	1850 ~ 1910	1930 ~ 1990
	WCDMA Band IV	1710 ~ 1755	2110 ~ 2155
	WCDMA Band V	824 ~ 849	869 ~ 894
	LTE Band 2	1850 ~ 1910	1930 ~ 1990
	LTE Band 4	1710 ~ 1755	2110 ~ 2155
	LTE Band 5	824 ~ 849	869 ~ 894
	LTE Band 7	2500 ~ 2570	2620 ~ 2690
	LTE Band 38	2570 ~ 2620	2570 ~ 2620
	LTE Band 41	2535 ~ 2655	2535 ~ 2655
	Bluetooth	2400 ~ 2483.5	2400 ~ 2483.5
	Wi-Fi 2.4GHz	2400 ~ 2483.5	2400 ~ 2483.5
	Wi-Fi 5GHz (U-NII-1)	5150 ~ 5250	5150 ~ 5250
	Wi-Fi 5GHz (U-NII-2A)	5250 ~ 5350	5250 ~ 5350
	Wi-Fi 5GHz (U-NII-2C)	5470 ~ 5725	5470 ~ 5725
	Wi-Fi 5GHz (U-NII-3)	5725 ~ 5850	5725 ~ 5850

	NFC	13.56	13.56
<b>EUT Accessory</b>			
Adapter	Manufacturer: Hunan Dajing Power Technology Co., Ltd. Model: ADP-60D24		
AC Cable	Manufacturer: Zhengyu Electronic Co., Ltd. Model: C393-240909-001		
<b>Note:</b> 1. The EUT is sent from the applicant to Eurofins TA and the information of the EUT is declared by the applicant.			

## 2.3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

### Test standards

**FCC Code CFR47 Part15B (2024)**

**ANSI C63.4-2014**

## 2.4 Test Mode

Test Mode	
Mode 1	Adapter +EUT+ LAN PORT WITH AP +WCDMA/LTE/Bluetooth/Wi-Fi/NFC receiver
Mode 2	Adapter + EUT++ LAN PORT WITH AP + EUT + play (1kHz)
Mode 3	Adapter + EUT++ LAN PORT WITH AP + EUT + play (1kHz) IN USB flash drive

Test Type	Test Mode	Worst Mode
Radiated Emission	Mode 1, 2, 3	Mode 2
Conducted Emission	Mode 1, 2, 3	Mode 3
After technical evaluation or/and preliminary test, the test data of the worst-case condition was recorded in this report.		

### 3 Test Case Results

#### 3.1 Radiated Emission

##### Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	30% ~ 60%

##### Methods of Measurement

The EUT is placed on a non-metallic table 0.8m above the horizontal metal reference ground plane. The distance between EUT and receive antenna should be 3 meters. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated signal level.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. During the test, the EUT is worked at maximum output power.

Set the spectrum analyzer in the following:

Below 1GHz:

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz:


(a) PEAK Detector: RBW=1MHz / VBW=3MHz/ Sweep=AUTO

(b) AVERAGE Detector: RBW=1MHz / VBW=3MHz / Sweep=AUTO


The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

## Test Setup

### Below 1GHz

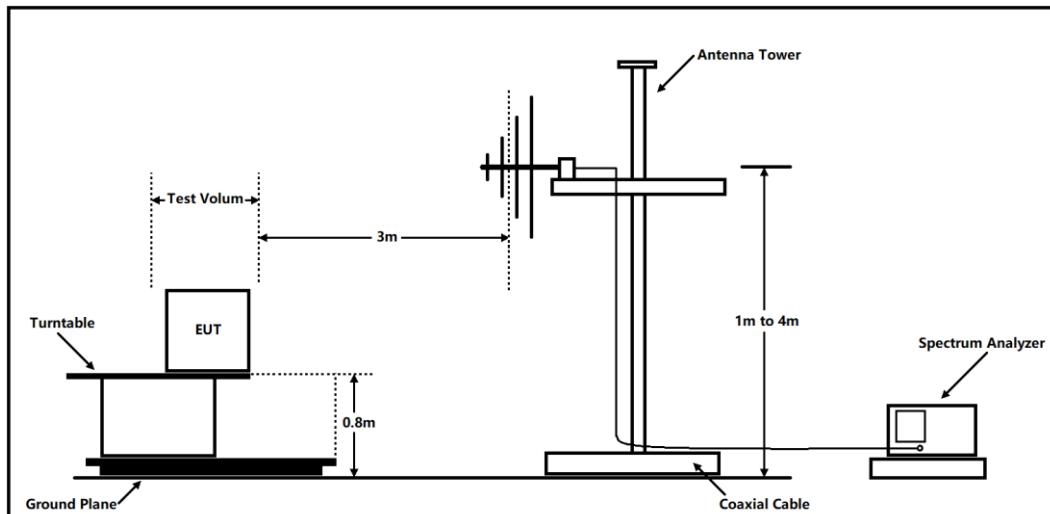

### Above 1GHz

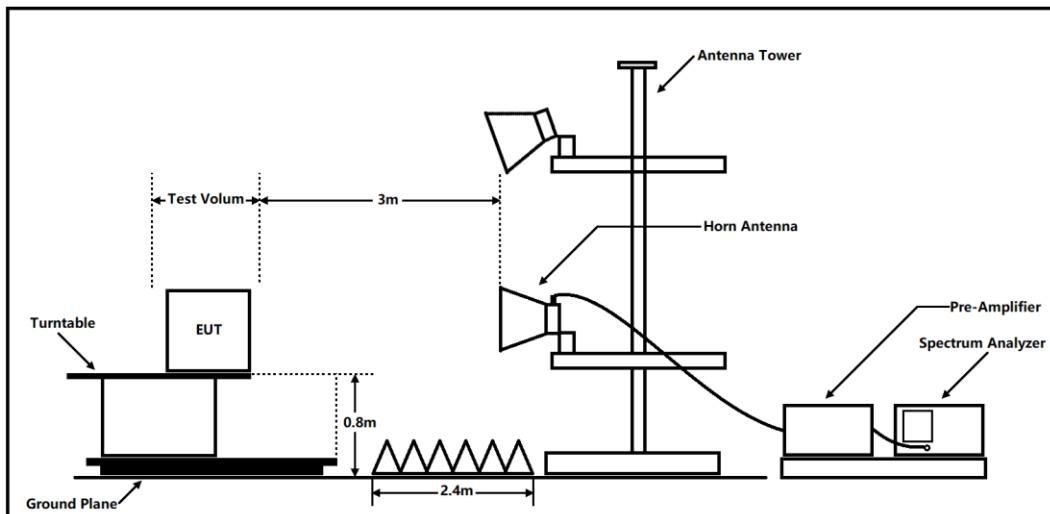

Note: Area side: 2.4mX3.6m

Antenna Tower meets ANSI C63.4 requirements for measurements above 1 GHz by keeping the antenna aimed at the EUT during the antenna's ascent/ descent along the antenna mast.

## Limits

### Class B

Frequency (MHz)	Field Strength (dB $\mu$ V/m)	Detector
30 -88	40.0	Quasi-peak
88-216	43.5	Quasi-peak
216 – 960	46.0	Quasi-peak
960-1000	54.0	Quasi-peak
1000-5 <sup>th</sup> harmonic of the highest frequency or 40GHz, which is lower	54 74	Average Peak


### Frequency range of radiated measurements

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

## Test Results

Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. The Emissions in the frequency band 18GHz – 26.5GHz is more than 20dB below the limit are not reported.

The following graphs display the maximum values of horizontal and vertical by software. For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection. A symbol (  $\text{dB } \text{V/}$  ) in the test plot below means (dB $\mu$ V/m)

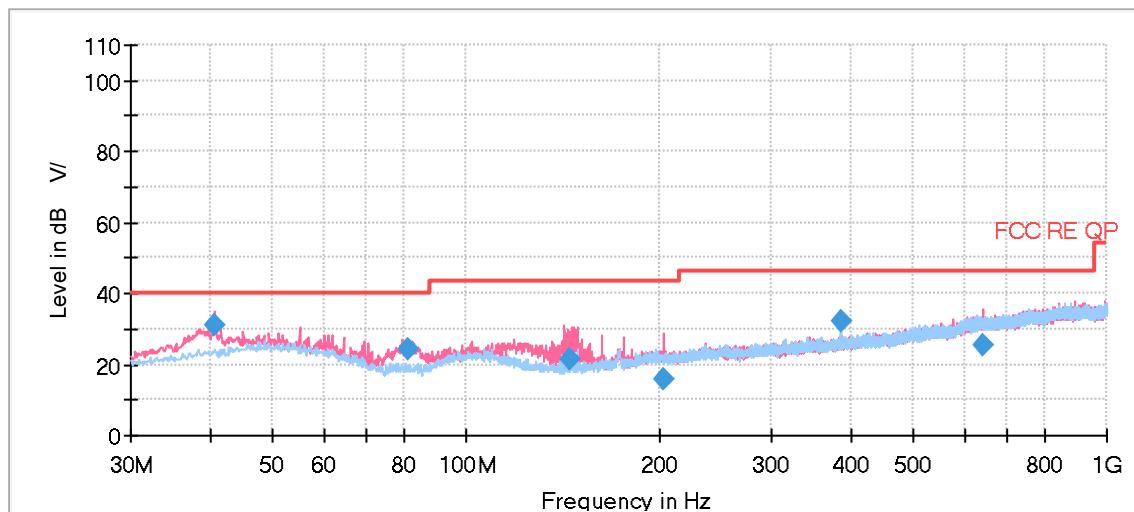


Radiated Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
40.670000	31.02	40.00	8.98	100.0	V	46.0	19.8
81.491250	24.23	40.00	15.77	109.0	V	114.0	15.6
145.343750	21.59	43.50	21.91	100.0	V	40.0	15.6
203.427500	15.74	43.50	27.76	125.0	V	311.0	18.7
384.010000	31.91	46.00	14.09	100.0	H	2.0	23.0
641.057500	25.43	46.00	20.57	122.0	V	22.0	28.1

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit – Quasi-Peak

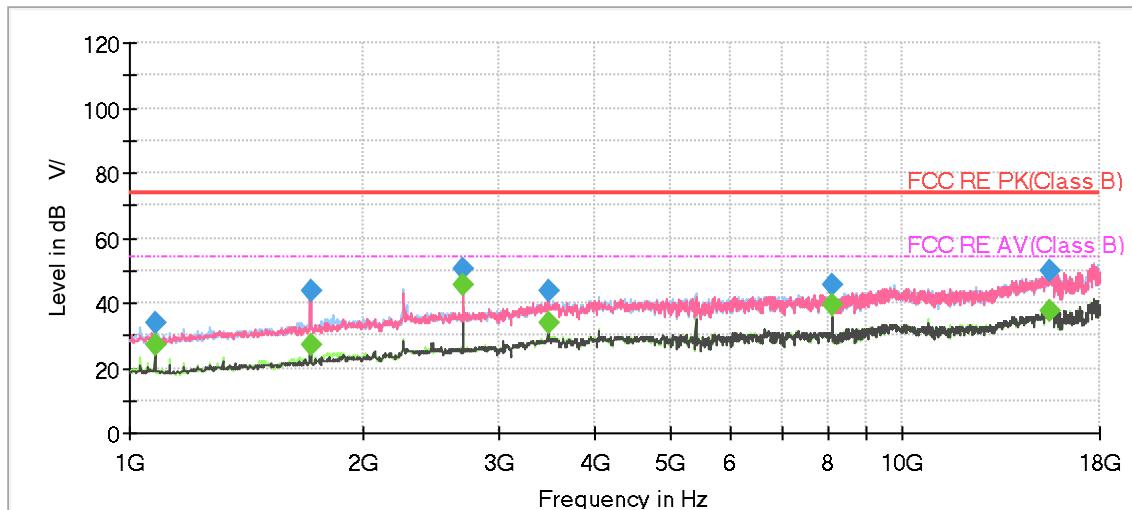
**Radiated Emission from 1GHz to 18GHz**

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1078.625000	---	27.12	54.00	26.88	500.0	100.0	H	1.0	-20.3
1078.625000	33.62	---	74.00	40.38	500.0	100.0	H	1.0	-20.3
1716.125000	---	26.89	54.00	27.11	500.0	200.0	V	344.0	-15.9
1716.125000	43.69	---	74.00	30.31	500.0	100.0	V	344.0	-15.9
2697.875000	50.73	---	74.00	23.27	500.0	100.0	H	158.0	-11.6
2700.000000	---	45.30	54.00	8.70	500.0	100.0	H	158.0	-11.6
3477.750000	43.89	---	74.00	30.11	500.0	200.0	V	21.0	-8.3
3479.875000	---	33.92	54.00	20.08	500.0	100.0	H	195.0	-8.3
8097.500000	45.60	---	74.00	28.40	500.0	100.0	H	195.0	-2.5
8097.500000	---	39.12	54.00	14.88	500.0	100.0	H	195.0	-2.5
15528.625000	---	37.33	54.00	16.67	500.0	20.0	H	0.0	6.2
15556.250000	49.75	---	74.00	24.25	500.0	100.0	V	104.0	6.3

**Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)**
**2. Margin = Limit – MaxPeak / Average**

## 3.2 Conducted Emission


### Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	30% ~ 60%

### Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

### Test Setup

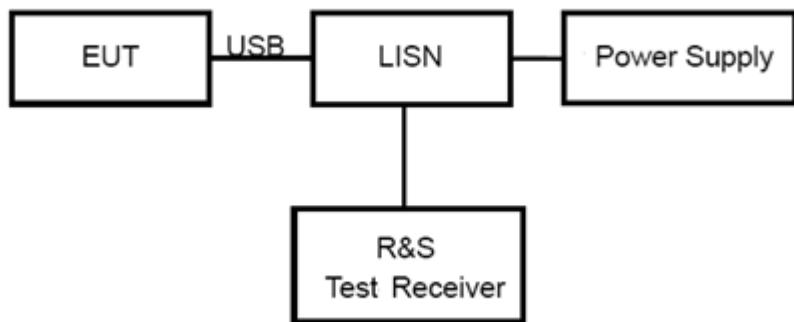

Note: Power Supply is AC Power source and it is used to change the voltage 120V/60Hz.

### Limits


Frequency (MHz)	Class A (dB $\mu$ V)		Class B (dB $\mu$ V)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 to 56 *	56 to 46*
0.5 - 5	73	60	56	46
5 - 30	73	60	60	50

\*: Decreases with the logarithm of the frequency.

Note: The EUT should meet CLASS B limit.

## Test Results

Following plots, Blue trace uses the peak detection; Green trace uses the average detection.

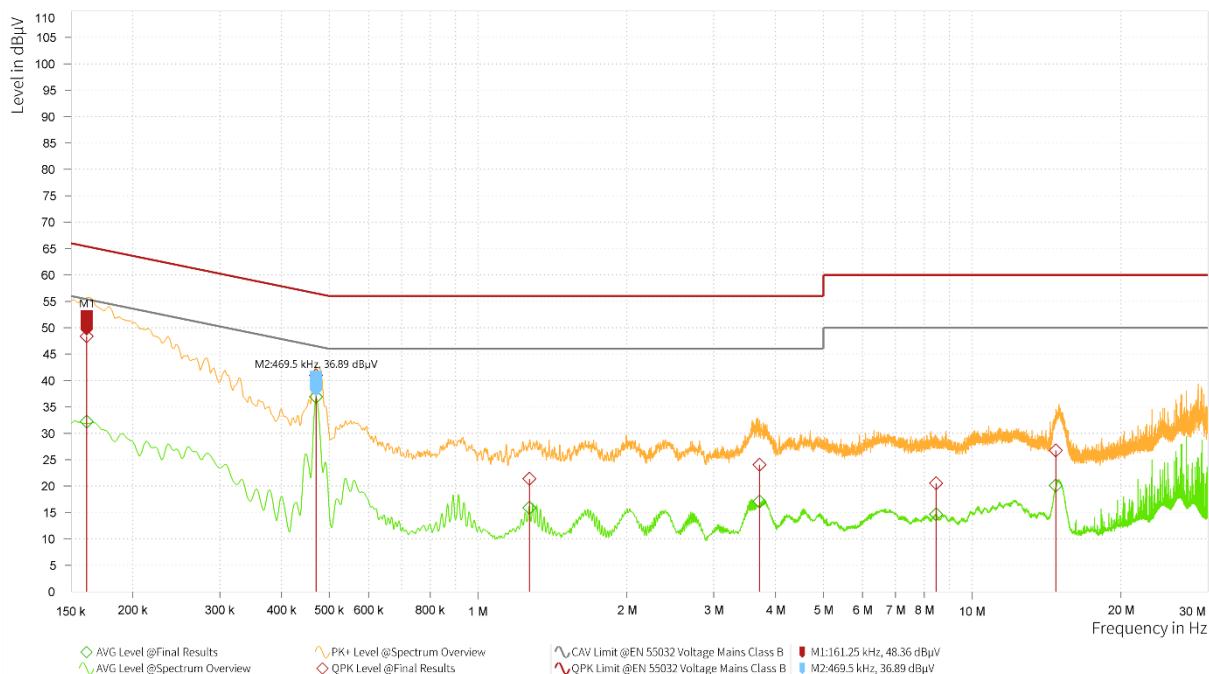


Frequency (MHz)	QuasiPeak (dBμV)	QuasiPeak Limit (dBμV)	QuasiPeak Margin (dB)	Average (dBμV)	Average Limit (dBμV)	Average Margin (dB)	Corr. (dB)	Line	Bandwidth (kHz)	Meas. Time (ms)
0.161	48.36	65.40	17.04	32.19	55.40	23.21	20.89	L1	9.000	1.000
0.470	40.99	56.52	15.53	36.89	46.52	9.63	20.81	L1	9.000	1.000
1.271	21.38	56.00	34.62	15.87	46.00	30.13	19.97	L1	9.000	1.000
3.714	24.04	56.00	31.96	17.07	46.00	28.93	19.44	L1	9.000	1.000
8.455	20.55	60.00	39.45	14.65	50.00	35.35	19.41	L1	9.000	1.000
14.777	26.77	60.00	33.23	20.10	50.00	29.90	19.50	L1	9.000	1.000
0.161	48.36	65.40	17.04	32.19	55.40	23.21	20.89	L1	9.000	1.000
0.470	40.99	56.52	15.53	36.89	46.52	9.63	20.81	L1	9.000	1.000
1.271	21.38	56.00	34.62	15.87	46.00	30.13	19.97	L1	9.000	1.000
3.714	24.04	56.00	31.96	17.07	46.00	28.93	19.44	L1	9.000	1.000
8.455	20.55	60.00	39.45	14.65	50.00	35.35	19.41	L1	9.000	1.000

Remark: Correct factor=cable loss + LISN factor

L line

Conducted Emission from 150 kHz to 30 MHz

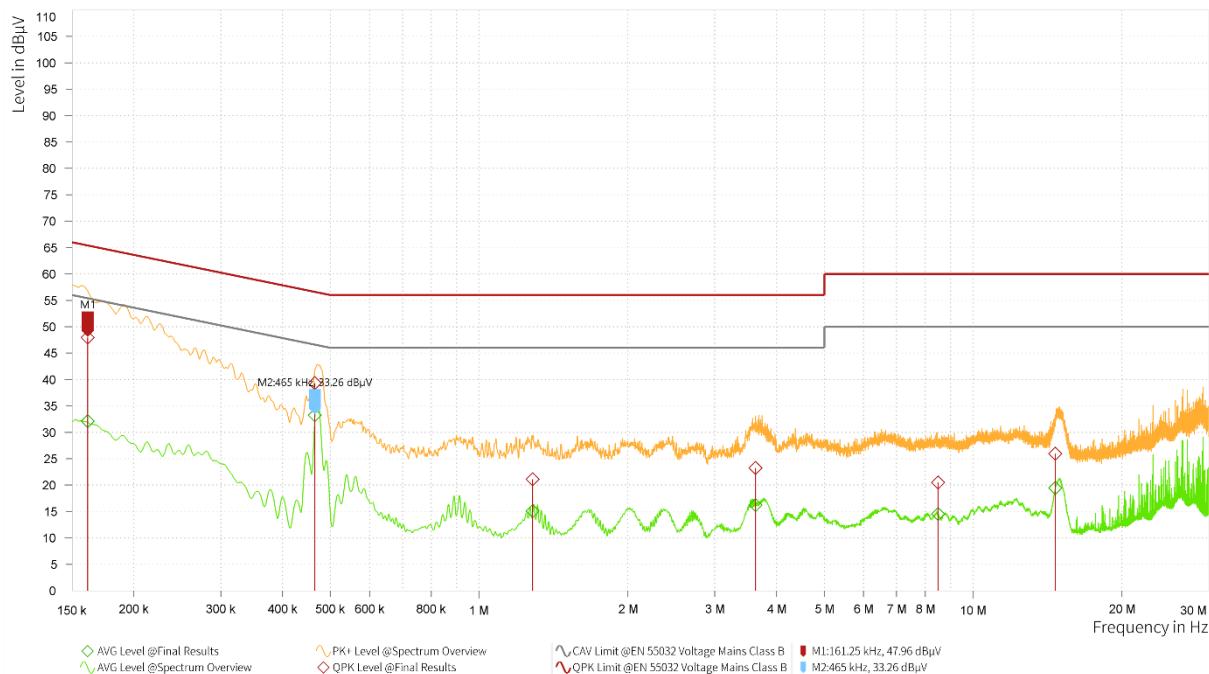

Frequency (MHz)	QuasiPeak (dBμV)	QuasiPeak Limit (dBμV)	QuasiPeak Margin (dB)	Average (dBμV)	Average Limit (dBμV)	Average Margin (dB)	Corr. (dB)	Line	Bandwidth (kHz)	Meas. Time (ms)
0.161	47.96	65.40	17.44	32.10	55.40	23.30	20.90	N	9.000	1.000
0.465	39.34	56.60	17.26	33.26	46.60	13.35	20.82	N	9.000	1.000
1.284	21.12	56.00	34.88	15.09	46.00	30.91	19.97	N	9.000	1.000
3.626	23.24	56.00	32.76	16.21	46.00	29.79	19.45	N	9.000	1.000
8.498	20.51	60.00	39.49	14.50	50.00	35.50	19.42	N	9.000	1.000
14.669	25.94	60.00	34.06	19.42	50.00	30.58	19.52	N	9.000	1.000
0.161	47.96	65.40	17.44	32.10	55.40	23.30	20.90	N	9.000	1.000
0.465	39.34	56.60	17.26	33.26	46.60	13.35	20.82	N	9.000	1.000
1.284	21.12	56.00	34.88	15.09	46.00	30.91	19.97	N	9.000	1.000
3.626	23.24	56.00	32.76	16.21	46.00	29.79	19.45	N	9.000	1.000
8.498	20.51	60.00	39.49	14.50	50.00	35.50	19.42	N	9.000	1.000

**Remark: Correct factor=cable loss + LISN factor**

N line  
Conducted Emission from 150 kHz to 30 MHz

## 4 Uncertainty Measurement

Case	Uncertainty	Factor k
Radiated Emission 30MHz – 200MHz	4.17 dB	1.96
Radiated Emission 200MHz – 1GHz	4.84 dB	1.96
Radiated Emission 1GHz – 18GHz	4.35 dB	1.96
Radiated Emission 18GHz – 26.5GHz	5.90 dB	1.96
Radiated Emission 26.5GHz – 40GHz	5.92 dB	1.96
Conducted Emission	2.57 dB	2

## 5 Main Test Instruments

Name of Equipment	Manufacturer	Type/Model	Serial Number	Calibration Date	Expiration Time
Radiated Emission					
EMI Test Receiver	R&S	ESCI3	100948	2025-05-07	2026-05-06
Signal Analyzer	R&S	FSV40	101186	2025-05-06	2026-05-05
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	1023	2023-07-14	2026-07-13
Horn Antenna	SCHWARZBECK	BBHA 9120D	430	2024-07-18	2027-07-17
Amplifier	R&S	SCU18F	101022	2025-05-06	2026-05-05
Software	R&S	EMC32	9.26.01	/	/
Conducted Emission					
Artificial main network	R&S	ENV216	102191	2024-12-02	2026-12-01
EMI Test Receiver	R&S	ESR	101667	2025-05-06	2026-05-05
Software	R&S	EMC32	10.35.10	/	/

## ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.

## ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.

\*\*\*\*\* END OF REPORT \*\*\*\*\*