



## Appendix F. FCC 3G SAR Measurement Procedures


### Conducted Output Power:

The EUT was tested according to the requirements of the FCC 3G procedures and the TS 34.121. The EUT's WCDMA and HSPA function is Release 6 version supporting HSDPA Category 8, and HSUPA Category 6. A detailed analysis of the output power for all WCDMA and HSPA (HSUPA & HSDPA) modes is provided in the tables below. According to the FCC 3G procedures, handsets with both HSDPA and HSUPA should be tested according to Release 6 HSPA test procedures, and the EUT does not support VOIP function over the HSPA function. Device was tested according to procedure KDB941225 - section Release 6 HSPA Data Devices as documented/evaluated in the following table.

| WCDMA SAR Test mode - Conducted Power |              |                |                |                |                 |                 |                 |
|---------------------------------------|--------------|----------------|----------------|----------------|-----------------|-----------------|-----------------|
| Mode                                  | Setup        | Band V (850)   |                |                | Band IV (1700)  |                 |                 |
|                                       |              | CH4132         | CH4182         | CH4233         | CH1312          | CH1413          | CH1513          |
|                                       |              | 826.4<br>(MHz) | 836.4<br>(MHz) | 846.6<br>(MHz) | 1712.4<br>(MHz) | 1732.6<br>(MHz) | 1752.6<br>(MHz) |
| WCDMA                                 | RMC 12.2Kbps | 23.03          | 23.15          | 23.23          | 22.68           | 22.89           | 23.03           |
| HSDPA                                 | Subtest 1    | 22.73          | 22.97          | 22.85          | 22.67           | 22.81           | 22.85           |
|                                       | Subtest 2    | 22.57          | 22.81          | 22.85          | 22.63           | 22.66           | 22.69           |
|                                       | Subtest 3    | 22.13          | 22.35          | 22.57          | 22.22           | 22.42           | 22.37           |
|                                       | Subtest 4    | 22.21          | 22.29          | 22.41          | 22.21           | 22.39           | 22.40           |
|                                       | Subtest 5    | 22.01          | 22.41          | 22.28          | 22.44           | 22.75           | 22.14           |
| HSUPA                                 | Subtest 1    | 21.12          | 20.81          | 21.37          | 21.14           | 21.16           | 21.31           |
|                                       | Subtest 2    | 21.02          | 20.98          | 21.39          | 21.48           | 21.89           | 21.48           |
|                                       | Subtest 3    | 21.13          | 21.60          | 21.62          | 21.56           | 21.34           | 21.30           |
|                                       | Subtest 4    | 22.26          | 22.61          | 22.67          | 22.47           | 22.85           | 22.01           |

**WCDMA Setup Configuration:**

- a. The EUT was connected to Base Station referred to the drawing of Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting
  - i. Data rates: Varied from RMC 12.2Kbps
  - ii. RMC Test Loop = Loop Mode 1
  - iii. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

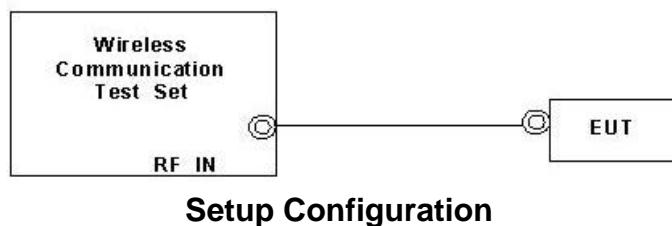

**HSDPA Setup Configuration:**

- a. The EUT was connected to Base Station referred to the drawing of Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each
  - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
  - iii. Set RMC12.2Kbps + HSDPA mode.
  - iv. Set Cell Power = -86 dBm
  - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
  - vi. Select HSDPA Uplink Parameters
  - vii. Set DeltaACK, DeltaNACK and DeltaCQI = 8
  - viii. Set Ack-Nack Repetition Factor to 3
  - ix. Set CQI Feedback Cycle (k) to 4 ms
  - x. Set CQI Repetition Factor to 2
  - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

**Table C.10.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH**

| Sub-test | $\beta_c$         | $\beta_d$         | $\beta_d$<br>(SF) | $\beta_c/\beta_d$ | $\beta_{hs}$<br>(Note 1,<br>Note 2) | CM (dB)<br>(Note 3) | MPR (dB)<br>(Note 3) |
|----------|-------------------|-------------------|-------------------|-------------------|-------------------------------------|---------------------|----------------------|
| 1        | 2/15              | 15/15             | 64                | 2/15              | 4/15                                | 0.0                 | 0.0                  |
| 2        | 12/15<br>(Note 4) | 15/15<br>(Note 4) | 64                | 12/15<br>(Note 4) | 24/15                               | 1.0                 | 0.0                  |
| 3        | 15/15             | 8/15              | 64                | 15/8              | 30/15                               | 1.5                 | 0.5                  |
| 4        | 15/15             | 4/15              | 64                | 15/4              | 30/15                               | 1.5                 | 0.5                  |

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ .

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ , and  $\Delta_{CQI} = 24/15$  with  $\beta_{hs} = 24/15 * \beta_c$ .

Note 3: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

**Setup Configuration**

**HSPA (HSUPA & HSPDA) Setup Configuration:**

- a. The EUT was connected to Base Station referred to the drawing of Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting \* :
  - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
  - ii. Set the Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
  - iii. Set Cell Power = -86 dBm
  - iv. Set Channel Type = 12.2k + HSPA
  - v. Set UE Target Power
  - vi. Power Ctrl Mode= Alternating bits
  - vii. Set and observe the E-TFCI
  - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH

| Sub-test | $\beta_c$         | $\beta_d$         | $\beta_d$<br>(SF) | $\beta_c/\beta_d$ | $\beta_{HS}$<br>(Note 1) | $\beta_{ec}$ | $\beta_{ed}$<br>(Note 5)<br>(Note 6)         | $\beta_{ed}$<br>(SF) | $\beta_{ed}$<br>(Codes) | CM<br>(dB)<br>(Note 2) | MPR<br>(dB)<br>(Note 2) | AG<br>Index<br>(Note 6) | E-TFCI |
|----------|-------------------|-------------------|-------------------|-------------------|--------------------------|--------------|--|----------------------|-------------------------|------------------------|-------------------------|-------------------------|--------|
| 1        | 11/15<br>(Note 3) | 15/15<br>(Note 3) | 64                | 11/15<br>(Note 3) | 22/15                    | 209/2<br>25  | 1309/225                                     | 4                    | 1                       | 1.0                    | 0.0                     | 20                      | 75     |
| 2        | 6/15              | 15/15             | 64                | 6/15              | 12/15                    | 12/15        | 94/75  | 4                    | 1                       | 3.0                    | 2.0                     | 12                      | 67     |
| 3        | 15/15             | 9/15              | 64                | 15/9              | 30/15                    | 30/15        | $\beta_{ed1}: 47/15$<br>$\beta_{ed2}: 47/15$ | 4                    | 2                       | 2.0                    | 1.0                     | 15                      | 92     |
| 4        | 2/15              | 15/15             | 64                | 2/15              | 4/15                     | 2/15         | 56/75  | 4                    | 1                       | 3.0                    | 2.0                     | 17                      | 71     |
| 5        | 15/15<br>(Note 4) | 15/15<br>(Note 4) | 64                | 15/15<br>(Note 4) | 30/15                    | 24/15        | 134/15                                       | 4                    | 1                       | 1.0                    | 0.0                     | 21                      | 81     |

Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 14/15$  and  $\beta_d = 15/15$ .

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6:  $\beta_{ed}$  can not be set directly, it is set by Absolute Grant Value.

**Setup Configuration**

**Note:** For details settings in the Agilent 8960 test equipment, please refer to the user guide " HSUPA Measurement Guide with 8960 V7.5.0 Release 7 (2007-06) Ver.: v.02.18"



## Example for HSPA Subtest 1, and other subtests following table, C11.1.3 (Gain Factors ( $\beta_c = 11$ and $\beta_d = 15$ ))

| Call Control                    |                      | Call Setup Screen  |        |  |  |  |  |                       |      |                    |                    |            |                     |              |                     |          |                     |              |                     |               |                 |             |                |             |                      |  |                      |  |                    |
|---------------------------------|----------------------|--|--------|--|--|--|--|-----------------------|------|--------------------|--------------------|------------|---------------------|--------------|---------------------|----------|---------------------|--------------|---------------------|---------------|-----------------|-------------|----------------|-------------|----------------------|--|----------------------|--|--------------------|
| Additional Screens              |                      | Active Cell Operating Mode   |        |  |  |  |  |                       |      |                    |                    |            |                     |              |                     |          |                     |              |                     |               |                 |             |                |             |                      |  |                      |  |                    |
| Cell Parameters                 |                      | UE Information   |        |  |  |  |  |                       |      |                    |                    |            |                     |              |                     |          |                     |              |                     |               |                 |             |                |             |                      |  |                      |  |                    |
| Generator Info                  |                      | INSI:<br>IMEI:<br>Power Class:   |        |  |  |  |  |                       |      |                    |                    |            |                     |              |                     |          |                     |              |                     |               |                 |             |                |             |                      |  |                      |  |                    |
| Uplink Parameters               |                      | UE Expected Open Loop Transmit Power   |        |  |  |  |  |                       |      |                    |                    |            |                     |              |                     |          |                     |              |                     |               |                 |             |                |             |                      |  |                      |  |                    |
| UE Rep Meas                     |                      | Initial PRACH TX Power: -11.70 dBm<br>Initial DPCCH TX Power: -0.56 dBm  |        |  |  |  |  |                       |      |                    |                    |            |                     |              |                     |          |                     |              |                     |               |                 |             |                |             |                      |  |                      |  |                    |
| Trig Output Setup               |                      | Call Processing Status   |        |  |  |  |  |                       |      |                    |                    |            |                     |              |                     |          |                     |              |                     |               |                 |             |                |             |                      |  |                      |  |                    |
| Sys Frame Clock                 |                      | <table border="1"> <tr> <td>Current Service Type:</td> <td>None</td> </tr> <tr> <td>IMI Status:</td> <td>Abs Single Shot AG</td> </tr> <tr> <td>GMI State:</td> <td>Index 15: (67/15)^2</td> </tr> <tr> <td>Current DPCH</td> <td>Index 16: (75/15)^2</td> </tr> <tr> <td>HSUPA In</td> <td>Index 17: (84/15)^2</td> </tr> <tr> <td>UE Rep E-DCH</td> <td>Index 18: (95/15)^2</td> </tr> <tr> <td>Last Received</td> <td>OSCH Cat: -----</td> </tr> <tr> <td>Throughput:</td> <td>Ratio: ----- %</td> </tr> <tr> <td>ACKs Transm</td> <td>Index 19: (106/15)^2</td> </tr> <tr> <td></td> <td>Index 20: (119/15)^2</td> </tr> <tr> <td></td> <td>Transmitted: -----</td> </tr> </table> |        |  |  |  |  | Current Service Type: | None | IMI Status:        | Abs Single Shot AG | GMI State: | Index 15: (67/15)^2 | Current DPCH | Index 16: (75/15)^2 | HSUPA In | Index 17: (84/15)^2 | UE Rep E-DCH | Index 18: (95/15)^2 | Last Received | OSCH Cat: ----- | Throughput: | Ratio: ----- % | ACKs Transm | Index 19: (106/15)^2 |  | Index 20: (119/15)^2 |  | Transmitted: ----- |
| Current Service Type:           | None                 |  |        |  |  |  |  |                       |      |                    |                    |            |                     |              |                     |          |                     |              |                     |               |                 |             |                |             |                      |  |                      |  |                    |
| IMI Status:                     | Abs Single Shot AG   |  |        |  |  |  |  |                       |      |                    |                    |            |                     |              |                     |          |                     |              |                     |               |                 |             |                |             |                      |  |                      |  |                    |
| GMI State:                      | Index 15: (67/15)^2  |  |        |  |  |  |  |                       |      |                    |                    |            |                     |              |                     |          |                     |              |                     |               |                 |             |                |             |                      |  |                      |  |                    |
| Current DPCH                    | Index 16: (75/15)^2  |  |        |  |  |  |  |                       |      |                    |                    |            |                     |              |                     |          |                     |              |                     |               |                 |             |                |             |                      |  |                      |  |                    |
| HSUPA In                        | Index 17: (84/15)^2  |  |        |  |  |  |  |                       |      |                    |                    |            |                     |              |                     |          |                     |              |                     |               |                 |             |                |             |                      |  |                      |  |                    |
| UE Rep E-DCH                    | Index 18: (95/15)^2  |  |        |  |  |  |  |                       |      |                    |                    |            |                     |              |                     |          |                     |              |                     |               |                 |             |                |             |                      |  |                      |  |                    |
| Last Received                   | OSCH Cat: -----      |  |        |  |  |  |  |                       |      |                    |                    |            |                     |              |                     |          |                     |              |                     |               |                 |             |                |             |                      |  |                      |  |                    |
| Throughput:                     | Ratio: ----- %       |  |        |  |  |  |  |                       |      |                    |                    |            |                     |              |                     |          |                     |              |                     |               |                 |             |                |             |                      |  |                      |  |                    |
| ACKs Transm                     | Index 19: (106/15)^2 |  |        |  |  |  |  |                       |      |                    |                    |            |                     |              |                     |          |                     |              |                     |               |                 |             |                |             |                      |  |                      |  |                    |
|                                 | Index 20: (119/15)^2 |  |        |  |  |  |  |                       |      |                    |                    |            |                     |              |                     |          |                     |              |                     |               |                 |             |                |             |                      |  |                      |  |                    |
|                                 | Transmitted: -----   |  |        |  |  |  |  |                       |      |                    |                    |            |                     |              |                     |          |                     |              |                     |               |                 |             |                |             |                      |  |                      |  |                    |
| 2 of 4                          |                      | <table border="1"> <tr> <td colspan="2">Active Cell</td><td colspan="4">Sys Type: UTRA FDD</td></tr> <tr> <td colspan="2">Idle</td><td colspan="4"></td></tr> <tr> <td colspan="2"></td><td>IntRef</td><td>Offset</td><td></td><td></td><td></td><td></td></tr> </table>   |        |  |  |  |  | Active Cell           |      | Sys Type: UTRA FDD |                    |            |                     | Idle         |                     |          |                     |              |                     |               |                 | IntRef      | Offset         |             |                      |  |                      |  |                    |
| Active Cell                     |                      | Sys Type: UTRA FDD   |        |  |  |  |  |                       |      |                    |                    |            |                     |              |                     |          |                     |              |                     |               |                 |             |                |             |                      |  |                      |  |                    |
| Idle                            |                      |  |        |  |  |  |  |                       |      |                    |                    |            |                     |              |                     |          |                     |              |                     |               |                 |             |                |             |                      |  |                      |  |                    |
|                                 |                      | IntRef   | Offset |  |  |  |  |                       |      |                    |                    |            |                     |              |                     |          |                     |              |                     |               |                 |             |                |             |                      |  |                      |  |                    |
| 1 of 2                          |                      |  |        |  |  |  |  |                       |      |                    |                    |            |                     |              |                     |          |                     |              |                     |               |                 |             |                |             |                      |  |                      |  |                    |
| Serving Grant                   |                      |  |        |  |  |  |  |                       |      |                    |                    |            |                     |              |                     |          |                     |              |                     |               |                 |             |                |             |                      |  |                      |  |                    |
| AG Mode                         |                      |  |        |  |  |  |  |                       |      |                    |                    |            |                     |              |                     |          |                     |              |                     |               |                 |             |                |             |                      |  |                      |  |                    |
| Single Shot                     |                      |  |        |  |  |  |  |                       |      |                    |                    |            |                     |              |                     |          |                     |              |                     |               |                 |             |                |             |                      |  |                      |  |                    |
| Single Shot AG                  |                      |  |        |  |  |  |  |                       |      |                    |                    |            |                     |              |                     |          |                     |              |                     |               |                 |             |                |             |                      |  |                      |  |                    |
| 20: (119/15)^2                  |                      |  |        |  |  |  |  |                       |      |                    |                    |            |                     |              |                     |          |                     |              |                     |               |                 |             |                |             |                      |  |                      |  |                    |
| Send Single Shot Absolute Grant |                      |  |        |  |  |  |  |                       |      |                    |                    |            |                     |              |                     |          |                     |              |                     |               |                 |             |                |             |                      |  |                      |  |                    |
| Send Relative Grant Up          |                      |  |        |  |  |  |  |                       |      |                    |                    |            |                     |              |                     |          |                     |              |                     |               |                 |             |                |             |                      |  |                      |  |                    |
| Send Relative Grant Down        |                      |  |        |  |  |  |  |                       |      |                    |                    |            |                     |              |                     |          |                     |              |                     |               |                 |             |                |             |                      |  |                      |  |                    |
| Return                          |                      |  |        |  |  |  |  |                       |      |                    |                    |            |                     |              |                     |          |                     |              |                     |               |                 |             |                |             |                      |  |                      |  |                    |

### Example: AG – Index = 20 for HSPA subtest 1



| Call Setup Screen            |   |                          |        |  |  |                    |  |  |  |  |  | E-TFCI Record                  |
|------------------------------|---|--------------------------|--------|--|--|--------------------|--|--|--|--|--|--------------------------------|
| Screen Ctrl                  | Recorded E-TFCI Information   |                          |        |  |  |                    |  |  |  |  |  | E-TFCI Rec Count               |
| Channel (UARFCN) Info        | E-TFCI Recording State  |                          |        |  |  |                    |  |  |  |  |  | 15                             |
| HSPA Information             | Idle  |                          |        |  |  |                    |  |  |  |  |  | Start Recording E-TFCI Values  |
| E-TFCI Recording Information | Recorded E-TFCI Values  |                          |        |  |  |                    |  |  |  |  |  | Send Step Up TPC Bit Pattern   |
| Clear UE Info                | 1: 75 11: 75 21: ---- 31: ---- 41: ----<br>2: 75 12: 75 22: ---- 32: ---- 42: ----<br>3: 75 13: 75 23: ---- 33: ---- 43: ----<br>4: 75 14: 75 24: ---- 34: ---- 44: ----<br>5: 75 15: 75 25: ---- 35: ---- 45: ----<br>6: 75 16: ---- 26: ---- 36: ---- 46: ----<br>7: 75 17: ---- 27: ---- 37: ---- 47: ----<br>8: 75 18: ---- 28: ---- 38: ---- 48: ----<br>9: 75 19: ---- 29: ---- 39: ---- 49: ----<br>10: 75 20: ---- 30: ---- 40: ---- 50: ---- |                          |        |  |  |                    |  |  |  |  |  | Send Step Down TPC Bit Pattern |
| Return                       | 15/15   |                          |        |  |  |                    |  |  |  |  |  | Return                         |
|                              | Background  | Active Cell<br>Connected |        |  |  | Sys Type: UTRA FDD |  |  |  |  |  |                                |
|                              |   | IntRef                   | Offset |  |  |                    |  |  |  |  |  |                                |

Example: Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1



**Reference:**

- [1] 941225 D01 SAR test for 3G devices v02, SAR Measurement Procedures for 3G Devices CDMA 2000/Ev-Do/WCDMA/HSDPA/HSPA Oct. 2007 Laboratory Division Office of Engineering and Technology Federal Communications Commission
- [2.] TS 34.121 Universal Mobile Telecommunications System (UMTS); Terminal Conformance Specification, Radio Transmission and Reception (FDD)
- [3.] HSUPA Measurement Guide with 8960 V7.5.0 Release 7 (2007-06) Ver.: v.02.18