

Wireless 4-20 mA Sensor PST-MA1

Description

The iTech Sensor PST 4-20mA Sensor is a cost-effective way to accurately measure the 4-20 mA output signal of an analog instrument. The 4 to 20 mA signal data can then be transmitted wirelessly, stored in a database, and viewed with *iStatus Reporting* software. The sensor data can easily be scaled to output in whatever engineering units are needed.

Transmitter

The Wireless 4-20 mA Sensor Transmitter uses two AA batteries with an approximate two-year battery life. These 900 MHz transmitter radios use the license-free 902-928 MHz ISM band. Before each transmission, the radio checks for a clear channel before it sends the sensor data. If the channel is busy, it waits until it finds an opening; then transmits the data. This clear channel assessment approach allows the system to function efficiently in noisy areas or heavy RF traffic areas without disrupting other communications. Data is typically transmitted once every 12 seconds to optimize battery life and minimize RF traffic. This data rate is more than sufficient for condition monitoring applications, but custom update rates are available from the factory if the 12 second rate does not meet the needs of your application. The transmitter range will vary depending on the location. Typical industrial environments are not ideal for RF reception; it is best to evaluate the site with a transmitter and software to find the ideal locations for transmitters and receivers.



Sensor

Temperature Range	-40°C to 80°C (-40°F to 176°F)
Nominal Current Range	4-20mA
Measurable Current Range	0 to 22mA
Resolution	5.5uA
Accuracy	+/- .2%

FCC ID-X58-PST-TX01

Batteries	2 "AA" 1.5 volt cells
Radio Frequency	902 to 928 digitally modulated spread spectrum radio

Parts List

Quantity	Part
1	PST-MA1 4-20 mA Transmitter




Wiring

The *iTech Sensor 4-20mA Sensor* comes with two stripped 22 AWG wire leads. Connect the sensor in series with other loop devices.


Case 1. Loop-Powered Device

- Remove power from the loop.
- Connect the sensor's red (positive) lead to the positive loop wire.
- Connect the sensor's black (negative) lead to the current output device's positive terminal.
- Connect the negative loop wire to the current output device's negative terminal.

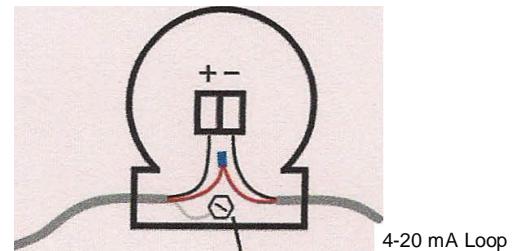

Case 2. 4-Wire or Externally Powered Device

- Remove power from the device.
- Connect the sensor's red (positive) lead to the current output device's positive terminal.
- Connect the sensor's black (negative) lead to the current output device's negative terminal.



Scaling in iStatus Software

Inputs from the PST-MA1 are easily scaled in software using the Sensor Setup tab.

The Math:

$$\text{ScaledOutput} = (\text{RawInputFromSensor}(mA) + \text{ZeroValueinSensorSetup}) * \text{SpanValueinSensorSetup}$$

Example:

Scale a 4-20 mA input for a 0 to 100% output.

Step 1: Calculate the zero value.

$$\text{Zero Value in Sensor Setup} =$$

$$\text{Minimum Scaled Value}(0) - \text{Minimum Raw Input from the sensor value}(4mA) = -4$$

Step 2: Calculate the Span value.

$$\text{Span Value in Sensor Setup} =$$

$$\text{Span Value} =$$

$$(\text{MaxScaledValue}(100\%) - \text{MinScaledValue}(0\%)) / (\text{MaxRawValue}(20mA) \text{MinRawValue}(4mA)) = 6.25$$

Step 3: Enter the calculated values into Sensor Setup table under the Zero and Span columns for that sensor.

Step 4: Select the Save Changes button. It can take up to 1 minute for scaling changes to take effect.



Predictive Sensor Technology, LLC
316 N Main St
Lynchburg, OH 45142

Phone: (937) 364-1000
Fax: (937) 364-2072
www.PSensorTech.com

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1) This device may not cause harmful interference, and
- 2) This device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

The Multi-Point Transmitter (MPT) is a low powered low bandwidth device that is designed for the monitoring of equipment and process parameters that change slowly over time. The factory default data update rate is 5 times per minute. This slow update rate allows this transmitter to enjoy a long battery life while maintaining a continuous watch on your equipment's health. The data rate is not suitable for control purposes and Predictive Sensor Technology does not recommend that it be used to control equipment.