

# Compact Bluetooth 6.0, 802.15.4 Module BC15C Draft Ver 0.90 May 2025

BC15C Series are powerful, highly flexible, ultra low power Bluetooth Low Energy (BLE) modules using Nordic nRF54L15 SoC. With an ARM Cortex™ M33 MCU, 1.524MB flash, 256KB RAM, embedded 2.4GHz multi-protocol transceiver, and an integrated chip antenna or an u.FL for an external antenna. It allows faster time to market with reduced development cost.

No external components needed. Both 32MHz, 32KHz crystals and DCDC converter inductors are embedded despite of its 6.0x6.3 mm size.



## BC15C Specifications

### BLE 5.4, IEEE 802.15.4-2006 Transceiver

- Complete RF solution with integrated antenna
  - BLE: 2Mbps, 1Mbps (-98 dBm sensitivity), 500kbps, 125kbps (-106 dBm sensitivity).
  - IEEE 802.15.4-2006: 250 kbps (-102 dBm sensitivity).
  - Proprietary: 4Mbps, 2Mbps, 1Mbps.
- Programmable TX power, -8 dBm +8 dBm.
- AoA and AoD direction finding using BLE.
- 128 bit AES/ECB/CCM/AAR co-processor (on-the-fly operation).
- 12.0 mW TX current at 0 dBm, 1Mbps, 1.8V VDD.
- 7.5 mW RX current, 1Mbps, 1.8V VDD.
- RSSI, 1 dB resolution

### Platform Security

- Secure/non-secure memory protection.
- Symmetric and asymmetric key crypto accelerator.
- Secure key management.
- Tamper detection.
- Immutable boot partition.
- Debug access port protection.
- Two watchdog timers for secure and non-secure context.

### MCU

- Nordic nRF54L with ARM Cortex M33, 128 MHz.
- Flash/RAM: 1524KB/256KB.
- 505 EEMAC CoreMark score running from non-volatile memory, 3.95 CoreMark per MHz.
- Single precision floating point unit (FPU).
- Memory protection unit (MPU).
- Digital signal processing (DSP) instructions.

- Data watchpoint and trace (DWT), embedded trace macrocell (ETM), instrumentation trace macrocell (ITM), and cross trigger interface (CTI).
- Serial Wire Debug (SWD)
- Trace port interface unit (TPIU), 4-bit parallel trace of ITM and ETM trace data; Serial wire output (SWO) trace of ITM data.

### Peripherals

- Two realtime counters (RTC), and one global RTC (GRTC) that can run in System OFF mode and implement a shared system timer.
- Seven 32-bit timers with counter mode.
- Five fully featured serial interfaces with EasyDMA, supporting I²C, SPI controller/peripheral, and UART.
- Three pulse width modulator (PWM) units with Easy DMA.
- I²S two channel inter-IC sound interface.
- 14-bit at 20KS/s, 12 bit at 250KS/s, or 10-bit at 2MS/s ADC with up to eight programmable gain channels.
- Near field communication (NFC).
- Two quadrature decoders (QDEC).
- 36 LGA pins.
- 31 GPIOs
- Embedded inductors for DCDC converter
- 1.7V to 3.6V supply voltage with up to 2.6V I/O voltage.
- Operation temperature: -40 °C to +105 °C

### Certifications

- FCC ID:
- ISED ID:
- TELEC ID:
- NCC ID:
- CE and RCM:
- QDID:

## Model Summaries

| module            | BC15C         | BC15E             | BC15M         | BC15P             |
|-------------------|---------------|-------------------|---------------|-------------------|
| Flash/RAM         | 1524KB/256KB  | 1524KB/256KB      | 1524KB/256KB  | 1524KB/256KB      |
| Embedded crystals | 32MHz + 32KHz | 32MHz + 32KHz     | 32MHz + 32KHz | 32MHz + 32KHz     |
| Size              | 6.0x11.0mm    | 6.0x10.5mm        | 6.0x9.6mm     | 6.0x6.3mm         |
| Antenna           | Chip          | u.FL for external | PCB antenna   | u.FL for external |

# Compact Bluetooth 6.0, 802.15.4 Module BC15C Draft Ver 0.90 May 2025

---

|                        |           |  |            |  |
|------------------------|-----------|--|------------|--|
| Bluetooth range, 1Mbps | 90 meters |  | 100 meters |  |
| NCC ID                 |           |  |            |  |
| Availability           |           |  |            |  |

## Table Of Contents

|  |             |
|--|-------------|
| 1. Introduction .....  | 4           |
| BC15C Block Diagram .....  | 4           |
| BC15C .....  | 4           |
| BC15E .....  | 4           |
| BC15M .....  | 5           |
| BC15P .....  | 5           |
| 2. Codes Development Using Nordic Tools .....                    | 6           |
| Development Tools .....  | 6           |
| 3. Product Overview .....  | 7           |
| Nordic SoCs .....  | 7           |
| Mechanical Drawings .....  | 9           |
| BC15C Pin Functions .....  | 11          |
| Mounting BC15C on the Host PCB .....                             | 14          |
| 4. Bluetooth Range Measurements .....                            | 15          |
| Measurement Results .....  | 15          |
| 5. Evaluation Board .....  | 16          |
| Loading Firmware into Evaluation Board Through a Nordic DK ..... | 16          |
| Procedures to Load Firmware .....                                | 17          |
| Evaluation Board Schematic for BC15C .....                       | 18          |
| Suggestion for Battery Power Application .....                   | 19          |
| Preloaded Firmware .....   | 19          |
| 6. Miscellaneous .....   | 20          |
| Soldering Temperature-Time Profile for Re-Flow Soldering .....   | 20          |
| Cautions, Design Notes, and Installation Notes .....             | 20          |
| Packaging .....  | 23          |
| FCC Label .....  | 23          |
| 7. Revision History .....  | 24          |
| 8. Contact Us .....  | 錯誤! 尚未定義書籤。 |


## 1. Introduction

BC15C module is powerful, highly flexible, ultra low power Bluetooth Low Energy (BLE) modules using Nordic nRF54L15 SoCs. With an ARM Cortex™ M33 MCU at 128 MHz, 1.524MB flash, 256KB RAM, embedded 2.4GHz multi-protocol transceiver, and an integrated antenna, it allows faster time to market with reduced development cost.

The following is a block diagram of BC15C. Antenna circuit and main clock are integrated. All 31 GPIOs of nRF54L15 can be accessed from main board. Both 32 MHz and 32.768 kHz crystals are embedded. Connection to an external NFC (Near Field Communication) antenna is provided.

In this data sheets, BC15C, BC15E, BC15M, and BC15P are referred as BC15C.

## BC15C Block Diagram

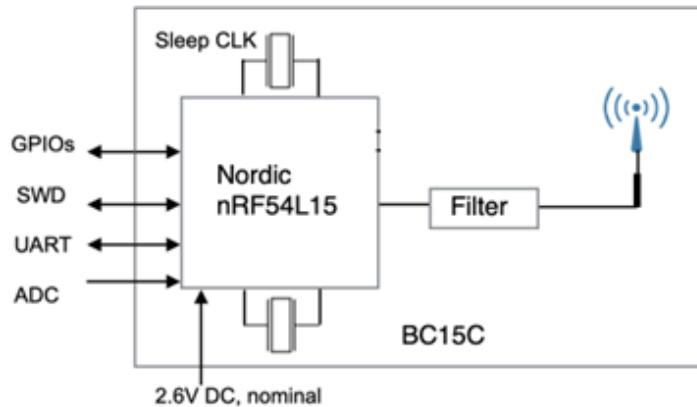

The following is a block diagram of BC15C.

BC15C Series modules have the same features except the followings.

### BC15C

- Uses an nRF54L15 SoC.
- Cortex M33 MCU at 128 MHz, 1524KB flash, 256 KB RAM
- Integrated chip antenna
- Size 6.0x11.0mm.

### BC15E

- Uses an nRF54L15 SoC.
- Cortex M33 MCU at 128 MHz, 1524KB flash, 256 KB RAM
- An u.FL connector for external antenna.
- Size 6.0x10.5mm.

**BC15M**

- Uses an nRF54L15 SoC.
- Cortex M33 MCU at 128 MHz, 1524KB flash, 256 KB RAM
- Integrated PCB trace antenna
- Size 6.0x9.6mm.

**BC15P**


- Uses an nRF54L15 SoC.
- Cortex M33 MCU at 128 MHz, 1524KB flash, 256 KB RAM
- Pads for external antenna connection.
- Size: 6.0x6.3 mm

## 2. Codes Development Using Nordic Tools

To be provided.

### Development Tools


Nordic Semiconductor provides a complete range of hardware and software development tools for the nRF54L15 Series devices. nRF54L15 DK board is recommended for firmware development.

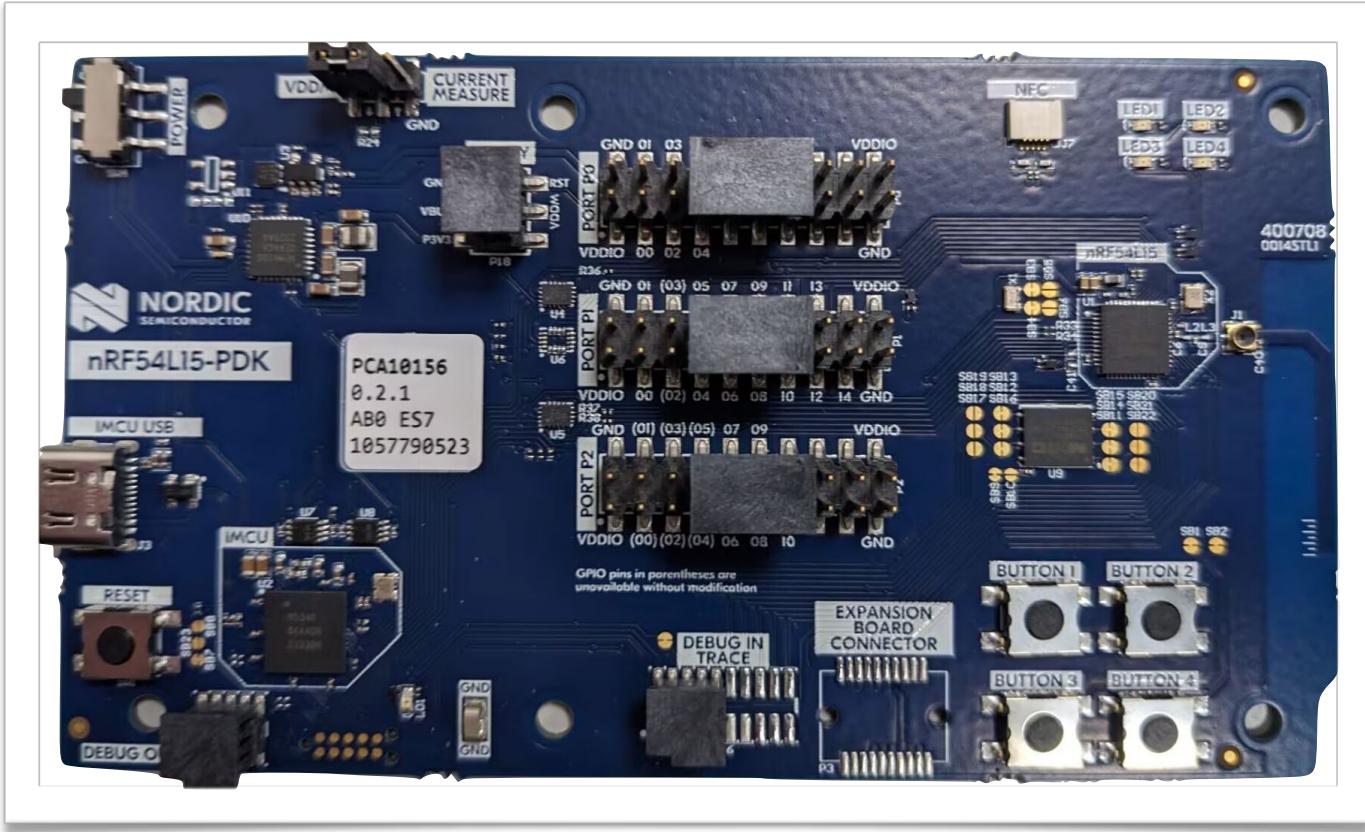

## 3. Product Overview

### Nordic SoCs

A block diagram of nRF54L15 is below. This is an ultra-low power SoC with advanced security features, a range of peripherals, and a multiple protocol 2.4 GHz transceiver. It supports Bluetooth Low Energy (BLE), IEEE 802.15.4 for Thread and Zigbee

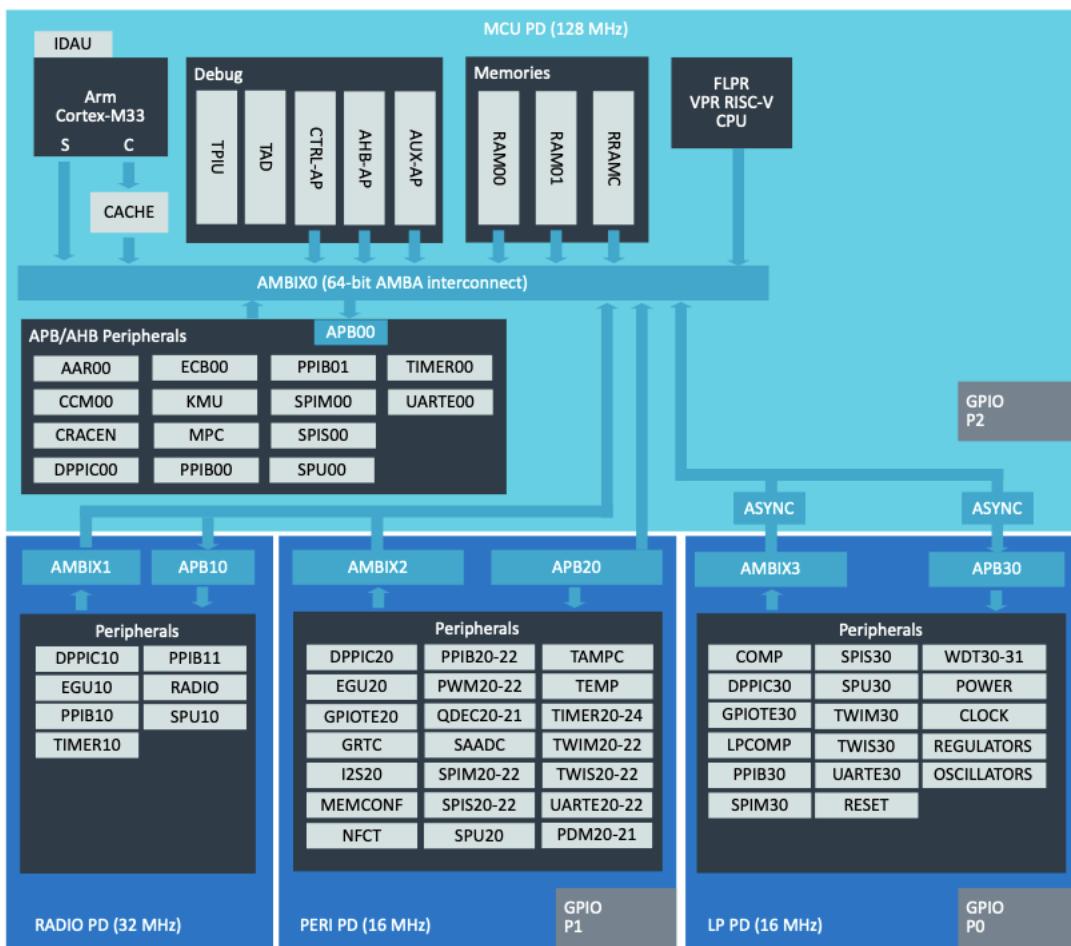

protocols, and allows for the implementation of proprietary 2.4 GHz protocols.

The main processing unit is an ARM Cortex M33 processor running at up to 128 MHz, supported by nonvolatile RRAM and RAM memory. The ARM Cortex M33 has a full set of digital processing (DSP) instructions and a memory protection unit (MPU) for application security. The full-featured single-precision floating-point unit (FPU) supports all single-precision instructions.

The peripheral set offers a variety of analog and digital functionality enabling single chip implementation of a wide range of applications. Hardware isolation between the secure and non-secure resources, as defined by ARM TrustZone, is implemented in the device. The hardware peripherals can be configured as secure or non-secure.

A key management unit (KMU) provides key storage, that when combined with a cryptographic accelerator (CRACEN), ensures discretion of encryption keys even within the secure world. The cryptographic accelerator has protection against differential power analysis (DPA) attacks.

The device has measures to protect against physical security attacks. It can detect and report fault injection attacks such as voltage glitching or electromagnetic fault injection. An external active shield I/O interface provides PCB or product level security for the detection of a product's encapsulation being opened, or product tampering.


The device non-volatile memory has a boot region that can be made immutable before the CPU starts up. Boot initiated from an immutable source allows subsequent boot steps to be performed by authenticated code.

The debug access port can be enabled or disabled to allow either non-intrusive or intrusive debugging, from secure or non secure worlds. The non volatile memory can be protected against erasing, providing protection from unauthenticated repurposing. Authenticated debug access control, such as facilitating the ARM ADAC architecture, is supported through a hardware mailbox. The mailbox allows on-chip firmware to authenticate the debug host before enabling the device debug interface.

The device has a dedicated RISC-V CPU (VPR), which is a fast, lightweight peripheral processor (FLPR) dedicated for software defined peripherals.

## Mechanical Drawings

BC15C and BC15M mechanical drawings, top view.

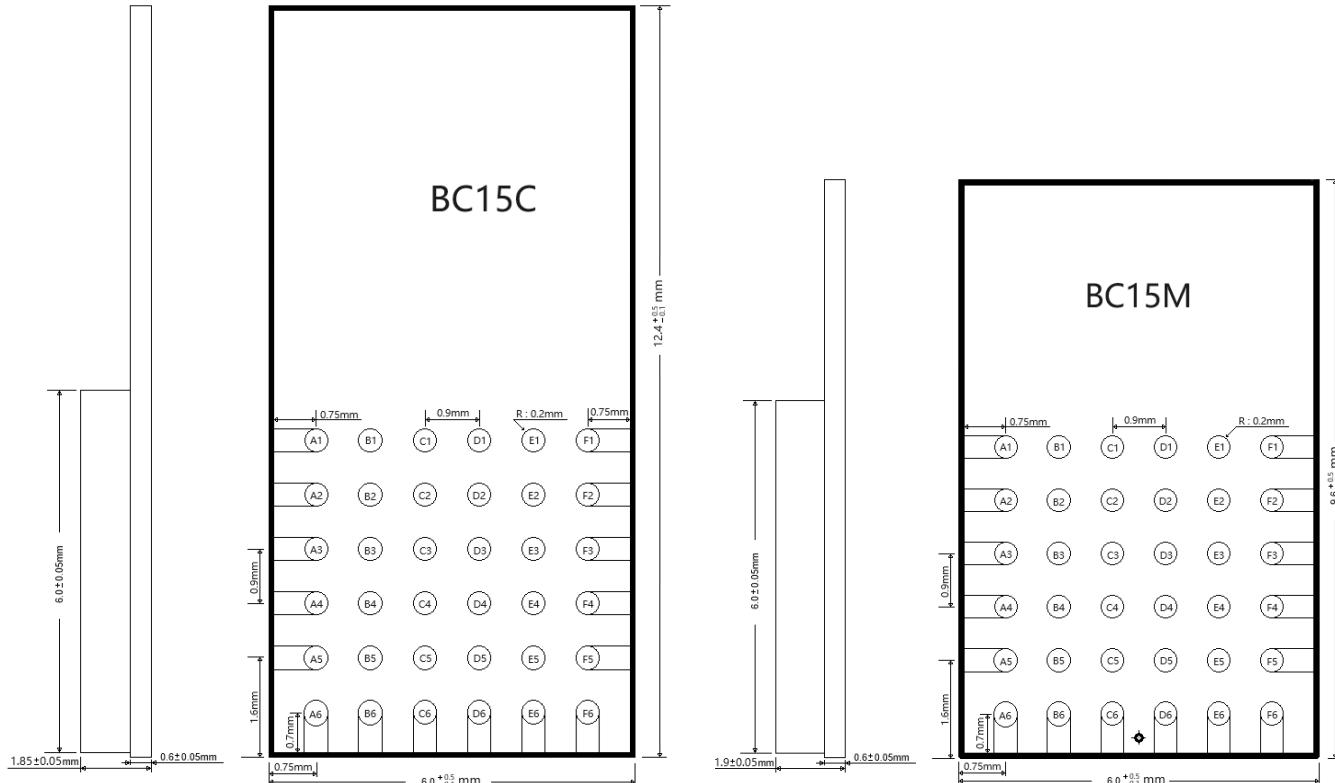

# Compact Bluetooth 6.0, 802.15.4 Module BC15C Draft Ver 0.90 May 2025


---

Library components for [Altium](#), [PADS](#) and [EAGLE](#) can be downloaded from the Fanstel website.

For other PCB layout tools, please download evaluation Gerber files and extract library component.

## BC15C Pin Functions

The following is a pin map of BC15C Series modules.

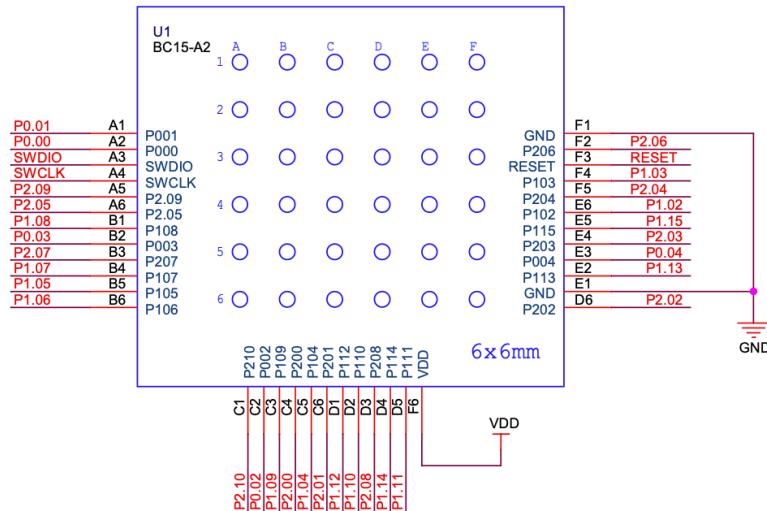


| Module | BC15C  | nRF54L15 |            |   |
|--------|--------|----------|------------|---|
| pin#   |        | pin#     | Name       | Descriptions  |
| A1     | P001   | F1       | P0.01      | GPIO  |
| A2     | P000   | G1       | P0.00      | GPIO  |
| A3     | SWDIO  | F2       | SWDIO      | Serial Wire Debug, Data                                 |
| A4     | SWDCLK | E3       | SWDCLK     | Serial Wire Debug, Clock                                |
| A5     | P209   | F3       | P2.09      | GPIO  |
| A6     | P205   | G5       | P2.05      | GPIO  |
| B1     | P108   | F7       | P1.08      | GPIO  |
| B2     | P003   | E1       | P0.03      | GPIO  |
| B3     | P207   | E4       | P2.07      | GPIO  |
| B4     | P107   | E7       | P1.07/AIN3 | GPIO, Analog input                                      |
| B5     | P105   | E6       | P1.05/AIN1 | GPIO, Analog input                                      |
| B6     | P106   | D7       | P1.06/AIN2 | GPIO, Analog input                                      |
| C1     | P210   | G2       | P2.10      | GPIO  |
| C2     | P002   | E2       | P0.02      | GPIO  |
| C3     | P109   | B3       | P1.09      | GPIO  |
| C4     | P200   | G6       | P2.00      | GPIO  |
| C5     | P104   | D6       | P1.04/AIN0 | GPIO, Analog input                                      |
| C6     | P201   | G7       | P2.01      | GPIO  |
| D1     | P112   | A3       | P1.12/AIN5 | GPIO, Analog input                                      |
| D2     | P110   | C3       | P1.10      | GPIO  |
| D3     | P208   | D4       | P2.08      | GPIO  |
| D4     | P114   | B5       | P1.14/AIN7 | GPIO, Analog input                                      |
| D5     | P111   | C4       | P1.11/AIN4 | GPIO, Analog input                                      |
| D6     | P202   | F6       | P2.02      | GPIO  |
| E1     | GND    | A6       | VSS        | Ground  |
| E2     | P113   | B4       | P1.13/AIN6 | GPIO, Analog input                                      |
| E3     | P004   | D3       | P0.04      | GPIO  |
| E4     | P203   | E6       | P2.03      | GPIO  |
| E5     | P115   | B6       | P1.15      | GPIO  |
| E6     | P102   | C7       | P1.02/NFC1 | GPIO, NFC Connection                                    |
| F1     | GND    | G4       | GND        | Ground  |
| F2     | P206   | F4       | P2.06      | GPIO  |
| F3     | /RESET | D2       | /RESET     | /Reset, active low.                                     |
| F4     | P103   | D5       | P1.03/NFC2 | GPIO, NFC Connection                                    |
| F5     | P204   | F5       | P2.04      | GPIO  |
| F6     | VDD    | G3       | VDD        | DC power supply, 2.6V for rev A; 1.8 to 3.6V for rev B. |

BC15C Pin Functions



## Mounting BC15C on the Host PCB

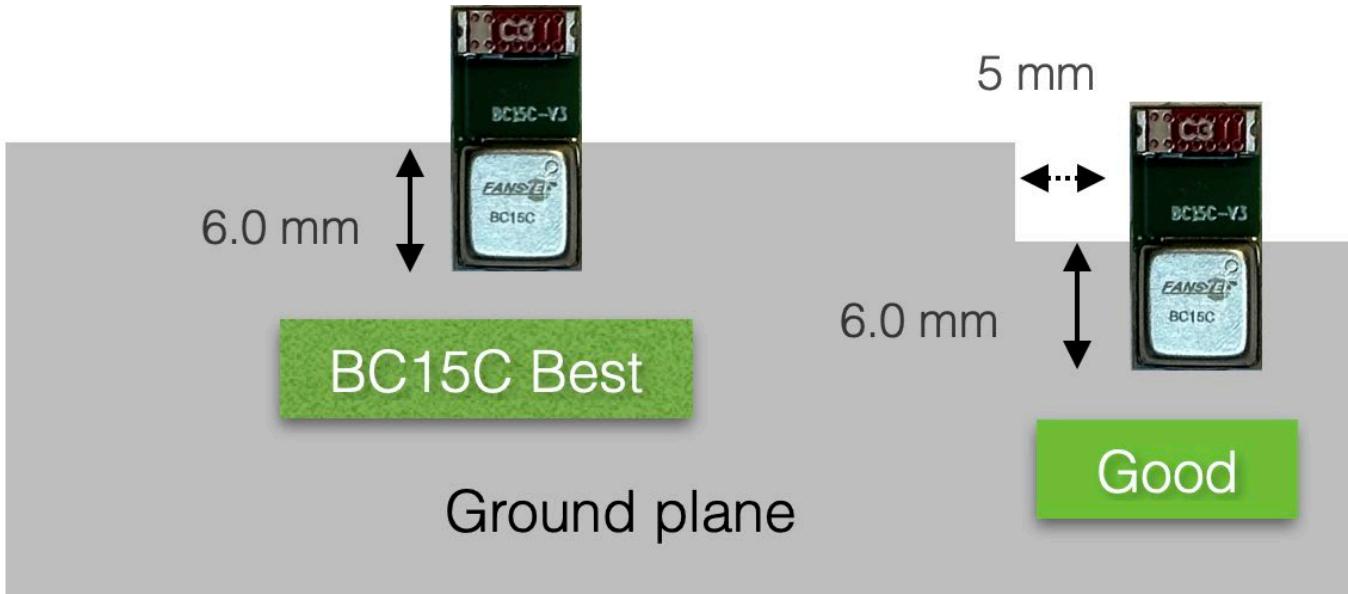

The following figure shows recommended mounting of BC15C module on the host PCB.

- For the best Bluetooth range performance, the upper edge of the RFI shield shall align with the upper edge of the ground plane on host PCB board, the height of the RFI shield is 6.0mm.
- The next choice is to place a module on a corner of host PCB, the upper edge of the RFI shield shall align with the upper edge of ground plane. Ground plane shall be at least 5 mm from the edge of the antenna area of module.
- We don't recommend mounting BC15C module in the middle of a host PCB.

For the best Bluetooth range performance, keep all external metal at least 30mm from the antenna area.

## 4. Bluetooth Range Measurements

Bluetooth range measurement hex codes can be downloaded from **Bluetooth Range Measurements** section of this webpage.

<http://www.fanstel.com/download-document/>

Description of measurement site, measurement methods, and range raw data are available at:

<https://www.fanstel.com/testreport/>

### Measurement Results

To be provided.

## 5. Evaluation Board


An evaluation board can be used to evaluate performance of module and to develop and test your firmware before an application-specific host board is developed.

### Loading Firmware into Evaluation Board Through a Nordic DK

A Nordic nRF54L15 PDK or DK is required to load firmware into EV-BC15C.

Procedures to connect a Nordic DK to a Fanstel nRF54 module evaluation board.

- Connect Nordic nRF54L15 DK debug out to Fanstel evaluation board debug in using the 10-pin flat cable as shown below.
- Connect Nordic nRF4L15 DK to PC.
- Connect a DC power source to micro or mini USB port of evaluation board.

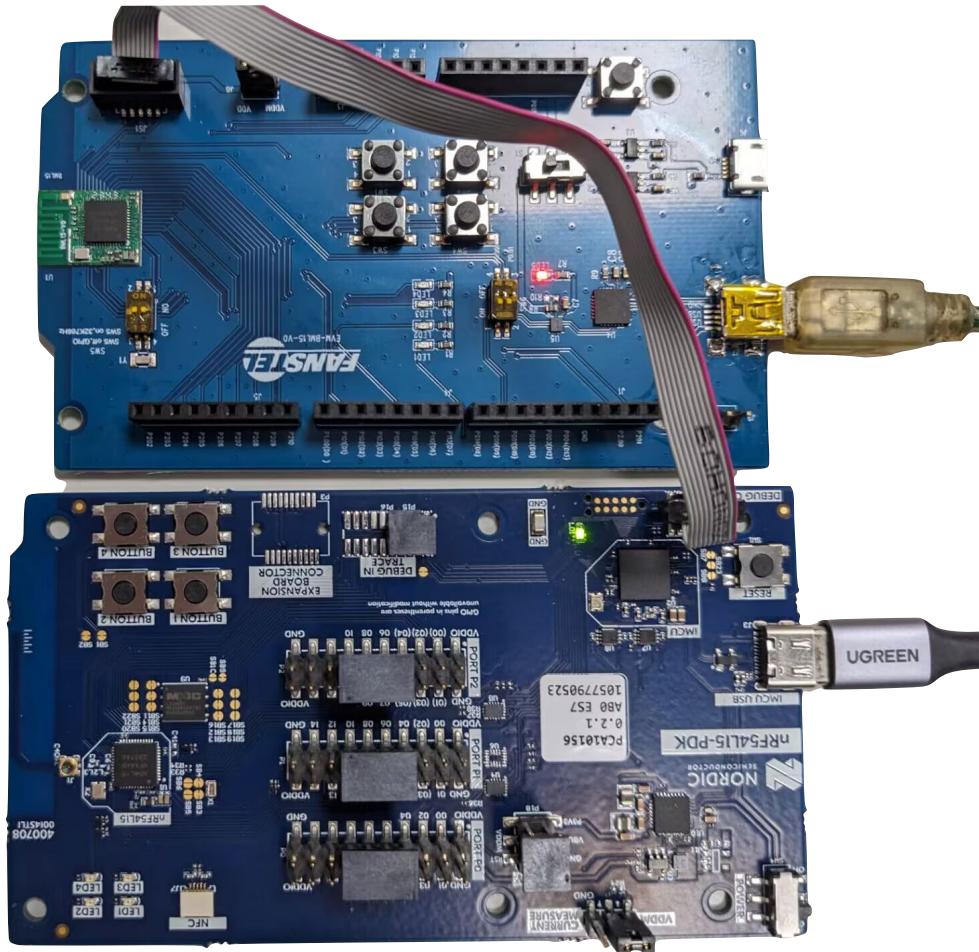

## Procedures to Load Firmware


[EV-BM15 hex codes and source codes](#) can be downloaded from the Fanstel website.

Open command line tool and execute the programming commands.

```
nrfjprog -f NRF54L --recover  
nrfjprog -f NRF54L --program BML15_231129.hex --chiperase --verify --reset
```

```
C:\Users\Leo\Desktop\Nordic_Firmware\BML15_231129\HEX>nrfjprog -f NRF54L --recover  
Recovering device. This operation might take 30s.  
Erasing user code and UICR flash areas.  
  
C:\Users\Leo\Desktop\Nordic_Firmware\BML15_231129\HEX>nrfjprog -f NRF54L --program BML15_231129.hex --chiperase --verify  
--reset  
[ ##### ] 0.261s | Erase file - Done erasing  
[ ##### ] 3.951s | Program file - Done programming  
[ ##### ] 1.720s | Verify file - Done verifying  
Applying system reset.  
Run.  
  
C:\Users\Leo\Desktop\Nordic_Firmware\BML15_231129\HEX>
```

## Board for

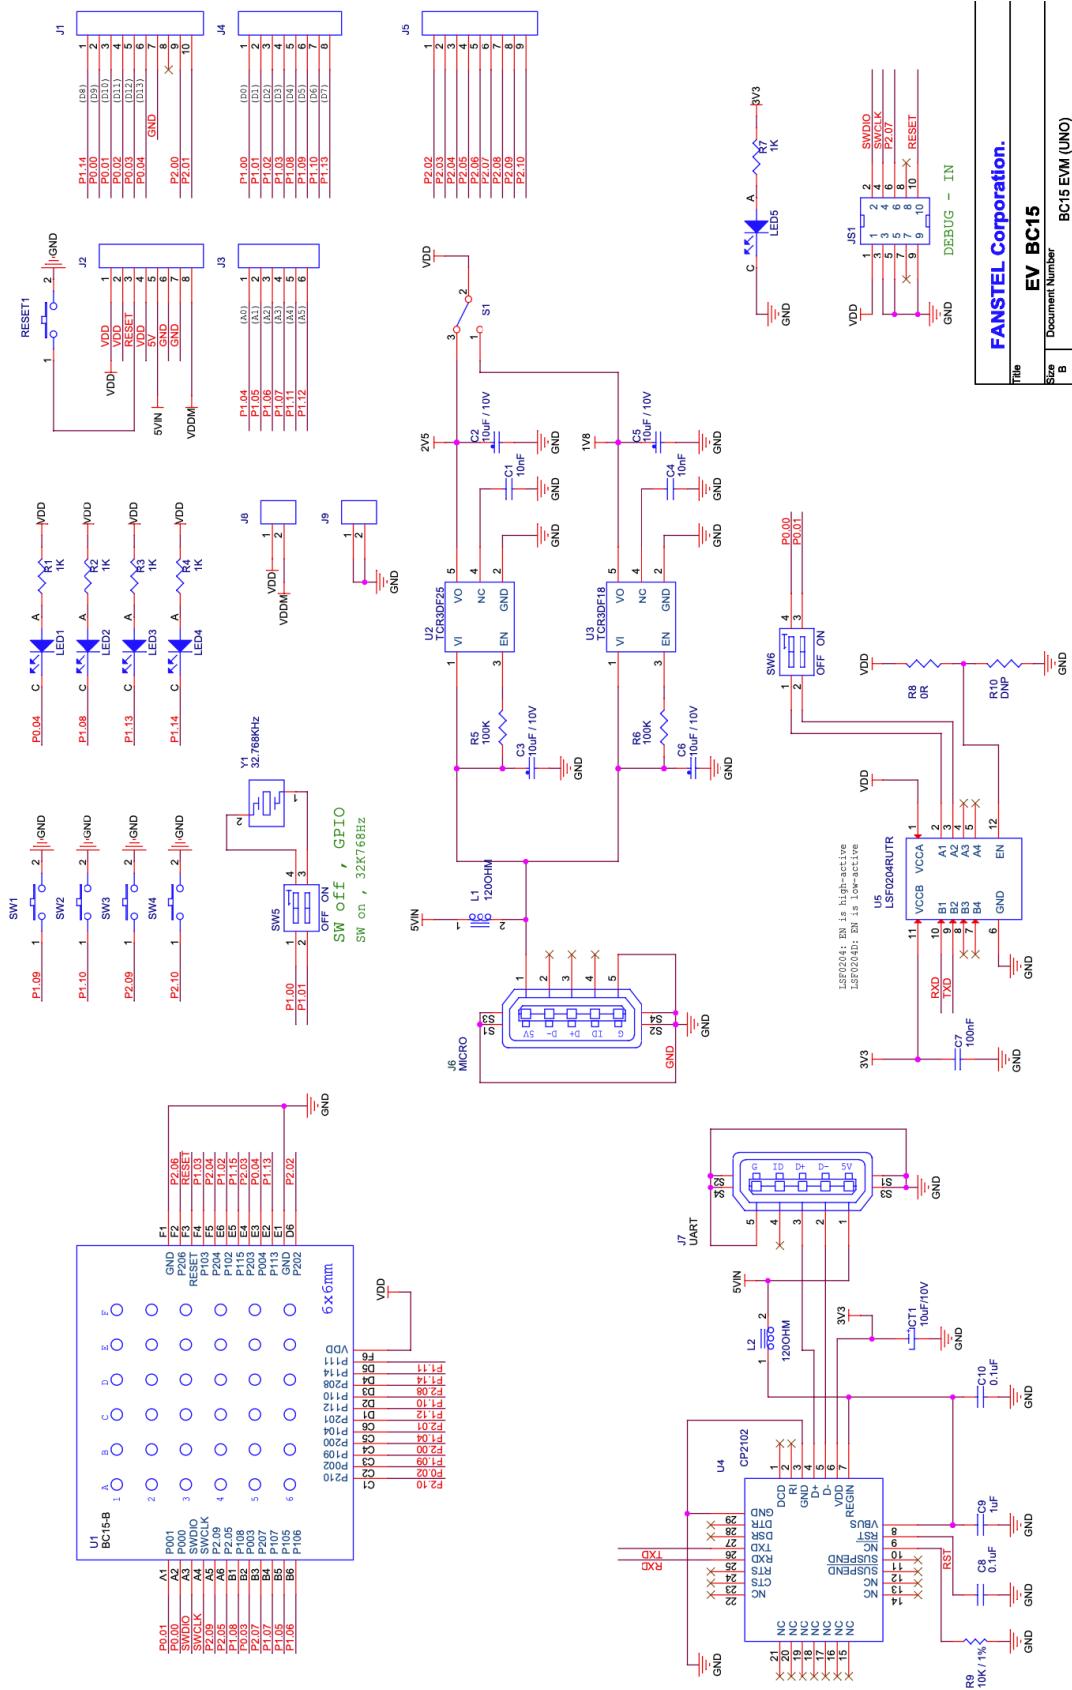

Evaluation  
Schematic  
BC15C



## **Suggestion for Battery Power Application**

Standby current consumption is important for battery-powered product. You can enable the embedded 32.768 kHz crystal to reduce power consumption. The 32MHz main clock won't be active at idle state to save power.

Two inductors required for DCDC converter are inside BC15C module. You can enable DCDC to lower power consumption.


## **Preloaded Firmware**

Modules are loaded with production test codes. Please erase them before use.

## 6. Miscellaneous

### Soldering Temperature-Time Profile for Re-Flow Soldering

Maximum number of cycles for re-flow is 2. No opposite side re-flow is allowed.

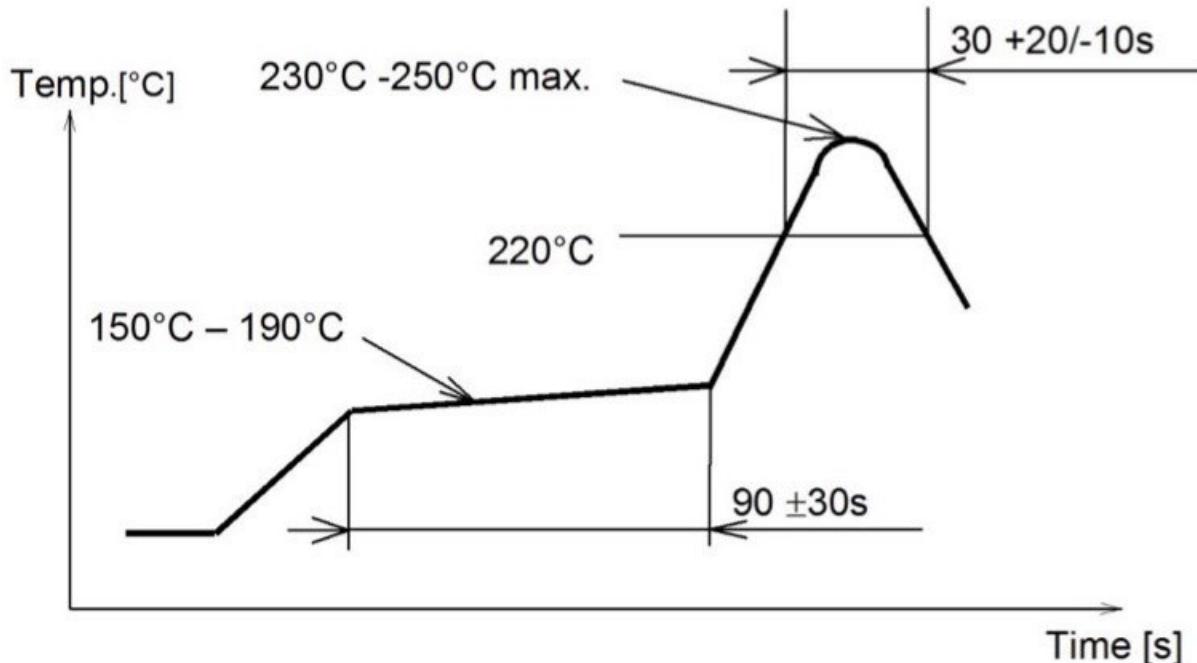

### Cautions, Design Notes, and Installation Notes

Failure to follow the guidelines set forth in this document may result in degrading of the product's functions and damage to the product.

#### *Design Notes*

- (1) Follow the conditions written in this specification, especially the control signals of this module.
- (2) The supply voltage has to be free of AC ripple voltage (for example from a battery or a low noise regulator output). For noisy supply voltages, provide a decoupling circuit (for example a ferrite in series connection and a bypass capacitor to ground of at least 47uF directly at the module).
- (3) This product should not be mechanically stressed when installed.
- (4) Keep this product away from heat. Heat is the major cause of decreasing the life of these products.
- (5) Avoid assembly and use of the target equipment in conditions where the products' temperature may exceed the maximum tolerance.
- (6) The supply voltage should not be exceedingly high or reversed. It should not carry noise and/or spikes.
- (7) Keep this product away from other high frequency circuits.

## ***Notes on Antenna and PCB Layout***

(1) Don't use a module with internal antenna inside a metal case.

(2) For PCB layout:

- Avoid running any signal line below module whenever possible,
- No ground plane below antenna,
- If possible, cut-off the portion of main board PCB below antenna.

## ***Installation Notes***

(1) Reflow soldering is possible twice based on the time-temperature profile in this data sheets. Set up the temperature at the soldering portion of this product according to this reflow profile.

(2) Carefully position the products so that their heat will not burn into printed circuit boards or affect the other components that are susceptible to heat.

(3) Carefully locate these products so that their temperatures will not increase due to the effects of heat generated by neighboring components.

(4) If a vinyl-covered wire comes into contact with the products, then the cover will melt and generate toxic gas, damaging the insulation. Never allow contact between the cover and these products to occur.

(5) This product should not be mechanically stressed or vibrated when reflowed.

(6) If you want to repair your board by hand soldering, please keep the conditions of this chapter.

(7) Do not wash this product.

(8) Refer to the recommended pattern when designing a board.

(9) Pressing on parts of the metal cover or fastening objects to the metal will cause damage to the unit.

(10) For more details on LGA (Land Grid Array) soldering processes refer to the application note.

## ***Usage Condition Notes***

(1) Take measures to protect the unit against static electricity. If pulses or other transient loads (a large load applied in a short time) are applied to the products, check and evaluate their operation before assembly on the final products.

(2) Do not use dropped products.

(3) Do not touch, damage or soil the pins.

(4) Follow the recommended condition ratings about the power supply applied to this product.

(5) Electrode peeling strength: Do not add pressure of more than 4.9N when soldered on PCB

(6) Pressing on parts of the metal cover or fastening objects to the metal cover will cause damage.

(7) These products are intended for general purpose and standard use in general electronic equipment, such as home appliances, office equipment, information and communication equipment.

## ***Storage Notes***

(1) The module should not be stressed mechanically during storage.

(2) Do not store these products in the following conditions or the performance characteristics of the product, such as RF performance will be adversely affected:

- Storage in salty air or in an environment with a high concentration of corrosive gas.
- Storage in direct sunlight
- Storage in an environment where the temperature may be outside the range specified.
- Storage of the products for more than one year after the date of delivery storage period.

(3) Keep this product away from water, poisonous gas and corrosive gas.

(4) This product should not be stressed or shocked when transported.

(5) Follow the specification when stacking packed crates (max. 10).

### ***Safety Conditions***

These specifications are intended to preserve the quality assurance of products and individual components. Before use, check and evaluate the operation when mounted on your products. Abide by these specifications, without deviation when using the products. These products may short-circuit. If electrical shocks, smoke, fire, and/or accidents involving human life are anticipated when a short circuit occurs, then provide the following failsafe functions, as a minimum.

(1) Ensure the safety of the whole system by installing a protection circuit and a protection device.

(2) Ensure the safety of the whole system by installing a redundant circuit or another system to prevent a dual fault causing an unsafe status.

### ***Other Cautions***

(1) This specification sheet is copyrighted. Reproduction of this data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices.

(2) Do not use the products for other purposes than those listed.

(3) Be sure to provide an appropriate failsafe function on your product to prevent an additional damage that may be caused by the abnormal function or the failure of the product.

(4) This product has been manufactured without any ozone chemical controlled under the Montreal Protocol.

(5) These products are not intended for other uses, other than under the special conditions shown below. Before using these products under such special conditions, check their performance and reliability under the said special conditions carefully to determine whether or not they can be used in such a manner.

- In liquid, such as water, salt water, oil, alkali, or organic solvent, or in places where liquid may splash.
- In direct sunlight, outdoors, or in a dusty environment
- In an environment where condensation occurs.
- In an environment with a high concentration of harmful gas.

- (6) If an abnormal voltage is applied due to a problem occurring in other components or circuits, replace these products with new products because they may not be able to provide normal performance even if their electronic characteristics and appearances appear satisfactory.
- (7) When you have any question or uncertainty, contact Fanstel.

## Packaging

Production modules are delivered in reel, 1000 modules in each reel.

## FCC LABEL

The Original Equipment Manufacturer (OEM) must ensure that the OEM modular transmitter must be labeled with its own FCC ID number. This includes a clearly visible label on the outside of the final product enclosure that displays the contents shown below. If the FCC ID is not visible when the equipment is installed inside another device, then the outside of the device into which the equipment is installed must also display a label referring to the enclosed equipment

The end product with this module may subject to perform FCC part 15 unintentional emission test requirement and be properly authorized.

This device is intended for OEM integrator only.

## 7. Revision History

- Nov. 2024, Ver. 0.70: The first draft release.
- May 2025, Ver. 0.90: Update module specs.

## 8 Contact Us

Fanstel Corp.  
7466 E. Monte Cristo Ave. Scottsdale AZ 85260  
Tel. 1 480-948-4928  
Fax. 1-480-948-5459  
Email: [info@fanstel.com](mailto:info@fanstel.com)  
Website: [www.fanstel.com](http://www.fanstel.com)

### Taiwan:

Fanstel Corp.  
10F-10, 79 Xintai Wu Road  
Xizhu, New Taipei City, Taiwan 22101  
泛世公司  
臺灣省新北市汐止區新臺五路 79 號 10 樓之 10, 22101  
Tel. 886-2-2698-9328  
Fax. 886-2-2698-4813  
Email: [info@fanstel.com](mailto:info@fanstel.com)  
Website: [www.fanstel.com](http://www.fanstel.com)

### China:

Fanstel Technologies Corp.  
11 Jiale Street  
Ping-Dih, Long-Gang, Shen Zhen, GD 518117  
泛世康科技(深圳)有限公司  
廣東省深圳市龍崗區坪地鎮佳樂街 11 號  
Tel. 86-755-8409-0928  
Fax. 86-755-8409-0973  
QQ. 3076221086  
Email: [info@fanstel.com](mailto:info@fanstel.com)  
Website: [www.fanstel.com](http://www.fanstel.com)

# Compact Bluetooth 6.0, 802.15.4 Module BC15C Draft Ver 0.90 May 2025

---

## Federal Communications Commission (FCC) Statement

### 15.21

You are cautioned that changes or modifications not expressly approved by the part responsible for compliance could void the user's authority to operate the equipment.

### 15.105(b)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

-Reorient or relocate the receiving antenna.

-Increase the separation between the equipment and receiver.

-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1) this device may not cause harmful interference, and

2) this device must accept any interference received, including interference that may cause undesired operation of the device.

## FCC RF Radiation Exposure Statement

The antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other transmitter, except in accordance with FCC multi-transmitter product procedures.

This equipment should be installed.

Note: The end product shall has the words "Contains Transmitter Module FCC ID: X8WBC15

## Canada, Industry Canada (IC)

This Class B digital apparatus complies with Canadian ICES-003

Cet appareil numérique de classe B est conforme à la norme NMB-003.

*This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject*

*to the following two conditions: (1) this device may not cause interference, and (2) this device*

*must accept any interference, including interference that may cause undesired operation of the*

*Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de  
licence. L'exploitation est autorisée aux deux conditions suivantes:*

*(1) l'appareil ne doit pas produire de brouillage, et*

*(2) l'utilisateur de l'appareil doit accepter tout brouillage adioélectrique subi, même si le brouillage est susceptible d'en  
 compromettre le fonctionnement.*

## Conformité des appareils de radiocommunication aux limites

### d'exposition humaine aux radiofréquences (CNR-102)

L'ordinateur utilise des antennes intégrales à faible gain qui n'émettent pas un champ électromagnétique supérieur aux normes imposées par Santé Canada pour la population. Consultez le Code de sécurité 6 sur le site Internet de Santé Canada à l'adresse suivante : <http://www.hc-sc.gc.ca/>

L'énergie émise par les antennes reliées aux cartes sans fil respecte la limite d'exposition aux radiofréquences telle que définie par Industrie Canada dans la clause 4.1 du document CNR-102, version 4.

## Caution: Exposure to Radio Frequency Radiation.

L'antenne ou les antennes utilisées pour cet émetteur doivent être installées de manière à assurer une distance de séparation d'au moins 20 cm par rapport à toutes les personnes et ne doivent pas être situées à proximité ou fonctionner en conjonction avec un autre émetteur, sauf conformément aux procédures de la FCC relatives aux produits multi-émetteurs. Cet équipement doit être installé.

## (Modular approval) End Product Labeling:

The final end product must be labeled in a visible area with the following: "Contains IC: 4100A-BC15

Le produit final doit être étiqueté dans une zone visible avec ce qui suit "Contient IC : 4100A-BC15

## OEM statement

The Original Equipment Manufacturer (OEM) must ensure that the OEM modular transmitter must be labeled with its own FCC ID number. This includes a clearly visible label on the outside of the final product enclosure that displays the contents shown below. If

the FCC ID is not visible when the equipment is installed inside another device, then the outside of the device into which the equipment is installed must also display a label referring to the enclosed equipment.

The end product with this module may subject to perform FCC part 15B unintentional emission test requirement and be properly authorized while installation to host(s), and platform, and integrator are obligated to have its manual or instruction with the related compliance warning to end users.

This device is intended for OEM integrator only

The end product with this module may be subject to re-evaluate RF exposure as per 47CFR §

2.1091, and §2.1093 if antenna or usage, including co-located usage of other transmitters, of the subsequent installation are changed.

This radio transmitter has been approved by FCC/Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that

Have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Chip antennas: 1.5 dBi dipole antennas: 6 dBi

Cet émetteur radio a été approuvé par FCC/Innovation, Science et Développement économique Canada pour fonctionner avec les types d'antennes répertoriés ci-dessous, avec le gain maximal autorisé indiqué. Les types d'antenne non inclus dans cette liste qui ont un gain supérieur au gain maximum indiqué pour tout type répertorié sont strictement interdits pour une utilisation avec cet appareil.

Chip[ Antennes : 1.5 dBi Antennes dipôles : 6 dBi

## NCC 警語:

取得審驗證明之低功率射頻器材，非經核准，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

低功率射頻器材之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。

前述合法通信，指依電信管理法規定作業之無線電通信。低功率射頻器材須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。