

# Regulatory WLAN Antenna Information (Template)

*English Language Required for Intel Regulatory Review / Approval*

**(OEM/ODM or antenna vendor is required to complete this document with platform antenna information.**

**Remove Intel references and make this your own document)**

Platform information										
Brand	ODM	****End product model name	Intel platform (ex: Yes, No or NA)	Platform type (ex: regular NB, convertible PC, AIO...etc)	*SAR minimum separation (mm)					
Valve	Quanta	1030	NA		2.23					
****Please fill in exact product model name and make sure the model name is visible on product cover or any parts for end users recognize for authority inspection.										
Antenna information										
Vendor	Type	Antenna Part number (Main)	Antenna Part number (Aux)	Antenna Part number (BT)						
WNC	PIFA	DQ6P15G7300 (81EABP15.G73)	DQ6P15G7400 (81EABP15.G74)	DQ6P15G7000 (81EABP15.G70)						
Peak gain w/ cable loss (dBi)*										
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz	
Main	0.24	0.62	0.62	0.09	0.56	2.54	1.56	1.56	0.32	
Aux	0.33	0.73	0.73	1.11	1.30	2.16	2.82	2.82	2.73	
BT	1.00	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
Intel Reference Gain/Type/ Separation distance										
Antenna Type	Antenna Peak gain (In dBi)*									Distance to the end user (mm)
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0GHz 6875-7125MHz	
Design	3.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	Generic: refer to modular FCC SAR report Mid-power: ≥ 8 mm Low power: ≥ 5 mm
PIFA	3.24	3.64	3.73	4.77	4.97	4.83	4.30	5.37	5.59	
Dipole	2.89	2.92	3.19	4.41	4.22	4.83	4.30	4.49	5.34	
Notes (marked with *)										
* SAR minimum separation (mm)										
- Regular NB: Minimum antenna-to-body (from antenna bottom to the bottom of the device)										
- Tablet / Convertible PC: Minimum antenna-to-edge (5 sides of the device)										
- Mini-tablet: Minimum antenna-to-edge (6 sides of the device)										
* 3D Peak Antenna gain should be equal or greater than -2 dBi										
- If a host integrator plans to use a lower gain antenna of the same type, additional CBP(FCC)/EDT(EU) testing need to be performed while the module is installed in the host.										

# Table of contents

1. Applicable test method
2. Test & System Description
  - a. Test setup
  - b. Equipment list
3. Setup photo

[Section 1. Antenna Assembly Specifications](#)

[Section 2. Dimensioned Photos or Drawings of Antennas](#)

[Section 3. Radiation characteristics of antenna loaded in Host Platform](#)

[Section 4. Antenna Host Platform Location Information](#)

[Section 5. Antenna dimensional information for SAR evaluation](#)

[Section 6. Diagram Example of Co-Location Antenna Separation](#)

WISTRON NEWEB CORPORATION

20 PARK AVENUE II, HSINCHU SCIENCE PARK, HSINCHU 308, TAIWAN, R.O.C.

**1. Applicable test methods**

T ETS-Lindgren AMS-8500 system is 3D fully anechoic chamber, it is applied to the “Conical Cut test method”, the detail description is described as below.


The Conical Cut method requires the ability of the Measurement Antenna to be physically rotated in the theta plane (overhead) of the EUT for implementations using a single Measurement Antenna, Eleven conical cuts are required to capture data at every 15 degrees from the EUT, with the top (0 degrees) and bottom (180 degrees) cuts not being measured. Typically, the EUT will remain affixed to a turntable during the entire measurement process. The Measurement Antenna will be positioned at a starting theta angle. The EUT will then be rotated around the full 360 degrees of phi rotation. The Measurement Antenna will then be positioned at the next theta angle, and the process repeated.

		$\theta$ -Axis	$\Phi$ -Axis
Passive	Step size	15°~165° step: 15°	0°~345° step: 15°
	N / M (Points)	12	24

**2. Test & System Description**

a. Test setup

Typical Setup for ETS-Lindgren AMS-8500:

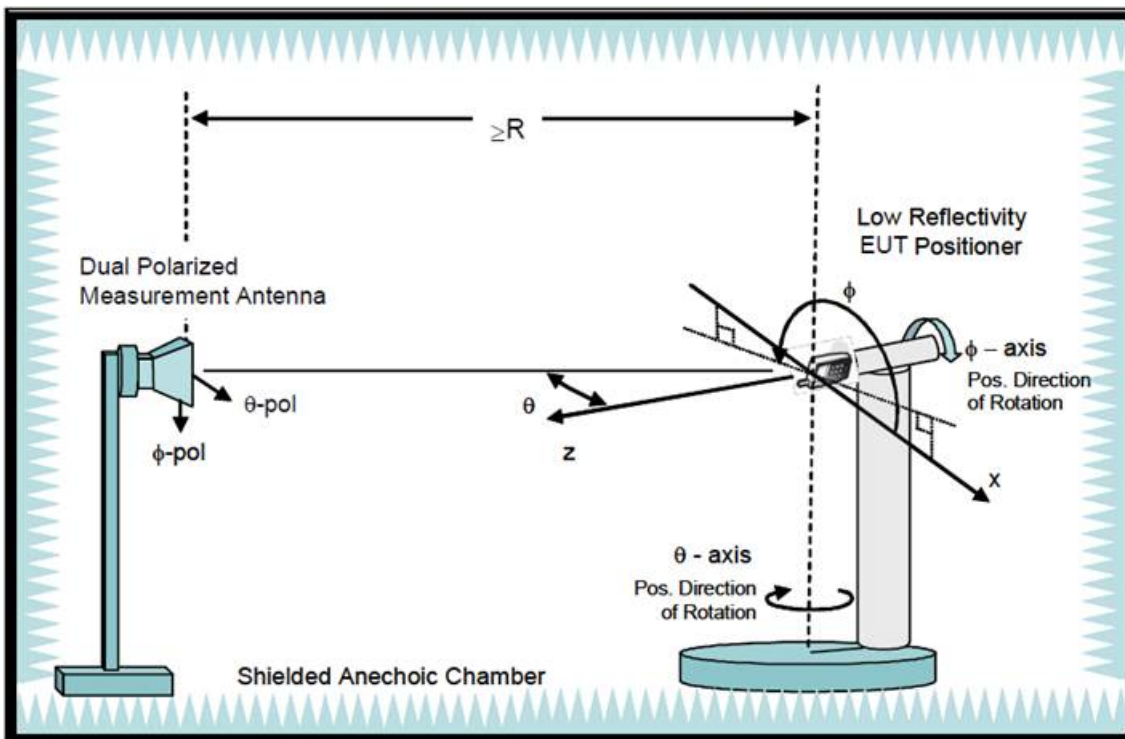

## b. Equipment list

**Test Equipment**

Equipment Description	Manufacturer	Identification no.	Current calibration date	Next calibration date
Network analyzer	Agilent	E5071C	2022/1/7	2023/1/6
Measurement software	ETS-Lindgren	EMQuest	N/A	N/A
Multi axis positioning system(MAPS™)	ETS-Lindgren	EMCO 2115	N/A	N/A
Multi axis positioning system(MAPS™)	ETS-Lindgren	EMCO 2110	N/A	N/A
MAPS™ controller	ETS-Lindgren	EMCO 2090	N/A	N/A
ETS OTA Chamber	ETS-Lindgren	AMS8500	2022/3/3	2022/3/2
Horn antenna	ETS-Lindgren	3164-10	2022/3/3	2022/3/2

Note : Chamber calibration included full set of implement

# Antenna Information

## Section 1. Antenna Assembly Specifications

1A	1B	1C	1D	1E	1F	1G	1H	
Antenna Part Number	Manufacturer	Antenna Type	Cable Assembly Part Number and Information	Freq Range MHz	* Peak Gain W/ Cable loss (dBi)	Peak Gain w/o Cable Loss (dBi)	Max VSWR	Cable Loss (dB)
<b>DQ6P15G7300</b> <b>(81EABP15.G73)</b>  Main Antenna	WNC	PIFA	Connector: MHF II 20311-011R-08  50 Ohm Coaxial Cable  Length: 86 mm Diameter: 0.81 mm	2400-2483.5	0.24	0.63	3.00	0.39
				5150-5250	0.62	1.21	3.00	0.59
				5250-5350	0.62	1.22	3.00	0.60
				5470-5725	0.09	0.71	3.00	0.62
				5725-5850	0.56	1.19	3.00	0.63
				5925-6425	2.54	3.18	3.00	0.64
				6425-6525	1.56	2.22	3.00	0.66
				6525-6875	1.56	2.25	3.00	0.69
				6875-7125	0.32	1.02	3.00	0.70
<b>DQ6P15G7400</b> <b>(81EABP15.G74)</b> Aux Antenna	WNC	PIFA	Connector: MHF II 20311-011R-08  50 Ohm Coaxial Cable  Length: 20 mm Diameter: 0.81 mm	2400-2483.5	0.33	0.51	3.00	0.18
				5150-5250	0.73	1.01	3.00	0.28
				5250-5350	0.73	1.01	3.00	0.28
				5470-5725	1.11	1.40	3.00	0.29
				5725-5850	1.30	1.60	3.00	0.30
				5925-6425	2.16	2.46	3.00	0.30
				6425-6525	2.82	3.13	3.00	0.31
				6525-6875	2.82	3.14	3.00	0.32
				6875-7125	2.73	3.06	3.00	0.33
<b>DQ6P15G7000</b> <b>(81EABP15.G70)</b>  BT Antenna	WNC	PIFA	Connector: MHF(IPEX) 20278-112R-13  50 Ohm Coaxial Cable  Length: 150 mm Diameter: 1.13 mm	2400-2483.5	1.00	1.45	3.00	0.45


- 3D Antenna Peak Gain required being test in system basis.

## Section 3. Radiation characteristics of antenna loaded in Host Platform

### Main Antenna


#### Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	0.24

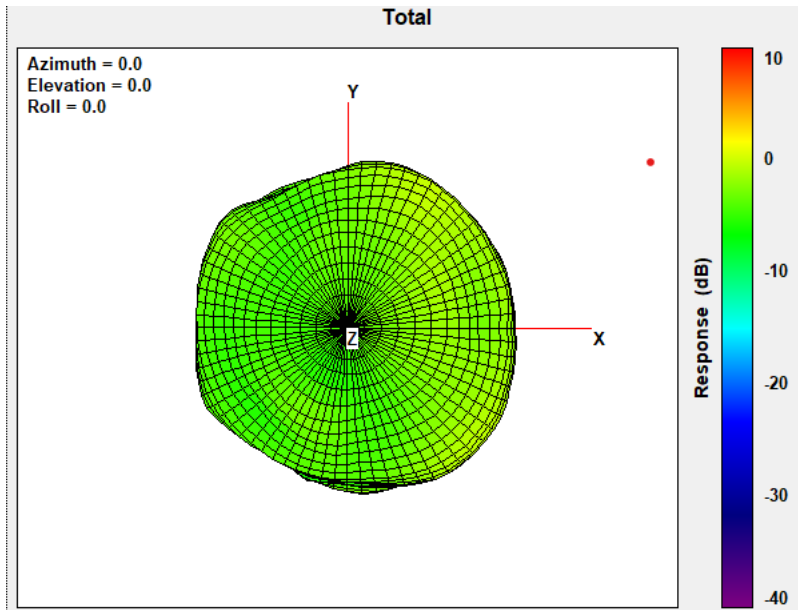


#### Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	0.62

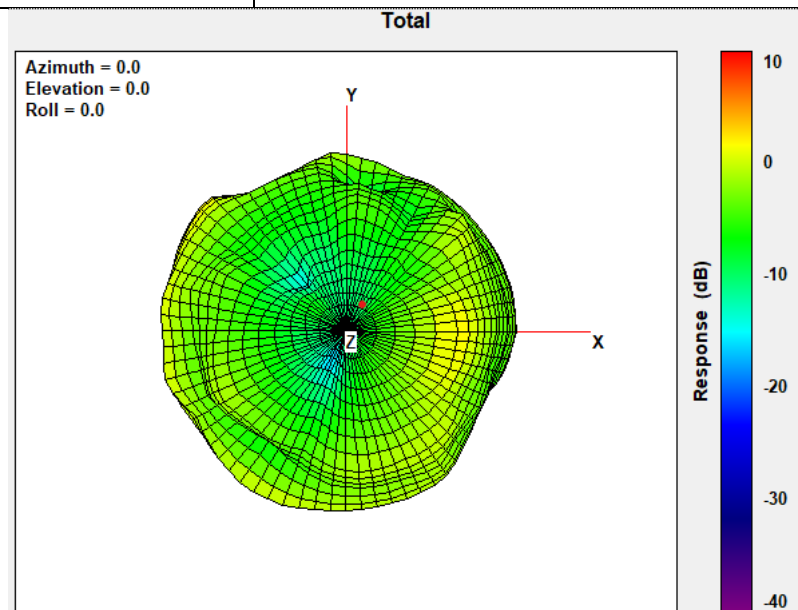


### Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	0.62

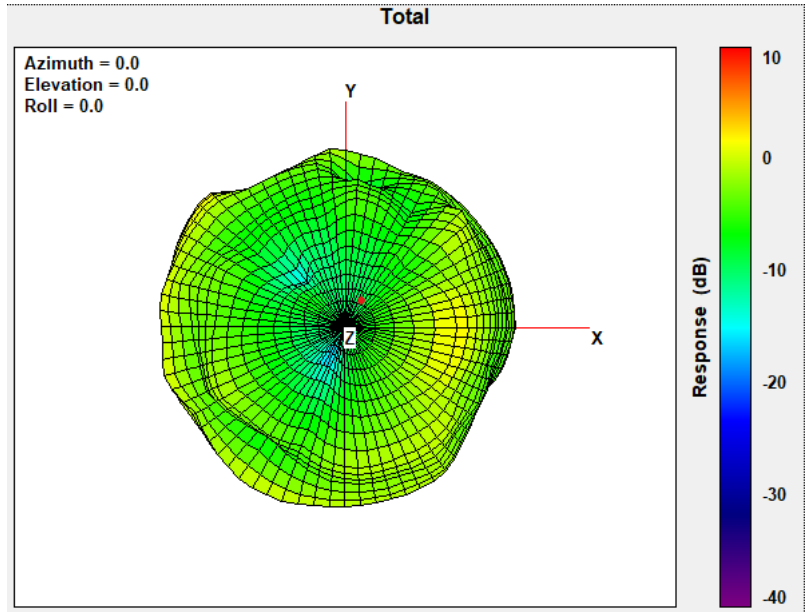


### Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	0.09

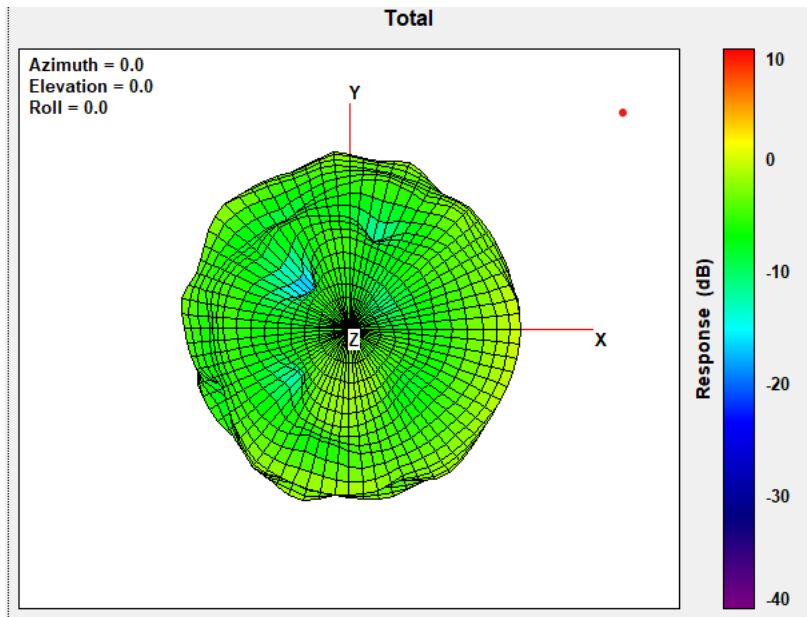


### Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	0.56

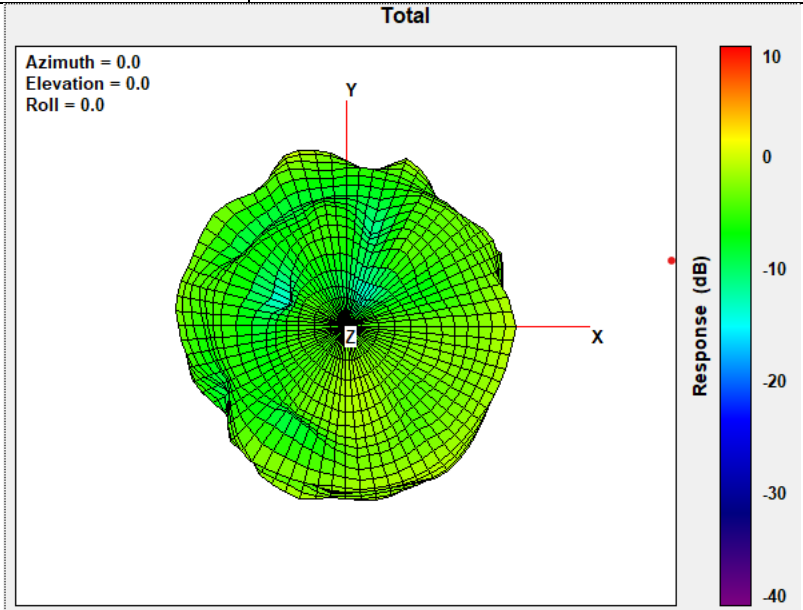

### Max Antenna 3D Radiation Pattern 5925-6425 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	2.54

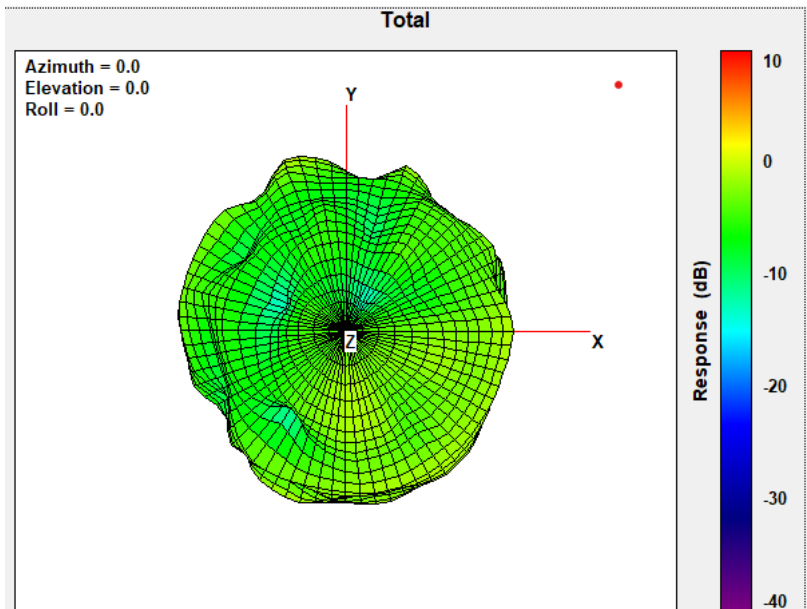




### Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	1.56

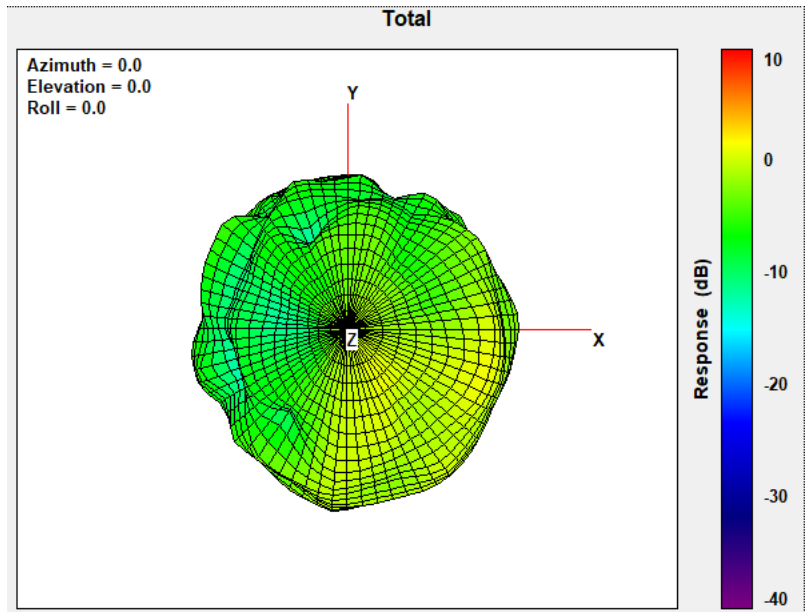


### Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	1.56

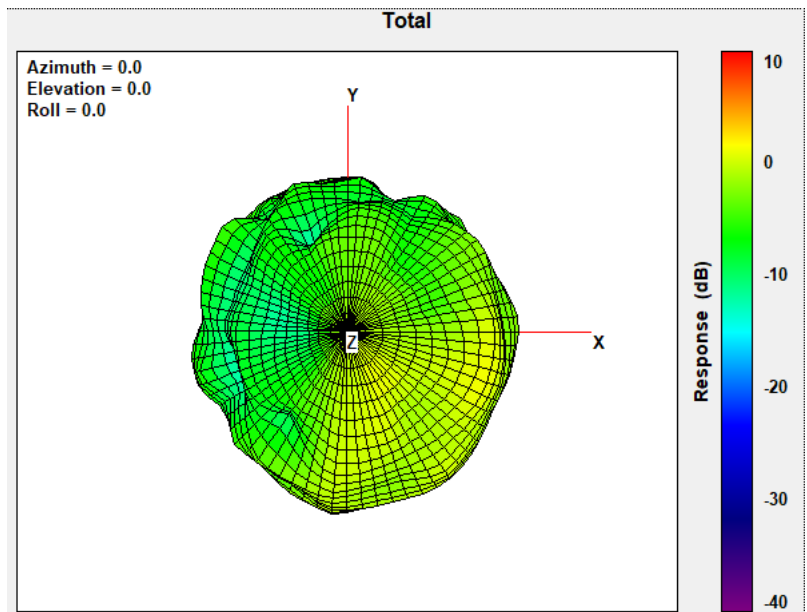

## Max Antenna 3D Radiation Pattern 6875-7125 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	0.32

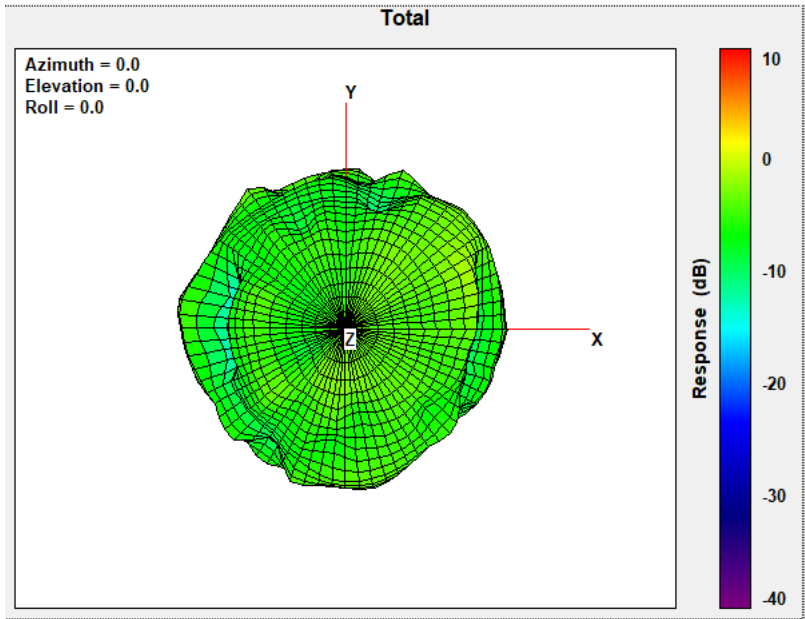

## Auxiliary Antenna


### Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	0.33

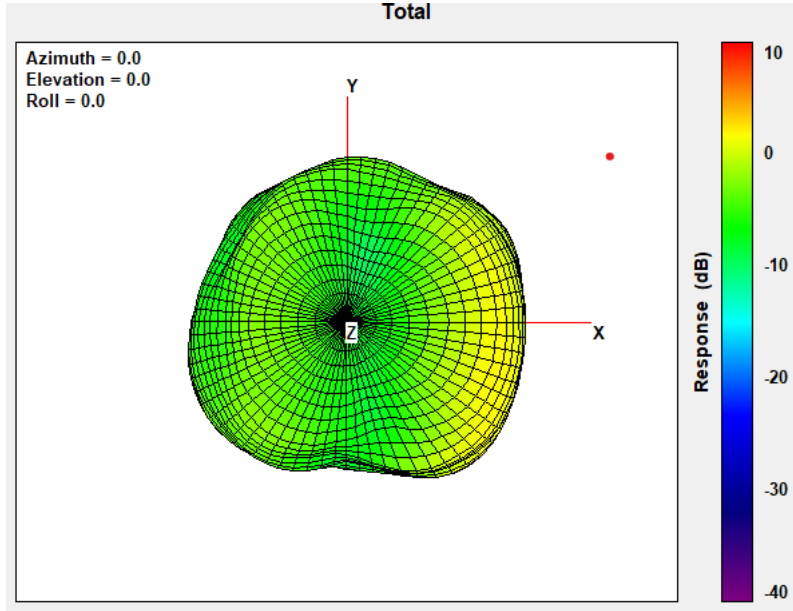


### Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	0.73

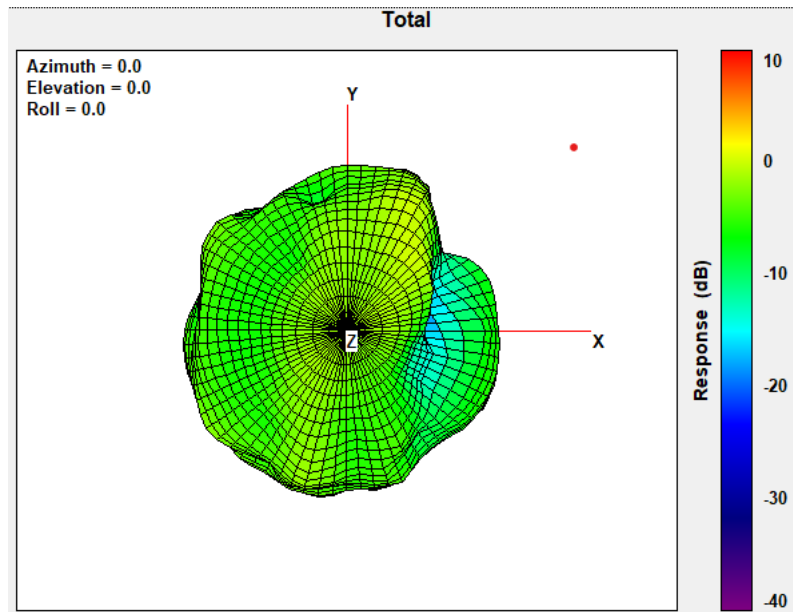


### Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	0.73

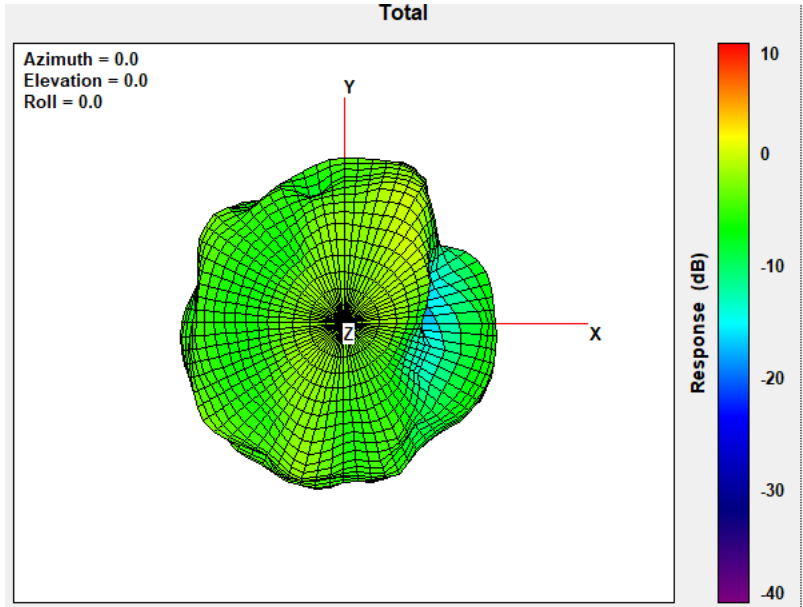


### Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	1.11

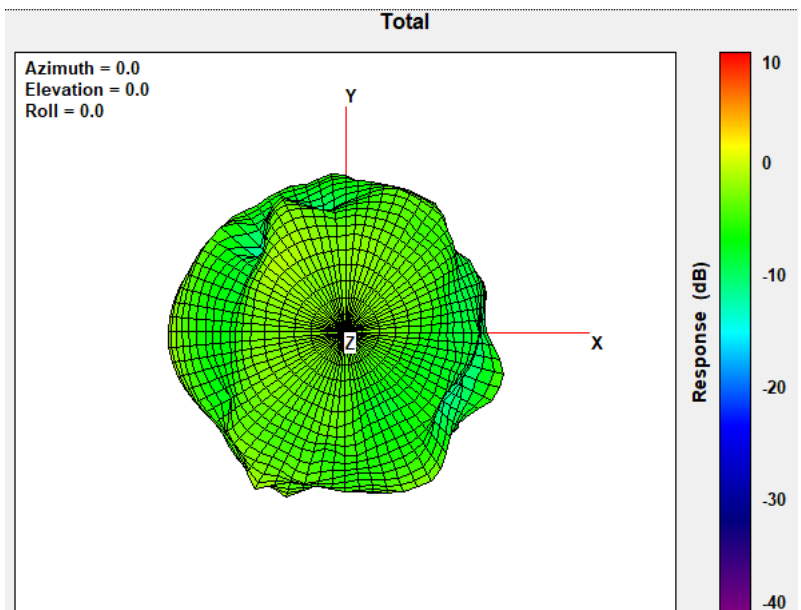


### Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	1.30

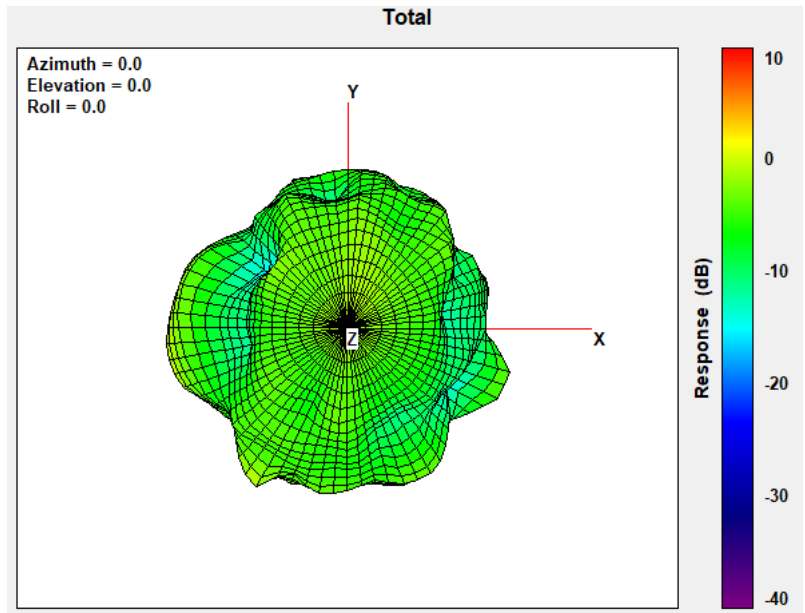


### Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	2.16

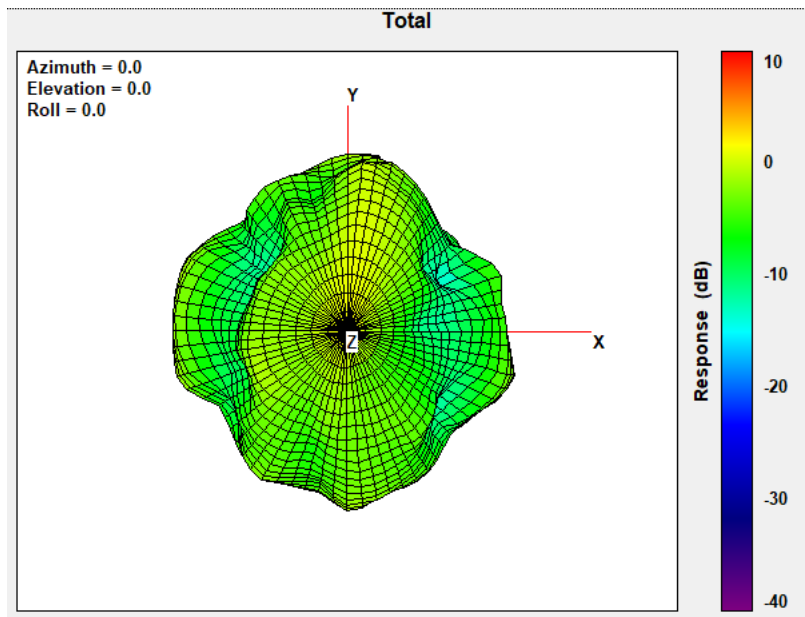


## Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	2.82

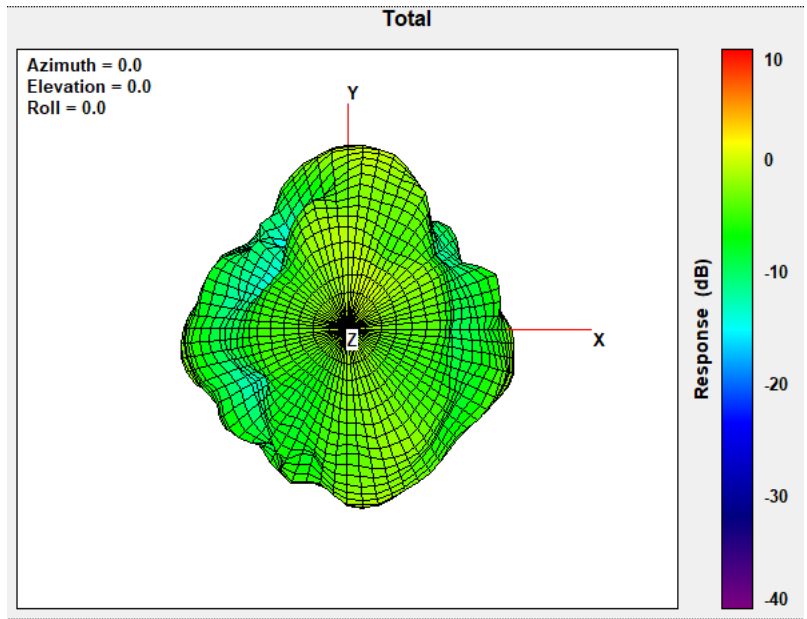


### Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	2.82

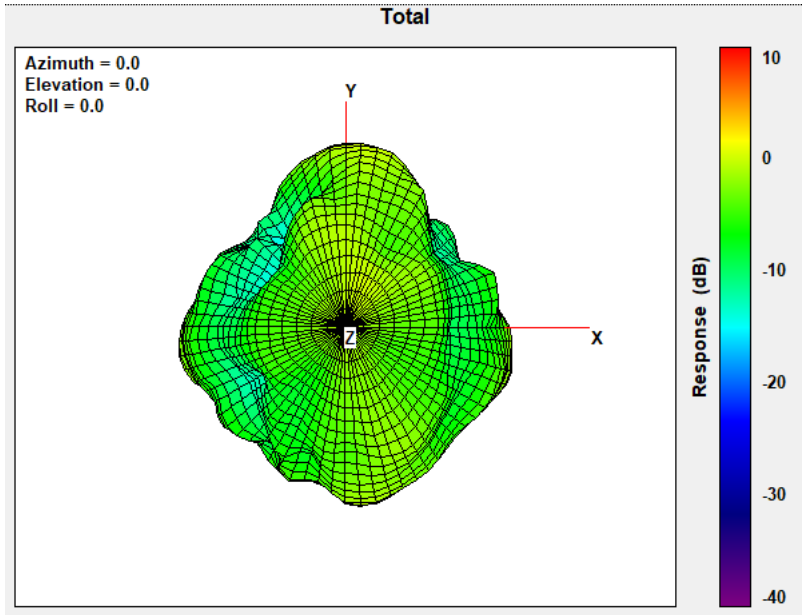

### Max Antenna 3D Radiation Pattern 6875-7125 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	2.73

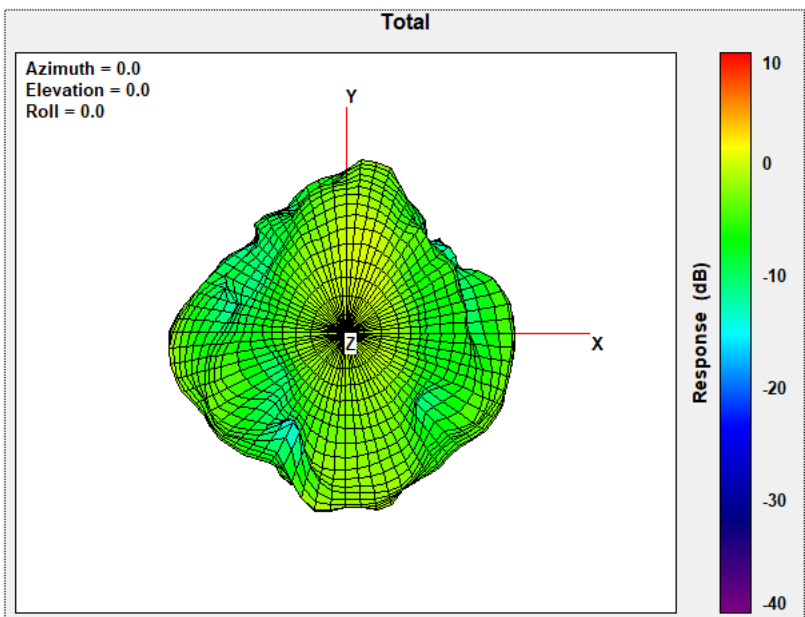

## BT Antenna

### Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	1.00

