

**TEST REPORT**  
**DP/CBSD-SAS Interoperability**

**Applicant Name:**  
Mercury Wireless  
1100 Walnut St, Suite 2050  
Kansas City, Missouri 64106  
USA

**Date of Testing:**  
6/23/2020 – 7/22/2020  
**Test Site/Location:**  
PCTEST Lab. Columbia, MD, USA  
**Test Report Serial No.:**  
3M2006240049

<b>FCC ID:</b>	<b>XN3-QUANTUM6636</b>
<b>APPLICANT:</b>	<b>Mercury Wireless</b>

<b>Application Type:</b>	Certification
<b>Model:</b>	QUANTUM 6636
<b>EUT Type:</b>	Base Station
<b>Frequency Range:</b>	3550 – 3700 MHz
<b>FCC Classification:</b>	Citizens Band Category A and B Devices (CBD)
<b>FCC Rule Part(s):</b>	Part 96
<b>Test Procedure(s):</b>	KDB 940660 D01 v01, WINNF-TS-0122-V1.0.0, CBRSA-TS-9001 V.1.0.0

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in the test procedures listed above. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez  
President



FCC ID: XN3-QUANTUM6636	 <b>PCTEST</b> Proud to be part of element		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020		EUT Type: LTE Base Station	Page 1 of 60

## T A B L E   O F   C O N T E N T S

---

1.0	INTRODUCTION.....	3
1.1	Scope.....	3
1.2	PCTEST Test Location .....	3
1.3	Test Facility / Accreditations .....	3
2.0	PRODUCT INFORMATION .....	4
2.1	Equipment Description.....	4
2.2	Device Capabilities .....	4
2.3	Test Configuration .....	4
2.4	Modifications.....	4
3.0	TEST EQUIPMENT CALIBRATION DATA.....	5
4.0	ENVIRONMENTAL CONDITIONS .....	6
5.0	EVALUATION PROCEDURE .....	7
6.0	TEST Summary.....	8
6.1	Summary .....	8
7.0	RF POWER MEASUREMENTS .....	10
8.0	CONCLUSION .....	11
APPENDIX A – TEST RESULT AND DATA .....		12
A1	[WINNF.FT.D.REG.6] DOMAIN PROXY SINGLE-STEP REGISTRATION FOR CBSD WITH CPI SIGNED DATA .....	12
A2	[WINNF.FT.D.REG.9] DOMAIN PROXY MISSING REQUIRED PARAMETERS (RESPONSECODE 102) .....	14
A3	[WINNF.FT.D.REG.11] DOMAIN PROXY PENDING REGISTRATION (RESPONSECODE 200).....	15
A4	[WINNF.FT.D.REG.13] DOMAIN PROXY INVALID PARAMETERS (RESPONSECODE 103).....	16
A5	[WINNF.FT.D.REG.15] DOMAIN PROXY BLACKLISTED CBSD (RESPONSECODE 101).....	17
A6	[WINNF.FT.D.REG.17] DOMAIN PROXY UNSUPPORTED SAS PROTOCOL VERSION (RESPONSECODE 100) .....	18
A7	[WINNF.FT.D.REG.19] DOMAIN PROXY GROUP ERROR (RESPONSECODE 201) .....	19
A8	[WINNF.FT.C.GRA.1] UNSUCCESSFUL GRANT RESPONSECODE=400 (INTERFERENCE) .....	20
A9	[WINNF.FT.C.GRA.2] UNSUCCESSFUL GRANT RESPONSECODE=401 (GRANT_CONFLICT).....	21
A10	[WINNF.FT.D.HBT.2] DOMAIN PROXY HEARTBEAT SUCCESS CASE (FIRST HEARTBEAT RESPONSE) .....	22
A11	[WINNF.FT.C.HBT.3] HEARTBEAT RESPONSECODE=105 (DREGISTER).....	25
A12	[WINNF.FT.C.HBT.5] HEARTBEAT RESPONSECODE=501 (SUSPENDED_GRANT) IN FIRST HEARTBEAT RESPONSE	27
A13	[WINNF.FT.C.HBT.6] HEARTBEAT RESPONSECODE=501 (SUSPENDED_GRANT) IN SUBSEQUENT HEARTBEAT RESPONSE .....	29
A15	[WINNF.FT.C.HBT.7] HEARTBEAT RESPONSECODE=502 (UNSYNC_OP_PARAM) .....	31
A16	[WINNF.FT.D.HBT.8] DOMAIN PROXY HEARTBEAT RESPONSECODE=500 (TERMINATED_GRANT) .....	33
A17	[WINNF.FT.C.HBT.9] HEARTBEAT RESPONSE ABSENT (FIRST HEARTBEAT) .....	35
A18	[WINNF.FT.C.HBT.10] HEARTBEAT RESPONSE ABSENT (SUBSEQUENT HEARTBEAT) .....	37
A19	[WINNF.FT.C.MES.3] GRANT RESPONSE CONTAINS MEASREPORTCONFIG .....	39
A20	[WINNF.FT.D.MES.5] DOMAIN PROXY HEARTBEAT RESPONSE CONTAINS MEASREPORTCONFIG .....	40
A21	[WINNF.FT.D.RLQ.2] DOMAIN PROXY SUCCESSFUL RELINQUISHMENT .....	42
A22	[WINNF.FT.C.DRG.1] SUCCESSFUL Deregistration .....	44
A23	[WINNF.FT.D.DRG.2] DOMAIN PROXY SUCCESSFUL Deregistration .....	46
A24	[WINNF.FT.C.SCS.1] SUCCESSFUL TLS CONNECTION BETWEEN UUT AND SAS TEST HARNESS .....	48
A25	[WINNF.FT.C.SCS.2] TLS FAILURE DUE TO REVOKED CERTIFICATE .....	50
A26	[WINNF.FT.C.SCS.3] TLS FAILURE DUE TO EXPIRED SERVER CERTIFICATE .....	51
A27	[WINNF.FT.C.SCS.4] TLS FAILURE WHEN SAS TEST HARNESS CERTIFICATE IS ISSUED BY AN UNKNOWN CA....	53
A28	[WINNF.FT.C.SCS.5] TLS FAILURE WHEN CERTIFICATE AT THE SAS TEST HARNESS IS CORRUPTED .....	55
A29	[WINNF.FT.C.HBT.1] UUT RF TRANSMIT POWER MEASUREMENT .....	57
APPENDIX B – TEST LOGS .....		60

FCC ID: XN3-QUANTUM6636	 PCTEST <sup>®</sup> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 MERCURY wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 2 of 60

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of compliance with the technical rules and regulations of the Federal Communications Commission.

### 1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046.

### 1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is a CBRS Alliance (OnGo) Approved Test Lab
- PCTEST is a WiInnForum Approved Test Lab
- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for CBRS Alliance Certification Test Plan and WiInnForum Conformance and Performance Test Technical Standard.
- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: XN3-QUANTUM6636	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 MERCURY wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 3 of 60

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Mercury Base Station FCC ID: XN3-QUANTUM6636**. The test data contained in this report pertains only to DP/CBSD-SAS interoperability. The EUT is a Domain Proxy.

**Test Device Serial Number(s):** 164899400032, T-F0103

### 2.2 Device Capabilities

This device contains the following capabilities:

IEEE 802.16e Mobile WiMAX

This device supports the following conditional features:

	Conditional Test Case Definitions	Supported
C1	Mandatory for UUT which supports multi-step registration message	<input type="checkbox"/>
C2	Mandatory for UUT which supports single-step registration with no CPI-signed data in the registration message. By definition, this is a subset of Category A devices which determine all registration information, including location, without CPI intervention.	<input type="checkbox"/>
C3	Mandatory for UUT which supports single-step registration containing CPI-signed data in the registration message.	<input checked="" type="checkbox"/>
C4	Mandatory for UUT which supports RECEIVED_POWER_WITHOUT_GRANT measurement report type.	<input type="checkbox"/>
C5	Mandatory for UUT which supports RECEIVED_POWER_WITH_GRANT measurement report type.	<input checked="" type="checkbox"/>
C6	Mandatory for UUT which supports parameter change being made at the UUT and prior to sending a deregistration	<input type="checkbox"/>

**Table 2-1. Conditional Features**

### 2.3 Test Configuration

Two base stations (EUT) were connected to the Domain Proxy which was connected to the SAS Test Harness developed by WINNF WG4-CBSD. The latest version of the SAS Test Harness (V1.0.0.2) provided by CBRS Alliance was used. The SAS Test Harness is synchronized to UTC time.

### 2.4 Modifications

No modifications were made to EUT during testing.

FCC ID: XN3-QUANTUM6636	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 MERCURY wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 4 of 60

## 3.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	N9020A	MXA Signal Analyzer	4/20/2019	Annual	8/20/2020	US46470561
Dell	Latitude 5580	Test Harness Laptop	N/A	N/A	N/A	N/A

**Table 3-1 Annual Test Equipment Calibration Schedule**

FCC ID: XN3-QUANTUM6636	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 MERCURY wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 5 of 60

## 4.0 ENVIRONMENTAL CONDITIONS

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: XN3-QUANTUM6636	 PCTEST <sup>®</sup> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 MERCURY wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 6 of 60

## 5.0 EVALUATION PROCEDURE

The measurement procedure described in KDB 940660 D01 v01 and WINNF-TS-0122-V1.0.0 was used in the measurement of the EUT.

**Deviation from measurement procedure.....**None

FCC ID: XN3-QUANTUM6636	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 MERCURY wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 7 of 60

## 6.0 TEST SUMMARY

### 6.1 Summary

Company Name: Mercury Wireless  
 FCC ID: XN3-QUANTUM6636

**Table 6-1. Summary of Test Results**

FCC Part Section(s)	KDB940660 D01 Section 3.3 a)	Test Case Description	WInnForum Test Case	Test Result
96.39 (c)	1	Confirm that the device will only transmit after it receives authorization from a SAS	WINNF.FT.D.REG.6 WINNF.FT.D.REG.9 WINNF.FT.D.REG.11 WINNF.FT.D.REG.13 WINNF.FT.D.REG.15 WINNF.FT.D.REG.17 WINNF.FT.D.REG.19 WINNF.FT.C.GRA.1 WINNF.FT.C.GRA.2	Pass
96.39 (c)	2	Check the device registration and authorization with the SAS – determine if the device behaves appropriately for successful and unsuccessful registrations. The device should not be transmitting without authorization from the SAS.	WINNF.FT.D.REG.6 WINNF.FT.D.REG.9 WINNF.FT.D.REG.11 WINNF.FT.D.REG.13 WINNF.FT.D.REG.15 WINNF.FT.D.REG.17 WINNF.FT.D.REG.19	Pass
96.39(c)(1)	3	Confirm that the device changes its operating power and/or channel in response to a command from the SAS.	WINNF.FT.D.HBT.2	Pass
96.39	4	Confirm that the device correctly configures based on the different license classes	N/A	N/A
96.39(c)(1)	5	Confirm that the device transmits at a power level less than or equal to the maximum power level approved by the SAS.	WINNF.PT.C.HBT	Pass
96.39(b)(c)	6	Confirm that the device transmits with a bandwidth less than or equal to the SAS specified bandwidth.	WINNF.FT.D.HBT.2	Pass
96.39(c)(2)	7	Confirm that the device transmits on the SAS specified frequency.	WINNF.FT.D.HBT.2	Pass
96.39(c)(2)	8	Confirm that the device stops transmission in response to a command from the SAS, within a period as required by Part 96.	WINNF.FT.C.HBT.3 WINNF.FT.C.HBT.5 WINNF.FT.C.HBT.6 WINNF.FT.C.HBT.7 WINNF.FT.D.HBT.8 WINNF.FT.C.HBT.9 WINNF.FT.C.HBT.10 WINNF.FT.D.RLQ.2 WINNF.FT.C.DRG.1 WINNF.FT.D.DRG.2	Pass

FCC ID: XN3-QUANTUM6636	 PCTEST <sup>®</sup> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 MERCURY wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station	Page 8 of 60	

**Table 6-2. Summary of Test Results (continued)**

96.39 (c)	9	Confirm that the device sends measurements data in response to the command from the SAS.	WINNF.FT.C.MES.3 WINNF.FT.D.MES.5	Pass
96.39(a)	10	For devices with geo-location, confirm that it notifies the SAS of a new location when it is beyond the required distance parameter ( $\pm 50$ m) within the required time frame.	N/A	N/A
96.39 (c)	11	Confirm that the device is capable of reporting the signal level (measurement data) and frequency to SAS.	WINNF.FT.C.MES.3 WINNF.FT.D.MES.5	Pass
	12	For a device that operates as a Category A CBSD and then desires to operate as a Category B CBSD (or vice versa), confirm that it re-registers with the SAS for the updated authorization status.	N/A	N/A
96 E	13	When CBSDs communicate through a management system, confirm compliance with all requirements.	N/A	N/A
96.39	14	When communication between the CBSD and SAS is lost: i) Describe how the CBSD would react if the communications between the device and the SAS is lost. Confirm that the CBSD stops transmission once it loses the link to the SAS. ii) Describe the process for re-establishment of the communications and confirm that the CBSD acts accordingly. iii) Confirm power-on restart process for registration (re-registration) occurs as expected. iv) Confirm the process for de-registration occurs as expected.	WINNF.FT.C.HBT.9 WINNF.FT.C.HBT.10	Pass
96.39(f)	KDB940660 D01 Section 4	SAS and Device Security Requirements	WINNF.FT.C.SCS.1 WINNF.FT.C.SCS.2 WINNF.FT.C.SCS.3 WINNF.FT.C.SCS.4 WINNF.FT.C.SCS.5	Pass

**Notes:**

- Test cases denoted as “N/A” in the table above are not applicable to the EUT and are either Optional or Conditional per Section 6 of WINNF-TS-0122.
- Please see Appendix for test data.

FCC ID: XN3-QUANTUM6636	 PCTEST <sup>®</sup> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 MERCURY wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 9 of 60

## 7.0 RF POWER MEASUREMENTS

Testing is performed per KDB 971168 D01 and across the transmit dynamic range of 37dBm/MHz to 16dBm/MHz for 10MHz Bandwidth.

The UUT was configured such that all ports were transmitting at the same output power level. The 6 ports of the UUT are the same design and pretesting showed that the power levels between the sampling of the various ports is the same. As all 6 ports are identical in design and equivalent power levels, the PSD was sampled on 1 port. The EIRP was calculated by adding the conducted power, antenna gain, and duty cycle correction factor. Please see appendix for plot data.

Freq [MHz]	SAS Granted maxEIRP [dBm/MHz]	Conducted PSD on Antenna Port 1 [dBm/MHz]	Ant Gain [dBi]	DCCF [dB]	maxEIRP [dBm/MHz]	Margin [dB]
3625	37	18.52	17	1.427	36.947	-0.053
3625	26	7.47	17	1.427	25.897	-0.103
3625	16	-2.533	17	1.427	15.894	-0.106

**Table 7-1 RF Output Power Measurements (WINNF.PT.C.HBT)**

FCC ID: XN3-QUANTUM6636	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 MERCURY wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 10 of 60

## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Mercury Base Station FCC ID: XN3-QUANTUM6636** has been tested to show compliance with Part 96 and KDB 940660 D01 v01.

FCC ID: XN3-QUANTUM6636	 PCTEST <sup>®</sup> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 MERCURY wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 11 of 60


## APPENDIX A – TEST RESULT AND DATA

### A1 [WINNF.FT.D.REG.6] Domain Proxy Single-Step registration for CBSD with CPI signed data

	Test Execution Steps	PASS	FAIL
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> <li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li> <li>• UUT is in the Unregistered state</li> </ul>	--	--
2	<p>DP with two CBSD sends correct Registration request information, as specified in [n.5], in the form of one 2-element Array or as individual messages to the SAS Test Harness:</p> <ul style="list-style-type: none"> <li>• The required userId, fcId and cbsdSerialNumber registration parameters shall be sent for each CBSD and conform to proper format and acceptable ranges.</li> <li>• Any REG-conditional or optional registration parameters that may be included in the message shall be verified that they conform to proper format and are within acceptable ranges.</li> </ul> <p>Note: It is outside the scope of this document to test the Registration information that is supplied via another means.</p>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	<ul style="list-style-type: none"> <li>• SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or individual messages as follows:           <ul style="list-style-type: none"> <li>- cbsdId = Ci</li> <li>- measReportConfig shall not be included</li> <li>- responseCode = 0 for each CBSD</li> </ul> </li> </ul>	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of each UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> <li>• UUT shall not transmit RF</li> </ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: XN3-QUANTUM6636	 PCTEST <sup>®</sup> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 MERCURY wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 12 of 60

## Test Plots:

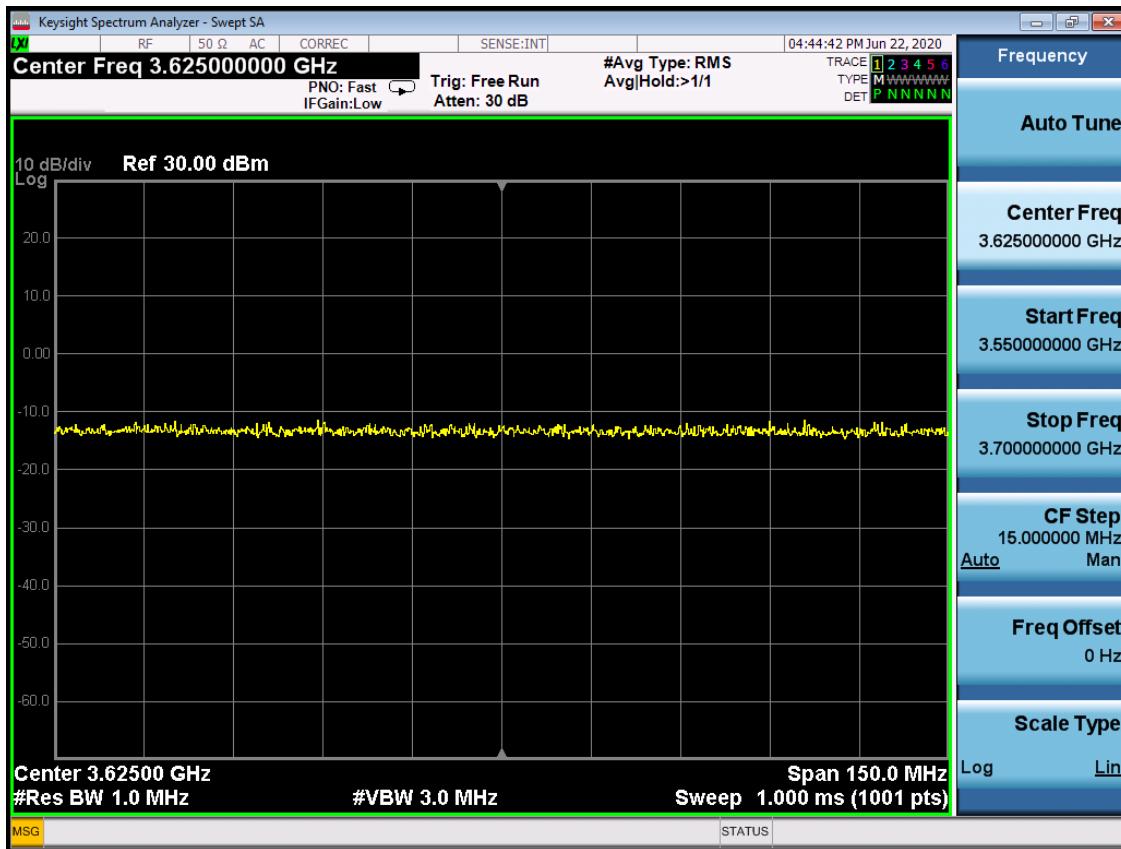


**Plot 1. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.D.REG.6)**

FCC ID: XN3-QUANTUM6636	 <b>PCTEST®</b> <small>Proud to be part of element</small>	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	 <b>MERCURY</b> <small>wireless</small>	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 13 of 60

## A2 [WINNF.FT.D.REG.9] Domain Proxy Missing Required parameters (resultCode 102)

	<b>Test Execution Steps</b>	<b>PASS</b>	<b>FAIL</b>
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> <li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li> <li>• UUT is in the Unregistered state</li> </ul>	--	--
2	The DP with two CBSDs sends a Registration request in the form of one 2-element Array or as individual messages to SAS Test Harness.	--	--
3	SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or as individual messages as follows: <ul style="list-style-type: none"> <li>- SAS response does not include a cbsdId.</li> <li>- resultCode = Ri for CBSD1 and CBSD2</li> </ul>	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (resultCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of each UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> <li>• UUT shall not transmit RF</li> </ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

### Test Plots:

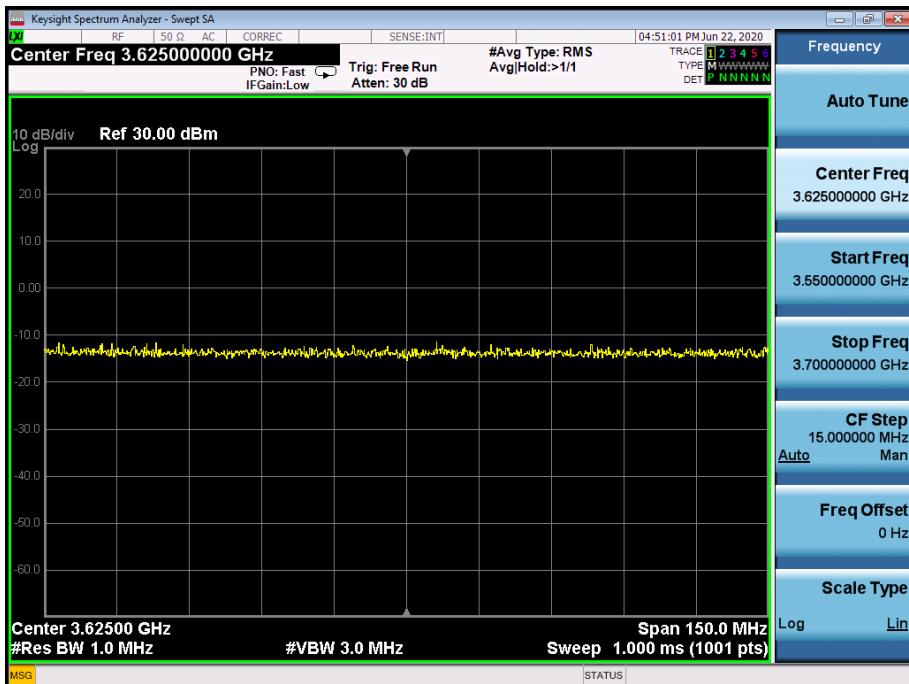


**Plot 2. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.D.REG.9)**

FCC ID: XN3-QUANTUM6636	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 MERCURY wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 14 of 60

### A3 [WINNF.FT.D.REG.11] Domain Proxy Pending registration (responseCode 200)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT is in the Unregistered state</li></ul>	--	--
2	The DP with two CBSDs sends a Registration request in the form of one 2-element Array or as individual messages to SAS Test Harness.	--	--
3	SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or as individual messages as follows: <ul style="list-style-type: none"><li>- SAS response does not include a cbsdId.</li><li>- responseCode = Ri for CBSD1 and CBSD2</li></ul>	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of each UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT shall not transmit RF</li></ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

#### Test Plots:

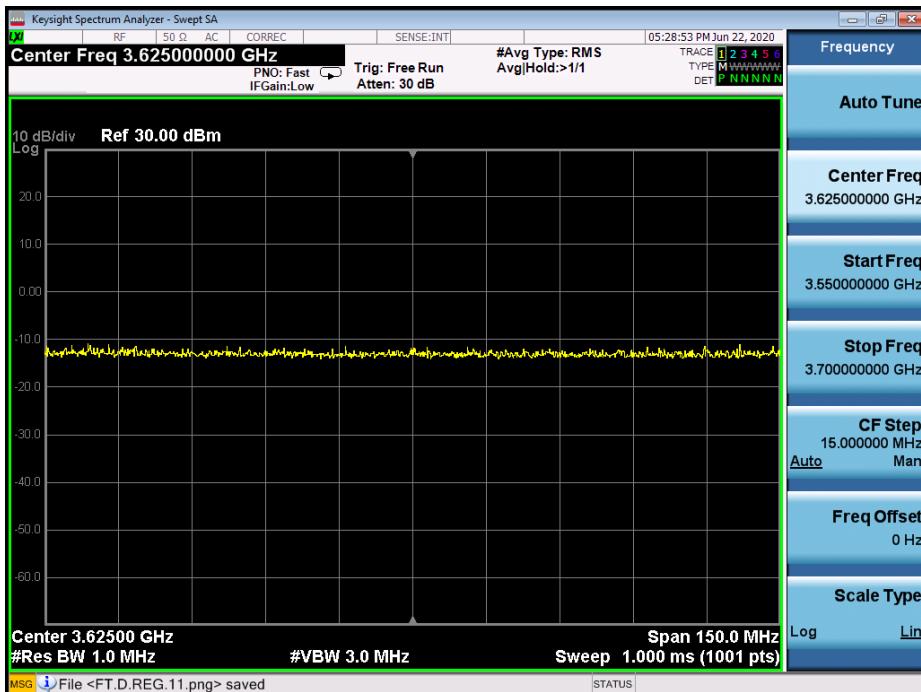


Plot 3. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.D.REG.11)

FCC ID: XN3-QUANTUM6636	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 MERCURY wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 15 of 60

## A4 [WINNF.FT.D.REG.13] Domain Proxy Invalid parameters (responseCode 103)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"><li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li><li>• UUT is in the Unregistered state</li></ul>	--	--
2	The DP with two CBSDs sends a Registration request in the form of one 2-element Array or as individual messages to SAS Test Harness.	--	--
3	SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or as individual messages as follows: <ul style="list-style-type: none"><li>- SAS response does not include a cbsId.</li><li>- responseCode = Ri for CBSD1 and CBSD2</li></ul>	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of each UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"><li>• UUT shall not transmit RF</li></ul>	☒	☐

### Test Plots:

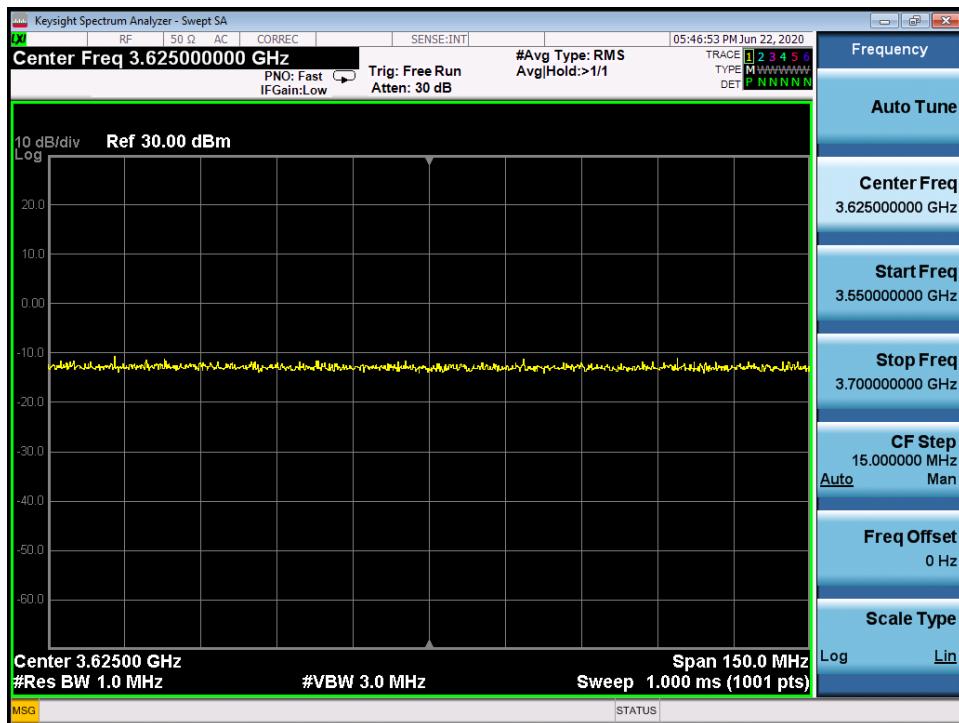


Plot 4. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.D.REG.13)

FCC ID: XN3-QUANTUM6636	 <b>PCTEST®</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 <b>MERCURY</b> wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 16 of 60

## A5 [WINNF.FT.D.REG.15] Domain Proxy Blacklisted CBSD (responseCode 101)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state	--	--
2	The DP with two CBSDs sends a Registration request in the form of one 2-element Array or as individual messages to SAS Test Harness.	--	--
3	SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or as individual messages as follows: - SAS response does not include a cbsId. - responseCode = Ri for CBSD1 and CBSD2	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of each UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall not transmit RF	<input checked="" type="checkbox"/>	<input type="checkbox"/>

### Test Plots:

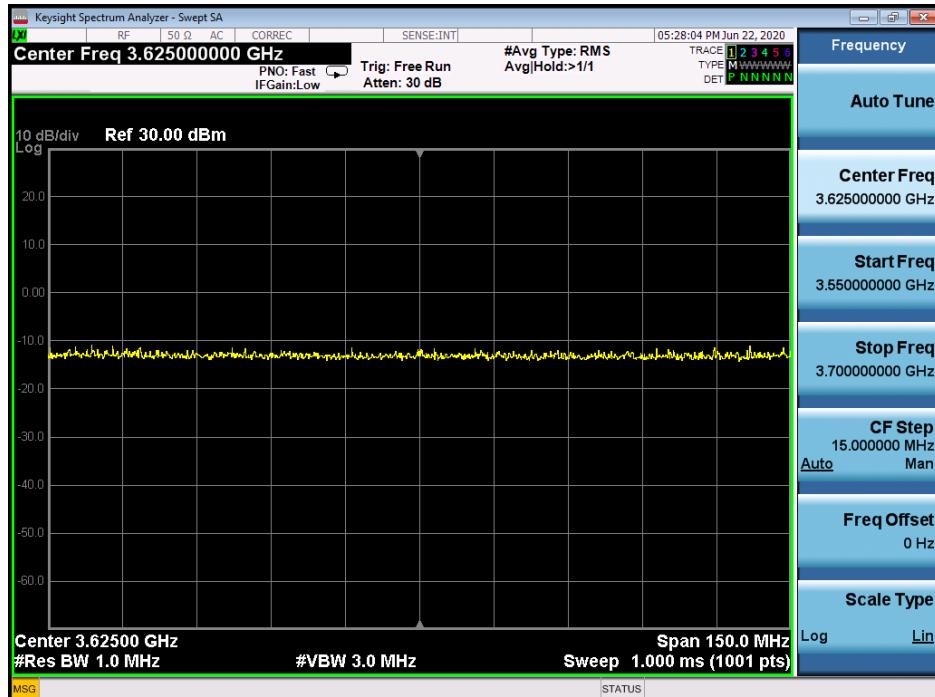


**Plot 5. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.D.REG.15)**

FCC ID: XN3-QUANTUM6636	 <b>PCTEST®</b> Proud to be part of 	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station	Page 17 of 60

## A6 [WINNF.FT.D.REG.17] Domain Proxy Unsupported SAS protocol version (responseCode 100)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state	--	--
2	The DP with two CBSDs sends a Registration request in the form of one 2-element Array or as individual messages to SAS Test Harness.	--	--
3	SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or as individual messages as follows: - SAS response does not include a cbsId. - responseCode = Ri for CBSD1 and CBSD2	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of each UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall not transmit RF	<input checked="" type="checkbox"/>	<input type="checkbox"/>

### Test Plots:

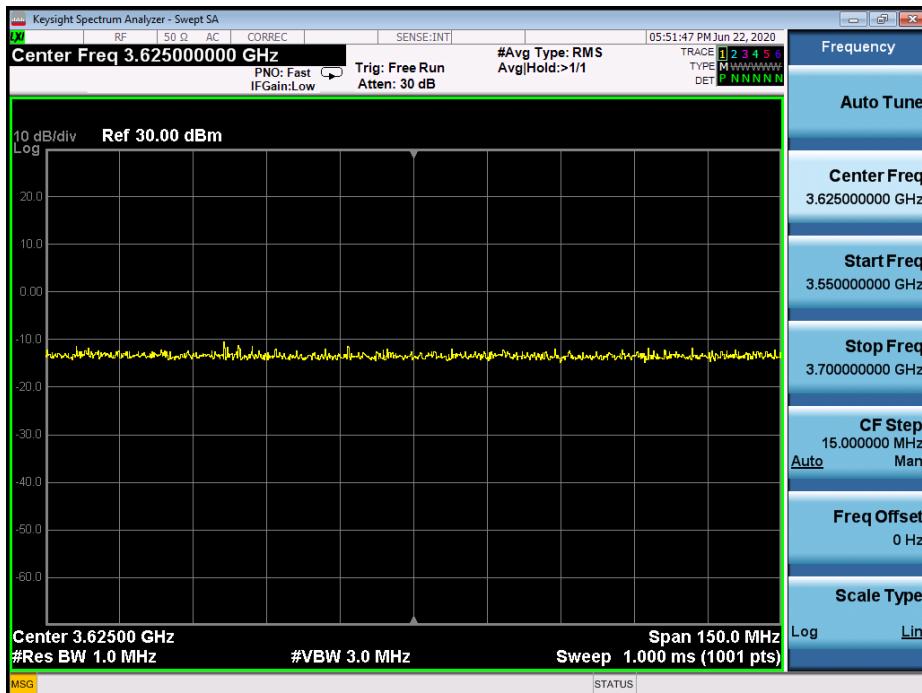


Plot 6. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.D.REG.17)

FCC ID: XN3-QUANTUM6636	 <b>PCTEST®</b> <small>Proud to be part of element</small>	MEASUREMENT REPORT (CERTIFICATION)	 <b>MERCURY</b> wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 18 of 60

## A7 [WINNF.FT.D.REG.19] Domain Proxy Group Error (responseCode 201)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> <li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li> <li>• UUT is in the Unregistered state</li> </ul>	--	--
2	The DP with two CBSDs sends a Registration request in the form of one 2-element Array or as individual messages to SAS Test Harness.	--	--
3	SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or as individual messages as follows: <ul style="list-style-type: none"> <li>- SAS response does not include a cbsId.</li> <li>- responseCode = Ri for CBSD1 and CBSD2</li> </ul>	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of each UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> <li>• UUT shall not transmit RF</li> </ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

### Test Plots:

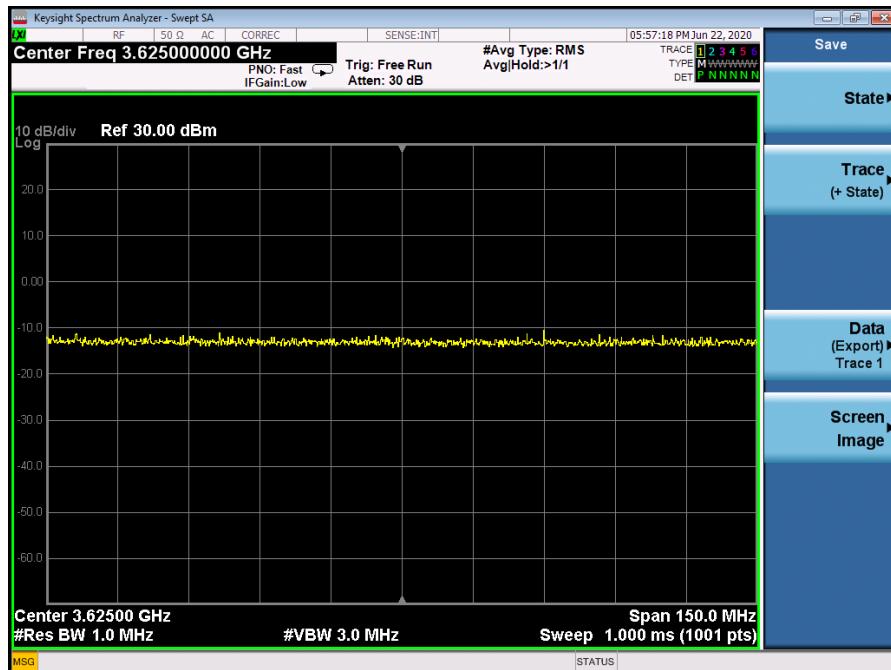


Plot 7. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.D.REG.19)

FCC ID: XN3-QUANTUM6636	 <b>PCTEST®</b> Proud to be part of 	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station	Page 19 of 60

## A8 [WINNF.FT.C.GRA.1] Unsuccessful Grant responseCode=400 (INTERFERENCE)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has registered successfully with SAS Test Harness, with cbsId = C	--	--
2	UUT sends valid Grant Request.	--	--
3	SAS Test Harness sends a Grant Response message, including • cbsId=C • responseCode = R	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall not transmit RF	☒	☐

### Test Plots:

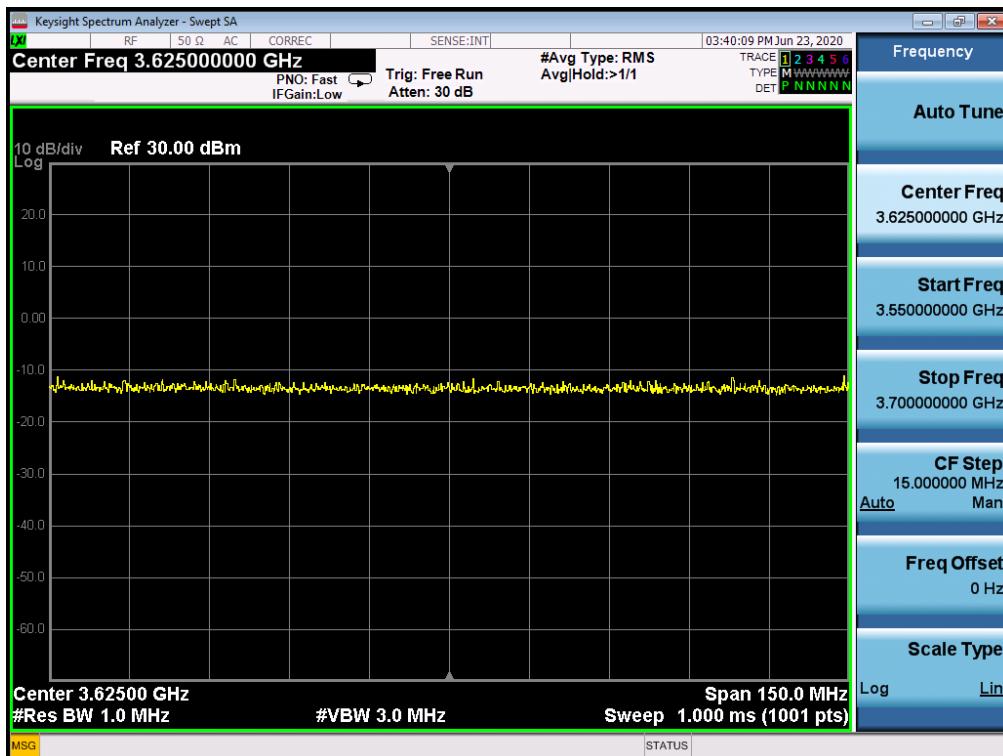


**Plot 8. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.C.GRA.1)**

FCC ID: XN3-QUANTUM6636	 <b>PCTEST®</b> <small>Proud to be part of element</small>	MEASUREMENT REPORT (CERTIFICATION)	 <b>MERCURY</b> wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 20 of 60

## A9 [WINNF.FT.C.GRA.2] Unsuccessful Grant responseCode=401 (GRANT\_CONFLICT)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has registered successfully with SAS Test Harness, with cbsId = C	--	--
2	UUT sends valid Grant Request.	--	--
3	SAS Test Harness sends a Grant Response message, including • cbsId=C • responseCode = R	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall not transmit RF	<input checked="" type="checkbox"/>	<input type="checkbox"/>

### Test Plots:

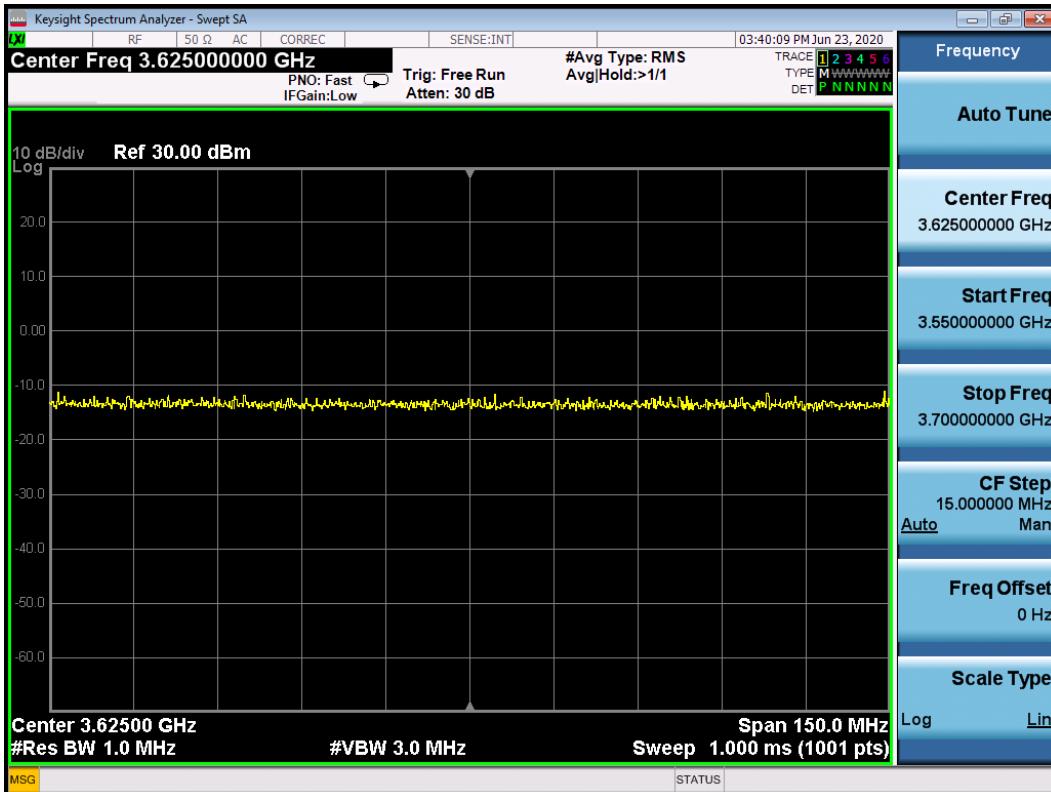

Plot 9. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.C.GRA.2)

FCC ID: XN3-QUANTUM6636	 PCTEST <small>Proud to be part of element</small>	MEASUREMENT REPORT (CERTIFICATION)	 MERCURY wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 21 of 60

## A10 [WINNF.FT.D.HBT.2] Domain Proxy Heartbeat Success Case (first Heartbeat Response)

	<b>Test Execution Steps</b>	<b>PASS</b>	<b>FAIL</b>
1	Ensure the following conditions are met for test entry: • DP has two CBSD registered successfully with SAS Test Harness, with cbsId = Ci, i={1,2}	--	--
2	DP sends a message: • If message is a Spectrum Inquiry Request, go to step 3 • If message is a Grant Request, go to step 5	--	--
3	DP sends a Spectrum Inquiry Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify Spectrum Inquiry Request message is formatted correctly for each CBSD, including for CBSDi, i={1,2}: • cbsId = Ci • List of frequencyRange objects sent by DP are within the CBRS frequency range	☒	☐
4	If a separate Spectrum Inquiry Request message was sent for each CBSD, the SAS Test Harness shall respond to each Spectrum Inquiry Request message with a separate Spectrum Inquiry Response message. If a single Spectrum Inquiry Request message was sent containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Spectrum Inquiry Response message containing a 2-object array. Verify parameters for each CBSD within the Spectrum Inquiry Response message are as follows, for CBSDi, i={1,2}: • cbsId = Ci • availableChannel is an array of availableChannel objects • responseCode = 0	--	--
5	DP sends a Grant Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify Grant Request message is formatted correctly for each CBSD, including for CBSDi, i={1,2}: • cbsId = C • maxEIRP is at or below the limit appropriate for CBSD category as defined by Part 96 • operationFrequencyRange, Fi, sent by UUT is a valid range within the CBRS band	☒	☐


FCC ID: XN3-QUANTUM6636	 PCTEST <sup>®</sup> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 MERCURY wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 22 of 60

6	<p>If a separate Grant Request message was sent for each CBSD, the SAS Test Harness shall respond to each Grant Request message with a separate Grant Response message.</p> <p>If a single Grant Request message was sent containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Grant Response message containing a 2-object array.</p> <p>Verify parameters for each CBSD within the Grant Response message are as follows, for CBSD<sub>i</sub>, i={1,2}:</p> <ul style="list-style-type: none"> <li>• cbsdId = Ci</li> <li>• grantId = Gi = a valid grant ID</li> <li>• grantExpireTime = UTC time greater than duration of the test</li> <li>• responseCode = 0</li> </ul>	--	--
7	<p>Ensure DP sends first Heartbeat Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2.</p> <p>Verify Heartbeat Request message is formatted correctly for each CBSD, including, for CBSD<sub>i</sub> i={1,2}:</p> <ul style="list-style-type: none"> <li>• cbsdId = Ci, i={1,2}</li> <li>• grantId = Gi, i={1,2}</li> <li>• operationState = "GRANTED"</li> </ul>	☒	□
8	<p>If a separate Heartbeat Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each Heartbeat Request message with a separate Heartbeat Response message.</p> <p>If a single Heartbeat Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Heartbeat Response message containing a 2-object array.</p> <p>Verify parameters for each CBSD within the Heartbeat Response message are as follows, for CBSD<sub>i</sub>:</p> <ul style="list-style-type: none"> <li>• cbsdId = Ci</li> <li>• grantId = Gi</li> <li>• transmitExpireTime = current UTC time + 200 seconds</li> <li>• responseCode = 0</li> </ul>	--	--
9	<p>For further Heartbeat Request messages sent from DP after completion of step 8, validate message is sent within latest specified heartbeatInterval for CBSD<sub>i</sub>:</p> <ul style="list-style-type: none"> <li>• cbsdId = Ci, • grantId = Gi</li> <li>• operationState = "AUTHORIZED"</li> </ul> <p>and SAS Test Harness responds with a Heartbeat Response message including the following parameters, for CBSD<sub>i</sub></p> <ul style="list-style-type: none"> <li>• cbsdId = Ci, • grantId = Gi</li> <li>• transmitExpireTime = current UTC time + 200 seconds</li> <li>• responseCode = 0</li> </ul>	☒	□

FCC ID: XN3-QUANTUM6636	 <small>Proud to be part of element</small>	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 23 of 60

10	<p>Monitor the RF output of the UUT from start of test until UUT transmission commences. Monitor the RF output of the UUT from start of test until RF transmission commences. Verify:</p> <ul style="list-style-type: none"> <li>• UUT does not transmit at any time prior to completion of the first heartbeat response</li> <li>• UUT transmits after step 8 is complete, and its transmission is limited to within the bandwidth range <math>F_i</math>.</li> </ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
----	--	-------------------------------------	--------------------------

### Test Plots:

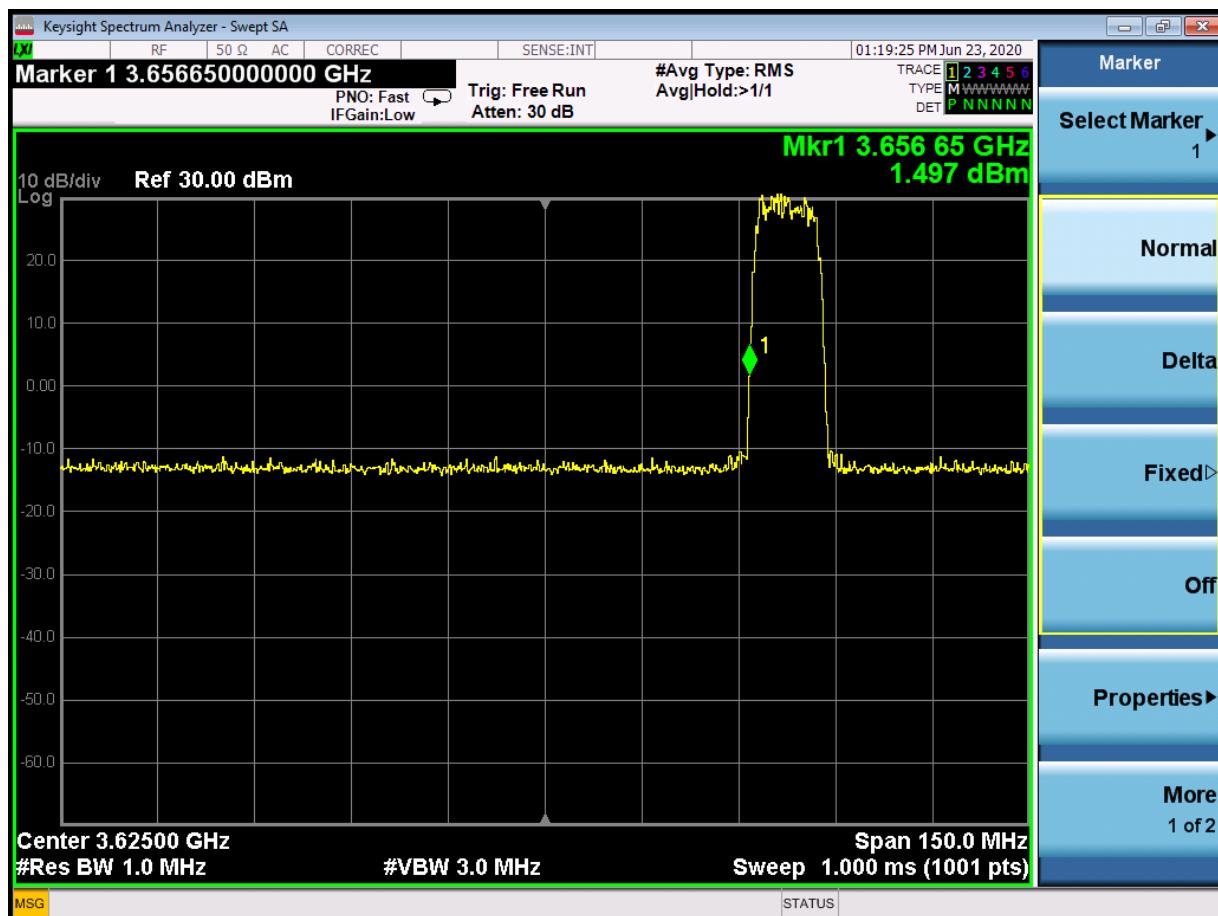

**Plot 10. Conducted Measurement - RF transmission after SAS heartbeat response and Occupied Bandwidth for 10MHz (WINNF.FT.D.HBT.2)**


FCC ID: XN3-QUANTUM6636		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 24 of 60

## A11 [WINNF.FT.C.HBT.3] Heartbeat responseCode=105 (DREGISTER)

	Test Execution Steps	PASS	FAIL
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> <li>• UUT has registered successfully with SAS Test Harness</li> <li>• UUT has a valid single grant as follows: <ul style="list-style-type: none"> <li>◦ valid cbsId = C</li> <li>◦ valid grantId = G</li> <li>◦ grant is for frequency range F, power P</li> <li>◦ grantExpireTime = UTC time greater than duration of the test</li> </ul> </li> <li>• UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface</li> </ul>	--	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including:</p> <ul style="list-style-type: none"> <li>• cbsId = C</li> <li>• grantId = G</li> <li>• operationState = "AUTHORIZED"</li> </ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	<p>SAS Test Harness sends a Heartbeat Response message, including the following parameters:</p> <ul style="list-style-type: none"> <li>• cbsId = C</li> <li>• grantId = G</li> <li>• transmitExpireTime = T = Current UTC time</li> <li>• responseCode = 105 (DREGISTER)</li> </ul>	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	<p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none"> <li>• UUT shall stop transmission within (T + 60 seconds) of completion of step 3</li> </ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: XN3-QUANTUM6636	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 MERCURY wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 25 of 60

## Test Plots:

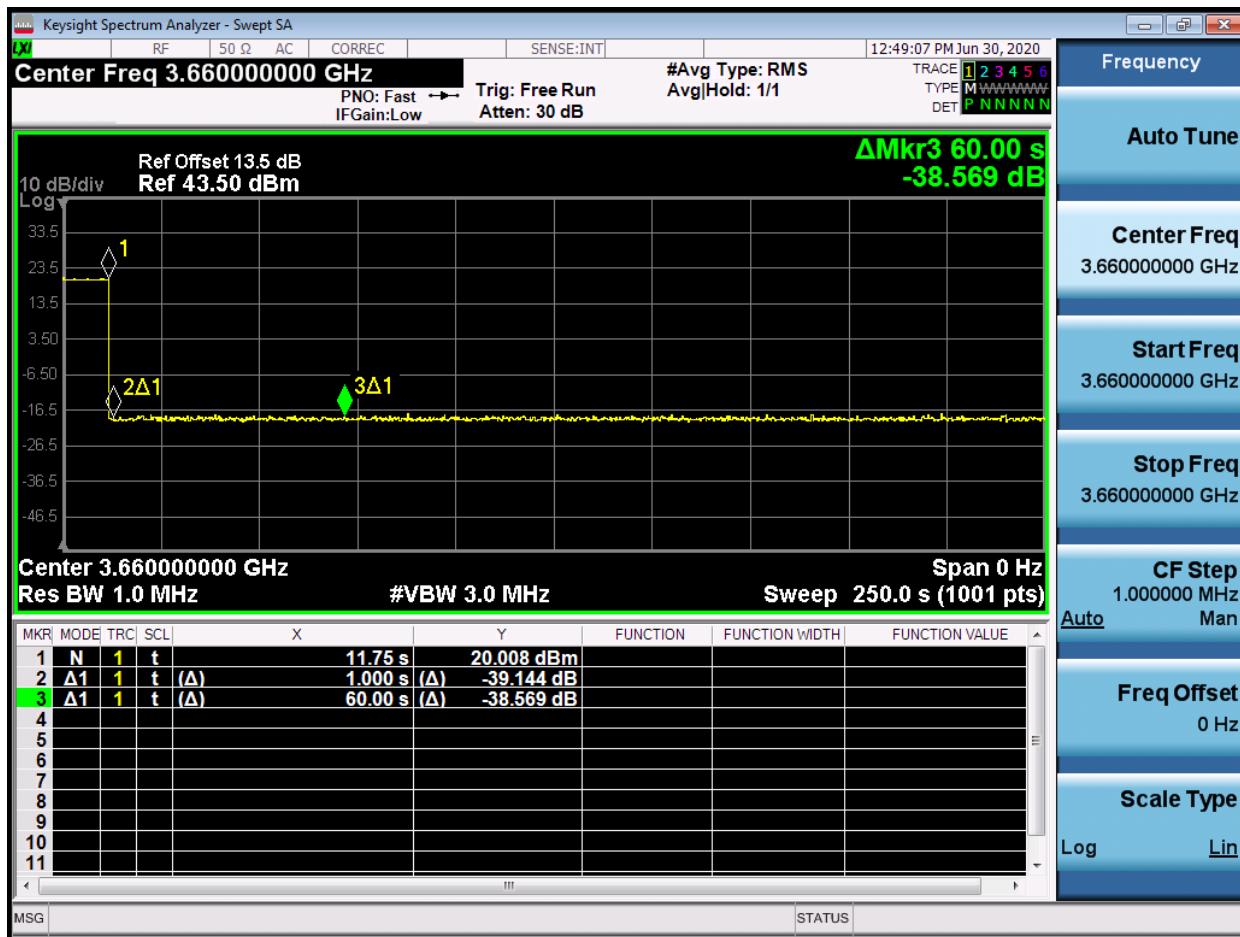

**Plot 11. Conducted Measurement - RF transmission stops within 60s of SAS message indicated by Marker 1 (X) (WINNF.FT.C.HBT.3)**


FCC ID: XN3-QUANTUM6636		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 26 of 60

## A12 [WINNF.FT.C.HBT.5] Heartbeat responseCode=501 (SUSPENDED\_GRANT) in First Heartbeat Response

	Test Execution Steps	PASS	FAIL
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> <li>• UUT has registered successfully with SAS Test Harness</li> <li>• UUT has a valid single grant as follows:           <ul style="list-style-type: none"> <li>◦ valid cbsId = C</li> <li>◦ valid grantId = G</li> <li>◦ grant is for frequency range F, power P</li> <li>◦ grantExpireTime = UTC time greater than duration of the test</li> </ul> </li> <li>• UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface</li> </ul>	--	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including:</p> <ul style="list-style-type: none"> <li>• cbsId = C</li> <li>• grantId = G</li> <li>• operationState = "GRANTED"</li> </ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	<p>SAS Test Harness sends a Heartbeat Response message, including the following parameters:</p> <ul style="list-style-type: none"> <li>• cbsId = C</li> <li>• grantId = G</li> <li>• transmitExpireTime = T = Current UTC time</li> <li>• responseCode = 501 (SUSPENDED_GRANT)</li> </ul>	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	<p>Monitor the SAS-CBSD interface. Verify either A OR B occurs:</p> <p>A. UUT sends a Heartbeat Request message. Ensure message is sent within latest specified heartbeatInterval, and is correctly formatted with parameters:</p> <ul style="list-style-type: none"> <li>• cbsId = C</li> <li>• grantId = G</li> <li>• operationState = "GRANTED"</li> </ul> <p>B. UUT sends a Relinquishment request message. Ensure message is correctly formatted with parameters:</p> <ul style="list-style-type: none"> <li>• cbdsId = C</li> <li>• grantId = G</li> </ul> <p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none"> <li>• UUT does not transmit at any time</li> </ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: XN3-QUANTUM6636	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 MERCURY wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 27 of 60

## Test Plots:

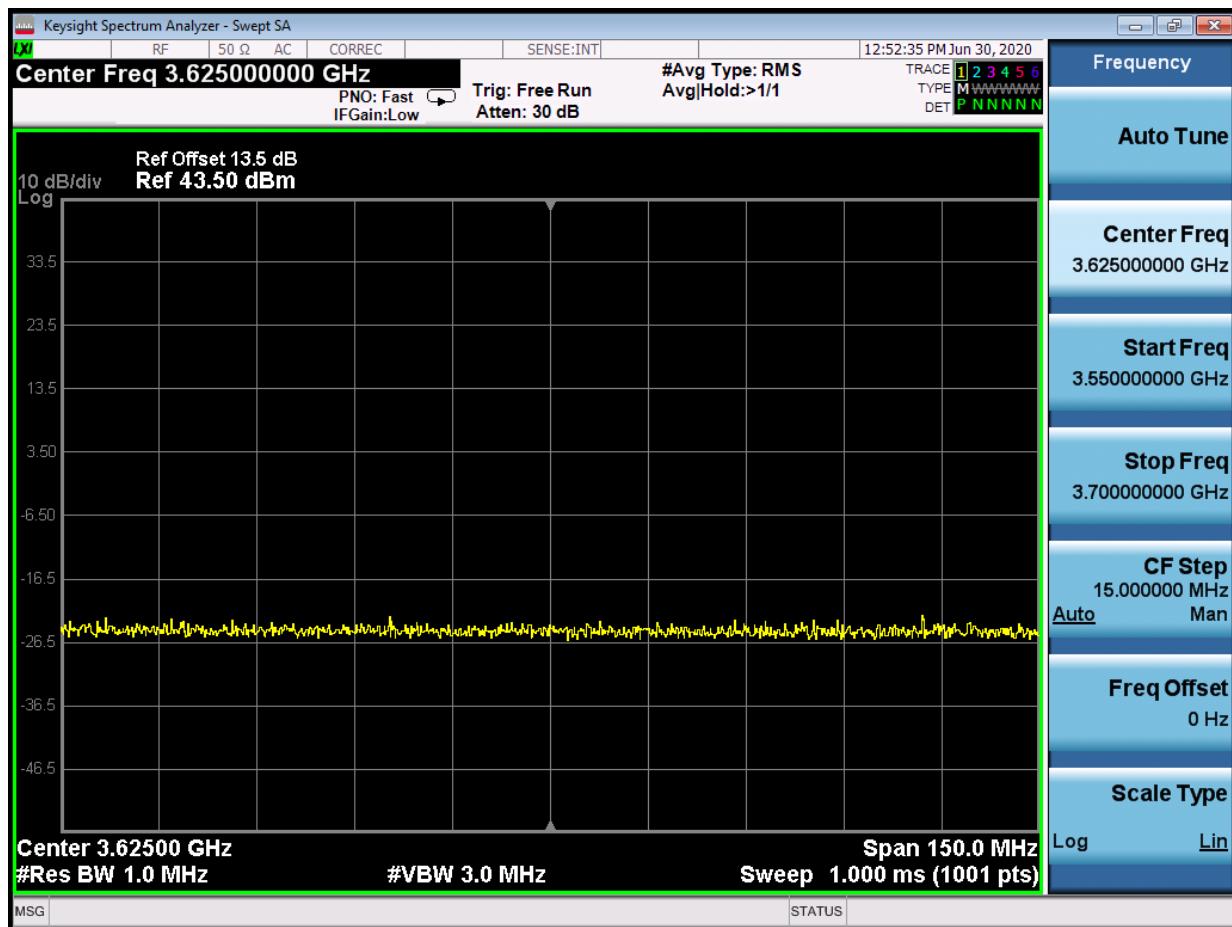

**Plot 12. Conducted Measurement – No RF transmission in entire band (WINNF.FT.C.HBT.5)**


FCC ID: XN3-QUANTUM6636		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 28 of 60

## A13 [WINNF.FT.C.HBT.6] Heartbeat responseCode=501 (SUSPENDED\_GRANT) in Subsequent Heartbeat Response

	Test Execution Steps	PASS	FAIL
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> <li>• UUT has registered successfully with SAS Test Harness</li> <li>• UUT has a valid single grant as follows:           <ul style="list-style-type: none"> <li>◦ valid cbsId = C</li> <li>◦ valid grantId = G</li> <li>◦ grant is for frequency range F, power P</li> <li>◦ grantExpireTime = UTC time greater than duration of the test</li> </ul> </li> <li>• UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface</li> </ul>	--	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including:</p> <ul style="list-style-type: none"> <li>• cbsId = C</li> <li>• grantId = G</li> <li>• operationState = "AUTHORIZED"</li> </ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	<p>SAS Test Harness sends a Heartbeat Response message, including the following parameters:</p> <ul style="list-style-type: none"> <li>• cbsId = C</li> <li>• grantId = G</li> <li>• transmitExpireTime = T = Current UTC time</li> <li>• responseCode = 501 (SUSPENDED_GRANT)</li> </ul>	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	<p>Monitor the SAS-CBSD interface. Verify either A OR B occurs:</p> <p>A. UUT sends a Heartbeat Request message. Ensure message is sent within latest specified heartbeatInterval, and is correctly formatted with parameters:</p> <ul style="list-style-type: none"> <li>• cbsId = C</li> <li>• grantId = G</li> <li>• operationState = "GRANTED"</li> </ul> <p>B. UUT sends a Relinquishment request message. Ensure message is correctly formatted with parameters:</p> <ul style="list-style-type: none"> <li>• cbdsId = C</li> <li>• grantId = G</li> </ul> <p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none"> <li>• UUT shall stop transmission within (T + 60 seconds) of completion of step 3</li> </ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: XN3-QUANTUM6636	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 MERCURY wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 29 of 60

## Test Plots:

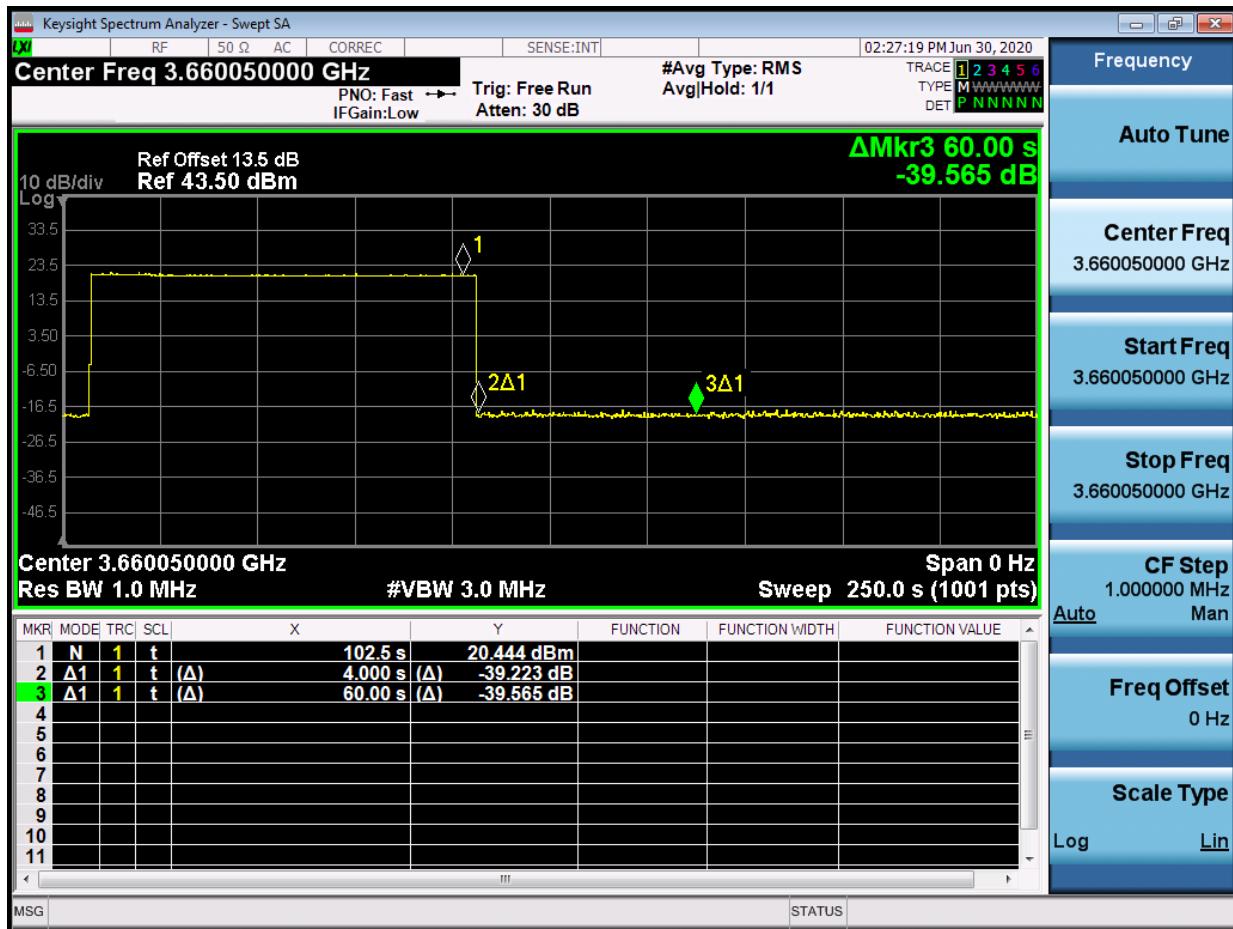

**Plot 13. Conducted Measurement - RF transmission stops within 60s of SAS message. The SAS message is indicated by Marker 1 (WINNF.FT.C.HBT.6)**


FCC ID: XN3-QUANTUM6636	 <b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 <b>MERCURY</b> wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 30 of 60

## A15 [WINNF.FT.C.HBT.7] Heartbeat responseCode=502 (UNSYNC\_OP\_PARAM)

	Test Execution Steps	PASS	FAIL
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> <li>• UUT has registered successfully with SAS Test Harness</li> <li>• UUT has a valid single grant as follows: <ul style="list-style-type: none"> <li>◦ valid cbsId = C</li> <li>◦ valid grantId = G</li> <li>◦ grant is for frequency range F, power P</li> <li>◦ grantExpireTime = UTC time greater than duration of the test</li> </ul> </li> <li>• UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface</li> </ul>	--	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including:</p> <ul style="list-style-type: none"> <li>• cbsId = C</li> <li>• grantId = G</li> <li>• operationState = "AUTHORIZED"</li> </ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	<p>SAS Test Harness sends a Heartbeat Response message, including the following parameters:</p> <ul style="list-style-type: none"> <li>• cbsId = C</li> <li>• grantId = G</li> <li>• transmitExpireTime = T = Current UTC time</li> <li>• responseCode = 502 (UNSYNC_OP_PARAM)</li> </ul>	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	<p>Monitor the SAS-CBSD interface. Verify:</p> <ul style="list-style-type: none"> <li>• UUT sends a Grant Relinquishment Request message. Verify message is correctly formatted with parameters: <ul style="list-style-type: none"> <li>◦ cbsId = C</li> <li>◦ grantId = G</li> </ul> </li> </ul> <p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none"> <li>• UUT shall stop transmission within (T+60) seconds of completion of step 3.</li> </ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: XN3-QUANTUM6636	 PCTEST <sup>®</sup> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 MERCURY wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 31 of 60

## Test Plots:

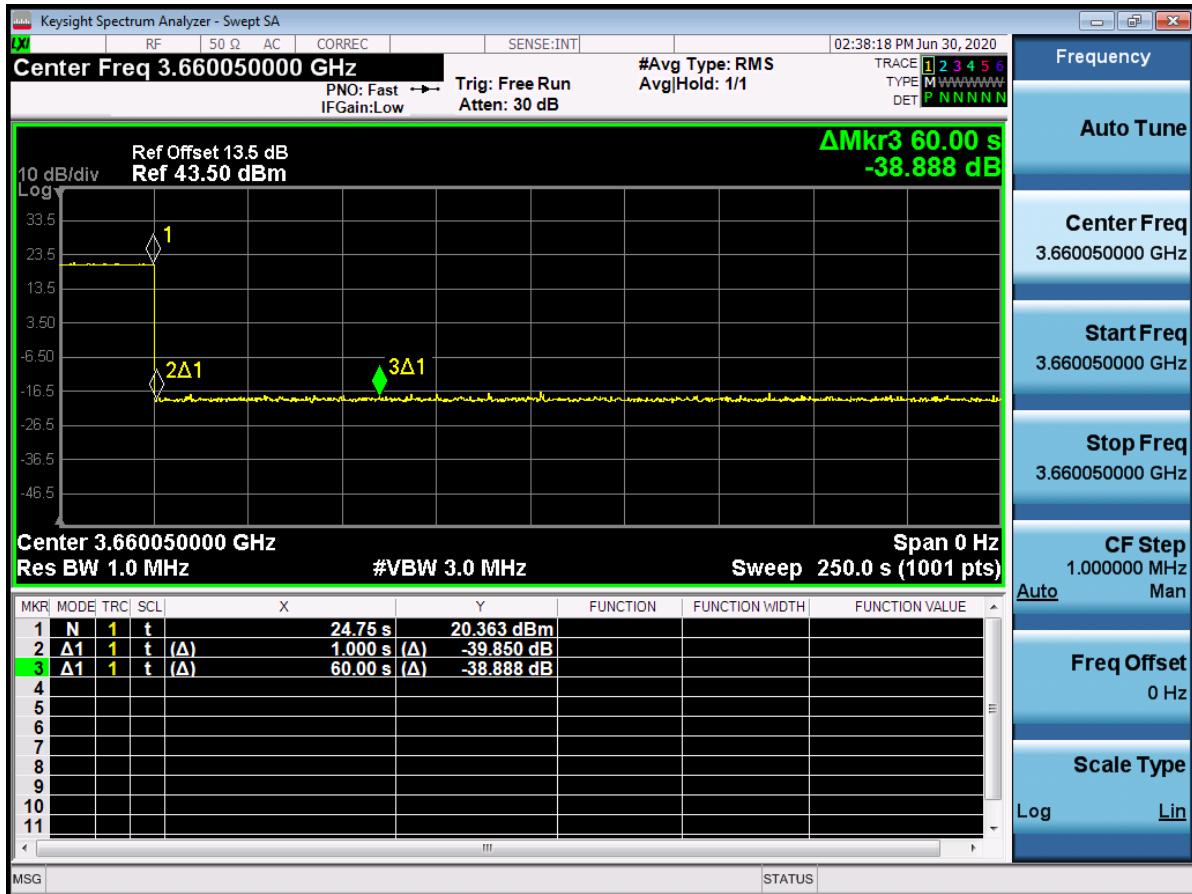

Plot 14. Conducted Measurement - RF transmission stops within 60s of SAS message. The SAS message is indicated by Marker 1 (WINNF.FT.C.HBT.7)

FCC ID: XN3-QUANTUM6636	 <b>PCTEST®</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 <b>MERCURY</b> wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 32 of 60

## A16 [WINNF.FT.D.HBT.8] Domain Proxy Heartbeat responseCode=500 (TERMINATED\_GRANT)

	Test Execution Steps	PASS	FAIL
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> <li>• DP has two CBSD registered successfully with SAS Test Harness</li> </ul> <p>Each CBSD {1,2} has a valid single grant as follows:</p> <ul style="list-style-type: none"> <li>◦ valid cbsId = Ci, i={1,2}</li> <li>◦ valid grantId = Gi, i={1,2}</li> <li>◦ grant is for frequency range Fi, power Pi</li> <li>◦ grantExpireTime = UTC time greater than duration of the test</li> </ul> <ul style="list-style-type: none"> <li>• Both CBSD are in AUTHORIZED state and transmitting within their granted bandwidth on RF interface</li> </ul>	--	--
2	<p>DP sends a Heartbeat Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of size 2.</p> <p>Verify Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly for each CBSD, including, for CBSDi i={1,2}:</p> <ul style="list-style-type: none"> <li>• cbsId = Ci, i = {1,2}</li> <li>• grantId = Gi, i = {1,2}</li> <li>• operationState = "AUTHORIZED"</li> </ul>	☒	☐
3	<p>If separate Heartbeat Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each Heartbeat Request message with a separate Heartbeat Response message.</p> <p>If a single Heartbeat Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Heartbeat Response message containing a 2-object array.</p> <p>Parameters for each CBSD within the Heartbeat Response message should be as follows, for CBSDi:</p> <ul style="list-style-type: none"> <li>• cbsId = Ci</li> <li>• grantId = Gi</li> <li>• For CBSD1: <ul style="list-style-type: none"> <li>◦ transmitExpireTime = current UTC time + 200 seconds</li> <li>◦ responseCode = 0</li> </ul> </li> <li>• For CBSD2: <ul style="list-style-type: none"> <li>◦ transmitExpireTime = T = current UTC time</li> </ul> </li> </ul>	--	--

FCC ID: XN3-QUANTUM6636	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 MERCURY wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 33 of 60

	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.  If CBSD sends further Heartbeat Request messages for CBSD1, SAS Test Harness shall respond with a Heartbeat Response message with parameters: <ul style="list-style-type: none"><li>• cbsdId = C1</li><li>• grantId = G1</li><li>• transmitExpireTime = current UTC time + 200 seconds</li><li>• responseCode = 0</li><li>• Heartbeat Request message is within heartbeatInterval of previous Heartbeat Request message</li></ul>	--	--
5	Monitor the RF output of CBSD2. Verify: <ul style="list-style-type: none"><li>• CBSD2 shall stop transmission within bandwidth F2 within (T + 60 seconds) of completion of step 3</li></ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

## Test Plots:



**Plot 15. Conducted Measurement - RF transmission stops within 60s of SAS message. The SAS message is indicated by Marker 1 (WINNF.FT.D.HBT.8)**

**Note:** Plot above shows CBSD2 stopping transmission, while CBSD1 continues to transmit.


FCC ID: XN3-QUANTUM6636	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 MERCURY wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 - 7/22/2020	EUT Type: LTE Base Station		Page 34 of 60

## A17 [WINNF.FT.C.HBT.9] Heartbeat Response Absent (First Heartbeat)

	Test Execution Steps	PASS	FAIL
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> <li>• UUT has registered successfully with SAS Test Harness</li> <li>• UUT has a valid single grant as follows:           <ul style="list-style-type: none"> <li>◦ valid cbsId = C</li> <li>◦ valid grantId = G</li> <li>◦ grant is for frequency range F, power P</li> <li>◦ grantExpireTime = UTC time greater than duration of the test</li> </ul> </li> <li>• UUT is in GRANTED, but not AUTHORIZED state (i.e. has not performed its first Heartbeat Request)</li> </ul>	--	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Ensure Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly, including:</p> <ul style="list-style-type: none"> <li>• cbsId = C</li> <li>• grantId = G</li> <li>• operationState = "GRANTED"</li> </ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	After completion of Step 2, SAS Test Harness does not respond to any further messages from UUT to simulate loss of network connection	--	--
4	<p>Monitor the RF output of the UUT from start of test to 60 seconds after step 3. Verify:</p> <ul style="list-style-type: none"> <li>• At any time during the test, UUT shall not transmit on RF interface</li> </ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: XN3-QUANTUM6636	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 MERCURY wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 35 of 60

## Test Plots:

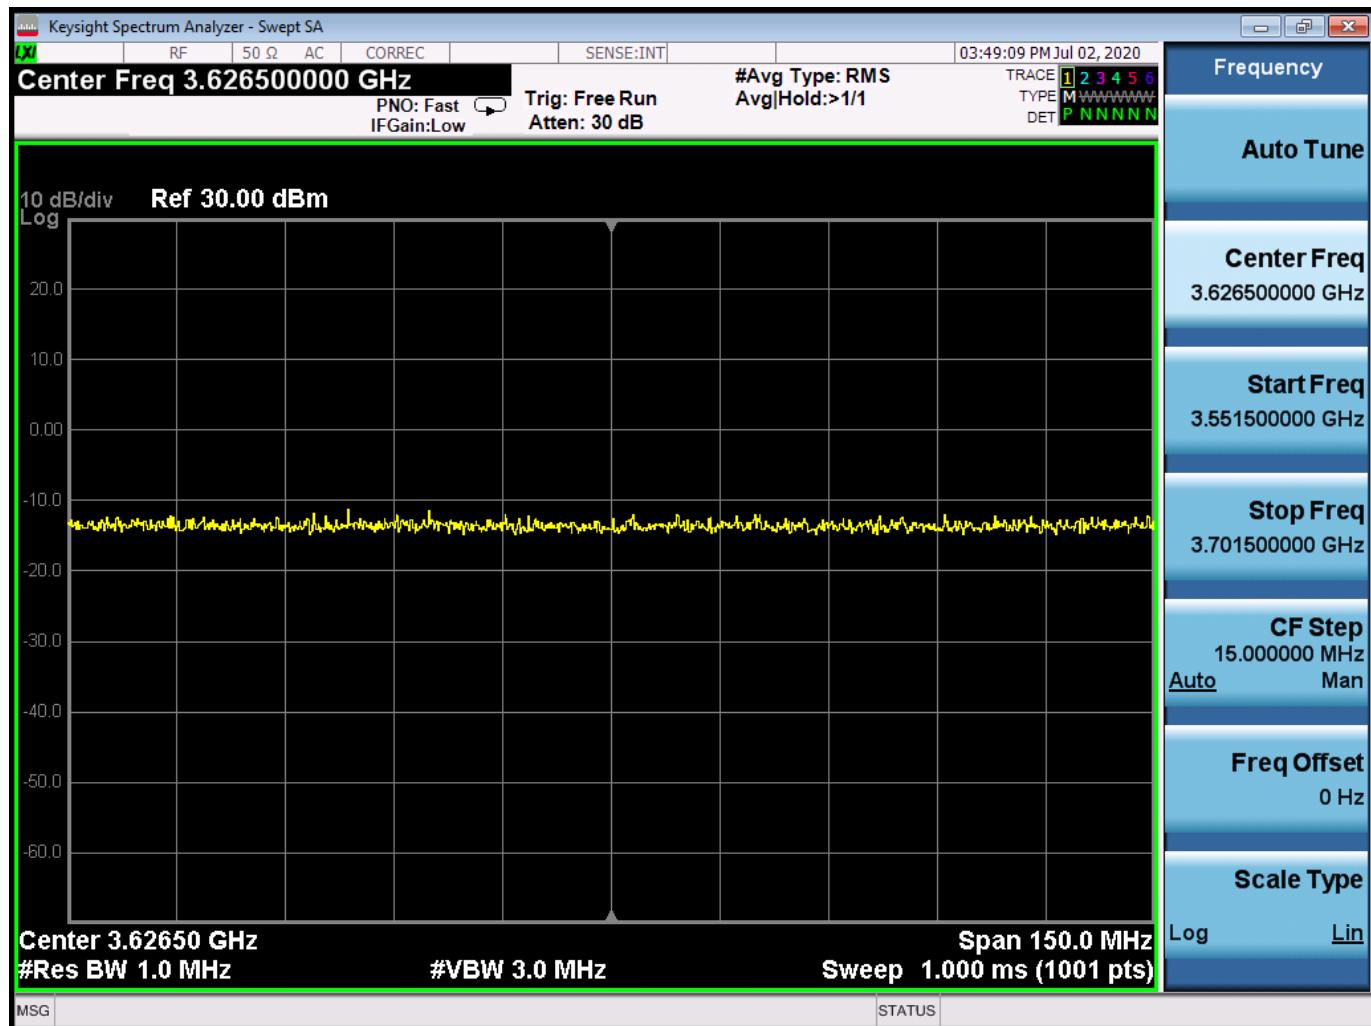

Plot 16. Conducted Measurement – No RF transmission in entire band at anytime (WINNF.FT.C.HBT.9)


FCC ID: XN3-QUANTUM6636	 <b>PCTEST®</b> <small>Proud to be part of element</small>	MEASUREMENT REPORT (CERTIFICATION)	 <b>MERCURY</b> wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 36 of 60

## A18 [WINNF.FT.C.HBT.10] Heartbeat Response Absent (Subsequent Heartbeat)

	Test Execution Steps	PASS	FAIL
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> <li>• UUT has registered successfully with SAS Test Harness</li> <li>• UUT has a valid single grant as follows:           <ul style="list-style-type: none"> <li>◦ valid cbsId = C</li> <li>◦ valid grantId = G</li> <li>◦ grant is for frequency range F, power P</li> <li>◦ grantExpireTime = UTC time greater than duration of the test</li> </ul> </li> <li>• UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface</li> </ul>	--	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Verify Heartbeat Request message is sent within the latest specified heartbeatInterval, and is formatted correctly, including:</p> <ul style="list-style-type: none"> <li>• cbsId = C</li> <li>• grantId = G</li> <li>• operationState = "AUTHORIZED"</li> </ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	<p>SAS Test Harness sends a Heartbeat Response message, including the following parameters:</p> <ul style="list-style-type: none"> <li>• cbsId = C</li> <li>• grantId = G</li> <li>• transmitExpireTime = current UTC time + 200 seconds</li> <li>• responseCode = 0</li> </ul>	--	--
4	After completion of Step 3, SAS Test Harness does not respond to any further messages from UUT	--	--
5	<p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none"> <li>• UUT shall stop all transmission on RF interface within (transmitExpireTime + 60 seconds), using the transmitExpireTime sent in Step 3.</li> </ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: XN3-QUANTUM6636	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 MERCURY wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 37 of 60

## Test Plots:

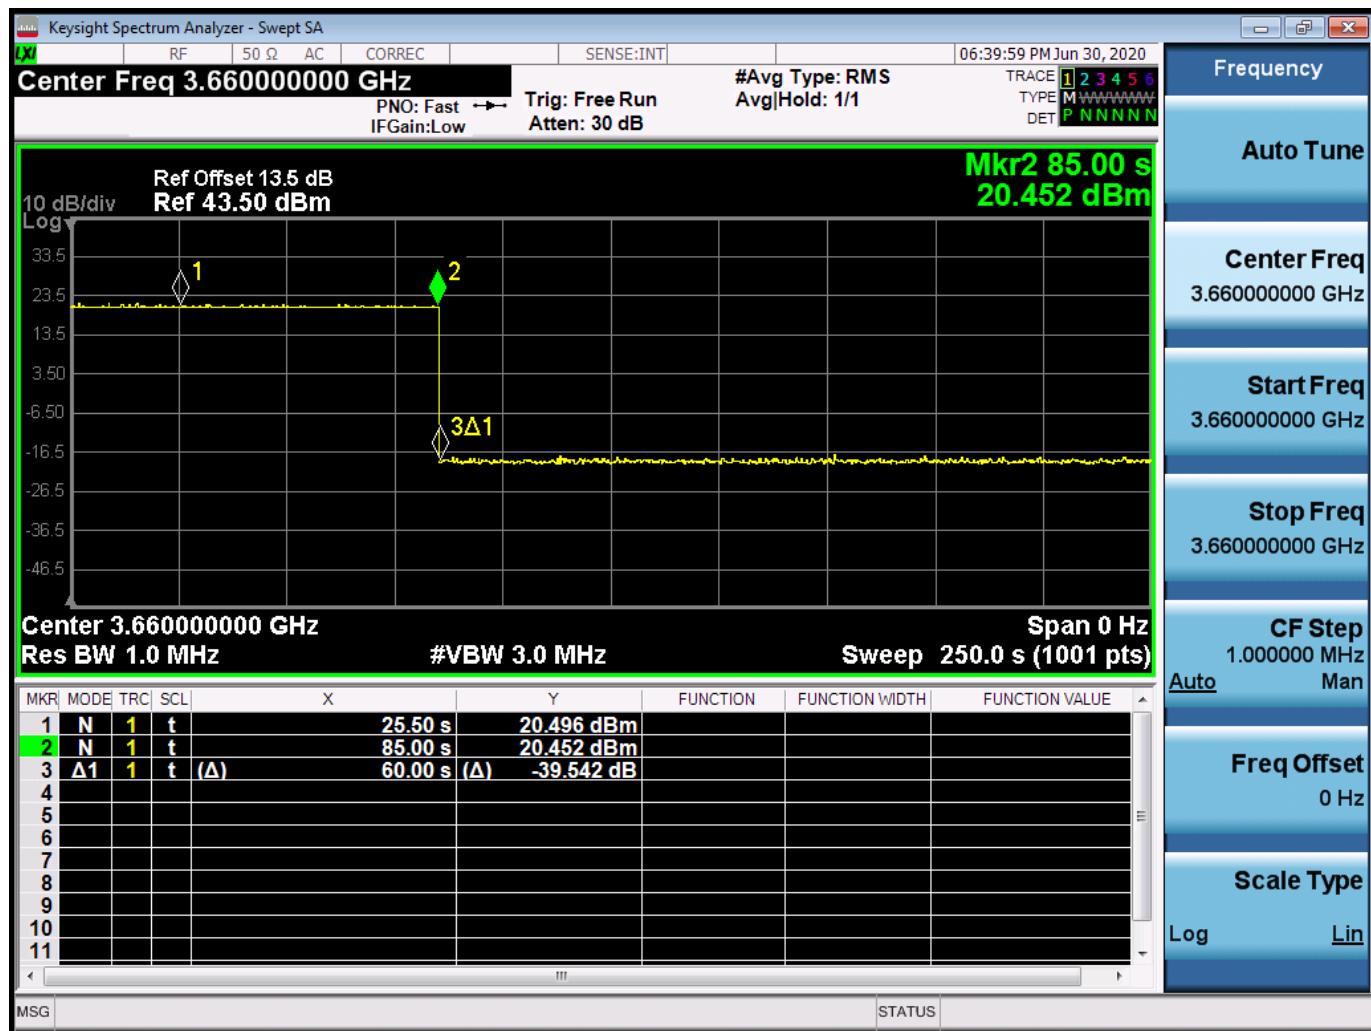

Plot 17. Conducted Measurement - RF transmission stops within transmitExpireTime + 60s. The last SAS heartbeat message is indicated by Marker 1 (WINNF.FT.C.HBT.10)

FCC ID: XN3-QUANTUM6636	 <b>PCTEST®</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 <b>MERCURY</b> wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 38 of 60

## A19 [WINNF.FT.C.MES.3] Grant Response contains measReportConfig

Test Execution Steps		PASS	FAIL
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> <li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li> <li>• UUT has successfully registered with SAS Test Harness, with cbsId=C and measCapability = "RECEIVED_POWER_WITH_GRANT"</li> </ul>	--	--
2	<p>UUT sends a Grant Request message.</p> <p>Verify Grant Request message contains all required parameters properly formatted, and specifically:</p> <ul style="list-style-type: none"> <li>• cbsId = C</li> <li>• operationParam is present and format is valid</li> </ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	<p>SAS Test Harness sends a Grant Response message, with the following parameters:</p> <ul style="list-style-type: none"> <li>• cbsId = C</li> <li>• grantId = G = valid grant ID</li> <li>• grantExpireTime = UTC time in the future</li> <li>• heartbeatInterval = 60 seconds</li> <li>• measReportConfig= "RECEIVED_POWER_WITH_GRANT"</li> <li>• operationParam is set to valid operating parameters</li> <li>• channelType = "GAA"</li> <li>• responseCode = 0</li> </ul>	--	--
4	<p>UUT sends a Heartbeat Request message. Verify message contains all required parameters properly formatted, and specifically:</p> <ul style="list-style-type: none"> <li>• cbsId = C</li> <li>• grantId = G</li> <li>• operationState = "GRANTED"</li> </ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
5	<p>If Heartbeat Request message (step 4) contains measReport object, then:</p> <ul style="list-style-type: none"> <li>• verify measReport is properly formatted as object rcvdPowerMeasReport</li> <li>• end test, with PASS result</li> </ul> <p>else, if Heartbeat Request message (step 4) does not contain measReport object, then:</p> <p>If number of Heartbeat Requests sent by UUT after Step 3 is = 5, then stop test with result of FAIL</p>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
6	<p>SAS Test Harness sends a Heartbeat Response message, containing all required parameters properly formatted, and specifically:</p> <ul style="list-style-type: none"> <li>• cbsId = C, • grantId = G</li> <li>• transmitExpireTime = current UTC time + 200 seconds</li> <li>• responseCode = 0</li> </ul> <p>Go to Step 4, above</p>	--	--

FCC ID: XN3-QUANTUM6636	 PCTEST <sup>®</sup> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 MERCURY wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 39 of 60

## A20 [WINNF.FT.D.MES.5] Domain Proxy Heartbeat Response contains measReportConfig

	Test Execution Steps	PASS	FAIL
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> <li>• DP has successfully completed SAS Discovery and Authentication with SAS Test Harness</li> <li>• DP has successfully registered 2 CBSD with SAS Test Harness, each with cbsdId=Ci, i={1,2} and measCapability = "RECEIVED_POWER_WITH_GRANT"</li> <li>• DP has received a valid grant with grantId = Gi, i={1,2} for each CBSD</li> <li>• Both CBSD are in Grant State AUTHORIZED and actively transmitting within the bounds of their grants.</li> <li>• Grants have heartbeatInterval =60 seconds</li> </ul>	--	--
2	<p>Verify DP sends a Heartbeat Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2.</p> <p>Verify Heartbeat Request message contains all required parameters properly formatted for each CBSD, specifically, for CBSDi:</p> <ul style="list-style-type: none"> <li>• cbsdId = Ci</li> <li>• grantId = Gi</li> <li>• operationState = "AUTHORIZED"</li> </ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	<p>If a separate Heartbeat Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each Heartbeat Request message with a separate Heartbeat Response message.</p> <p>If a single Heartbeat Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Heartbeat Response message containing a 2-object array.</p> <p>Parameters for each CBSD within the Heartbeat Response message containing all required parameters properly formatted, and specifically:</p> <ul style="list-style-type: none"> <li>• cbsdId = Ci</li> <li>• grantId = Gi</li> <li>• measReportConfig= "RECEIVED_POWER_WITH_GRANT"</li> <li>• responseCode = 0</li> </ul>	--	--
4	<p>Verify DP sends a Heartbeat Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2.</p> <p>Verify Heartbeat Request message contains all required parameters properly formatted for each CBSD, and specifically, for CBSDi, i = {1,2}:</p> <ul style="list-style-type: none"> <li>• cbsdId = Ci</li> <li>• grantId = Gi</li> <li>• operationState = "AUTHORIZED"</li> </ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: XN3-QUANTUM6636	 <b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 <b>MERCURY</b> wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 40 of 60

	<ul style="list-style-type: none"> <li>• Check whether measReport is present, and if present, ensure it is a properly formatted rcvdPowerMeasReport object, and record its reception for each CBSD<sub>i</sub>, <math>i = \{1,2\}</math>.</li> </ul>		
5	<p>If Heartbeat Request message (step 4) contains measReport object, then:</p> <ul style="list-style-type: none"> <li>• Verify measReport is properly formatted as object rcvdPowerMeasReport</li> <li>• record which CBSD have successfully sent a measReport object</li> </ul> <p>If all CBSD<sub>i</sub>, <math>i = \{1,2\}</math> have successfully sent a measReport object, then</p> <ul style="list-style-type: none"> <li>• end test, with PASS result</li> </ul> <p>else, if the number of Heartbeat Requests sent per CBSD is 5 or more, then stop test with result of FAIL</p>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
6	<p>If a separate Heartbeat Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each Heartbeat Request message with a separate Heartbeat Response message.</p> <p>If a single Heartbeat Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Heartbeat Response message containing a 2-object array.</p> <p>Parameters for each CBSD within the Heartbeat Response message containing all required parameters properly formatted, and specifically:</p> <ul style="list-style-type: none"> <li>• cbsdId = Ci</li> <li>• grantId = Gi</li> <li>• responseCode = 0</li> </ul> <p>Go to Step 4, above.</p>	--	--


FCC ID: XN3-QUANTUM6636	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 MERCURY wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 41 of 60

## A21 [WINNF.FT.D.RLQ.2] Domain Proxy Successful Relinquishment

Test Execution Steps		PASS	FAIL
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> <li>• DP has successfully completed SAS Discovery and Authentication with SAS Test Harness</li> <li>• DP has successfully registered 2 CBSD with SAS Test Harness, each with cbsdId=Ci, i={1,2}</li> <li>• DP has received a valid grant with grantId = Gi, i={1,2} for each CBSD</li> <li>• Both CBSD are in Grant State AUTHORIZED and actively transmitting within the bounds of their grants.</li> </ul> <p>Invoke trigger to relinquish each UUT Grant from the SAS Test Harness</p>	--	--
2	<p>Verify DP sends a Relinquishment Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2.</p> <p>Verify Relinquishment Request message contains all required parameters properly formatted for each CBSD, specifically, for CBSDi:</p> <ul style="list-style-type: none"> <li>• cbsdId = Ci</li> <li>• grantId = Gi</li> </ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	<p>If a separate Relinquishment Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each request message with a separate response message.</p> <p>If a single Relinquishment Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Response message containing a 2-object array.</p> <p>Parameters for each CBSD within the Relinquishment Response shall be as follows:</p> <ul style="list-style-type: none"> <li>• cbsdId = Ci</li> <li>• grantId = Gi</li> <li>• responseCode = 0</li> </ul>	--	--
4	After completion of step 3, SAS Test Harness will not provide any additional positive response (responseCode=0) to further request messages from the UUT.	--	--
5	<p>Monitor the RF output of each UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> <li>• UUT shall stop RF transmission at any time between triggering the relinquishments and UUT sending the relinquishment requests for each CBSD.</li> </ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: XN3-QUANTUM6636	 PCTEST <sup>®</sup> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 MERCURY wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 42 of 60

## Test Plots:

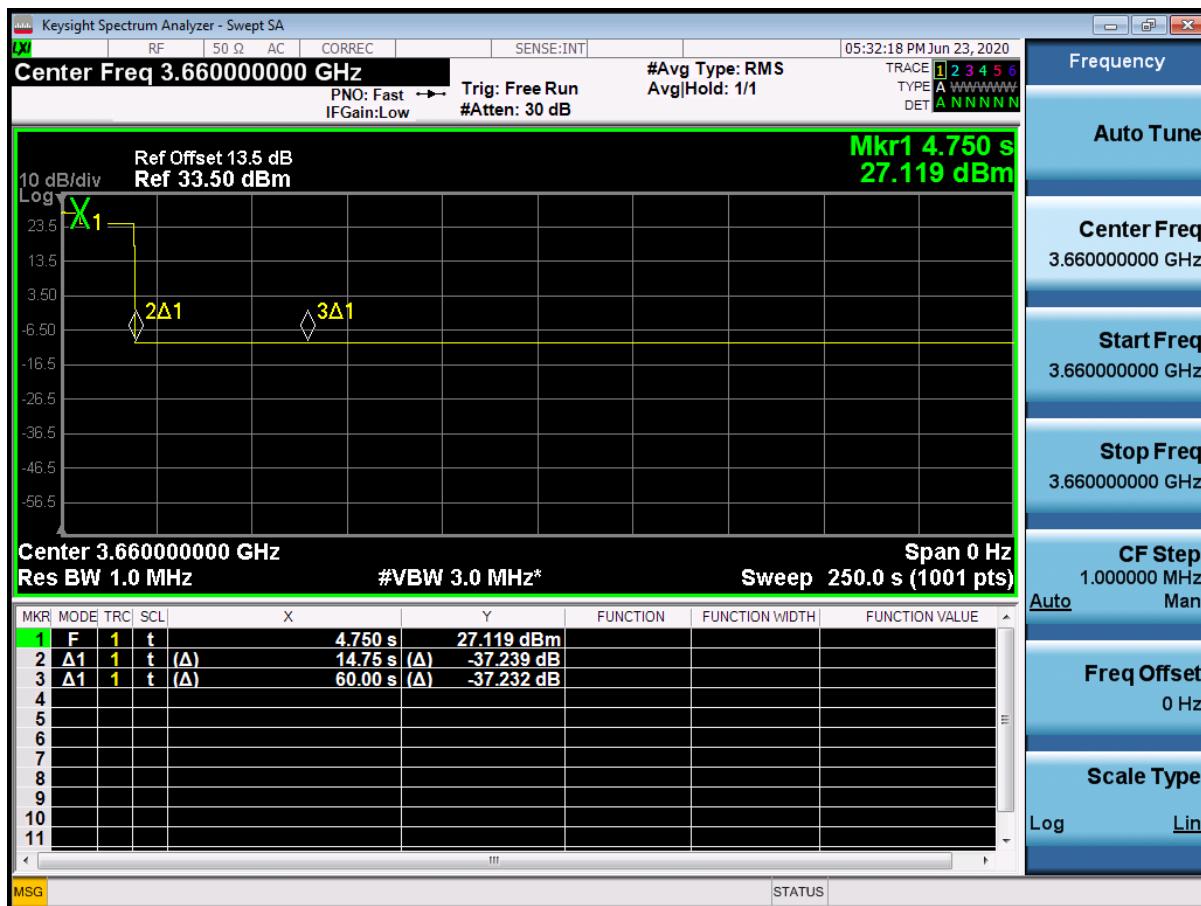

**Plot 18. Conducted Measurement - RF transmission stops (WINNF.FT.D.RLQ.2)**


FCC ID: XN3-QUANTUM6636		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 43 of 60

## A22 [WINNF.FT.C.DRG.1] Successful Deregistration

Test Execution Steps		PASS	FAIL
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> <li>• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness</li> <li>• UUT has successfully registered with SAS Test Harness, with cbsId=C</li> <li>• UUT has received a valid grant with grantId = G</li> <li>• UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant.</li> </ul> <p>Invoke trigger to deregister UUT from the SAS Test Harness</p>	--	--
2	UUT sends a Relinquishment request and receives Relinquishment response with responseCode=0	--	--
3	UUT sends Deregistration Request to SAS Test Harness with cbsId = C.	<input checked="" type="checkbox"/>	<input type="checkbox"/>
4	<p>SAS Test Harness shall approve the request with a Deregistration Response message with parameters:</p> <ul style="list-style-type: none"> <li>• cbsId = C</li> <li>• responseCode = 0</li> </ul>	--	--
5	After completion of step 3, SAS Test Harness will not provide any additional positive response (responseCode=0) to further request messages from the UUT	--	--
6	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 4 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> <li>• UUT stopped RF transmission at any time between triggering the deregistration and either A OR B occurs:</li> </ul> <p>A. UUT sending a Registration Request message, as this is not mandatory</p> <p>B. UUT sending a Deregistration Request message</p>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: XN3-QUANTUM6636	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 MERCURY wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 44 of 60

## Test Plots:

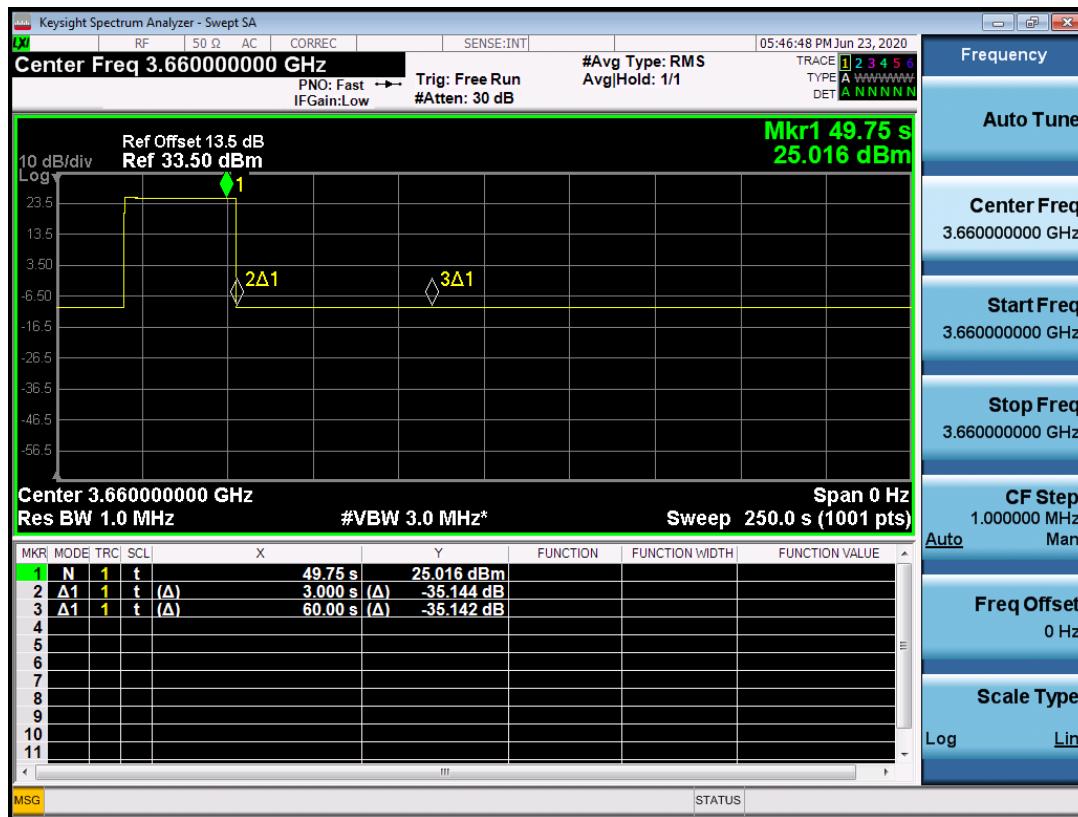

**Plot 19. Conducted Measurement - RF transmission stops within 60s. The SAS message is indicated by Marker 1 (WINNF.FT.C.DRG.1)**

FCC ID: XN3-QUANTUM6636	 <b>PCTEST®</b> Proud to be part of 	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	 <b>MERCURY</b> wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 45 of 60

## A23 [WINNF.FT.D.DRG.2] Domain Proxy Successful Deregistration

Test Execution Steps		PASS	FAIL
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> <li>• Each UUT has successfully registered with SAS Test Harness</li> <li>• Each UUT is in the authorized state</li> <li>• DP has successfully completed SAS Discovery and Authentication with SAS Test Harness</li> <li>• DP has successfully registered 2 CBSD with SAS Test Harness, each with cbsdId=Ci, i={1,2}</li> <li>• DP has received a valid grant with grantId = Gi, i={1,2} for each CBSD</li> <li>• Both CBSD are in Grant State AUTHORIZED and actively transmitting within the bounds of their grants.</li> </ul> <p>Invoke trigger to deregister each UUT from the SAS Test Harness</p>	--	--
2	UUT sends a Relinquishment request and receives Relinquishment response with responseCode=0	--	--
3	<p>Verify DP sends a Deregistration Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2.</p> <p>Verify Deregistration Request message contains all required parameters properly formatted for each CBSD, specifically, for CBSDi:</p> <ul style="list-style-type: none"> <li>• cbsdId = Ci</li> </ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
4	<p>If a separate Deregistration Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each request message with a separate response message.</p> <p>If a single Deregistration Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Response message containing a 2-object array.</p> <p>Parameters for each CBSD within the Deregistration Response shall be as follows:</p> <ul style="list-style-type: none"> <li>• cbsdId = Ci</li> <li>• responseCode = 0</li> </ul>	--	--
5	After completion of step 4, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
6	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 4 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> <li>• UUT stopped RF transmission at any time between triggering the deregistration and either A OR B occurs:           <ul style="list-style-type: none"> <li>A. UUT sending a Registration Request message, as this is not mandatory</li> <li>B. UUT sending a Deregistration Request message</li> </ul> </li> </ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: XN3-QUANTUM6636	 PCTEST <sup>®</sup> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 MERCURY wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 46 of 60

## Test Plots:



**Plot 20. Conducted Measurement - RF transmission stops within 60s. The SAS message is indicated by Marker 1 (X) (WINNF.FT.D.DRG.2)**


FCC ID: XN3-QUANTUM6636	 <b>PCTEST®</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 <b>MERCURY</b> wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 47 of 60

## A24 [WINNF.FT.C.SCS.1] Successful TLS connection between UUT and SAS Test Harness


	Test Execution Steps	PASS	FAIL
1	<ul style="list-style-type: none"> <li>• UUT shall start CBSD-SAS communication with the security procedure</li> <li>• The UUT shall establish a TLS handshake with the SAS Test Harness using configured certificate.</li> <li>• Configure the SAS Test Harness to accept the security procedure and establish the connection</li> </ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
2	<ul style="list-style-type: none"> <li>• Make sure that Mutual authentication happens between UUT and the SAS Test Harness.</li> <li>• Make sure that UUT uses TLS v1.2</li> <li>• Make sure that cipher suites from one of the following is selected,</li> <li>• TLS_RSA_WITH_AES_128_GCM_SHA256</li> <li>• TLS_RSA_WITH_AES_256_GCM_SHA384</li> <li>• TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256</li> <li>• TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384</li> <li>• TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256</li> </ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	<p>A successful registration is accomplished using one of the test cases described in section 6.1.4.1, depending on CBSD capability.</p> <ul style="list-style-type: none"> <li>• UUT sends a registration request to the SAS Test Harness and the SAS Test Harness sends a Registration Response with responseCode = 0 and cbsdId.</li> </ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
4	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> <li>• UUT shall not transmit RF</li> </ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: XN3-QUANTUM6636	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 MERCURY wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 48 of 60

## Test Plots:

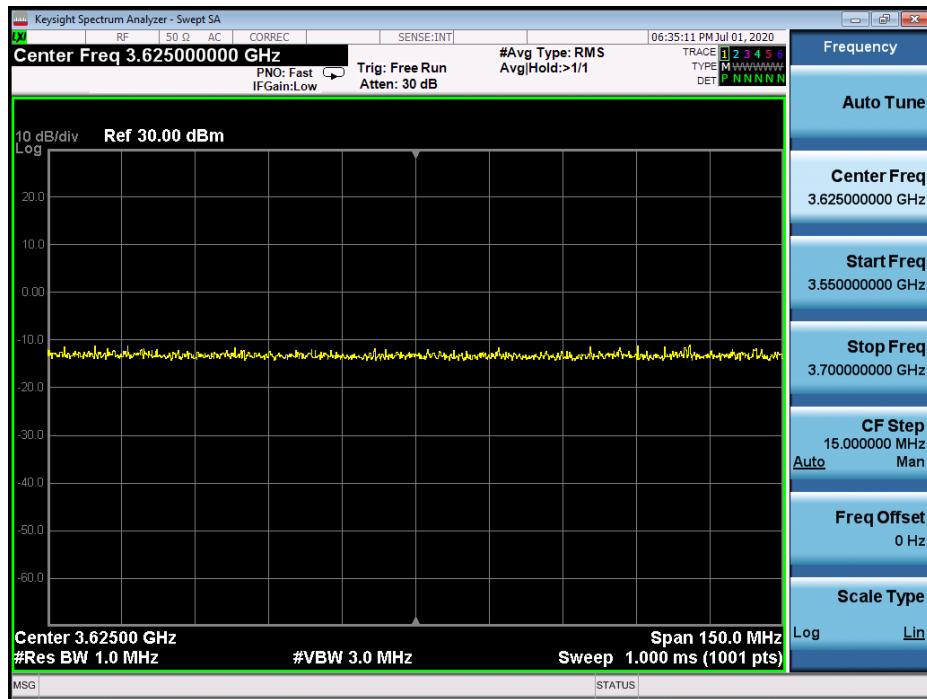

Plot 21. Conducted Measurement – No RF transmission in entire band at anytime (WINNF.FT.C.SCS.1)

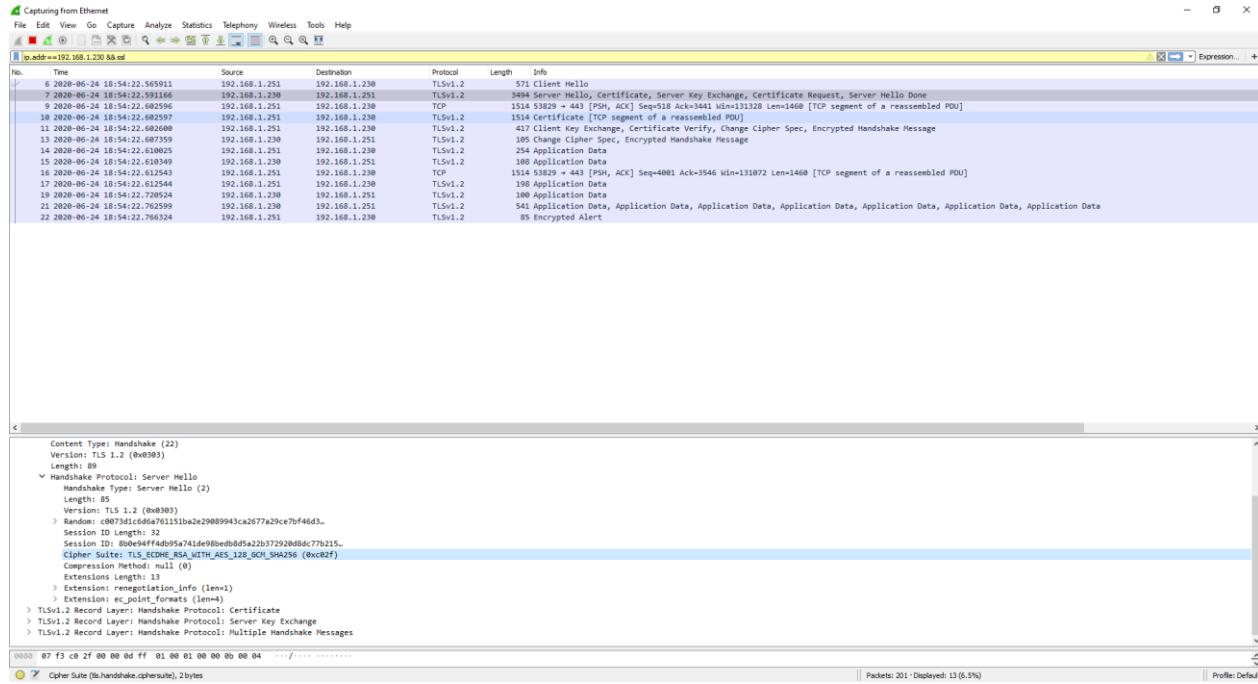


Plot 22. Wireshark Screenshot (WINNF.FT.C.SCS.1)

FCC ID: XN3-QUANTUM6636	 PCTEST <sup>®</sup> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 MERCURY wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 49 of 60

## A25 [WINNF.FT.C.SCS.2] TLS failure due to revoked certificate


	<b>Test Execution Steps</b>	<b>PASS</b>	<b>FAIL</b>
1	• UUT shall start CBSD-SAS communication with the security procedure	<input checked="" type="checkbox"/>	<input type="checkbox"/>
2	• Make sure that UUT uses TLS v1.2 for security establishment. • Make sure UUT selects the correct cipher suite. • UUT shall use CRL or OCSP to verify the validity of the server certificate. • Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	UUT may retry for the security procedure which shall fail	<input checked="" type="checkbox"/>	<input type="checkbox"/>
4	SAS Test-Harness shall not receive any Registration request or any application data.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall not transmit RF	<input checked="" type="checkbox"/>	<input type="checkbox"/>

### Test Plots:

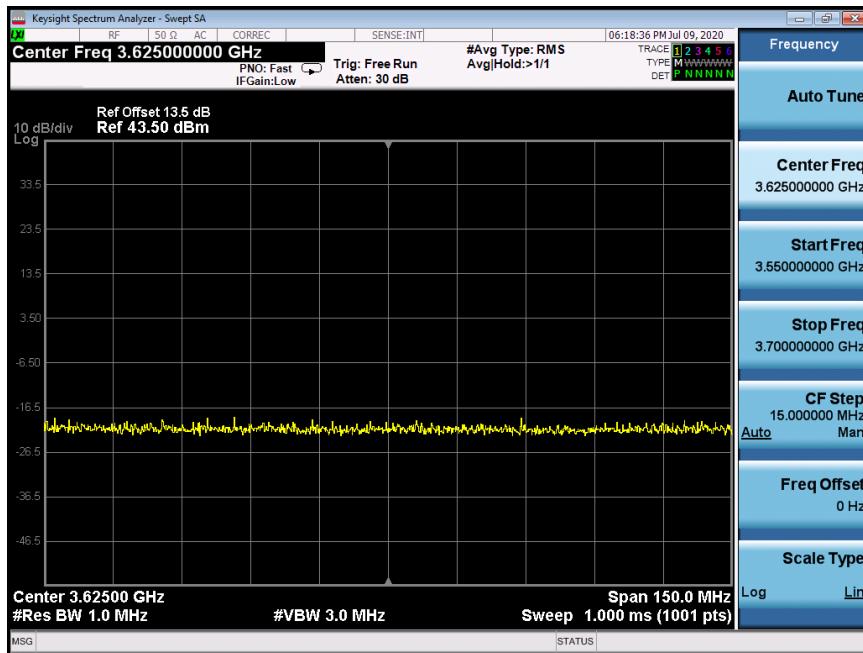

**Plot 23. Conducted Measurement – No RF transmission in entire band at anytime (WINNF.FT.C.SCS.2)**

FCC ID: XN3-QUANTUM6636	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 MERCURY wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 50 of 60

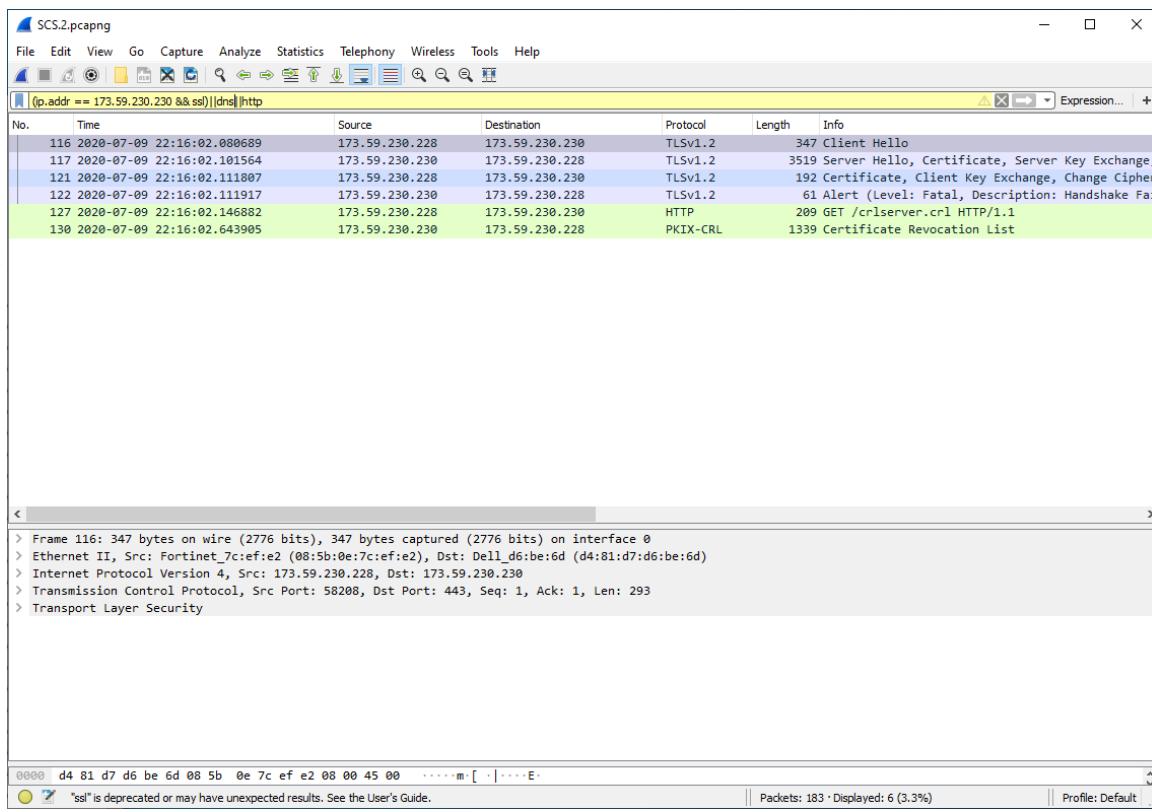


**Plot 24. WireShark Screenshot 1 (WINNF.FT.C.SCS.2)**

## A26 [WINNF.FT.C.SCS.3] TLS failure due to expired server certificate


	<b>Test Execution Steps</b>	<b>PASS</b>	<b>FAIL</b>
1	• UUT shall start CBSD-SAS communication with the security procedure	<input checked="" type="checkbox"/>	<input type="checkbox"/>
2	<ul style="list-style-type: none"> <li>• Make sure that UUT uses TLS v1.2 for security establishment.</li> <li>• Make sure UUT selects the correct cipher suite.</li> <li>• UUT shall use CRL or OCSP to verify the validity of the server certificate.</li> <li>• Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.</li> </ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	UUT may retry for the security procedure which shall fail	<input checked="" type="checkbox"/>	<input type="checkbox"/>
4	SAS Test-Harness shall not receive any Registration request or any application data.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> <li>• UUT shall not transmit RF</li> </ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: XN3-QUANTUM6636	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	MERCURY wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 51 of 60

## Test Plots:

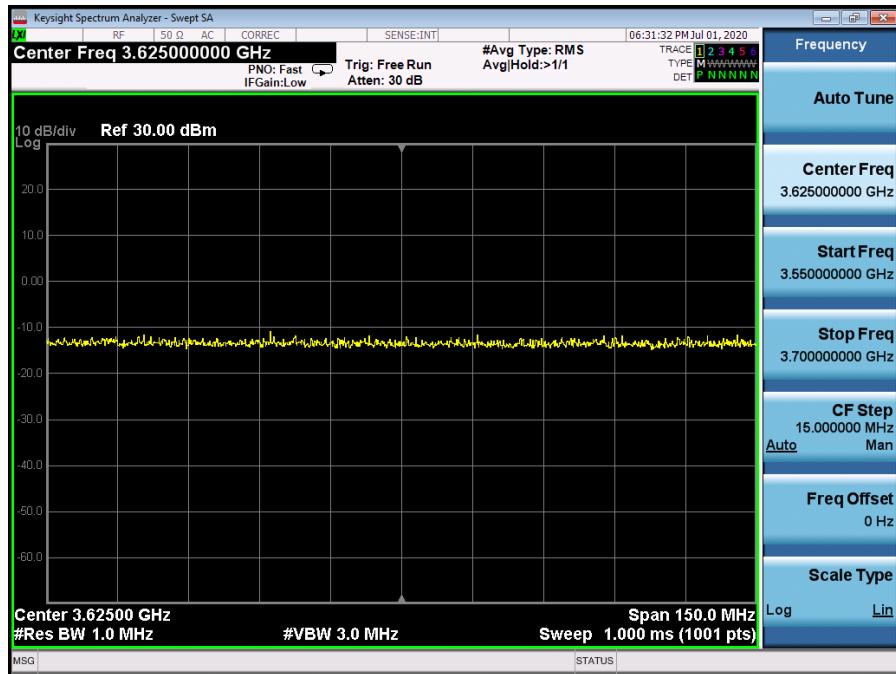

## Plot 25. Conducted Measurement – No RF transmission in entire band at anytime (WINNF.FT.C.SCS.3)

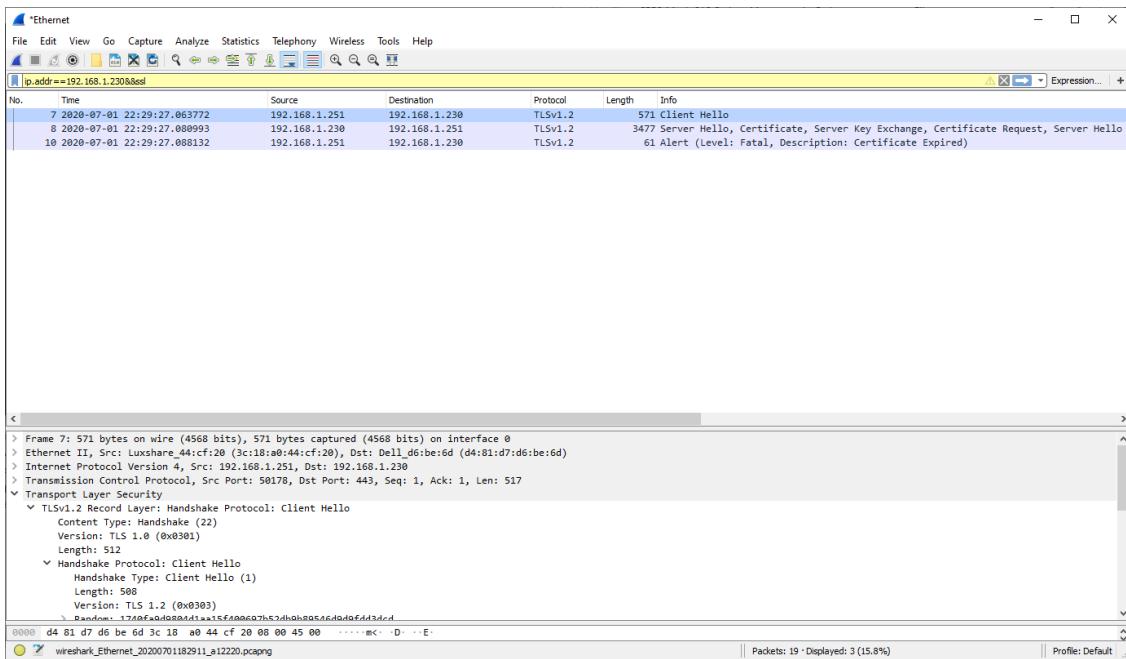


## Plot 26. Wireshark Screenshot (WINNF.FT.C.SCS.3)

FCC ID: XN3-QUANTUM6636	 <b>PCTEST</b> Proud to be part of 	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	 <b>MERCURY</b> wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 52 of 60

## A27 [WINNF.FT.C.SCS.4] TLS failure when SAS Test Harness certificate is issued by an unknown CA


	<b>Test Execution Steps</b>	<b>PASS</b>	<b>FAIL</b>
1	<ul style="list-style-type: none"> <li>UUT shall start CBSD-SAS communication with the security procedure</li> </ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
2	<ul style="list-style-type: none"> <li>Make sure that UUT uses TLS v1.2 for security establishment.</li> <li>Make sure UUT selects the correct cipher suite.</li> <li>UUT shall use CRL or OCSP to verify the validity of the server certificate.</li> <li>Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.</li> </ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	UUT may retry for the security procedure which shall fail	<input checked="" type="checkbox"/>	<input type="checkbox"/>
4	SAS Test-Harness shall not receive any Registration request or any application data.	--	--
5	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> <li>UUT shall not transmit RF</li> </ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

### Test Plots:

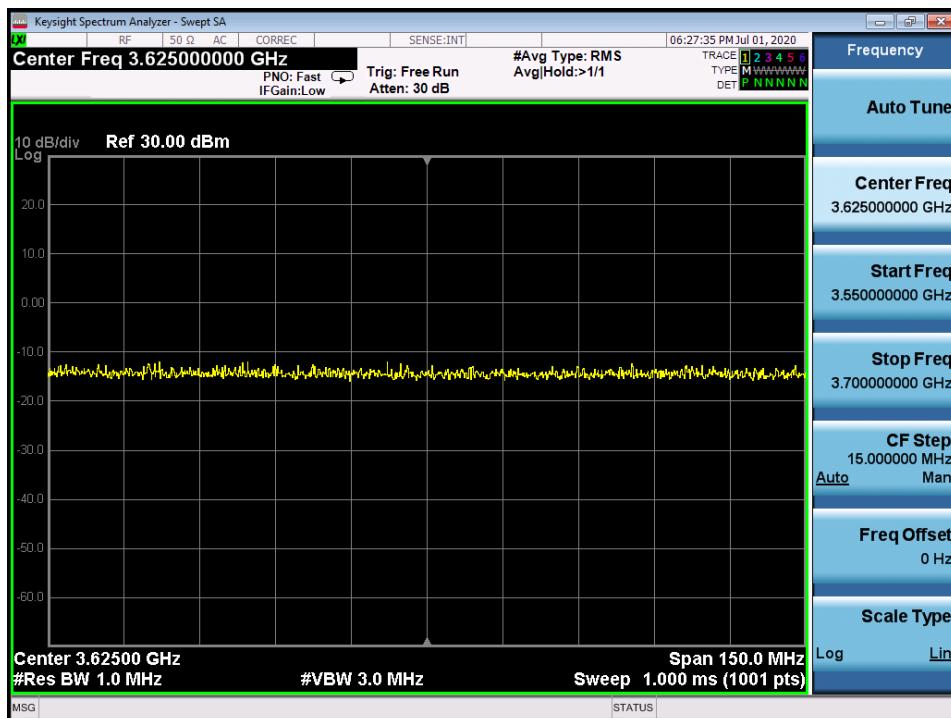

Plot 27. Conducted Measurement – No RF transmission in entire band at anytime (WINNF.FT.C.SCS.4)

FCC ID: XN3-QUANTUM6636	 <b>PCTEST®</b> <small>Proud to be part of element</small>	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	 <b>MERCURY</b> wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 53 of 60

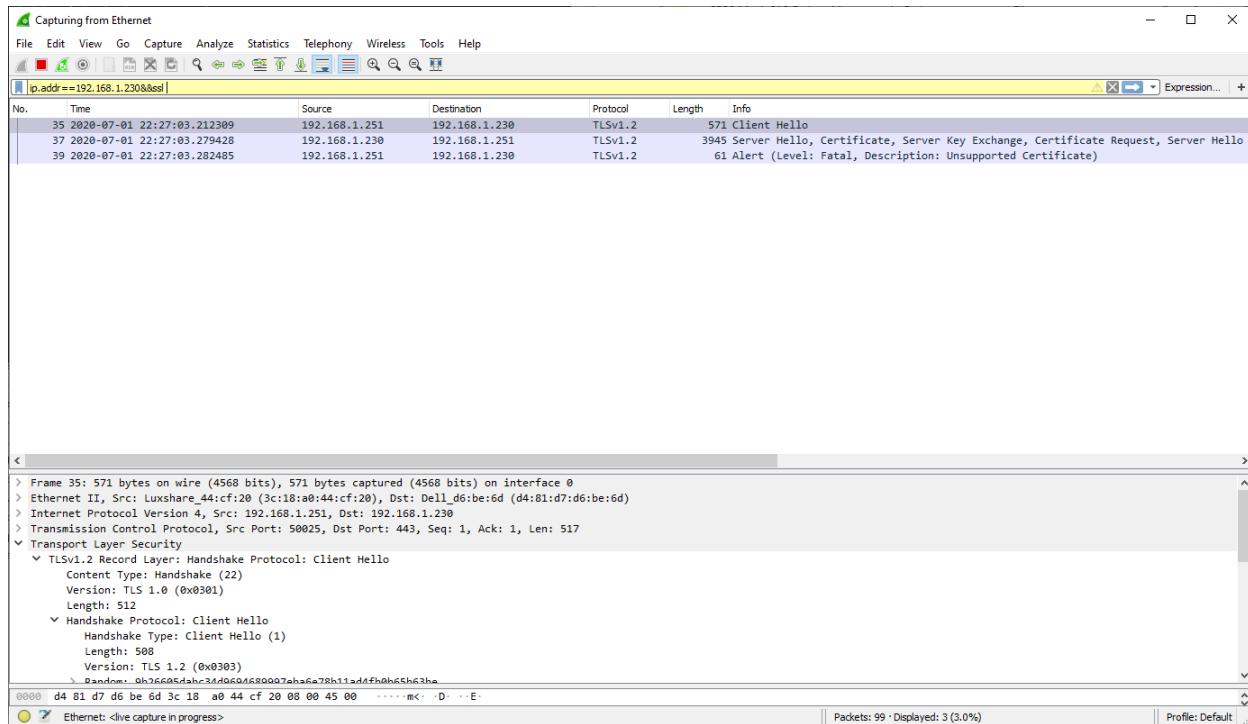


FCC ID: XN3-QUANTUM6636	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 MERCURY wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 54 of 60

## A28 [WINNF.FT.C.SCS.5] TLS failure when certificate at the SAS Test Harness is corrupted


	Test Execution Steps	PASS	FAIL
1	<ul style="list-style-type: none"> <li>• UUT shall start CBSD-SAS communication with the security procedure</li> </ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
2	<ul style="list-style-type: none"> <li>• Make sure that UUT uses TLS v1.2 for security establishment.</li> <li>• Make sure UUT selects the correct cipher suite.</li> <li>• UUT shall use CRL or OCSP to verify the validity of the server certificate.</li> <li>• Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.</li> </ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	UUT may retry for the security procedure which shall fail	<input checked="" type="checkbox"/>	<input type="checkbox"/>
4	SAS Test-Harness shall not receive any Registration request or any application data.	--	--
5	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> <li>• UUT shall not transmit RF</li> </ul>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

### Test Plots:

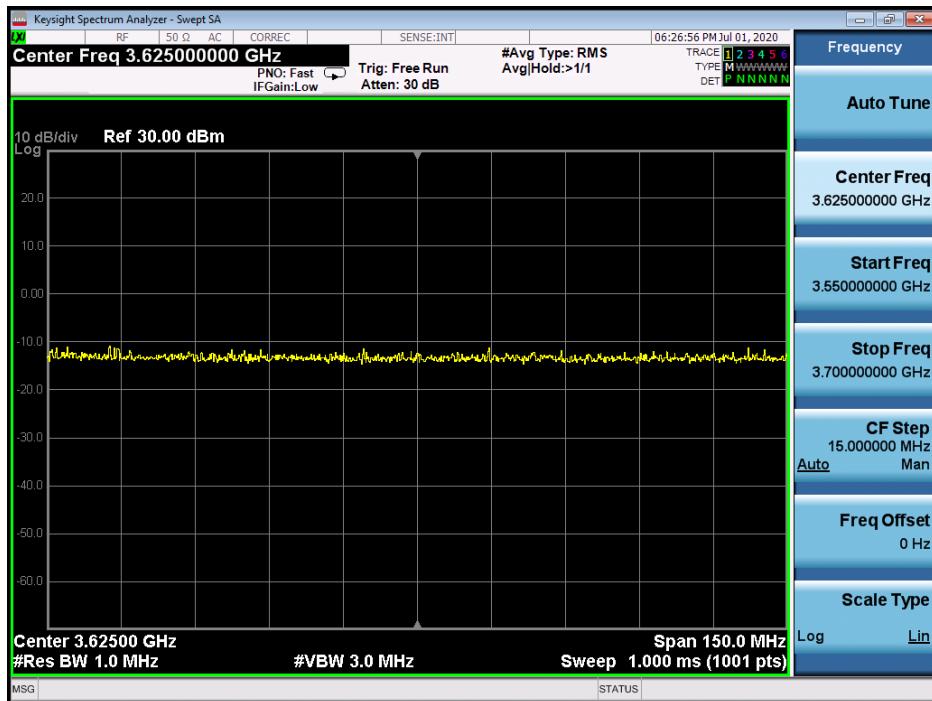

Plot 29. Conducted Measurement – No RF transmission in entire band at anytime (WINNF.FT.C.SCS.5)

FCC ID: XN3-QUANTUM6636	 <b>PCTEST®</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 <b>MERCURY</b> wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 55 of 60

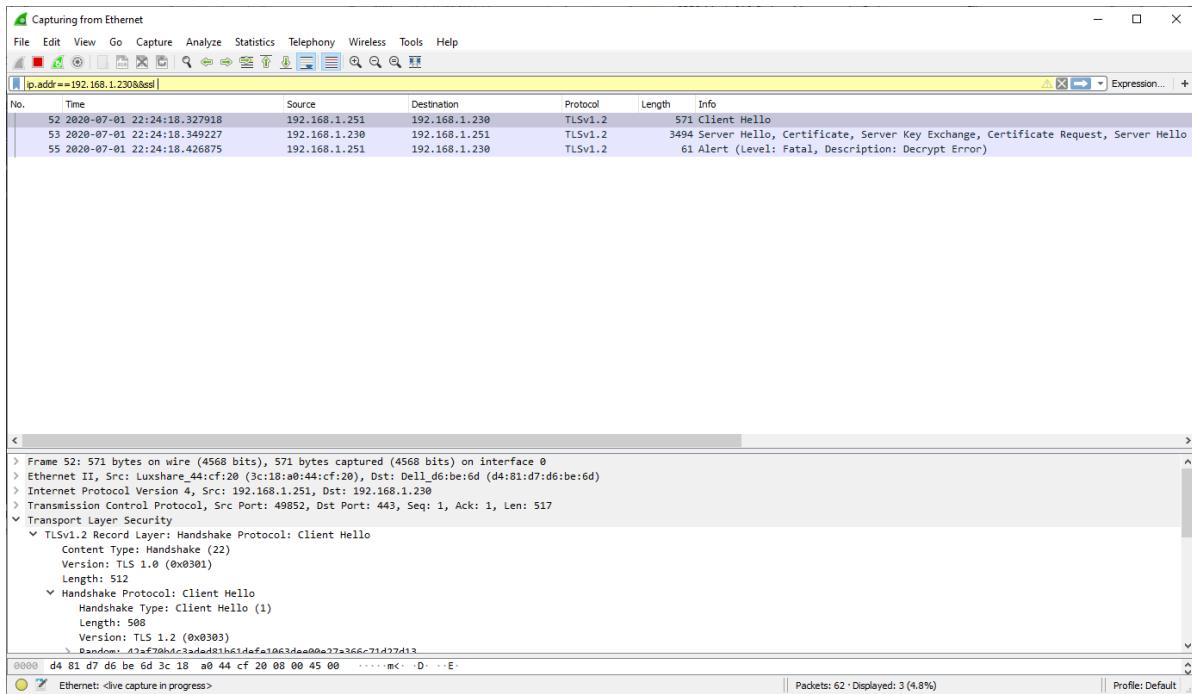

**Plot 30. WireShark Screenshot (WINNF.FT.C.SCS.5)**

FCC ID: XN3-QUANTUM6636	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 MERCURY wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 56 of 60

## A29 [WINNF.PT.C.HBT.1] UUT RF Transmit Power Measurement

	<b>Test Execution Steps</b>	<b>PASS</b>	<b>FAIL</b>
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> <li>• UUT has successfully completed SAS Discovery and Authentication with the SAS Test Harness</li> <li>• UUT has registered with the SAS, with CBSID ID = C</li> <li>• UUT has a single valid grant G with parameters {lowFrequency = FL, highFrequency = FH, maxEirp = Pi}, with grant in AUTHORIZED state, and grantExpireTime set to a value far past the duration of this test case</li> </ul> <p><i>Note: in order for the UUT to request a grant with the parameters {lowFrequency, highFrequency, maxEirp}, the SAS Test Harness may need to provide appropriate guidance in the availableChannel object of the spectrumInquiry response message, and the operationParam object of the grant response message. Alternately, the UUT vendor may provide the ability to set those parameters on the UUT so that the UUT will request a grant with those parameters.</i></p>	--	--
2	<p>UUT and SAS Test Harness perform a series of Heartbeat Request/Response cycles, which continues until the other test steps are complete. Messaging for each cycle is as follows:</p> <ul style="list-style-type: none"> <li>• UUT sends Heartbeat Request, including:             <ul style="list-style-type: none"> <li>o cbsId = C</li> <li>o grantId = G</li> </ul> </li> <li>• SAS Test Harness responds with Heartbeat Response, including:             <ul style="list-style-type: none"> <li>o cbsId = C</li> <li>o grantId = G</li> <li>o transmitExpireTime = current UTC time + 200 seconds</li> <li>o responseCode = 0</li> </ul> </li> </ul>	--	--
3	<p>Tester performs power measurement on RF interface(s) of UUT, and verifies it complies with the maxEirp setting, Pi. The RF measurement method is out of scope of this document, but may include additional configuration of the UUT, as required, to fulfil the requirements of the power measurement method.</p> <p><i>Note: it may be required for the vendor to provide a method or configuration to bring the UUT to a mode which is required by the measurement methodology. Any such mode is vendor-specific and depends upon UUT behavior and the measurement methodology.</i></p>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

FCC ID: XN3-QUANTUM6636	 <b>PCTEST®</b> <small>Proud to be part of element</small>	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	 <b>MERCURY</b> wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 57 of 60

## RF Power Measurements:


Testing is performed per KDB 971168 D01 and across the transmit dynamic range of 37dBm/MHz to 16dBm/MHz for 10MHz Bandwidth.

The UUT was configured such that all ports were transmitting at the same output power level. The 6 ports of the UUT are the same design and pretesting showed that the power levels between the sampling of the various ports is the same. As all 6 ports are identical in design and equivalent power levels, the PSD was sampled on 1 port. The EIRP was calculated by adding the conducted power, antenna gain, and duty cycle correction factor.

Freq [MHz]	SAS Granted maxEIRP [dBm/MHz]	Conducted PSD on Antenna Port 1 [dBm/MHz]	Ant Gain [dBi]	DCCF [dB]	maxEIRP [dBm/MHz]	Margin [dB]
3625	37	18.52	17	1.427	36.947	-0.053
3625	26	7.47	17	1.427	25.897	-0.103
3625	16	-2.533	17	1.427	15.894	-0.106


Table 7-1 RF Output Power Measurements (WINNF.PT.C.HBT)

## Test Plots:

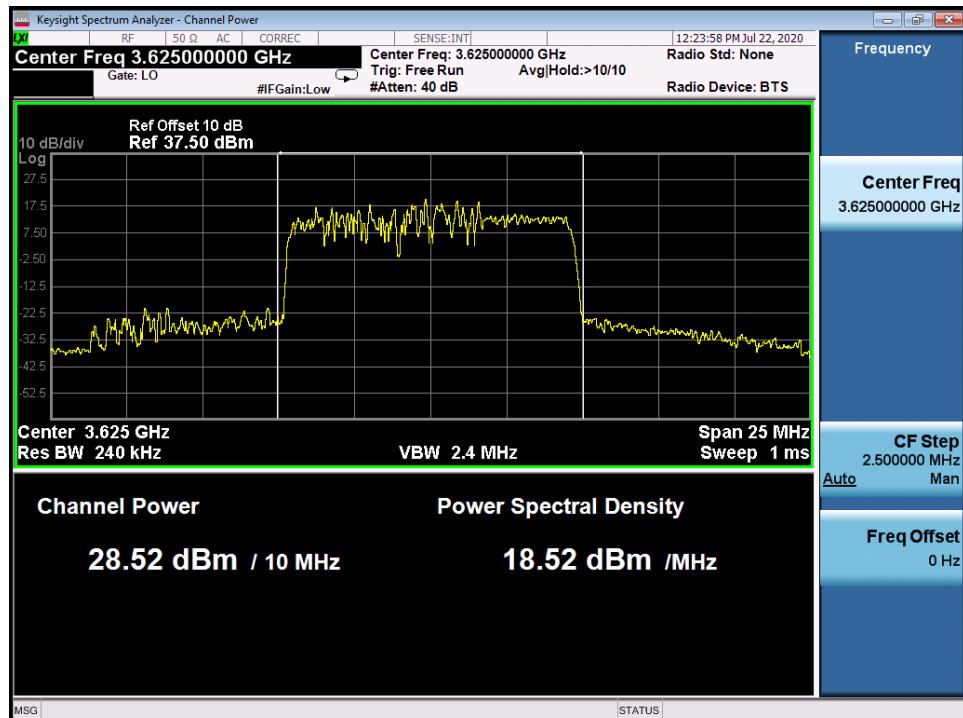


Plot 31. Conducted PSD, Mid-Channel SAS Granted maxEIRP 37

FCC ID: XN3-QUANTUM6636	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 MERCURY wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 58 of 60

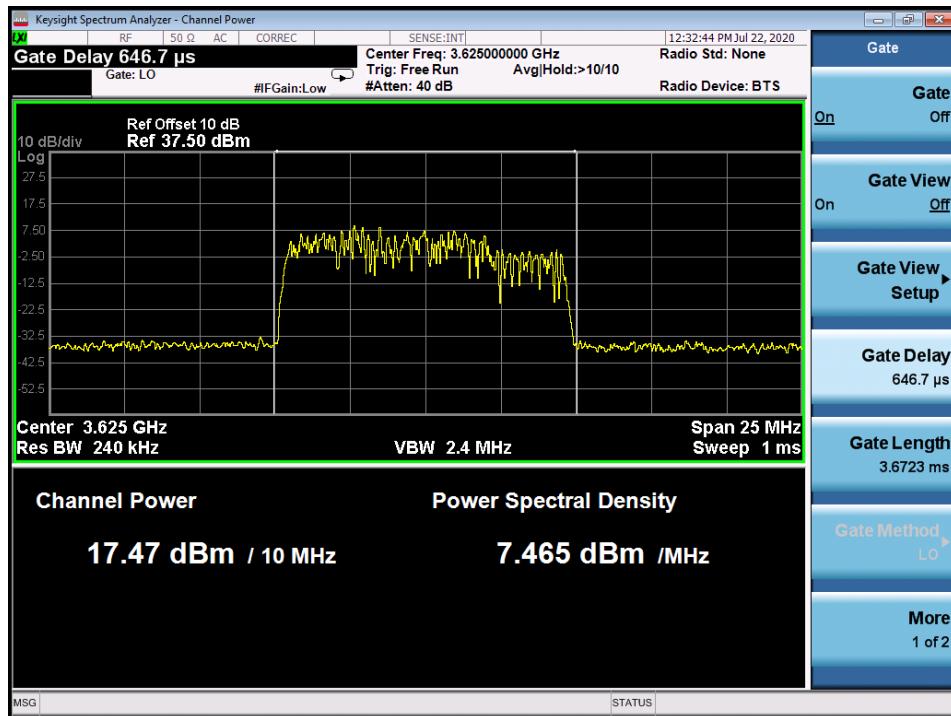

Plot 32. Conducted PSD, Mid-Channel SAS Granted maxEIRP 26

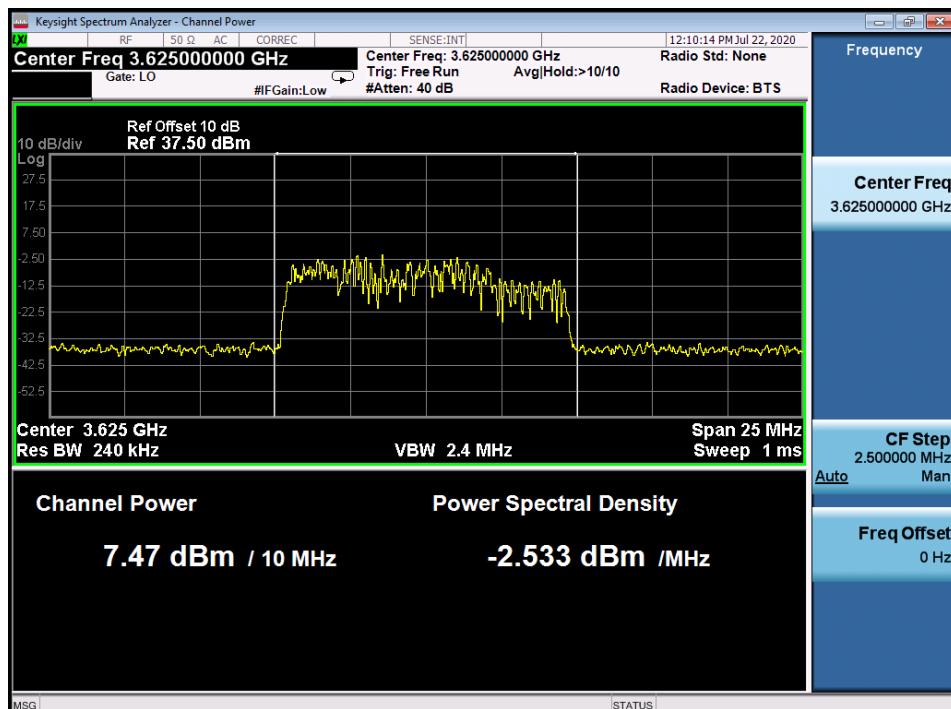

Plot 33. Conducted PSD, Mid-Channel SAS Granted maxEIRP 16

FCC ID: XN3-QUANTUM6636		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 59 of 60

## APPENDIX B – TEST LOGS

Logs are available upon request

 WINNF.FT.C.DRG.1_2020-06-23T21.41.11Z Text Document	 WINNF.FT.C.GRA.1_2020-06-23T19.37.20Z Text Document	 WINNF.FT.C.GRA.2_2020-06-23T19.44.54Z Text Document
 WINNF.FT.C.HBT.3_2020-06-30T16.39.44Z Text Document	 WINNF.FT.C.HBT.5_2020-06-30T16.50.01Z Text Document	 WINNF.FT.C.HBT.9_2020-07-02T19.43.58Z Text Document
 WINNF.FT.C.HBT.10_2020-06-30T22.30.10Z Text Document	 WINNF.FT.C.MES.3_2020-06-30T21.32.52Z Text Document	 WINNF.FT.C.REG.1_SCS1_2020-06-24T19.00.03Z Text Document
 WINNF.FT.C.REG.1_SCS3_2020-07-01T22.29.22Z Text Document	 WINNF.FT.C.REG.1_SCS4_2020-07-01T22.26.29Z Text Document	 WINNF.FT.C.REG.1_SCS5_2020-07-01T22.24.11Z Text Document
 WINNF.FT.D.DRG.2_2020-06-23T21.33.06Z Text Document	 WINNF.FT.D.HBT.2_2020-06-23T17.02.36Z Text Document	 WINNF.FT.D.HBT.8_2020-06-30T20.58.30Z Text Document
 WINNF.FT.D.MES.5_2020-06-30T21.41.04Z Text Document	 WINNF.FT.D.REG.6_2020-06-22T20.41.41Z Text Document	 WINNF.FT.D.REG.6_SCS2_2020-07-09T22.15.56Z Text Document
 WINNF.FT.D.REG.9_2020-06-22T20.48.22Z Text Document	 WINNF.FT.D.REG.11_2020-06-22T20.52.22Z Text Document	 WINNF.FT.D.REG.13_2020-06-22T21.40.12Z Text Document
 WINNF.FT.D.REG.15_2020-06-22T21.23.22Z Text Document	 WINNF.FT.D.REG.17_2020-06-22T21.48.41Z Text Document	 WINNF.FT.D.REG.19_2020-06-22T21.51.50Z Text Document
 WINNF.FT.D.RLQ.2_2020-06-23T21.25.10Z Text Document		

FCC ID: XN3-QUANTUM6636	 PCTEST <sup>®</sup> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 MERCURY wireless	Approved by: Quality Manager
Test Report S/N: 3M2006240049	Test Dates: 6/23/20 – 7/22/2020	EUT Type: LTE Base Station		Page 60 of 60