
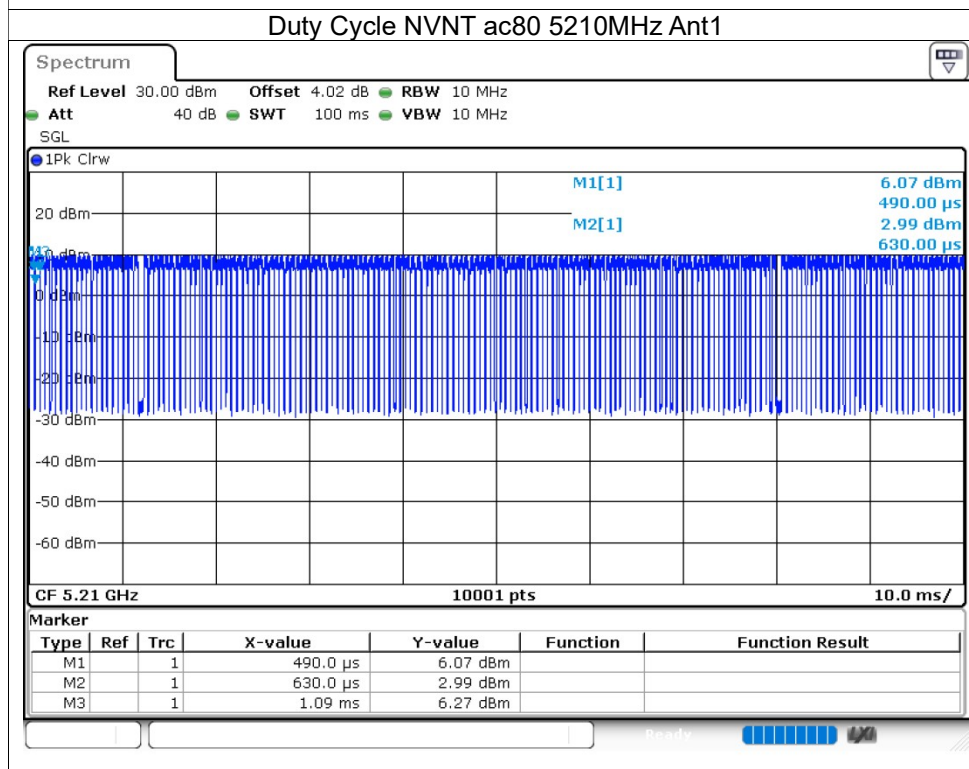


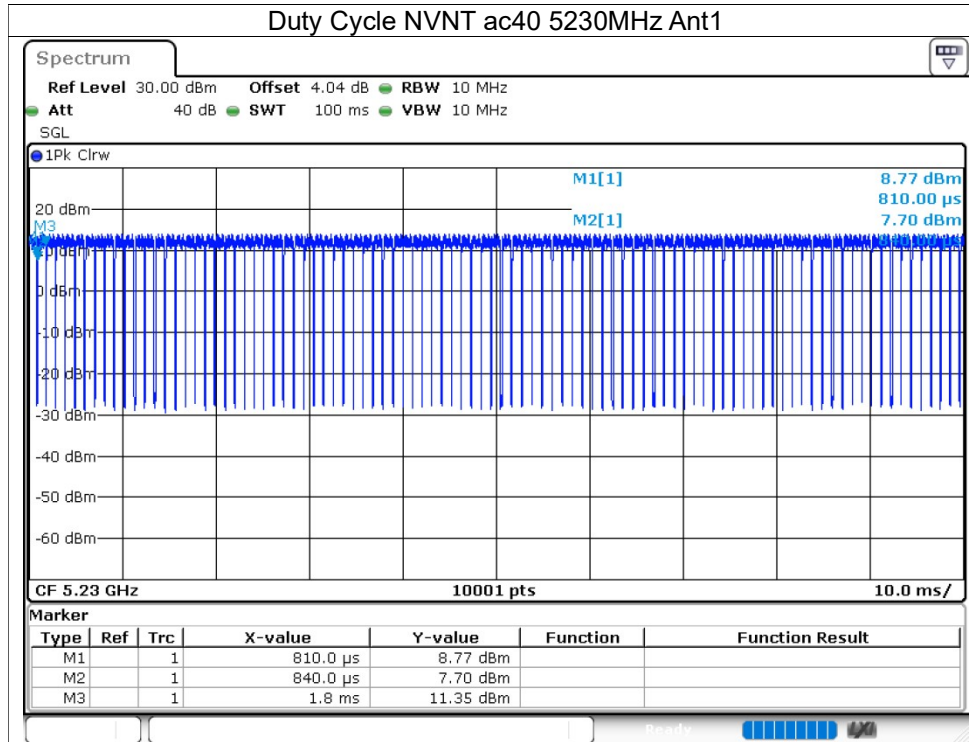

5.1.2 MAXIMUM CONDUCTED OUTPUT POWER

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	10.66	24	Pass
NVNT	a	5200	Ant1	10.7	24	Pass
NVNT	a	5240	Ant1	11.59	24	Pass
NVNT	n20	5180	Ant1	10.18	24	Pass
NVNT	n20	5200	Ant1	10.51	24	Pass
NVNT	n20	5240	Ant1	11.26	24	Pass
NVNT	n40	5190	Ant1	10.65	24	Pass
NVNT	n40	5230	Ant1	11.59	24	Pass
NVNT	ac20	5180	Ant1	9.99	24	Pass
NVNT	ac20	5200	Ant1	10.35	24	Pass
NVNT	ac20	5240	Ant1	11.37	24	Pass
NVNT	ac40	5190	Ant1	10.62	24	Pass
NVNT	ac40	5230	Ant1	11.7	24	Pass
NVNT	ac80	5210	Ant1	11.14	24	Pass

5.1.3 -26DB BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	20.433	Pass
NVNT	a	5200	Ant1	20.061	Pass
NVNT	a	5240	Ant1	21.27	Pass
NVNT	n20	5180	Ant1	20.517	Pass
NVNT	n20	5200	Ant1	21.084	Pass
NVNT	n20	5240	Ant1	20.658	Pass
NVNT	n40	5190	Ant1	41.808	Pass
NVNT	n40	5230	Ant1	42.162	Pass
NVNT	ac20	5180	Ant1	20.79	Pass
NVNT	ac20	5200	Ant1	20.649	Pass
NVNT	ac20	5240	Ant1	21.306	Pass
NVNT	ac40	5190	Ant1	40.962	Pass
NVNT	ac40	5230	Ant1	42.702	Pass
NVNT	ac80	5210	Ant1	81.012	Pass

