

# Rufa 2.4 GHz SMD Antenna

Part No. A5839 / A5887

Product Specification

## 1 Features

- Designed for 2.4 GHz applications: Bluetooth<sup>®</sup>, Wi-Fi<sup>®</sup> (802.11b/g), ZigBee<sup>®</sup>, etc.
- Easy to integrate
- Low profile design for use with no ground beneath the antenna
- High efficiency
- Light weight
- Intended for SMD mounting
- Supplied in tape on reel

## 2 Description

Rufa is intended for use with all 2.4 GHz applications. The antenna uses a ground plane in order to radiate efficiently, but this ground plane must not extend underneath the antenna itself.

The antenna is available in two versions with the feed locations on the right or left hand side of the antenna.

## 3 Applications

- Mobile phones
- PDAs
- PNDs
- Headsets
- PMPs / MP3s
- Laptops
- PC-Cards
- Sensors



Integrated Antenna and RF Solutions

## 4 Part numbers

Rufa Left: A5839



Rufa Right: A5887



## 5 General data

Product name	Rufa 2.4 GHz
Part Number	A5839 (Left) A5887 (Right)
Frequency	2.4 – 2.5 GHz
Polarization	Linear
Operating temperature	-40 °C to +85 °C
Impedance with matching	50 Ω
Weight	0.1 g
Antenna type	SMD
Dimensions	12.8 x 3.9 x 1.1 [mm]


## 6 Electrical characteristics

	Typical performance	Conditions
Peak gain	2.1 dBi	
Average gain	-1.2 dBi	All data measured on Antenova's reference boards, part numbers A5839-U1 and A5887-U1
Average efficiency	75%	
Maximum Return Loss	-11 dB	Data given for the 2.4 – 2.5 GHz frequency range
Maximum VSWR	1.8:1	


Integrated Antenna and RF Solutions

## 7 Electrical performance

### 7-1 Return Loss

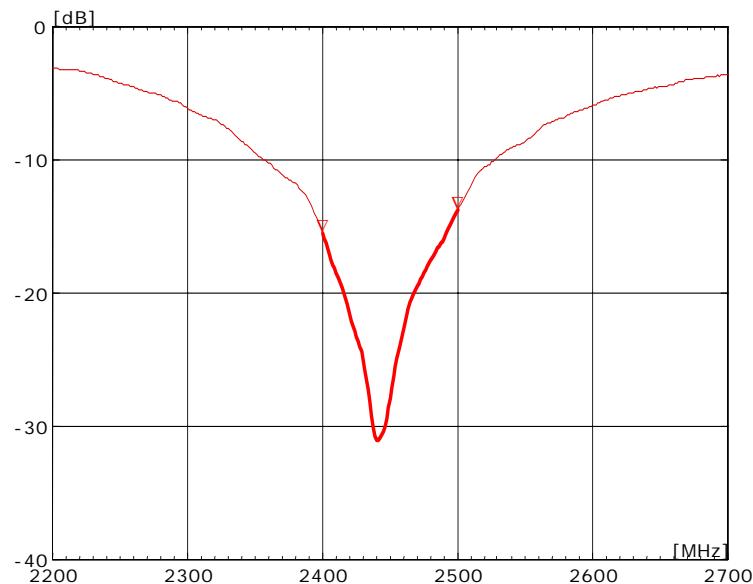


### 7-2 VSWR

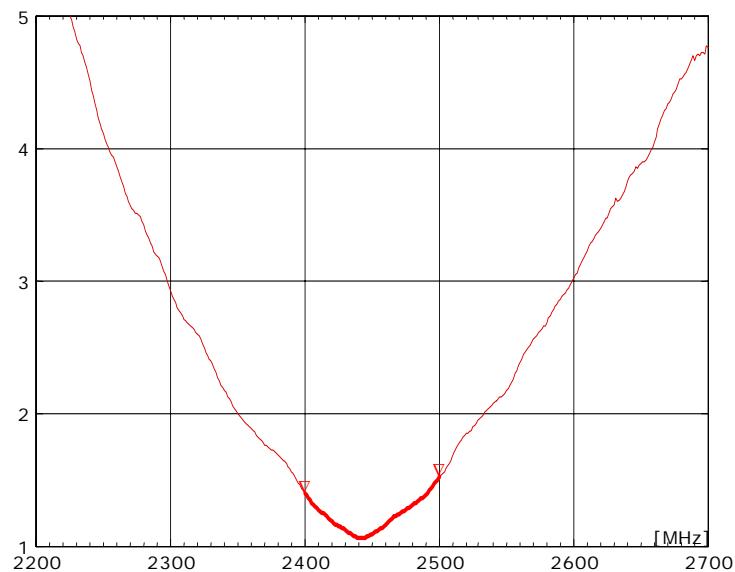

Integrated Antenna and RF Solutions


## 7-3 Antenna patterns

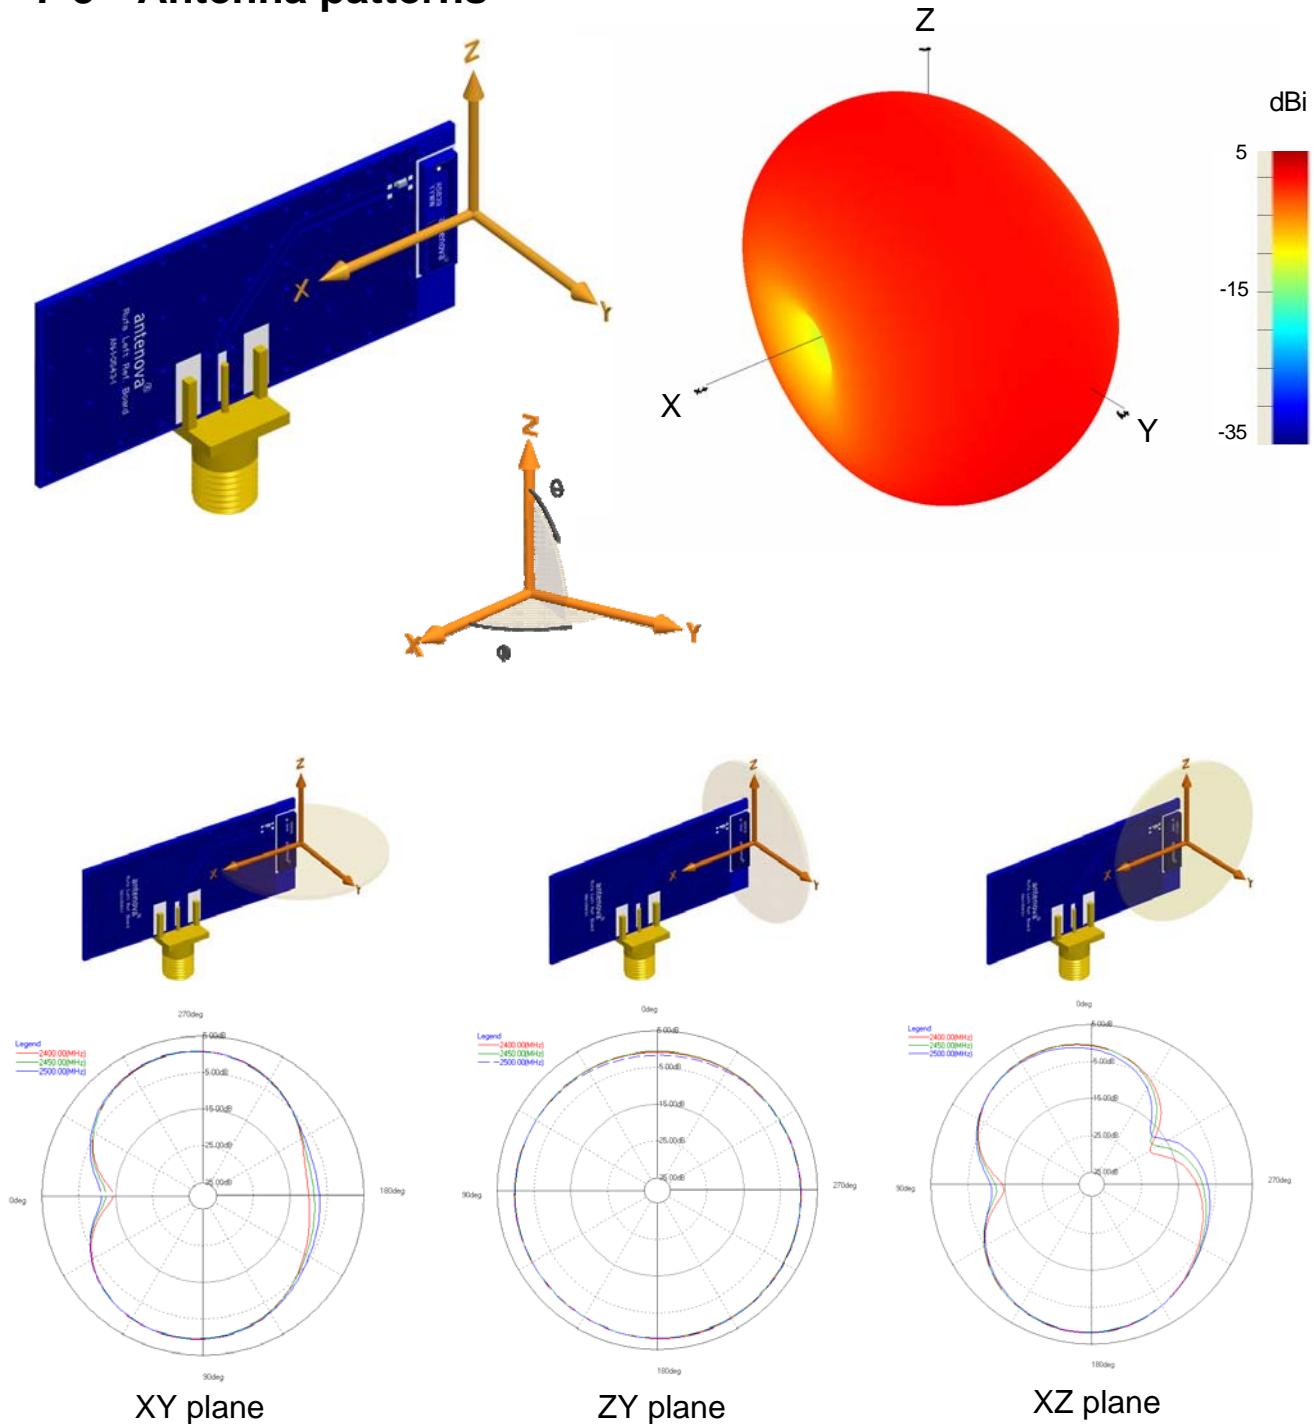

Patterns show combined polarisations  
measured on reference board A5839-U1

Integrated Antenna and RF Solutions


## 8 Antenna dimensions

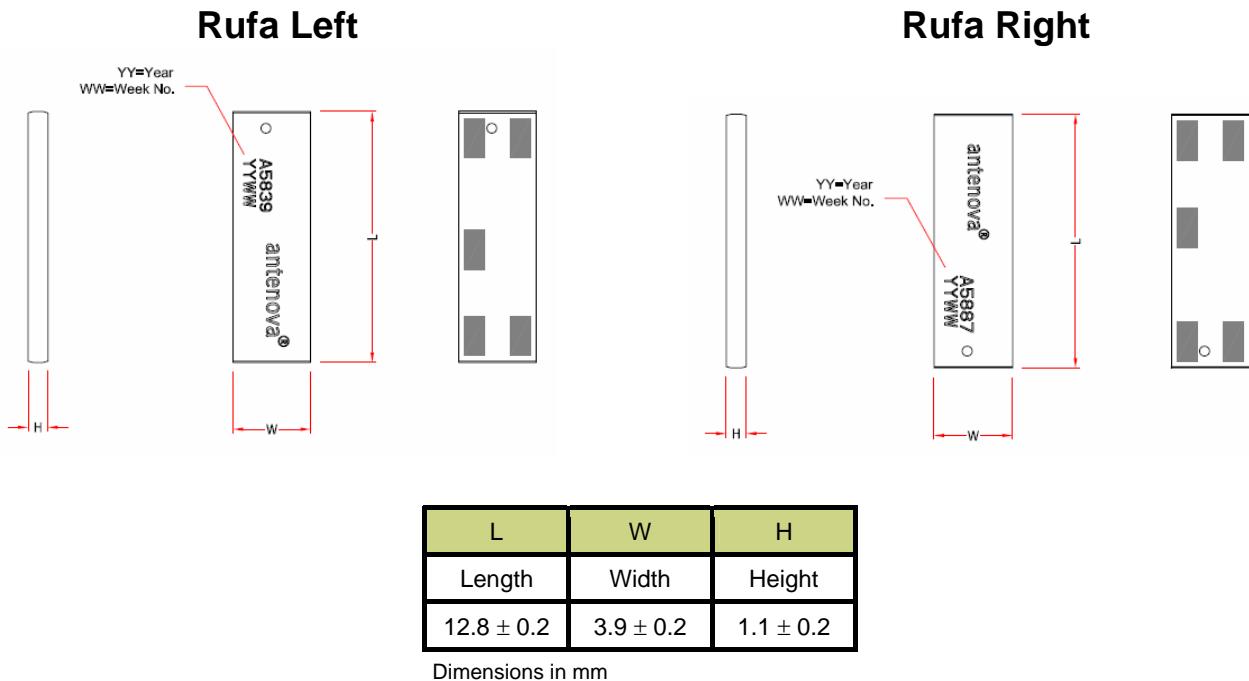

## 9 Antenna footprint


### Rufa Left (Part No: A5839)

\* CAD files of the antenna footprint are available from Antenova on request.

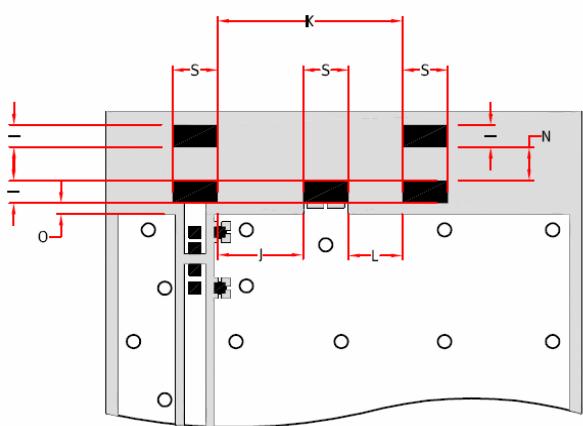

### Rufa Right (Part No: A5887)

\* CAD files of the antenna footprint are available from Antenova on request.

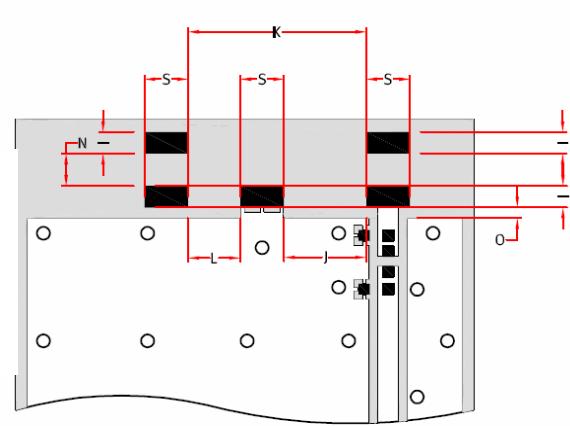

Please contact [info@antenova.com](mailto:info@antenova.com) for further details.

I	S	K	J	N	L	O
$1.0 \pm 0.1$	$2.0 \pm 0.1$	$8.1 \pm 0.1$	$3.7 \pm 0.1$	$1.3 \pm 0.1$	$2.4 \pm 0.1$	$0.5 \pm 0.1$

Dimensions in mm

Integrated Antenna and RF Solutions

## 10 Electrical interface


### 10-1 Transmission lines

- All transmission lines should be designed to have a characteristic impedance of  $50 \Omega$
- The length of the transmission lines should be kept to a minimum
- Any other parts of the RF system like transceivers, power amplifiers, etc, should also be designed to have an impedance of  $50 \Omega$

Once the material for the PCB has been chosen (PCB thickness and dielectric constant), a coplanar transmission line can easily be designed using any of the commercial software packages for transmission line design. For the chosen PCB thickness, copper thickness and substrate dielectric constant, the program will calculate the appropriate transmission line width and gaps on either side of the track so the characteristic impedance of the coplanar transmission line is  $50 \Omega$ .

### 10-2 Matching circuit

The antenna requires a matching circuit that must be optimized for each customer's product. The matching circuit will require up to three components and the following pad layout should be designed into the device so the correct circuit can be installed:

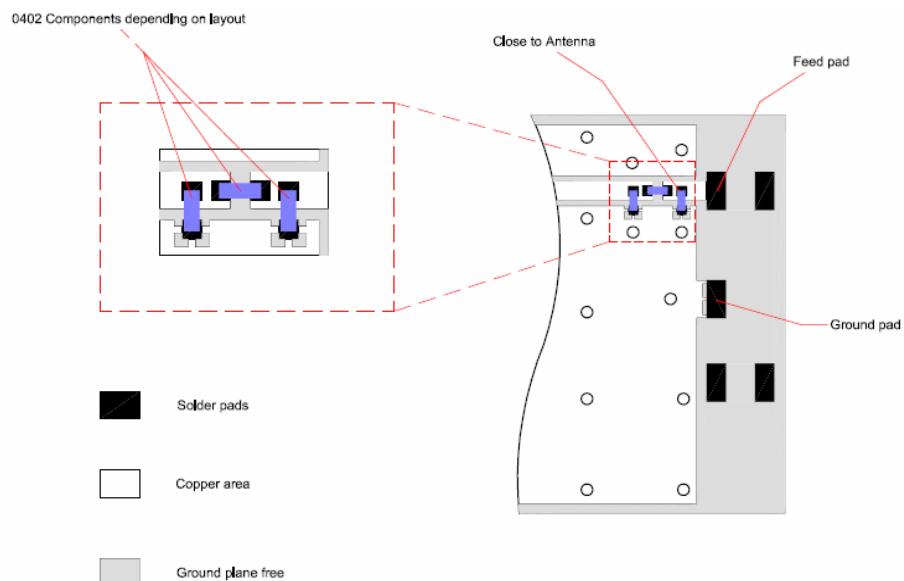

The antenna feed pad and the antenna ground pad are indicated in the drawing above. Additional pads are for mechanical attachment only and should not be grounded.


Integrated Antenna and RF Solutions

In addition to the matching circuit, a separate DC blocking capacitor will also be required between the radio and the antenna matching circuit.

**Note: The component values for the matching circuit will vary depending on the size of the PCB and surrounding components.** The impedance of the antenna should be measured before selecting suitable matching components. Antenova offers this service on request. Contact [info@antenova.com](mailto:info@antenova.com) for further information.

### 10-3 Antenna placement

Antenova strongly recommends placing the antenna near the edge of the board. Maximum antenna performance is achieved by placing the antenna towards one of the corners of the PCB and with the feed point of the antenna as close to same corner of the PCB as possible.

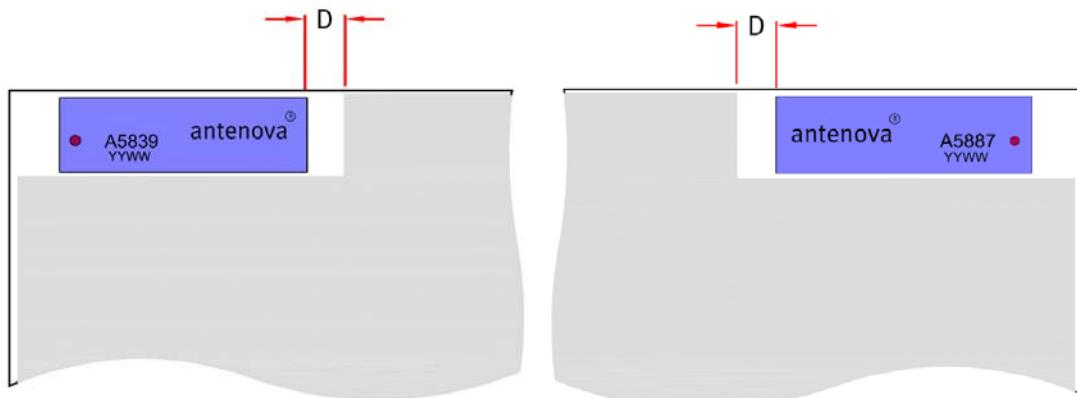


Additional ground and components near the antenna should be at a distance of at least 2 mm. Where possible the antenna should be clear of ground from both sides, although the antenna can work well with a minimum clearance of  $D \geq 2$  mm as shown in the drawing above.


## 10-4 Reference boards

The reference boards have been designed for evaluation purposes of Rufa 2.4 GHz and they include a SMA female connector

**Rufa Left**

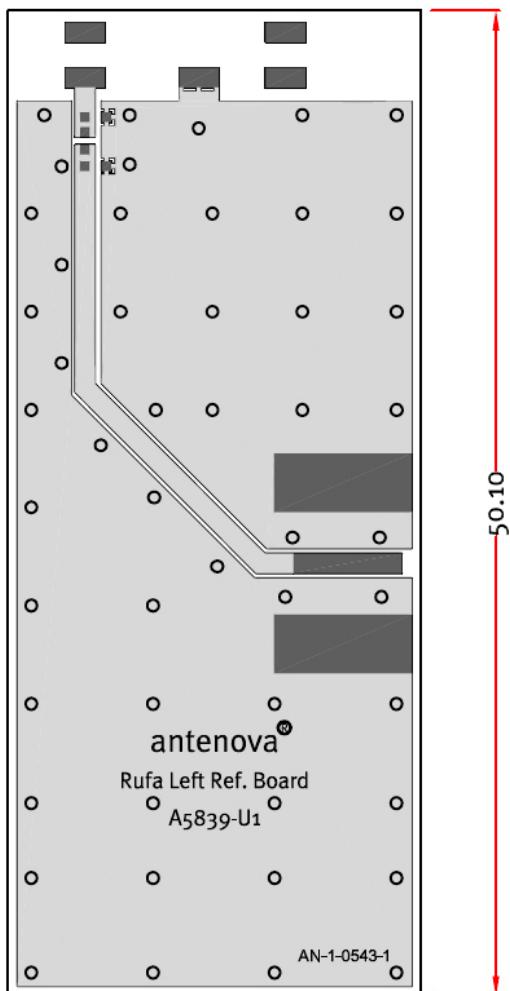

**Rufa Right**

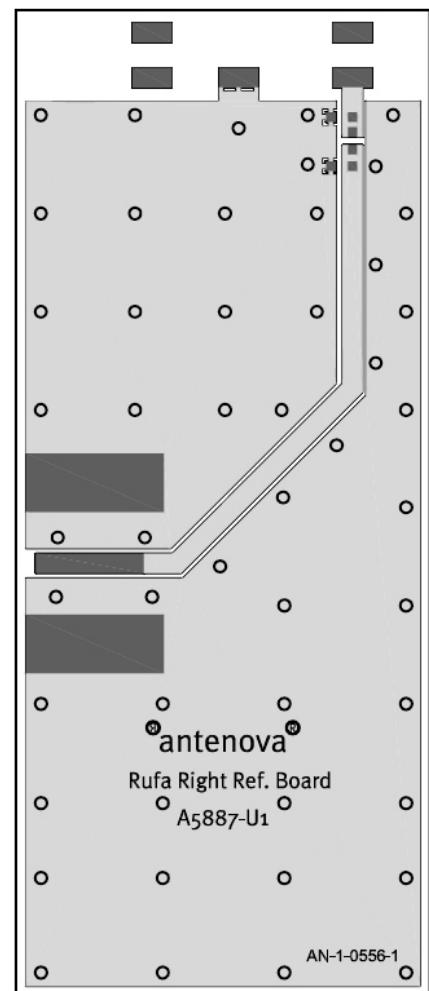

Dimensions in mm

To order a reference board contact [info@antenova.com](mailto:info@antenova.com)


Integrated Antenna and RF Solutions

## 11 Soldering

This antenna is suitable for lead free soldering.

The reflow profile should be adjusted to suit the device, oven and solder paste, while observing the following conditions:

- The maximum temperature should not exceed 240 °C
- However for lead free soldering, a maximum temperature of 255 °C for no more than 20 seconds is permitted.
- The antenna should not be exposed to temperatures exceeding 120 °C more than 3 times during the soldering process.

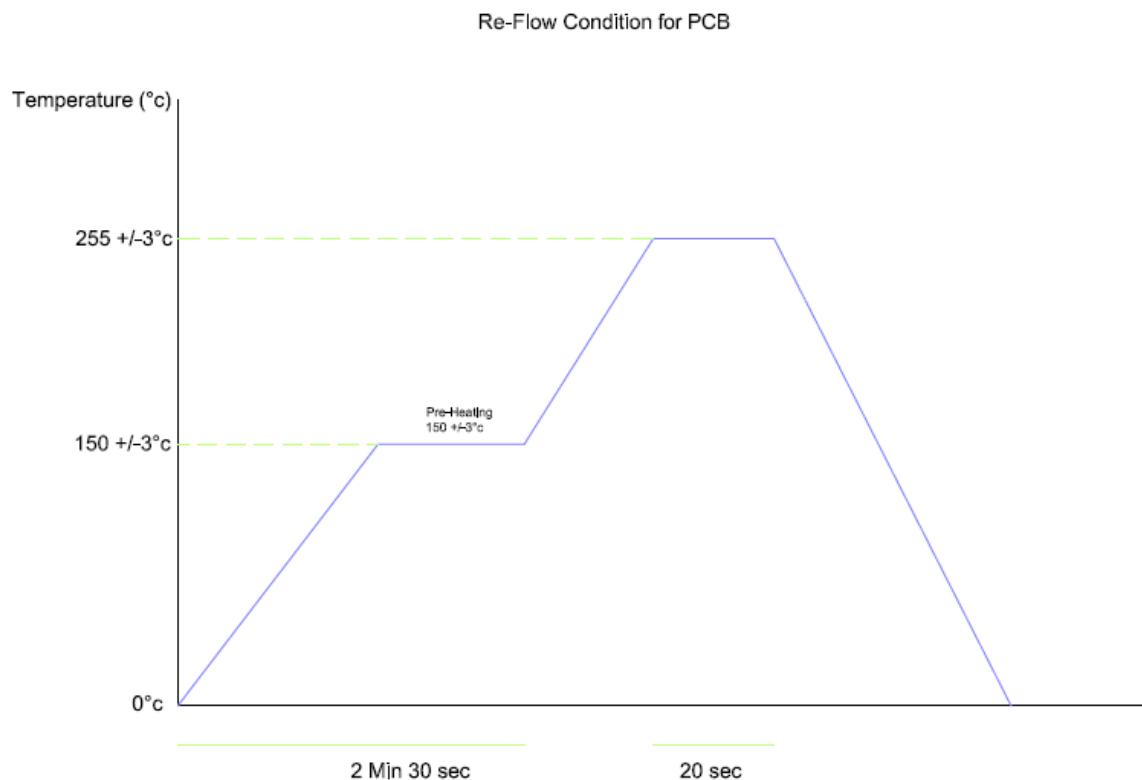

## 12 Hazardous material regulation conformance

The antenna has been tested to conform to RoHS requirements. A certificate of conformance is available from Antenova's website.

Integrated Antenna and RF Solutions

## 13 Packaging


### 13-1 Optimal storage conditions for packaged reels

Temperature	-10°C to 40°C
Humidity	Less than 75% RH
Shelf Life	18 Months
Storage place	Away from corrosive gas and direct sunlight
Packaging	Reels should be stored in unopened sealed manufacturer's plastic packaging.

**Note: Storage of open reels of antennas is not recommended due to possible oxidization of pads on antennas. If short term storage is necessary, then it is highly recommended that the bag containing the antenna reel is re-sealed and stored in like storage conditions as in above table.**

## 13-2 Tape characteristics

**Rufa Left**  
[Part Number: A5839]

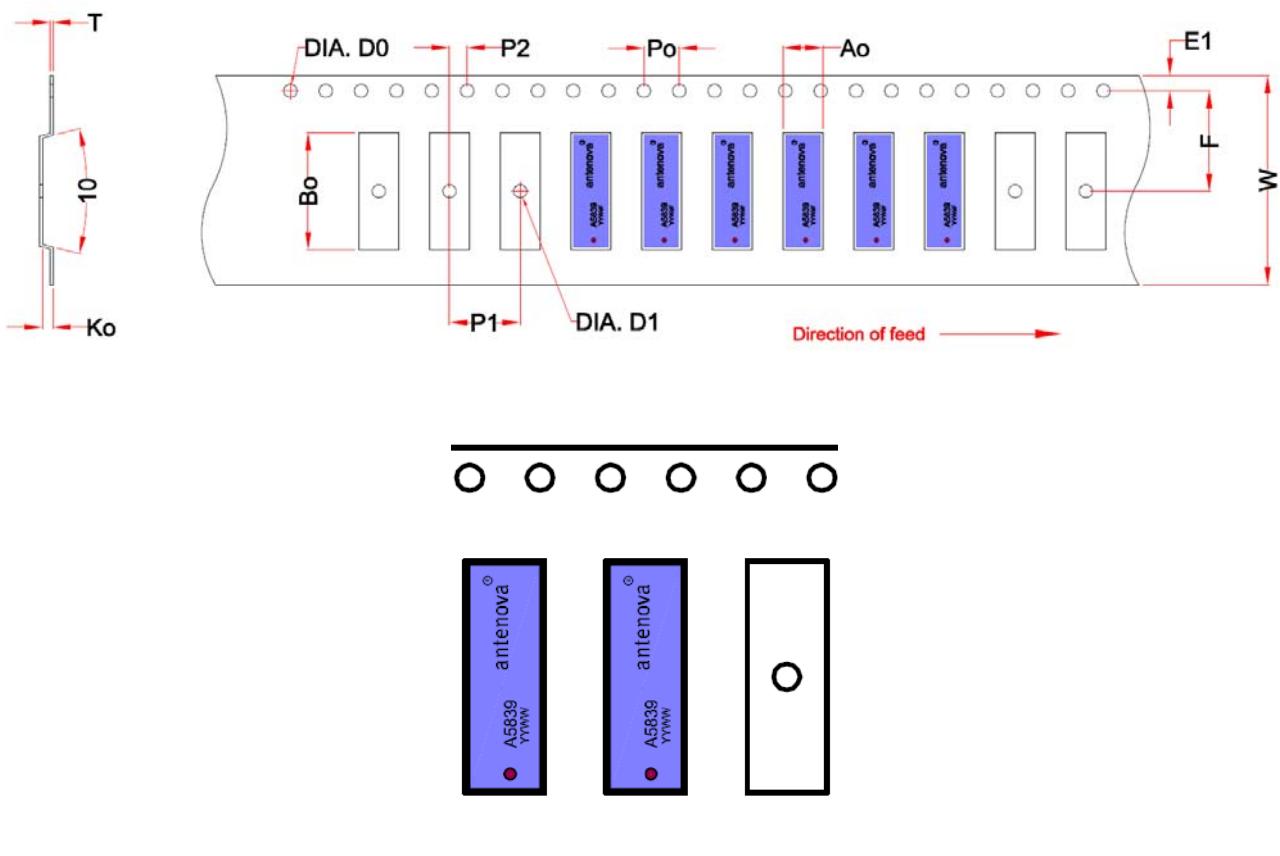


W	F	E1	P0	P1	P2	A0	B0	K0	T	D0	D1
$24 \pm 0.2$	$11.5 \pm 0.1$	$1.75 \pm 0.1$	$4 \pm 0.1$	$8 \pm 0.1$	$2 \pm 0.1$	$4.3 \pm 0.1$	$13.1 \pm 0.1$	$1.4 \pm 0.1$	$0.3 \pm 0.05$	Min 1.5	Min 1.5

Dimensions in mm

Quantity	Leading Space	Trailing Space
1000 pcs / reel	50 blank antenna holders	37 blank antenna holders

Integrated Antenna and RF Solutions

**Rufa Right**  
[Part Number: A5887]

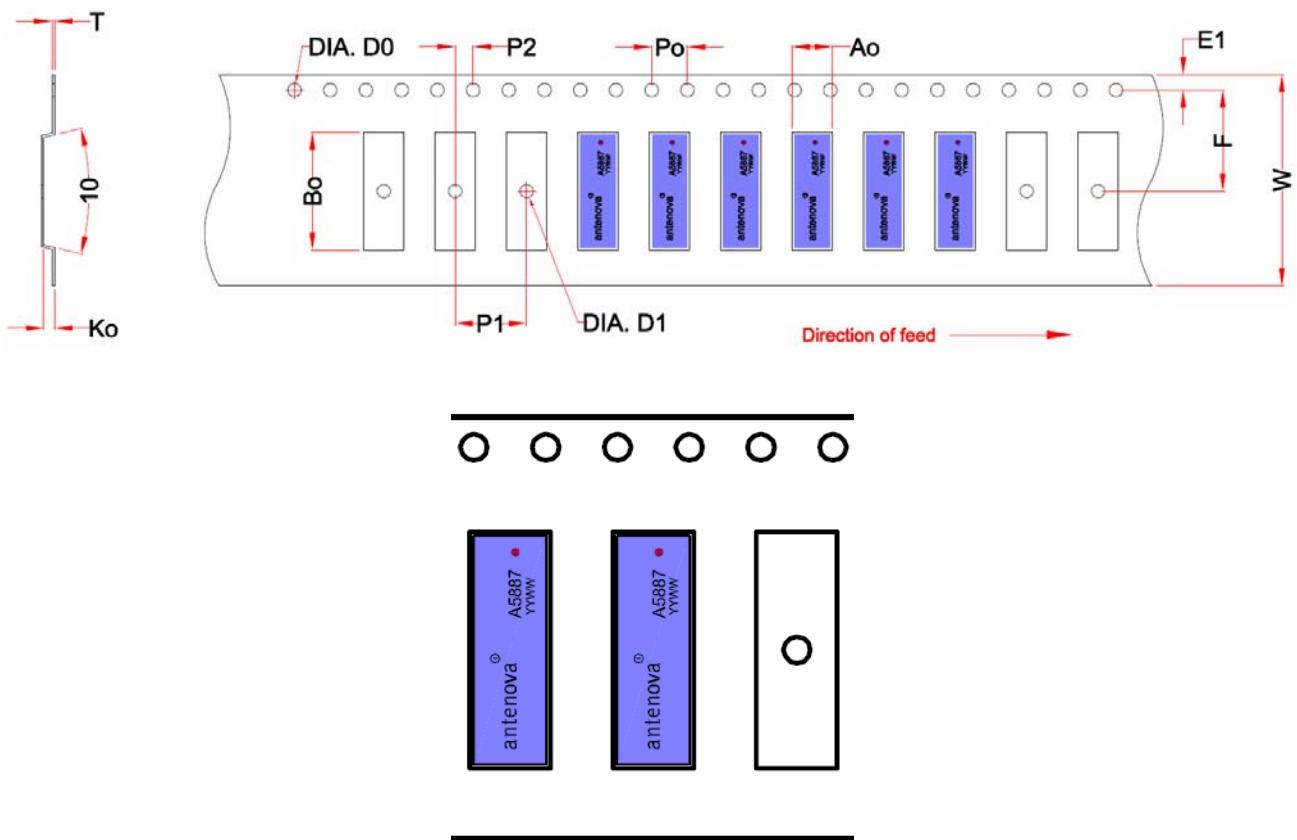


W	F	E1	P0	P1	P2	A0	B0	K0	T	D0	D1
$24 \pm 0.2$	$11.5 \pm 0.1$	$1.75 \pm 0.1$	$4 \pm 0.1$	$8 \pm 0.1$	$2 \pm 0.1$	$4.3 \pm 0.1$	$13.1 \pm 0.1$	$1.4 \pm 0.1$	$0.3 \pm 0.05$	Min 1.5	Min 1.5

Dimensions in mm

Quantity	Leading Space	Trailing Space
1000 pcs / reel	50 blank antenna holders	37 blank antenna holders

Integrated Antenna and RF Solutions

### 13-3 Reel dimensions

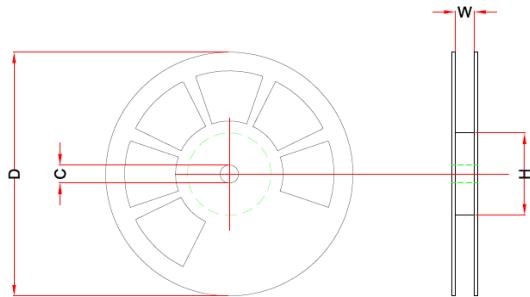

Width (W)	Reel Diameter (D)	Hub Diameter (H)	Shaft Diameter (C)
24 mm	180 mm (7")	60 mm (2")	13 mm

### 13-4 Box dimensions



Width (W)	Breadth (B)	Thickness (H)
203 mm	188 mm	40 mm

### 13-5 Bag properties

Reels are supplied in protective plastic packaging

### 13-6 Reel label information

#### Rufa Left



#### Rufa Right



Dimensions in mm

Integrated Antenna and RF Solutions



[www.antenova.com](http://www.antenova.com)

**Corporate Headquarters**

Antenova Ltd.  
Far Field House  
Albert Road  
Stow-cum-Quy  
Cambridge  
CB25 9AR

Tel: +44 1223 810600  
Fax: +44 1223 810650  
Email: [info@antenova.com](mailto:info@antenova.com)

**North America Headquarters**

Antenova Ltd.  
Rogers Business Park  
2541 Technology Drive Suite 403  
Elgin, IL 60124

Tel: +1 (847) 551 9710  
Fax: +1 (847) 551 9719  
Email: [info@antenova.com](mailto:info@antenova.com)

**Asia Headquarters**

Antenova Asia Ltd.  
4F, No. 324, Sec. 1, Nei-Hu Road  
Nei-Hu District  
Taipei 11493  
Taiwan, ROC

Tel: +886 (0) 2 8797 8630  
Fax: +886 (0) 2 8797 6890  
Email: [info@antenova.com](mailto:info@antenova.com)

**Copyright® 2009 Antenova Ltd.** All Rights Reserved. Antenova® and gigaNOVA® are trademarks of Antenova Ltd. Any other names and/or trademarks belong to their respective companies.

The materials provided herein are believed to be reliable and correct at the time of print. Antenova does not warrant the accuracy or completeness of the information, text, graphics or other items contained within these information. Antenova further assumes no responsibility for the use of this information, and all such information shall be entirely at the user's risk.



Certificate No: 4598

Integrated Antenna and RF Solutions