



## USER GUIDE

**ePMP(802.11ac/ax)**

Release 4.7.1



## **Reservation of Rights**

Cambium reserves the right to make changes to any products described herein to improve reliability, function, or design, and reserves the right to revise this document and to make changes from time to time in content hereof with no obligation to notify any person of revisions or changes. Cambium recommends reviewing the Cambium Networks website for the latest changes and updates to products. Cambium does not assume any liability arising out of the application or use of any product, software, or circuit described herein; neither does it convey license under its patent rights or the rights of others. It is possible that this publication may contain references to, or information about Cambium products (machines and programs), programming, or services that are not announced in your country. Such references or information must not be construed to mean that Cambium intends to announce such Cambium products, programming, or services in your country.

## **Copyrights**

This document, Cambium products, and 3<sup>rd</sup> Party software products described in this document may include or describe copyrighted Cambium and other 3<sup>rd</sup> Party supplied computer programs stored in semiconductor memories or other media. Laws in the United States and other countries preserve for Cambium, its licensors, and other 3<sup>rd</sup> Party supplied software certain exclusive rights for copyrighted material, including the exclusive right to copy, reproduce in any form, distribute and make derivative works of the copyrighted material. Accordingly, any copyrighted material of Cambium, its licensors, or the 3<sup>rd</sup> Party software supplied material contained in the Cambium products described in this document may not be copied, reproduced, reverse engineered, distributed, merged or modified in any manner without the express written permission of Cambium. Furthermore, the purchase of Cambium products shall not be deemed to grant either directly or by implication, estoppel, or otherwise, any license under the copyrights, patents or patent applications of Cambium or other 3<sup>rd</sup> Party supplied software, except for the normal non-exclusive, royalty free license to use that arises by operation of law in the sale of a product.

## **Restrictions**

Software and documentation are copyrighted materials. Making unauthorized copies is prohibited by law. No part of the software or documentation may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, without prior written permission of Cambium.

## **License Agreements**

The software described in this document is the property of Cambium and its licensors. It is furnished by express license agreement only and may be used only in accordance with the terms of such an agreement.

## **High Risk Materials**

Cambium and its supplier(s) specifically disclaim any express or implied warranty of fitness for any high-risk activities or uses of its products including, but not limited to, the operation of nuclear facilities, aircraft navigation or aircraft communication systems, air traffic control, life support, or weapons systems ("High Risk Use").

This product is not restricted in the EU. Any High Risk is unauthorized, is made at your own risk and you shall be responsible for any and all losses, damage or claims arising out of any High-Risk Use.

# Contents

---

<b>Contents</b> .....	<b>3</b>
<b>About This User Guide</b> .....	<b>14</b>
Problems and warranty .....	14
Reporting problems .....	14
Repair and service .....	14
Warranty .....	14
Security advice .....	15
Precautionary statements .....	15
Warning .....	15
Federal Communication Commission Interference Statement .....	15
IC Interference Statement .....	16
Attention .....	17
Note .....	17
Caring for the environment .....	18
In EU countries .....	18
In non-EU countries .....	18
<b>Chapter 1: Product Description</b> .....	<b>19</b>
Overview of ePMP .....	19
Purpose – ePMP portfolio .....	19
ePMP 3000 .....	19
ePMP 3000L .....	21
ePMP MP 3000 MicroPoP .....	22
ePMP 4500C .....	22
ePMP 4500 .....	23
ePMP 4600 .....	24
ePMP 4600L .....	25
ePMP 4500L .....	26
Force 300-25 .....	27

Force 300-19 .....	28
Force 300-19R .....	29
Force 300-16 .....	30
Force 300-13 .....	31
Force 300-13L .....	32
Force 300 CSM .....	33
Force 300 CSML .....	34
Force 425 .....	35
Force 400C .....	36
Force 4600C .....	36
Force 4525 .....	37
Force 4625 .....	37
Typical installation equipment .....	38
Wireless operation .....	39
MU-MIMO .....	39
MIMO .....	39
Smart beamforming (ePMP 2000/3000 series) .....	39
Smart antenna key advantages .....	40
Time-division duplexing .....	40
OFDM and channel bandwidth .....	40
Adaptive modulation .....	41
Radar avoidance .....	41
Encryption .....	41
Country codes .....	41
Further reading on wireless operation .....	42
System management .....	42
Management agent .....	42
Webserver .....	43
SNMP .....	43
Network Time Protocol (NTP) .....	43

Software upgrade .....	44
Further reading on system management .....	44
<b>Chapter 2: System Hardware .....</b>	<b>45</b>
Site planning .....	46
Site installation .....	46
Grounding and lightning protection .....	46
Lightning protection zones .....	48
Electromagnetic compatibility (EMC) compliance .....	49
ePMP 3000 Access Point .....	50
ePMP 3000 Access Point description .....	50
ePMP 3000 Access Point part numbers .....	51
ePMP 3000 Access Point mounting bracket .....	52
ePMP 3000 Access Point interfaces .....	52
ePMP 3000 Access Point specifications .....	53
ePMP 3000 Access Point heater .....	54
ePMP 3000 Access Point wind loading .....	54
ePMP 3000 Access Point software packages .....	55
ePMP 3000L Access Point .....	55
ePMP 3000L Access Point description .....	55
ePMP 3000L Access Point part numbers .....	56
ePMP 3000L Access Point mounting bracket .....	57
ePMP 3000L Access Point interfaces .....	58
ePMP 3000L Access Point specifications .....	58
ePMP 3000L Access Point heater .....	59
ePMP 3000L Access Point wind loading .....	59
ePMP 3000L Access Point software packages .....	60
ePMP MP 3000 MicroPoP .....	61
ePMP MP 3000 MicroPoP integrated description .....	61
ePMP MP 3000 MicroPoP part numbers .....	61
ePMP MP 3000 MicroPoP interfaces .....	63

ePMP MP 3000 MicroPoP specifications .....	63
ePMP MP 3000 MicroPoP heater .....	64
ePMP MP 3000 MicroPoP wind loading .....	64
ePMP MP 3000 MicroPoP software packages .....	65
ePMP 4500C Access Point .....	65
ePMP 4500C Access Point description .....	65
ePMP 4500C Access Point part numbers .....	66
ePMP 4500C Access Point mounting bracket .....	67
ePMP 4500C Access Point interfaces .....	68
ePMP 4500C Access Point specifications .....	68
ePMP 4500C Access Point heater .....	69
ePMP 4500C Access Point wind loading .....	69
ePMP 4500C Access Point software packages .....	70
ePMP 4500 Access Point .....	71
ePMP 4500 Access Point description .....	71
ePMP 4500 Access Point part numbers .....	71
ePMP 4500 Access Point mounting bracket .....	73
ePMP 4500 Access Point interfaces .....	73
ePMP 4500 Access Point specifications .....	74
ePMP 4500 Access Point heater .....	75
ePMP 4500 Access Point wind loading .....	75
ePMP 4500 Access Point software packages .....	76
ePMP 4600 Access Point .....	76
ePMP 4600 Access Point description .....	76
ePMP 4600 Access Point part numbers .....	78
ePMP 4600 Access Point mounting bracket .....	79
ePMP 4600 Access Point interfaces .....	79
ePMP 4600 Access Point specifications .....	80
ePMP 4600 Access Point heater .....	80
ePMP 4600 Access Point wind loading .....	81

ePMP 4600 Access Point software packages .....	82
ePMP 4600L Access Point .....	82
ePMP 4600L Access Point description .....	82
ePMP 4600L Access Point part numbers .....	84
ePMP 4600L Access Point mounting bracket .....	84
ePMP 4600L Access Point interfaces .....	85
ePMP 4600L Access Point specifications .....	85
ePMP 4600L Access Point heater .....	86
ePMP 4600L Access Point wind loading .....	86
ePMP 4600L Access Point software packages .....	87
ePMP 4500L Access Point .....	87
ePMP 4500L Access Point description .....	88
ePMP 4500L Access Point part numbers .....	88
ePMP 4500L Access Point mounting bracket .....	90
ePMP 4500L Access Point interfaces .....	90
ePMP 4500L Access Point specifications .....	90
ePMP 4500L Access Point heater .....	91
ePMP 4500L Access Point wind loading .....	92
ePMP 4500L Access Point software packages .....	92
Force 300-25 .....	93
Force 300-25 integrated description .....	93
Force 300-25 part numbers .....	93
Force 300-25 mounting bracket .....	94
Force 300-25 interfaces .....	95
Force 300-25 specifications .....	95
Force 300-25 heater .....	96
Force 300-25 wind loading .....	96
Force 300-25 software packages .....	97
Force 300-25L .....	97
Force 300-25L integrated description .....	98

Force 300-25L part numbers .....	98
Force 300-25L interfaces .....	100
Force 300-25L specifications .....	100
Force 300-25L heater .....	101
Force 300-25L wind loading .....	101
Force 300-25L software packages .....	102
Force 300-19 .....	102
Force 300-19 integrated description .....	103
Force 300-19 part numbers .....	103
Force 300-19 mounting bracket .....	104
Force 300-19 interfaces .....	104
Force 300-19 specifications .....	105
Force 300-19 heater .....	105
Force 300-19 wind loading .....	106
Force 300-19 software packages .....	107
Force 300-19R .....	107
Force 300-19R integrated description .....	107
Force 300-19R part numbers .....	107
Force 300-19R mounting bracket .....	109
Force 300-19R interfaces .....	109
Force 300-19R specifications .....	110
Force 300-19R heater .....	110
Force 300-19R wind loading .....	111
Force 300-19R software packages .....	111
Force 300-16 .....	112
Force 300-16 integrated description .....	112
Force 300-16 part numbers .....	113
Force 300-16 interfaces .....	114
Force 300-16 specifications .....	114
Force 300-16 heater .....	115

Force 300-16 wind loading .....	115
Force 300-16 software packages .....	116
Force 300-13 .....	116
Force 300-13 integrated description .....	116
Force 300-13 part numbers .....	117
Force 300-13 interfaces .....	118
Force 300-13 specifications .....	118
Force 300-13 heater .....	119
Force 300-13 wind loading .....	119
Force 300-13 software packages .....	120
Force 300-13L .....	120
Force 300-13L integrated description .....	121
Force 300-13L part numbers .....	121
Force 300-13L interfaces .....	122
Force 300-13L specifications .....	123
Force 300-13L wind loading .....	124
Force 300-13L LEDs .....	124
Force 300-13L software packages .....	125
Force 300 CSM .....	125
Force 300 CSM description .....	125
Force 300 CSM part numbers .....	125
Force 300 CSM interfaces .....	127
Force 300 CSM specifications .....	127
Force 300 CSM heater .....	128
Force 300 CSM wind loading .....	128
Force 300 CSM software packages .....	129
Force 300 CSML .....	129
Force 300 CSML description .....	129
Force 300 CSML part numbers .....	130
Force 300 CSML interfaces .....	131

Force 300 CSML mounting bracket .....	131
Force 300 CSML specifications .....	132
Force 300 CSML wind loading .....	132
Force 300 CSML LEDs .....	133
Force 300 CSML software packages .....	133
Force 425 .....	133
Force 425 integrated description .....	134
Force 425 part numbers .....	134
Force 425 mounting bracket with Range Extender .....	136
Force 425 interfaces .....	136
Force 425 specifications .....	136
Force 425 heater .....	137
Force 425 wind loading .....	137
Force 425 software packages .....	138
Force 400C .....	138
Force 400C integrated description .....	138
Force 400C part numbers .....	139
Force 400C interfaces .....	140
Force 400C specifications .....	140
Force 400C heater .....	141
Force 400C wind loading .....	141
Force 400C software packages .....	142
Force 4600C .....	142
Force 4600C integrated description .....	142
Force 4600C part numbers .....	143
Force 4600C interfaces .....	145
Force 4600C specifications .....	145
Force 4600C heater .....	145
Force 4600C wind loading .....	146
Force 4600C software packages .....	147

Force 4525 .....	147
Force 4525 integrated description .....	147
Force 4525 part numbers .....	147
Force 4525 interfaces .....	148
Force 4525 specifications .....	149
Force 4525 heater .....	149
Force 4525 wind loading .....	150
Force 4525 software packages .....	150
Force 4625 .....	151
Force 4625 integrated description .....	151
Force 4625 part numbers .....	152
Force 4625 interfaces .....	153
Force 4625 specifications .....	153
Force 4625 heater .....	153
Force 4625 wind loading .....	154
Force 4625 software packages .....	155
Power supply .....	155
Power supply description .....	155
Power supply part numbers .....	155
Power supply interfaces .....	156
Power supply specifications .....	157
Power supply location considerations .....	157
Ethernet cabling .....	158
Ethernet standards and cable lengths .....	158
Outdoor Cat5e cable .....	158
Surge suppression unit .....	159
Gigabit Ethernet Surge Suppressor .....	160
cnPulse sync generator .....	160
<b>Chapter 3: System Planning .....</b>	<b>162</b>
Radio spectrum planning .....	162

General wireless specifications .....	162
Regulatory limits .....	163
Conforming to the limits .....	164
Available spectrum .....	164
Channel bandwidth .....	164
Electromagnetic compatibility (EMC) compliance .....	164
Compliance with safety standards .....	165
Link planning .....	165
Range and obstacles .....	165
Path loss .....	165
Adaptive modulation .....	166
Data network planning .....	166
Ethernet interfaces .....	166
Management VLAN .....	166
Quality of service for bridged Ethernet traffic .....	166
<b>Chapter 4: Using the Device Management Interface .....</b>	<b>167</b>
Preparing for configuration .....	167
Safety precautions .....	167
Regulatory compliance .....	167
Connecting to the unit .....	167
Configuring the management PC .....	168
Connecting to the PC and powering up .....	168
Using the web interface .....	169
Logging into the web interface .....	169
Using the installation wizard – Access Point .....	170
Step 1: Main system parameters .....	170
Step 2: Radio parameters .....	171
Step 3: Network parameters .....	172
Step 4: Security parameters .....	173
Using the installation wizard – Subscriber Module .....	174

Step 1: Main system parameters .....	174
Step 2: Radio parameters .....	175
Step 3: Network parameters .....	176
Step 4: Security parameters .....	177
Using the menu options .....	178
Status page .....	179
Installation page .....	182
Configuration menu .....	182
Monitor menu .....	218
Tools menu .....	234
<b>Chapter 5: Operation and Troubleshooting .....</b>	<b>246</b>
General Planning for troubleshooting .....	246
Upgrading device software .....	247
Testing the hardware .....	247
Checking the power supply LED .....	247
Power LED is OFF .....	247
Ethernet LED is OFF .....	248
Troubleshooting the radio link .....	249
The module has lost or does not establish radio connectivity .....	249
Module exhibiting frequent boots or disconnects .....	250
Link is unreliable or does not achieve the data rates required .....	250
Resetting ePMP to factory defaults by power cycling .....	250
<b>Glossary .....</b>	<b>252</b>
<b>Cambium Networks .....</b>	<b>254</b>

# About This User Guide

---

This guide describes the planning, installation, configuration, and operation of the Cambium ePMP Series of point-to-multipoint and point-to-point wireless Ethernet systems. It is intended for use by the system designer, system installer, and system administrator.

For radio network design, see:

- [Product Description](#)
- [System Hardware](#)
- [System Planning](#)
- [Legal and Reference Information](#)

For system configuration, monitoring, and fault finding, see:

- [Using the Device Management Interface](#)

## Problems and warranty

### Reporting problems

At Cambium Networks, we know what it takes to keep a growing network running optimally. We provide multiple layers of support including training, online documentation, technical support, information-sharing with an experienced community of users, software downloads, warranty services, and repair.

Through the Cambium Networks Support Center <https://support.cambiumnetworks.com/> you can:

- Submit support requests
- Submit RMA request
- View support global contact numbers

Additional information including field service bulletins, license key information, warranty details, security advisories, Cambium Networks Care program descriptions, regional codes for PTP solutions, and compliance requirements can be viewed at <https://www.cambiumnetworks.com/support/>.

### Repair and service

If unit failure is suspected, obtain details of the Return Material Authorization (RMA) process from the [Cambium Networks support site](#).

### Warranty

For products shipped after October 1<sup>st</sup>, 2018 Cambium Networks' standard hardware warranty is for three (3) years from the date of shipment from Cambium Networks or a Cambium Networks distributor. Cambium Networks warrants that hardware will conform to the relevant published specifications and will be free from material defects in material and workmanship under normal use and service. Cambium Networks shall within this time, at its own option, either repair or replace the defective product within thirty (30) days of receipt of the defective product. Repaired or replaced products will be subject to the original warranty period but not less than thirty (30) days.

To register ePMP products or activate warranties, visit the [Cambium Networks support site](#).

For warranty assistance, contact the reseller or distributor.



#### Attention

Do not open the radio housing for repair or diagnostics; there are no serviceable parts within the housing.

Portions of Cambium equipment may be damaged from exposure to electrostatic discharge. Use precautions to prevent damage.

## Security advice

Cambium Networks' systems and equipment provide security parameters that can be configured by the operator based on their particular operating environment. Cambium Networks recommends setting and using these parameters following industry-recognized security practices. Security aspects to be considered are protecting the confidentiality, integrity, and availability of information and assets. Assets include the ability to communicate, information about the nature of the communications, and information about the parties involved.

In certain instances Cambium Networks make specific recommendations regarding security practices, however, the implementation of these recommendations and final responsibility for the security of the system lies with the operator of the system.

ePMP equipment from Cambium Networks is shipped with the default web management interface login credentials. It is highly recommended that, these usernames and passwords are modified before system installation.

## Precautionary statements

The following describes how precautionary statements are used in this document.

### Warning

Precautionary statements with the Warning tag precede instructions that contain potentially hazardous situations. Warnings are used to alert the reader to possible hazards that could cause loss of life or physical injury. A warning has the following format:



#### Warning

Text and consequence for not following the instructions in the warning.

## Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



#### Caution

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.



#### IMPORTANT NOTE

##### FCC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 211 cm between the radiator and your body.

## IC Interference Statement

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

*Cet appareil contient des émetteurs / récepteurs exempts de licence qui sont conformes au (x) RSS (s) exemptés de licence d'Innovation, Sciences et Développement économique Canada. L'opération est soumise aux deux conditions suivantes:*

*(1) Cet appareil ne doit pas provoquer d'interférences.*

*(2) Cet appareil doit accepter toute interférence, y compris les interférences susceptibles de provoquer un fonctionnement indésirable de l'appareil.*



#### IMPORTANT NOTE

##### IC Radiation Exposure Statement:

This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator and your body.

*Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement et votre corps.*

IC MPE distance: 20 cm



#### Warning

This radio transmitter 109W-0068 has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Le présent émetteur radio (109W-0068) a été approuvé par Innovation, Sciences et Développement économique Canada pour fonctionner avec les types d'antenne énumérés ci-dessous et ayant un gain admissible maximal d'antenne. Les types d'antennes non inclus dans cette liste qui ont un gain supérieur au gain maximal indiqué pour tout type listé sont strictement interdits pour une utilisation avec cet appareil.



#### Warning

Operation on oil platforms, automobiles, trains, maritime vessels and aircraft shall be prohibited.

L'exploitation sur les plates-formes pétrolières, les automobiles, les trains, les navires maritimes et les aéronefs est interdite.



#### Warning

The antenna height shall be determined by the installer or operator of the standard-power access point or fixed client device, or by automatic means. This information shall be stored internally in the device. Provision of accurate device information is mandatory.

La hauteur de l'antenne doit être déterminée par l'installateur ou l'opérateur du point d'accès à puissance standard ou de l'appareil client fixe, ou par des moyens automatiques. Ces informations doivent être stockées en interne dans l'appareil. La fourniture d'informations précises sur l'appareil est obligatoire.

## Attention

Precautionary statements with the Attention tag precede instructions that are used when there is a possibility of damage to systems, software, or individual items of equipment within a system. However, this damage presents no danger to personnel. An attention statement has the following format:



#### Attention

Text and consequence for not following the instructions.

## Note

Precautionary statements with the Note tag indicate the possibility of an undesirable situation or provide additional information to help the reader understand a topic or concept. A note has the following format:

**Note**

Text.

## Caring for the environment

The following information describes national or regional requirements for the disposal of Cambium Networks supplied equipment and for the approved disposal of surplus packaging.

### In EU countries



The following information is provided to enable regulatory compliance with the European Union (EU) directives identified and any amendments made to these directives when using Cambium Networks equipment in the EU countries.

### Disposal of Cambium Networks equipment

European Union (EU) Directive 2002/96/EC Waste Electrical and Electronic Equipment (WEEE).

Do not dispose of Cambium Networks equipment in landfill sites. For disposal instructions, see <https://support.cambiumnetworks.com>

### Disposal of surplus packaging

Do not dispose of surplus packaging in landfill sites. In the EU, it is the individual recipient's responsibility to ensure that packaging materials are collected and recycled according to the requirements of EU environmental law.

### In non-EU countries

In non-EU countries, dispose of Cambium Networks equipment and all surplus packaging in accordance with national and regional regulations.

# Chapter 1: Product Description

---

This chapter provides a high-level description of the ePMP products. It describes the function of the product, the main product variants, and the typical installation. It also describes the main hardware components.

The following topics are described in this chapter:

- The key features, typical uses, product variants, and components of the ePMP are explained in the [Overview of ePMP](#).
- ePMP wireless link is operations, including modulation modes, power control, and security is described under [Wireless operation](#).
- The ePMP management system, including the web interface, installation, configuration, alerts, and upgrades is described in [System management](#).

## Overview of ePMP

This section introduces the key features, typical uses, product variants, and components of the ePMP portfolio as a whole (802.11ac) products.

### Purpose – ePMP portfolio

ePMP Series products from Cambium Networks are designed for Ethernet bridging over Point-to-Multipoint (PMP) and Point-to-Point (PTP) microwave links in the unlicensed 2.4 GHz, 2.5 GHz (Brazil only), 5 GHz, and 6 GHz bands. Users must ensure that the ePMP Series complies with local operating regulations.

ePMP devices support point-to-point microwave links in the unlicensed 5 GHz and 6 GHz bands.

The ePMP Series acts as a transparent bridge between two segments of the operator and customers' networks. In this sense, it can be treated as a virtual wired connection between the Access Point (AP) and the Subscriber Module (SM). The ePMP series forwards 802.3 Ethernet packets destined for the other part of the network and filters packets it does not need to forward and can deliver unicast data to unknown destinations as broadcast, similar to a switch functionality.

### ePMP 3000

ePMP 3000 is a high-capacity outdoor point-to-multipoint or point-to-point link wireless device in the unlicensed 5 GHz frequency bands with a maximum UDP sector throughput of up to 1+ Gbps (when operating with 80 MHz channel bandwidth).

- It is capable of operating in Line-of-Sight (LoS) and near-LoS conditions and supports Quality of Service (QoS) for traffic prioritization.
- It is available as a connectorized unit for use with a separate 4x4 MU-MIMO Sector/Dual-Horn/Omni antenna and optional Smart Antenna (for uplink beam steering).
- ePMP 3000 supports maximum information rate (MIR) further allowing the operator to manage traffic profiles for end customers.

- ePMP 3000 provides Dynamic Frequency Selection (DFS) for North America (FCC) and supports additional DFS tuning balances detection of actual DFS signals vs false detection.
- ePMP 3000 supports backward and forward compatibility with ePMP 802.11n devices to provide an immediate sector upgrade to 802.11ac Wave 2 performance, and also to support future upgrades of networks operating ePMP 1000/2000 APs.
- ePMP 3000 is based on highly integrated wireless semiconductor components designed to meet the IEEE 802.11ac standard, however, the ePMP 3000 device has a proprietary air interface for the main point-to-multipoint or point-to-point link.
- ePMP 3000 is powered by standard power-over-Ethernet to a 1000BASE-T port.
- Management of the unit is conducted via the same interface as the bridged traffic (in-band Management).

ePMP 3000 is shown in [Figure 1](#).



[Figure 1: ePMP 3000](#)

A summary of the main ePMP 3000 characteristics is listed under [Table 1](#).

**Table 1: Main characteristics of the ePMP 3000 Series**

Characteristic	Value
Topology	PMP or PTP
Wireless link condition	LoS, near LoS
Scheduler	TDD
Connectivity	Ethernet

Characteristic	Value
Operating frequencies	Unlicensed bands, 5 GHz
Channel Bandwidth	10 MHz*, 20 MHz, 40 MHz, 80 MHz
Data rate	Up to 1+ Gbps Sector Throughput

\* The 10 MHz Channel Bandwidth is supported only with the [Force 300-19R SM](#).

## ePMP 3000L

ePMP 3000L is the third-generation Access Point (AP) that carries on the interference tolerance mechanisms with an emphasis on high-performance in low-density point to multipoint sectors. The ePMP 3000L is a 2x 2 MIMO connectorized AP that can support a wide variety of deployments including 90/120-degree sectors, narrow-sector horns, or even 360-degree Omni coverage.

Also, the ePMP 3000L continues interference mitigation techniques with the support of TDD synchronization using GPS and the robust software from the ePMP product line. The ePMP 3000L system consists of the ePMP 3000L AP, an optional 2x2 sector antenna, and a wide variety of subscriber modules with varying form factors and link budgets.

ePMP 3000 supports backward and forward compatibility with ePMP 802.11n devices to provide an immediate sector upgrade to 802.11ac Wave 2 performance, and also to support future upgrades of networks operating ePMP 1000/2000 APs.

The ePMP 3000L system boasts a high packet per second performance, peak throughput of 600 Mbps, and supports subscriber modules with up to 600 Mbps of peak throughput.

ePMP 3000L is shown in [Figure 2](#)



[Figure 2: ePMP 3000L](#)

A summary of the main ePMP 3000L characteristics are listed under [Table 2](#).

Table 2: Main characteristics of the ePMP 3000L Series

Characteristic	Value
Topology	PMP or PTP
Wireless link condition	LoS, near LoS
Scheduler	TDD
Connectivity	Ethernet
Operating frequencies	Unlicensed bands, 5 GHz
Channel Bandwidth	20 MHz, 40 MHz, 80 MHz
Data rate	Up to 1+ Gbps Sector Throughput

## ePMP MP 3000 MicroPoP

ePMP MP 3000 MicroPoP is an integrated AP designed to serve short-range, low-density applications. It uses 802.11ac 2x2 architecture and can interoperate with a Force 300 subscriber module.

ePMP MP 3000 is shown in [Figure 3](#).



[Figure 3: ePMP MP 3000 MicroPoP](#)

## ePMP 4500C

ePMP 4500C is the third-generation Access Point (AP) that carries on the interference tolerance mechanisms with an emphasis on high-performance in low-density point to multipoint sectors. The ePMP 4500C is a 8 X 8 MU-MIMO connectorized AP that can support a wide variety of deployments including 90/120-degree sectors, narrow-sector horns, or even 360-degree Omni coverage.

The ePMP 4500C system consists of the ePMP 4500C AP, an optional 2x2 sector antenna, and a wide variety of subscriber modules with varying form factors and link budgets.

The ePMP 4500C system boasts a high packet per second performance, peak throughput of 3 Gbps, and supports subscriber modules with up to 3 Gbps of peak throughput.

ePMP 4500C is shown in [Figure 4](#)



Figure 4: ePMP 4500C

A summary of the main ePMP 4500C characteristics are listed under [Table 3](#).

Table 3: Main characteristics of the ePMP 4500C Series

Characteristic	Value
Topology	PMP or PTP
Wireless link condition	LoS, near LoS
Scheduler	WLR, TDD
Connectivity	Ethernet
Operating frequencies	Unlicensed bands, 5 GHz
Channel Bandwidth	20 MHz, 40 MHz, 80 MHz
Data rate	3 Gbps

## ePMP 4500

ePMP 4500 is the third-generation Access Point (AP) that carries on the interference tolerance mechanisms with an emphasis on high-performance in low-density point to multipoint sectors. The ePMP 4500 is a 2x 2 MIMO connectorized AP that can support a wide variety of deployments including 90/120-degree sectors, narrow-sector horns, or even 360-degree Omni coverage.

The ePMP 4500 system consists of the ePMP 4500 AP, an optional 2x2 sector antenna, and a wide variety of subscriber modules with varying form factors and link budgets.

The ePMP 4500 system boasts a high packet per second performance, peak throughput of 3 Gbps, and supports subscriber modules with up to 3 Gbps of peak throughput.

ePMP 4500 is shown in [Figure 5](#)



Figure 5: ePMP 4500

A summary of the main ePMP 4500 characteristics are listed under [Table 4](#).

Table 4: Main characteristics of the ePMP 4500 Series

Characteristic	Value
Topology	PMP or PTP
Wireless link condition	LoS, near LoS
Scheduler	WLR, TDD
Connectivity	Ethernet
Operating frequencies	Unlicensed bands, 5 GHz
Channel Bandwidth	20 MHz, 40 MHz, 80 MHz
Data rate	3 Gbps

## ePMP 4600

ePMP 4600 is the third-generation Access Point (AP) that carries on the interference tolerance mechanisms with an emphasis on high-performance in low-density point to multipoint sectors. The ePMP 4600 is a 4 x 4 MIMO connectorized AP that can support a wide variety of deployments including 90/120-degree sectors, narrow-sector horns, or even 360-degree omni coverage.

The ePMP 4600 system consists of the ePMP 4600 AP, an optional 4x4 sector antenna, and a wide variety of subscriber modules with varying form factors and link budgets.

The ePMP 4600 system boasts a high packet per second performance, peak throughput of 4.3 Gbps, and supports subscriber modules with up to 4.3 Gbps of peak throughput.

ePMP 4600 is shown in [Figure 6](#)



**Figure 6:** ePMP 4600

A summary of the main ePMP 4600 characteristics are listed under [Table 5](#).

**Table 5: Main characteristics of the ePMP 4600 Series**

Characteristic	Value
Topology	PTP
Wireless link condition	LoS, near LoS
Scheduler	WLR, TDD
Connectivity	Ethernet
Operating frequencies	Unlicensed bands, 6 GHz
Channel Bandwidth	20 MHz, 40 MHz, 80 MHz, 160 MHz
Data rate	Up to 4.3 Gbps Sector Throughput

## ePMP 4600L

ePMP 4600L is the third-generation Access Point (AP) that carries on the interference tolerance mechanisms with an emphasis on high-performance in low-density point to multipoint sectors. The ePMP 4600L is a 4 x 4 MIMO connectorized AP that can support a wide variety of deployments including 90/120-degree sectors, narrow-sector horns, or even 360-degree omni coverage.

The ePMP 4600L system consists of the ePMP 4600L AP, an optional 4x4 sector antenna, and a wide variety of subscriber modules with varying form factors and link budgets.

The ePMP 4600L system boasts a high packet per second performance, peak throughput of 4.3 Gbps, and supports subscriber modules with up to 4.3 Gbps of peak throughput.

ePMP 4600L is shown in [Figure 7](#)



Figure 7: ePMP 4600L

A summary of the main ePMP 4600L characteristics are listed under [Table 6](#).

Table 6: Main characteristics of the ePMP 4600L Series

Characteristic	Value
Topology	PTP
Wireless link condition	LoS, near LoS
Scheduler	WLR, TDD
Connectivity	Ethernet
Operating frequencies	Unlicensed bands, 6 GHz
Channel Bandwidth	20 MHz, 40 MHz, 80 MHz, 160 MHz
Data rate	Up to 4.3 Gbps Sector Throughput

## ePMP 4500L

ePMP 4500L is the third-generation Access Point (AP) that carries on the interference tolerance mechanisms with an emphasis on high-performance in low-density point to multipoint sectors. The ePMP 4500L is a 2 x 2 MIMO connectorized AP that can support a wide variety of deployments including 90/120-degree sectors, narrow-sector horns, or even 360-degree Omni coverage.

The ePMP 4500L system consists of the ePMP 4500L AP, an optional 2x2 sector antenna, and a wide variety of subscriber modules with varying form factors and link budgets.

The ePMP 4500L system boasts a high packet per second performance, peak throughput of 1 Gbps, and supports subscriber modules with up to 1 Gbps of peak throughput.

ePMP 4500L is shown in [Figure 8](#)



Figure 8: ePMP 4500L

A summary of the main ePMP 4500L characteristics are listed under [Table 7](#).

Table 7: Main characteristics of the ePMP 4500L Series

Characteristic	Value
Topology	PMP or PTP
Wireless link condition	LoS, near LoS
Scheduler	WLR, TDD
Connectivity	Ethernet
Operating frequencies	Unlicensed bands, 5 GHz
Channel Bandwidth	20 MHz, 40 MHz, 80 MHz
Data rate	1 Gbps

## Force 300-25

Force 300-25 is a high-capacity outdoor Point-to-Multipoint or Point-to-Point link wireless device in the unlicensed 5 GHz frequency bands with a maximum UDP throughput of 500+ Mbps (when operating with 80 MHz channel bandwidth). It is capable of operating in line-of-sight (LoS) and near-LoS conditions. Force 300-25 is available as an integrated unit with a dual-polarized 25 dBi narrow Beamwidth dish antenna.

Force 300-25 is based on highly integrated wireless semiconductor components designed to meet the IEEE 802.11ac standard, however, the Force 300-25 device has a proprietary air interface for the main point-to-point link.

Force 300-25 is powered by standard power-over-Ethernet to a 1000BASE-T port.

Management of the unit is conducted via the same interface as the bridged traffic (in-band Management).

Force 300-25 is shown in [Figure 9](#)



**Figure 9: Force 300-25**

A summary of the main Force 300-25 characteristics are listed under [Table 8](#).

**Table 8: Main characteristics of the Force 300-25 Series**

Characteristic	Value
Topology	PMP, PTP
Wireless link condition	LoS, near LoS
Scheduler	TDD
Connectivity	Ethernet
Operating frequencies	Unlicensed bands, 5 GHz
Channel Bandwidth	20 MHz, 40 MHz, 80 MHz
Data rate	Up to 500+ Mbps

## Force 300-19

Force 300-19 is a high-capacity outdoor Point-to-Multipoint or Point-to-Point link wireless devices in the unlicensed 5 GHz frequency bands with a maximum UDP throughput of 500+ Mbps (when operating with 80 MHz channel bandwidth). The Force 300-19 is IP55 rated capable of operating in line-of-sight (LoS) and near-LoS conditions.

Management of the unit is conducted through the same interface as the bridged traffic (in-band Management).

Force 300-19 is shown in [Figure 10](#).



Figure 10: Force 300-19

A summary of the main Force 300-19 characteristics are listed under [Table 9](#).



**Note**

This product meets the UL/cUL 62368 / IEC 62368 edition 2 specification, and the radio housings are designed to be rain-tight.

Table 9: Main characteristics of the Force 300-19

Characteristic	Value
Topology	PMP, PTP
Wireless link condition	LoS, near LoS
Scheduler	TDD
Connectivity	Ethernet
Operating frequencies	Unlicensed bands, 5 GHz
Channel Bandwidth	20 MHz, 40 MHz, 80 MHz
Data rate	Up to 500+ Mbps

## Force 300-19R

Force 300-19R is a high-capacity outdoor Point-to-Multipoint or Point-to-Point link wireless device in the unlicensed 5 GHz frequency bands with a maximum UDP throughput of 600+ Mbps (when operating with 80 MHz channel bandwidth). The Force 300-19R is IP67 rated capable of operating in line-of-sight (LoS) and near-LoS conditions. Force 300-19R is available as an integrated unit with a dual-polarized 19dBi integrated flat-panel antenna.

Force 300-19R is based on highly integrated wireless semiconductor components designed to meet the IEEE 802.11ac standard, however, the Force 300-19R device has a proprietary air interface for the main point-to-point link.

Force 300-19R is powered by standard power-over-Ethernet to a 1000BASE-T port.

Management of the unit is conducted through the same interface as the bridged traffic (in-band Management).

Force 300-19R is shown in [Figure 11](#)



Figure 11: Force 300-19R

A summary of the main Force 300-19R characteristics is listed under Table 10.



**Note**

This product meets the UL/cUL 62368 / IEC 62368 edition 2 specification, and the radio housings are designed to be rain-tight.

Table 10: Main characteristics of the Force 300-19R

Characteristic	Value
Topology	PMP, PTP
Wireless link condition	LoS, near LoS
Scheduler	TDD
Connectivity	Ethernet
Operating frequencies	Unlicensed bands, 5 GHz
Channel Bandwidth	10/20/40/80 MHz
Data rate	Up to 500+ Mbps
Environmental	IP67 <div data-bbox="554 1488 620 1573" data-label="Image"> </div> <div data-bbox="693 1488 758 1520" data-label="Section-Header"> <p><b>Note</b></p> </div> <div data-bbox="693 1537 1428 1634" data-label="Text"> <p>This product meets the UL/cUL 62368 / IEC 62368 edition 2 specification, and the radio housings are designed to be rain-tight.</p> </div>
Temperature	-30°C to +60°C (-22°F to 140°F)

## Force 300-16

Force 300-16 is a high-capacity outdoor Point-to-Multipoint or Point-to-Point link wireless device in the unlicensed 5 GHz frequency bands with a maximum UDP throughput of 500+ Mbps (when operating with 80 MHz channel bandwidth). It is capable of operating in line-of-sight (LoS) and near-LoS conditions.

Force 300-16 is available as an integrated unit with a dual-polarized 16 dBi integrated antenna.

Force 300-16 is based on highly integrated wireless semiconductor components designed to meet the IEEE 802.11ac standard, however, the Force 300-16 device has a proprietary air interface for the main point-to-point link.

Force 300-16 is powered by standard power-over-Ethernet to a 1000BASE-T port.

Management of the unit is conducted through the same interface as the bridged traffic (in-band Management). Force 300-16 is shown in [Figure 12](#).



[Figure 12: Force 300-16](#)

A summary of the main Force 300-16 characteristics is listed under [Table 11](#).

[Table 11: Main characteristics of the Force 300-16](#)

Characteristic	Value
Topology	PMP, PTP
Wireless link condition	LoS, near LoS
Scheduler	TDD
Connectivity	Ethernet
Operating frequencies	Unlicensed bands, 5 GHz
Channel Bandwidth	20 MHz, 40 MHz, 80 MHz
Data rate	Up to 500+ Mbps

## [Force 300-13](#)

Force 300-13 is a high-capacity outdoor Point-to-Multipoint or Point-to-Point link wireless device in the unlicensed 5 GHz frequency bands with a maximum UDP throughput of 500+ Mbps (when operating with 80 MHz channel bandwidth). It can operate in line-of-sight (LoS). Force 300-13 is available as an integrated unit with a dual-polarized 13 dBi flat-panel antenna.

Force 300-13 is based on highly integrated wireless semiconductor components designed to meet the IEEE 802.11ac standard, however, the Force 300-13 device has a proprietary air interface for the main point-to-point link.

Force 300-13 is powered by standard power-over-Ethernet to a 1000BASE-T port.

Management of the unit is conducted through the same interface as the bridged traffic (in-band Management). Force 300-13 is shown in [Figure 13](#)



[Figure 13: Force 300-13](#)

A summary of the main Force 300-13 characteristics are listed under [Table 12](#).

[Table 12: Main characteristics of the Force 300-13](#)

Characteristic	Value
Topology	PMP, PTP
Wireless link condition	LoS
Scheduler	TDD
Connectivity	Ethernet
Operating frequencies	Unlicensed bands, 5 GHz
Channel Bandwidth	20 MHz, 40 MHz, 80 MHz
Data rate	Up to 500+ Mbps

## Force 300-13L

Force 300-13L is an affordable Subscriber Module (SM) in the ePMP Force 300 series. The Force 300-13L uses 802.11ac technology and supports MU-MIMO and other features offered by the ePMP 3000 and ePMP 3000L APs. It is also backward compatible with the ePMP 2000 using backward compatibility features. The Force 300-13L is powered by standard power-over-Ethernet to a 1000BASE-T port. Force 300-13L is shown in [Figure 14](#)



**Figure 14:** Force 300-13L



**Note**

The ePMP Force 300-13L is available in EMEA, CALA, and APAC regions where type approved. It is NOT available in North America.

A summary of the main Force 300-13L characteristics is listed under [Table 13](#).

**Table 13:** Main characteristics of the Force 300-13L

Characteristic	Value
Topology	PMP, PTP
Wireless link condition	LoS
Scheduler	TDD
Connectivity	Ethernet
Operating frequencies	Unlicensed bands, 5 GHz
Channel Bandwidth	20 MHz, 40 MHz, 80 MHz
Data rate	Up to 400+ Mbps

## Force 300 CSM

Force 300 CSM is an IP67 high-capacity outdoor Point-to-Multipoint or Point-to-Point link wireless device in the unlicensed 5 GHz frequency bands with a maximum UDP throughput of 600+ Mbps (when operating with 80 MHz channel bandwidth). It can operate in line-of-sight (LoS). Force 300 CMS is a Connectorized device with support for RF Element Twistport™ adaptors.

The Force 300 CSM device is based on highly integrated wireless semiconductor components designed to meet the IEEE 802.11ac standard.

Management of the unit is conducted via the same interface as the bridged traffic (in-band Management). Force 300 CSM is shown in [Figure 15](#).



**Figure 15:** Force 300 CSM

A summary of the main Force 300 CSM characteristics are listed under [Table 14](#).



**Note**

This product meets the UL/cUL 62368 / IEC 62368 edition 2 specification, and the radio housings are designed to be raintight.

**Table 14:** Main characteristics of the Force 300 CSM

Characteristic	Value
Topology	PMP, PTP
Wireless link condition	LoS
Scheduler	TDD
Connectivity	Ethernet
Operating frequencies	Unlicensed bands, 5 GHz
Channel Bandwidth	20 MHz, 40 MHz, 80 MHz
Data rate	Up to 600+ Mbps

## Force 300 CSML

Force 300CSML is an affordable subscriber module in the ePMP Force 300 series. The Force 300 CSML uses 802.11ac technology and supports MU-MIMO and other features offered by the ePMP 3000 and ePMP 3000L APs. It is also backward compatible with the ePMP 2000 using backward compatibility features. The Force 300 CSML is powered by standard power-over-Ethernet to a 1000BASE-T port.

Force 300 CSML is shown in [Figure 16](#).



Figure 16: Force 300 CSML



**Note**

The ePMP Force 300 CSML is available in EMEA, CALA, and APAC regions where type approved. It is not available in North America.

A summary of the main Force 300 CSML characteristics is listed under [Table 15](#).

Table 15: Main characteristics of the Force 300 CSML

Characteristic	Value
Topology	PMP, PTP
Wireless link condition	LoS
Scheduler	TDD
Connectivity	Ethernet
Operating frequencies	Unlicensed bands, 5 GHz
Channel Bandwidth	20 MHz, 40 MHz, 80 MHz
Data rate	Up to 400+ Mbps

## Force 425

Force 425 is a self-contained transceiver unit that houses both radio and networking electronics.

Force 425 is shown in [Figure 17](#).



[Figure 17: Force 425 integrated](#)

## Force 400C

Force 400C is a self-contained transceiver unit that houses both radio and networking electronics.

Force 400C is shown in [Figure 18](#).



[Figure 18: Force 400C integrated](#)

## Force 4600C

Force 4600C is a self-contained transceiver unit that houses both radio and networking electronics. The Force 4600C uses 802.11ax technology and supports MU-MIMO. It is powered by standard power-over-Ethernet to a 1000BASE-T port.

Force 4600C is shown in [Figure 19](#).



Figure 19: Force 4600C integrated

## Force 4525

Force 4525 is a self-contained transceiver unit that houses both radio and networking electronics. The Force 4525 uses 802.11ac technology and supports MU-MIMO. The Force 4525 is powered by standard power-over-Ethernet to a 1000BASE-T port.

Force 4525 is shown in Figure 20.



Figure 20: Force 4525 integrated

## Force 4625

Force 4625 device is a self-contained transceiver unit that houses both radio and networking electronics. The Force 4625 uses 802.11ax technology and supports MU-MIMO. It is powered by standard power-over-Ethernet to a 1000BASE-T port.

Force 4625 is shown in Figure 21.



Figure 21: Force 4625 integrated

## Typical installation equipment

The ePMP is a solution consisting of integrated outdoor units, indoor power supply units / LAN injectors, cabling, and surge suppression equipment.

The following are the main hardware components of an ePMP installation:

- **ePMP 3000 Access Point:** A connectorized outdoor transceiver unit containing all the radio, networking, and surge suppression electronics.
- **ePMP 3000L Access Point:** A connectorized \*IP67 outdoor transceiver unit containing all the radio, networking, and surge suppression electronics.
- **ePMP 3000/3000L Access Point Power Supply:** An indoor power supply module providing Power-over-Ethernet (PoE) supply and 1000 / 100 Base-TX to the AP.
- **ePMP 3000/3000L Access Point Radio Cabling and Lightning Protection:** Shielded Cat5e cables, grounding cables, surge suppressors, and connectors.
- **ePMP Smart Antenna and cabling (optional):** For Smart Beamforming, dynamically creates a narrow, targeted beam to each subscriber
- **Force 300-25/Force 300-19/Force 300-19R/Force 300-16/Force 300-13/Force 300 CSM Radio:** Integrated outdoor transceiver units containing all the radio, networking, and surge suppression electronics.
- **Force 300-25/Force 300-19/Force 300-19R/Force 300-16/Force 300-13/Force 300 CSM Power Supply:** An indoor power supply module providing Power-over-Ethernet (PoE) supply and 100/1000 BASE-T to the Force 300-25 device.
- **Force 300-25/Force 300-19/Force 300-19R/Force 300-16/Force 300-13/Force 300 CSM Radio Cabling and Lightning Protection:** Shielded Cat5e cables, grounding cables, surge suppressors, and connectors.

- **ePMP 4x4 MU-MIMO Sector Antenna/ePMP 4x4 MU-MIMO Dual-Horn Antenna/ePMP 4x4 MU-MIMO Omni Antenna:** External Antennas for the ePMP 3000 AP.

For more information about these components, including interfaces, specifications, and Cambium part numbers, see [Chapter 2: System Hardware](#).



#### Note

This product meets the UL/cUL 62368 / IEC 62368 edition 2 specification, and the radio housings are designed to be rain-tight.

## Wireless operation

This section describes ePMP wireless link operating methods, modulation modes, power control, and security.

### MU-MIMO

The ePMP 3000 MU-MIMO AP is equipped either with a sector antenna array or a pseudo-omni antenna. Antenna diversity allows simultaneous DL transmissions for two subscriber modules for MU-MIMO. As such, the ePMP 3000 AP's DL throughput capacity is significantly increased versus the ePMP 1000/2000 APs.

This is a contrast to a traditional wireless system, where two subscribers cannot communicate on the same channel to the same AP at the same time without causing significant self-interference and degrading the overall wireless network performance.

### MIMO

The Multiple-Input Multiple-Output (MIMO) technique protects against the fading and increases the probability of a received decoded signal being usable.

### Smart beamforming (ePMP 2000/3000 series)

ePMP series APs feature Smart Beamforming is powered by Hypure™ technology. This powerful addition to your network creates narrow, targeted beams to each subscriber, rather than relying on a traditional wide beam, blocking out multiple sources of interference to keep performance high.

The System learns the locations of each served Subscriber Module and forms a narrow beam towards the desired Subscriber Module while that radio is transmitting in the uplink. This reduces the gain on the uplink for on-channel interferers that are transmitting at an azimuth angle different than the Subscriber Module, delivering performance gains never seen before.



Figure 22: Smart beamforming

## Smart antenna key advantages

The following are the key advantages of smart antenna:

- **Eliminate Uplink Interference:** Smart Beamforming delivers dramatic performance improvements when dealing with strong co-channel uplink interference, maximizing network performance.
- **Consistent Performance in High Interference:** By mitigating significant sources of interference, packet loss and retransmissions are kept to a minimum, keeping your network applications working at their best.
- **Improvement in Uplink and Downlink Performance:** By eliminating packet loss and retransmissions resulting from co-channel uplink interference, TCP retransmissions are greatly reduced. Other applications also show significant performance benefits.
- **Intelligent Filtering improves both receive and transmit performance:** It protects the network from off-channel interferences with a filter that dynamically moves around the channel. On the transmit side, it protects the RF environment by reducing off-channel transmission noise.

## Time-division duplexing

### TDD cycle

ePMP links operate using Time Division Duplexing (TDD). The links employ a TDD cycle in which the AP determines the Subscriber Modules to transmit and the time based on the configured downlink/uplink ratio (duty cycle). Three fixed Downlink/Uplink frame ratios are available – 75/25, 50/50, and 30/70.

### OFDM and channel bandwidth

ePMP 3000 transmits using Orthogonal Frequency Division Multiplexing (OFDM). This wideband signal consists of many equally spaced sub-carriers. Although each subcarrier is modulated at a low rate using conventional modulation schemes, the resultant data rate from all the sub-carriers is high.

The channel bandwidth of the OFDM signal is 20 MHz, 40 MHz, or 80 MHz, based on operator configuration.

Each channel is offset in center frequency from its neighboring channel by 5 MHz.

## Adaptive modulation

ePMP 3000 can transmit a data over the wireless link using several different modulation modes ranging from 256-QAM to QPSK. For a given channel bandwidth and TDD frame structure, each modulation mode transmits data at a fixed rate. Also, the receiver requires a given signal-to-noise ratio to successfully demodulate a given modulation mode. Although the more complex modulations such as 256-QAM transmits data at a more higher rate than the less complex modulation modes, the receiver requires a much higher signal-to-noise ratio.

ePMP 3000 provides an adaptive modulation scheme where the receiver constantly monitors the quality of the received signal and notifies the far end of the link of the optimum modulation mode with which to transmit. In this way, optimum capacity is achieved at all times.

## Radar avoidance

In regions where the protection of radars is a part of the local regulations, ePMP must detect interference from radar-like systems and avoid co-channel operation with these systems.

To meet this requirement, ePMP implements the following features:

- The equipment can only transmits on available channels, of which there are none at initial power-up. The radar detection algorithm always scan a usable channel for 60 seconds for radar interference before making the channel an available channel.
- This compulsory channel scan means that there is at least 60 seconds service outage every time radar is detected, and that the installation time is extended by at least 60 seconds even if there is no radar on the channel.

There is a secondary requirement for bands requiring radar avoidance. Regulators have mandated that products provide a uniform loading of the spectrum across all devices. In general, this prevents operation with fixed frequency allocations as follows:

- ETSI regulations allow frequency planning of networks (as that has the same effect of spreading the load across the spectrum).
- The FCC allows the channels to be avoided if there is actual interference on them.



### Note

When operating in a region that requires DFS, ensure that the AP is configured with alternate frequencies and the SM is configured to scan for these frequencies to avoid long outages.

## Encryption

ePMP supports optional encryption for data transmitted over the wireless link. The encryption algorithm used is the Advanced Encryption Standard (AES) with a 128-bit key size. AES is a symmetric encryption algorithm approved by U.S. Government organizations (and others) to protect sensitive information.

## Country codes

Some aspects of the wireless operation are controlled, enforced, or restricted according to a country code. ePMP country codes represent individual countries (for example Denmark) or regulatory regions (for example FCC or ETSI).

Country codes affect the following aspects of wireless operation:

- Maximum transmit power
- Radar avoidance (upcoming release)
- Frequency range



#### Attention

To avoid possible enforcement action by the country regulator, always operate links in accordance with the local regulations.

## Further reading on wireless operation

For information on planning wireless operation, see:

- The regulatory restrictions that affect radio spectrum usages, such as frequency range and radar avoidance are described in [Radio spectrum planning](#).
- The factors to be taken into account when planning links such as range, path loss, and data throughput are described in [Link planning](#).
- The safety specifications against which the ePMP is tested are listed under [Compliance with safety standards](#). It also describes how to keep RF exposure within safe limits.
- ePMP complies with the radio regulations that are enforced in various countries are explained in [Compliance with radio regulations](#).

For more information on configuring and operating the wireless link, see:

- The configuration parameters of the ePMP devices are described in [Using the menu options](#).
- Post-installation procedures and troubleshooting tips are explained in [Operation and Troubleshooting](#).

## System management

This section describes the ePMP management system, including the web interfaces, installation, alerts, upgrades, configuration, and management software.

### Management agent

ePMP equipment is managed through an embedded management agent. Management workstations, network management systems, or PCs can be connected to this agent using the module's Ethernet port, SFP port, over the air (Subscriber Module connection through AP), or by using the device Wi-Fi management interface.

The management agent supports the following interfaces:

- Hypertext Transfer Protocol (HTTP)
- Hypertext Transfer Protocol Secure (HTTPs)
- Simple Network Management Protocol (SNMP)
- Network Time Protocol (NTP)
- System logging (Syslog)

- cnMaestro™ Cloud-based or On-premises Management System
- Dynamic Host Configuration Protocol (DHCP)

## Webserver

The ePMP management agent contains a web server. The web server supports access through the HTTP and HTTPS interfaces.

Web-based management offers a convenient way to manage the ePMP equipment from a locally connected computer or from a network management workstation connected through a management network, without requiring any special management software. The web-based interfaces are the only interfaces supported for the installation of ePMP, and the majority of ePMP configuration management tasks.

## Identity-based user accounts

When identity-based user accounts are configured, a security officer can define from one to four user accounts, each of which may have one of the four possible roles:

- ADMINISTRATOR (default username/password is **admin**), who has full read and write permission.
- INSTALLER (default username/password is **installer**), who has permission to read and write parameters applicable to unit installation and monitoring.
- HOME (default username/password is **home**), who has permission only to access pertinent information for support purposes.
- READONLY (default username/password is **readonly**), who has permission to only view the Monitor page.

## SNMP

The management agent supports fault and performance management utilizing an SNMP interface. The management agent is compatible with SNMP v2c using one Management Information Base (MIB) file which is available for download from the Cambium Networks support site:

<https://support.cambiumnetworks.com/files/epmp>.

## Network Time Protocol (NTP)

The clock supplies accurate date and time information to the system. It can be set to run with or without a connection to a network time server (NTP). It can be configured to display local time by setting the time zone and daylight saving on the Time web page.

If an NTP server connection is available, the clock can be set to synchronize with the server time at regular intervals.

ePMP devices may receive NTP data from a CMM module or an NTP server configured in the system's management network.

The Time Zone option is configurable on the **Configure > System** page and may be used to offset the received NTP time to match the operator's local time zone.

## Software upgrade

Software upgrades may be issued through the radio web interface (**Tools > Software Upgrade**) or cnMaestro ([cloud.cambiumnetworks.com](http://cloud.cambiumnetworks.com)). For software upgrades, visit: <https://support.cambiumnetworks.com/files/epmp>.

## Further reading on system management

For more information on system management, refer to [Operation and Troubleshooting](#) section.

# Chapter 2: System Hardware

---

This chapter describes the site planning and hardware components of an ePMP link.

The following topics are described in this chapter:

- Factors to be considered when planning the proposed network is described under [Site planning](#).
- The ePMP 3000 Access Point hardware, part numbers, mounting equipment, and specifications are described in [ePMP 3000 Access Point](#).
- The ePMP 3000L Access Point hardware, part numbers, mounting equipment, and specifications are described in [ePMP 3000L Access Point](#).
- The ePMP MP3000 MicroPoP Access Point hardware, part numbers, mounting equipment, and specifications are described in [ePMP MP3000 MicroPoP Access Point](#).
- The ePMP 4500C Access Point hardware, part numbers, mounting equipment, and specifications are described in [ePMP 4500C Access Point](#).
- The ePMP 4500 Access Point hardware, part numbers, mounting equipment, and specifications are described in [ePMP 4500 Access Point](#).
- The ePMP 4600 Access Point hardware, part numbers, mounting equipment, and specifications are described in [ePMP 4600 Access Point](#).
- The ePMP 4600L Access Point hardware, part numbers, mounting equipment, and specifications are described in [ePMP 4600L Access Point](#).
- The ePMP 4500L Access Point hardware, part numbers, mounting equipment, and specifications are described in [ePMP 4500L Access Point](#).
- The Force 300-25 module hardware, part numbers, mounting equipment, and specifications are described in [Force 300-25](#).
- The Force 300-25L module hardware, part numbers, mounting equipment, and specifications are described in [Force 300-25L](#).
- The Force 300-19 module hardware, part numbers, mounting equipment, and specifications are described in [Force 300-19](#).
- The Force 300-19R module hardware, part numbers, mounting equipment, and specifications are described in [Force 300-19R](#).
- The Force 300-16 module hardware, part numbers, mounting equipment, and specifications are described in [Force 300-16](#).
- The Force 300-13 module hardware, part numbers, mounting equipment, and specifications are described in [Force 300-13](#).
- The Force 300-13L module hardware, part numbers, mounting equipment, and specifications are described in [Force 300-13L](#).

- The Force 300 CSM module hardware, part numbers, mounting equipment, and specifications are described in [Force 300 CSM](#) .
- The Force 300 CSML module hardware, part numbers, mounting equipment, and specifications are described in [Force 300 CSML](#) .
- The Force 425 module hardware, integrated description, part numbers, mounting equipment, and specifications are described in [Force 425](#) .
- The Force 400C module hardware, integrated description, part numbers, mounting equipment, and specifications are described in [Force 400C](#) .
- The Force 4600C module hardware, integrated description, part numbers, mounting equipment, and specifications are described in [Force 4600C](#) .
- The Force 4525 module hardware, integrated description, part numbers, mounting equipment, and specifications are described in [Force 4525](#) .
- The Force 4625 module hardware, integrated description, part numbers, mounting equipment, and specifications are described in [Force 4625](#) .
- The power supply hardware, part numbers, and specifications are described in [Power supply](#) .
- Cable standards and lengths are described in [Ethernet cabling](#) .
- Surge suppression requirements and recommendations are described in [Surge suppression unit](#) .
- GPS synchronization generation information are described in [cnPulse sync generator](#) .

## Site planning

Conduct a site survey to ensure that the proposed sites meet the requirements defined in this section.

## Site installation

An ePMP site typically consists of a high supporting structure such as a mast, tower, or building for the devices.

Find a location for the device that meets the following requirements:

- The equipment is high enough to achieve the best radio path.
- People can be kept a safe distance away from the equipment when it is radiating. .
- The equipment is lower than the top of the supporting structure (tower, mast, or building) or its lightning air terminal.
- There is one Ethernet interface, a copper Cat5e connection from the device to the power supply, and network terminating equipment.

## Grounding and lightning protection

Structures, equipment, and people must be protected against power surges (typically caused by lightning) by conducting the surge current to the ground through a separate preferential solid path. The

actual degree of protection required depends on local conditions and applicable local regulations. To adequately protect an ePMP installation, both ground bonding and transient voltage surge suppression are required.



### Warning

Electro-magnetic discharge (lightning) damage is not covered under warranty. The recommendations in this guide, when followed correctly, give the user the best protection from the harmful effects of EMD. However, 100 percent protection is neither implied nor possible.

Details of lightning protection methods and requirements can be found in the international standards IEC 61024-1 and IEC 61312-1, the U.S. National Electric Code ANSI/NFPA No. 70-1984, or section 54 of the Canadian Electric Code.



### Note

International and national standards take precedence over the requirements in this guide.

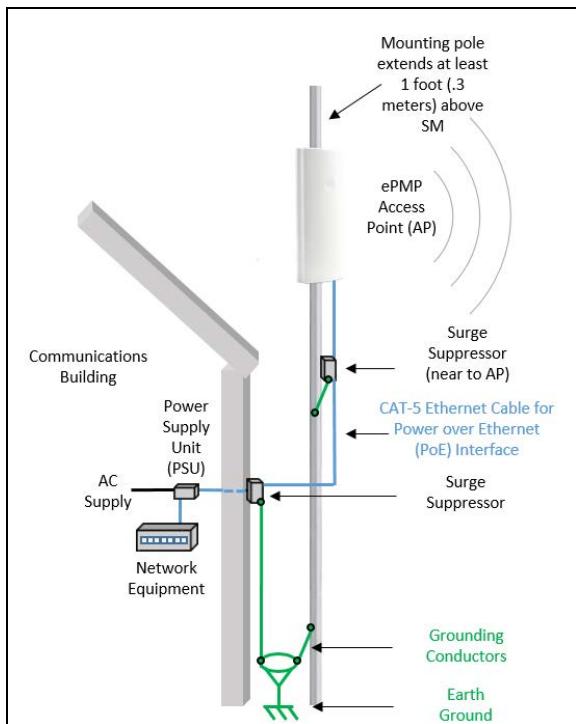


Figure 23: Access Point installation diagram

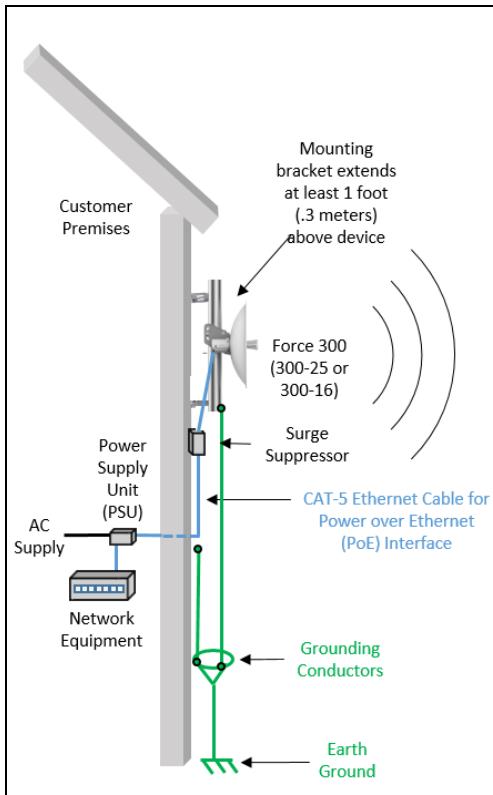


Figure 24: *Subscriber / Point-to-Point* installation diagram

## Lightning protection zones

Use the rolling sphere method as shown in [Figure 25](#) to determine where it is safe to mount the equipment. An imaginary sphere, typically 50 meters in radius, is rolled over the structure. Where the sphere rests against the ground and a strike termination device (such as a finial or ground bar), all the space under the sphere is considered to be in the zone of protection (Zone B). Similarly, where the sphere rests on two finials, the space under the sphere is considered to be in the zone of protection.

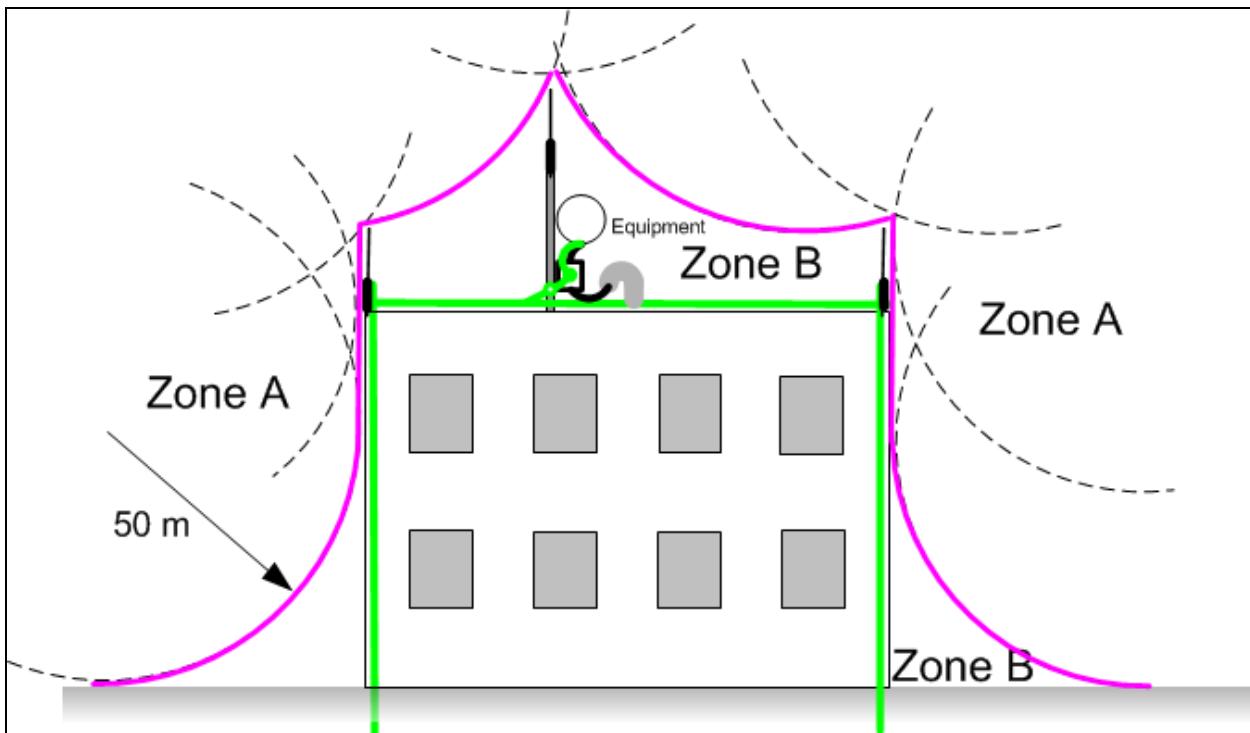


Figure 25: Rolling sphere method to determine the lightning protection zones

Assess locations on masts, towers, and buildings to determine if the location is in Zone A or Zone B:

- **Zone A:** In this zone a direct lightning strike is possible. Do not mount the equipment in this zone.
- **Zone B:** In this zone, direct EMD (lightning) effects are still possible, but mounting the equipment in this zone significantly reduces the possibility of a direct strike. Mount the equipment in this zone.



**Warning**

Do not mount the equipment in Zone A. Mounting the equipment in Zone A poses risk to the equipment, structures, and human lives.

## Electromagnetic compatibility (EMC) compliance

The ePMP complies with European EMC Specification EN301 489-1 with testing carried out to the detailed requirements of EN301 489-4.

The EMC specification type approvals that is granted for ePMP are listed under [Table 16](#).

Table 16: EMC emissions compliance

Region	Specification (Type Approvals)
USA	FCC CFR 47 Part 15 class B
Canada	RSS210, Issue 8
	RSS247, Issue 1 (May 2015)
Europe	ETSI EN301 489-4

# ePMP 3000 Access Point

For details of the ePMP 3000 Access Point hardware, see:

- [ePMP 3000 Access Point description](#)
- [ePMP 3000 Access Point part numbers](#)
- [ePMP 3000 Access Point mounting bracket](#)
- [ePMP 3000 Access Point interfaces](#)
- [ePMP 3000 Access Point specifications](#)
- [ePMP 3000 Access Point heater](#)
- [ePMP 3000 Access Point wind loading](#)
- [ePMP 3000 Access Point software packages](#)

## ePMP 3000 Access Point description

ePMP 3000 AP is a self-contained transceiver unit that contains both radio and networking electronics.

It is available as a connectorized unit for use with a separate 4x4 MU-MIMO Sector/Dual-Horn/Omni antenna and an optional Smart Antenna (for uplink beam steering). ePMP 3000 is shown in [Figure 26](#). The MPE distance is 105 cm.



*Figure 26: ePMP 3000 Access Point*



### IMPORTANT NOTE

#### FCC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 211 cm between the radiator and your body.



### IMPORTANT NOTE

#### IC Radiation Exposure Statement:

This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator and your body.

*Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement et votre corps.*

## ePMP 3000 Access Point part numbers

Select the correct regional variant to adhere to the local licensing restrictions.

Each of the parts listed in [Table 17](#) and [Table 18](#) includes the following items:

- One connectorized unit
- One power supply 1000/100 BASE-TX LAN injector
- One line cord

Table 17: ePMP 3000 Access Point part numbers

Cambium description	Cambium part number
ePMP 3000 5 GHz Access Point Radio (FCC) (US cord)	C058910A102A
ePMP 3000 5 GHz Access Point Radio (IC) (Canada/US cord)	C050910A104A
ePMP 3000 5 GHz Access Point Radio (EU) (EU cord)	C050910A203A
ePMP 3000 5 GHz Access Point Radio (EU) (UK cord)	C050910A303A
ePMP 3000 5 GHz Access Point Radio (ROW) (no cord)	C050910A001A
ePMP 3000 5 GHz Access Point Radio (ROW) (US cord)	C050910A101A
ePMP 3000 5 GHz Access Point Radio (ROW) (EU cord)	C050910A201A
ePMP 3000 5 GHz Access Point Radio (ROW) (UK cord)	C050910A301A
ePMP 3000 5 GHz Access Point Radio (ROW) (India cord)	C050910A401A
ePMP 3000 5GHz Access Point Radio (India) (India Cord)	C050910A402A
ePMP 3000 5 GHz Access Point Radio (ROW) (China cord)	C050910A501A
ePMP 3000 5 GHz Access Point Radio (ROW) (Brazil cord)	C050910A601A
ePMP 3000 5 GHz Access Point Radio (ROW) (Argentina cord)	C050910A701A
ePMP 3000 5 GHz Access Point Radio (ROW) (ANZ cord)	C050910A801A
ePMP 3000 5 GHz Access Point Radio (ROW) (South Africa cord)	C050910A901A
ePMP 3000 5 GHz Access Point Radio (ROW) (No PSU)	C050910AZ01A
ePMP 4x4 MU-MIMO Sector Antenna (for ePMP3000AP)	C050910D301A
ePMP 4x4 MU-MIMO Dual-Horn Antenna (for ePMP3000AP)	C050900D025A
ePMP 4x4 MU-MIMO Omni Antenna (for ePMP3000AP) <ul style="list-style-type: none"> <li>■ KP-5QSOMNI-13 (available directly from KP Performance)</li> </ul>	

Table 18: ePMP 3000 accessories part numbers

Cambium description	Cambium part number
PoE Gigabit DC Injector, 15W Output at 30V, Energy Level 6 Supply	N000900L001
CABLE, UL POWER SUPPLY CORD SET, ARGENTINA	N000900L013
CABLE, UL POWER SUPPLY CORD SET, AUS/NZ	N000900L011
CABLE, UL POWER SUPPLY CORD SET, Brazil	N000900L010
CABLE, UL POWER SUPPLY CORD SET, CHINA	N000900L015
CABLE, UL POWER SUPPLY CORD SET, EU	N000900L008
CABLE, UL POWER SUPPLY CORD SET, INDIA	N000900L012
CABLE, UL POWER SUPPLY CORD SET, UK	N000900L009
CABLE, UL POWER SUPPLY CORD SET, US	N000900L007

## ePMP 3000 Access Point mounting bracket

ePMP 3000 AP module is designed to be mounted with a sector antenna or pole-mounted using the mounting bracket provided in the box with the radio.

ePMP 3000 AP mounting bracket is shown in [Figure 27](#).



[Figure 27: ePMP 3000 Access Point module mounting bracket](#)

## ePMP 3000 Access Point interfaces

The Ethernet port is located at the bottom of the unit. This interface is described in [Table 19](#).

Table 19: ePMP 3000 Series – rear interfaces

Port name	Connector	Interface	Description
Eth	RJ45	PoE input	<p>Power over Ethernet (PoE).</p>  <div style="border: 1px solid #ccc; padding: 5px; background-color: #e0f2f1;"> <p><b>Note</b></p> <p>All RJ45 Ethernet LAN cables used for providing power or are connected to power ports (PoE) must be UL certified with VW-1 markings.</p> </div>
		100/1000BASE-T Ethernet	Data.
SFP	SFP	Optical or Copper Gigabit Ethernet	Management and/or data.

## ePMP 3000 Access Point specifications

ePMP 3000 connectorized module conforms to the specifications listed in [Table 20](#) and [Table 21](#).

The connectorized module meets the low-level static discharge specifications identified in [Electromagnetic compatibility \(EMC\) compliance](#) and provides internal surge suppression, but does not provide lightning suppression.

Table 20: ePMP 3000 Access Point physical specifications

Category	Specification
Dimensions (Length x Width x Height)	22.2 cm x 12.4 cm x 4.5 cm (8.75 in x 4.9 in x 1.75 in) without brackets
Weight	0.7 kg (1.5 lbs) without brackets

Table 21: ePMP 3000 Access Point environmental specifications

Category	Specification
Temperature	-30°C (-22°F) to +55°C (131°F)
Wind loading	124 mph (200 kph) maximum. See <a href="#">ePMP 3000 Access Point wind loading</a> for a full description.
Humidity	95% condensing
Environmental	<p>IP55</p>  <div style="border: 1px solid #ccc; padding: 5px; background-color: #e0f2f1;"> <p><b>Note</b></p> <p>This product meets the UL/cUL 62368 / IEC 62368 edition 2 specification, and the radio housings are designed to be rain-tight.</p> </div>

## ePMP 3000 Access Point heater

While starting, if the ePMP 3000 AP module temperature is at 32°F (0°C) or below than that, an internal heater is activated to ensure that the device can successfully begin the operation. The unit's heater is only activated when the unit is powered ON and does not apply heat to the device once the startup is complete. When the unit temperature is greater than 32°F (0°C), the heater is deactivated and the unit continues its startup sequence.

The effect on device startup time at various temperatures is defined in [Table 22](#).

Table 22: ePMP 3000 AP startup times based on ambient temperature

Initial Temperature	Startup time (from power on to operational)
-22°F (-30°C) H	20 minutes
-4°F (-20°C)	6 minutes
14°F (-10°C)	2 minutes, 30 seconds

## ePMP 3000 Access Point wind loading

Ensure that the device and the structure on which it is mounted are capable of withstanding the prevalent wind speeds at a proposed ePMP site. Wind speed statistics are available from national meteorological offices.

The device and its mounting bracket are capable of withstanding wind speeds of up to 200 kph (124 mph).

Wind blowing on the device subjects the mounting structure to significant lateral force. The magnitude of the force depends on both wind strength and the surface area of the device. Wind loading is estimated using the following formulae:

$$\text{Force (in kilograms)} = 0.1045aV^2$$

Where:	Is:
a	the surface area in square meters
V	wind speed in meters per second

$$\text{Force (in pounds)} = 0.0042Av^2$$

Where:	Is:
A	the surface area in square feet
V	wind speed in miles per hour

Applying these formulae to the ePMP device at different wind speeds, the resulting wind loadings are shown in [Table 23](#) and [Table 24](#).

Table 23: ePMP 3000 Access Point wind loading (Kg)

Type of ePMP device	Largest surface area (square meters)	Wind speed (meters per second)		
		40	50	60
ePMP 3000 AP with Sector Antenna	0.13	21.74 Kg	33.96 Kg	48.91 Kg

Table 24: ePMP 3000 Access Point wind loading (lb)

Type of ePMP device	Largest surface area (square feet)	Wind speed (miles per hour)		
		80	100	120
ePMP 3000 AP with Sector Antenna	1.4	37.63 lb	58.80 lb	84.67 lb

## ePMP 3000 Access Point software packages

ePMP 3000 AP devices can be upgraded by downloading new software packages from the [Cambium Networks site](#) or by using the cnMaestro. The software packages applicable to ePMP integrated radios are named:

- ePMP-AC-v4.5-GA.img (or higher version number)

## ePMP 3000L Access Point

For details of the ePMP 3000L Access Point hardware, see:

- [ePMP 3000L Access Point description](#)
- [ePMP 3000L Access Point part numbers](#)
- [ePMP 3000L Access Point mounting bracket](#)
- [ePMP 3000L Access Point interfaces](#)
- [ePMP 3000L Access Point specifications](#)
- [ePMP 3000L Access Point heater](#)
- [ePMP 3000L Access Point wind loading](#)
- [ePMP 3000L Access Point software packages](#)

## ePMP 3000L Access Point description

ePMP 3000L is a self-contained transceiver unit that contains both radio and networking electronics.

ePMP 3000L is shown in [Figure 28](#).



Figure 28: ePMP 3000L Access Point

## ePMP 3000L Access Point part numbers

Select the correct regional variant to adhere to local licensing restrictions.

Each of the parts listed in [Table 25](#) and [Table 26](#) includes the following items:

- One connectorized unit
- One power supply 1000/100 BASE-TX LAN injector
- One line cord

Table 25: ePMP 3000L Access Point part numbers

Cambium description	Cambium part number
ePMP 3000L 5 GHz Access Point Radio (FCC) (US cord)	C058910A122A
ePMP 3000L 5 GHz Access Point Radio (IC) (Canada/US cord)	C050910A124A
ePMP 3000L 5 GHz Access Point Radio (EU) (EU cord)	C050910A223A
ePMP 3000L 5 GHz Access Point Radio (EU) (UK cord)	C050910A323A
ePMP 3000L 5 GHz Access Point Radio (ROW) (no cord)	C050910A021A
ePMP 3000L 5 GHz Access Point Radio (ROW) (US cord)	C050910A121A
ePMP 3000L 5 GHz Access Point Radio (ROW) (EU cord)	C050910A221A
ePMP 3000L 5 GHz Access Point Radio (ROW) (UK cord)	C050910A321A
ePMP 3000L 5 GHz Access Point Radio (ROW) (India cord)	C050910A421A
ePMP 3000L 5GHz Access Point Radio (India) (India Cord)	C050910A422A
ePMP 3000L 5 GHz Access Point Radio (ROW) (China cord)	C050910A521A

Cambium description	Cambium part number
ePMP 3000L 5 GHz Access Point Radio (ROW) (Brazil cord)	C050910A621A
ePMP 3000L 5 GHz Access Point Radio (ROW) (Argentina cord)	C050910A721A
ePMP 3000L 5 GHz Access Point Radio (ROW) (ANZ cord)	C050910A821A
ePMP 3000L 5 GHz Access Point Radio (ROW) (South Africa cord)	C050910A921A
ePMP 3000L 5 GHz Access Point Radio (ROW) (No PSU)	C050910AZ21A

Table 26: ePMP 3000L accessories part numbers

Cambium description	Cambium part number
PoE Gigabit DC Injector, 15W Output at 30V, Energy Level 6 Supply	N000900L001
CABLE, UL POWER SUPPLY CORD SET, ARGENTINA	N000900L013
CABLE, UL POWER SUPPLY CORD SET, AUS/NZ	N000900L011
CABLE, UL POWER SUPPLY CORD SET, Brazil	N000900L010
CABLE, UL POWER SUPPLY CORD SET, CHINA	N000900L015
CABLE, UL POWER SUPPLY CORD SET, EU	N000900L008
CABLE, UL POWER SUPPLY CORD SET, INDIA	N000900L012
CABLE, UL POWER SUPPLY CORD SET, UK	N000900L009
CABLE, UL POWER SUPPLY CORD SET, US	N000900L007

## ePMP 3000L Access Point mounting bracket

ePMP 3000L AP module is designed to be mounted with a sector antenna or pole-mounted using the mounting bracket provided in the box with the radio.

ePMP 3000L Access Point mounting bracket is shown in [Figure 29](#)



Figure 29: ePMP 3000L Access Point module mounting bracket

## ePMP 3000L Access Point interfaces

The Ethernet port is located at the bottom of the unit. This interface is described in [Table 27](#).

Table 27: ePMP 3000 Series – rear interfaces

Port name	Connector	Interface	Description
Eth	RJ45	PoE input	<p>Power over Ethernet (PoE).</p> <p> <b>Note</b></p> <p>All RJ45 Ethernet LAN cables used for providing power or are connected to power ports (PoE) must be UL certified with VW-1 markings.</p>
		100/1000BASE-T Ethernet	Data
SFP	SFP	Optical or Copper Gigabit Ethernet	Management and/or data

## ePMP 3000L Access Point specifications

ePMP 3000L connectorized module conforms to the specifications listed in [Table 28](#) and [Table 29](#).

The connectorized module meets the low-level static discharge specifications identified in [Electromagnetic compatibility \(EMC\) compliance](#) and provides internal surge suppression, but does not provide lightning suppression.

Table 28: ePMP 3000L Access Point physical specifications

Category	Specification
Dimensions (Length x Width x Height)	22.2 cm x 12.4 cm x 4.5 cm (8.75 in x 4.9 in x 1.75 in) without brackets
Weight	0.7 kg (1.5 lbs) without brackets

Table 29: ePMP 3000L Access Point environmental specifications

Category	Specification
Temperature	-30°C (-22°F) to +55°C (131°F)
Wind loading	124 mph (200 kph) maximum. See <a href="#">ePMP 3000L Access Point wind loading (Kg)</a> for a full description.
Humidity	95% condensing
Environmental	IP67.   <b>Note</b> This product meets the UL/cUL 62368 / IEC 62368 edition 2 specification, and the radio housings are designed to be rain-tight.

## ePMP 3000L Access Point heater

While starting, if the ePMP 3000L AP module temperature is at 32°F (0°C) or below than that, an internal heater is activated to ensure that the device can successfully begin operation. The unit's heater is only activated when the unit is powered on and does not apply heat to the device once the startup is complete. When the unit temperature is greater than 32°F (0°C), the heater is deactivated, and the unit continues its startup sequence.

The effect on device startup time at various temperatures is defined in [Table 30](#).

Table 30: ePMP 3000L Access Point startup times based on ambient temperature

Initial Temperature	Startup time (from power on to operational)
-22°F (-30°C) H	20 minutes
-4°F (-20°C)	6 minutes
14°F (-10°C)	2 minutes, 30 seconds

## ePMP 3000L Access Point wind loading

Ensure that the device and the structure on which it is mounted are capable of withstanding the prevalent wind speeds at a proposed ePMP site. Wind speed statistics are available from national meteorological offices.

The device and its mounting bracket are capable of withstanding wind speeds of up to 200 kph (124 mph).

Wind blowing on the device subjects the mounting structure to significant lateral force. The magnitude of the force depends on both wind strength and the surface area of the device. Wind loading is estimated using the following formulae:

$$\text{Force (in kilograms)} = 0.1045aV^2$$

<b>Where:</b>	Is:
a	the surface area in square meters
V	wind speed in meters per second

$$\text{Force (in pounds)} = 0.0042Av^2$$

<b>Where:</b>	Is:
A	the surface area in square feet
V	wind speed in miles per hour

Applying these formulae to the ePMP device at different wind speeds, the resulting wind loadings are shown in [Table 31](#) and [Table 32](#).

**Table 31: ePMP 3000L Access Point wind loading (Kg)**

Type of ePMP device	Largest surface area (square meters)	Wind speed (meters per second)		
		40	50	60
ePMP 3000L Access Point with Sector Antenna	0.13	21.74 Kg	33.96 Kg	48.91 Kg

**Table 32: ePMP 3000L Access Point wind loading (lb)**

Type of ePMP device	Largest surface area (square feet)	Wind speed (miles per hour)		
		80	100	120
ePMP 3000L Access Point with Sector Antenna	1.4	37.63 lb	58.80 lb	84.67 lb

## ePMP 3000L Access Point software packages

ePMP 3000L AP devices can be upgraded by downloading new software packages from the [Cambium Networks site](#) or by using the cnMaestro. The software packages applicable to ePMP integrated radios are named:

- ePMP-AC-v4.5-GA.img (or higher version number)

## ePMP MP 3000 MicroPoP

For details of the ePMP MP 3000 MicroPoP hardware, see:

- [ePMP MP 3000 MicroPoP integrated description](#)
- [ePMP MP 3000 MicroPoP part numbers](#)
- [ePMP MP 3000 MicroPoP interfaces](#)
- [ePMP MP 3000 MicroPoP specifications](#)
- [ePMP MP 3000 MicroPoP heater](#)
- [ePMP MP 3000 MicroPoP wind loading](#)
- [ePMP MP 3000 MicroPoP software packages](#)

### ePMP MP 3000 MicroPoP integrated description

The ePMP MP 3000 MicroPoP is an integrated AP designed to serve short-range, low-density applications. It uses 802.11ac 2x2 architecture and can interoperate with a Force 300 subscriber module.

ePMP MP 3000 MicroPoP is shown in [Figure 30](#).



*Figure 30: ePMP MP 3000 MicroPoP integrated*

### ePMP MP 3000 MicroPoP part numbers

Select the correct regional variant to adhere to local licensing restrictions.

Each of the parts listed in [Table 33](#) and [Table 34](#) includes the following items:

- One integrated unit
- One power supply 1000/100 BASE-TX LAN injector
- One line cord

Table 33: ePMP MP 3000 MicroPoP part numbers

Cambium description	Cambium part number
ePMP 5 GHz MP 3000 MicroPoP Radio (ROW) (no cord)	C050910A031A
ePMP 5 GHz MP 3000 MicroPoP Radio (ROW) (US cord)	C050910A131A
ePMP 5 GHz MP 3000 MicroPoP Radio (IC) (Canada/US cord)	C058910A134A
ePMP 5 GHz MP 3000 MicroPoP Radio (ROW) (EU cord)	C050910A231A
ePMP 5 GHz MP 3000 MicroPoP Radio (EU) (EU cord)	C050910A233A
ePMP 5 GHz MP 3000 MicroPoP Radio (ROW) (UK cord)	C050910A331A
ePMP 5 GHz MP 3000 MicroPoP Radio (EU) (UK cord)	C050910A333A
ePMP 5 GHz MP 3000 MicroPoP Radio (ROW) (India cord)	C050910A431A
ePMP 5 GHz MP 3000 MicroPoP Radio (India) (India Cord)	C050910A432A
ePMP 5 GHz MP 3000 MicroPoP Radio (ROW) (China cord)	C050910A531A
ePMP 5 GHz MP 3000 MicroPoP Radio (ROW) (Brazil cord)	C050910A631A
ePMP 5 GHz MP 3000 MicroPoP Radio (ROW) (Argentina cord)	C050910A731A
ePMP 5 GHz MP 3000 MicroPoP Radio (ROW) (ANZ cord)	C050910A831A
ePMP 5 GHz MP 3000 MicroPoP Radio (ROW) (South Africa cord)	C050910A931A
ePMP 5 GHz MP 3000 MicroPoP Radio (ROW) (No PSU)	C050910AZ31A
ePMP 5 GHz MP 3000 MicroPoP Radio (FCC) (US cord)	C058910A132A

Table 34: ePMP MP 3000 accessories part numbers

Cambium description	Cambium part number
PoE Gigabit DC Injector, 15W Output at 30V, Energy Level 6 Supply	N000900L001
CABLE, UL POWER SUPPLY CORD SET, ARGENTINA	N000900L013
CABLE, UL POWER SUPPLY CORD SET, AUS/NZ	N000900L011
CABLE, UL POWER SUPPLY CORD SET, Brazil	N000900L010
CABLE, UL POWER SUPPLY CORD SET, CHINA	N000900L015
CABLE, UL POWER SUPPLY CORD SET, EU	N000900L008
CABLE, UL POWER SUPPLY CORD SET, INDIA	N000900L012
CABLE, UL POWER SUPPLY CORD SET, UK	N000900L009
CABLE, UL POWER SUPPLY CORD SET, US	N000900L007

## ePMP MP 3000 MicroPoP interfaces

The Ethernet port is located on the rear of the integrated unit.

Table 35: ePMP MP 3000 MicroPoP – rear interfaces

Port name	Connector	Interface	Description
Eth	RJ45	PoE input	<p>Power over Ethernet (PoE).</p> <p></p> <p><b>Note</b></p> <p>All RJ45 Ethernet LAN cables used for providing power or are connected to power ports (PoE) must be UL certified with VW-1 markings.</p>
		100/1000BASE-T Ethernet	Data

## ePMP MP 3000 MicroPoP specifications

The ePMP MP 3000 MicroPoP integrated module conforms to the specifications listed in [Table 36](#) and [Table 37](#). The integrated module meets the low-level static discharge specifications identified in [Electromagnetic compatibility \(EMC\) compliance](#) and provides internal surge suppression, but does not provide lightning suppression.

Table 36: ePMP MP 3000 MicroPoP physical specifications

Category	Specification
Dimensions (Diameter x Depth)	220mm x 80mm x 25mm (8.7in x 3.15in x 1.0in)
Weight	0.5 kg (1.1 lbs) – with mounting bracket
Antenna	Integrated dual-polarized, Omni-direction 8dBi

Table 37: ePMP MP 3000 MicroPoP environmental specifications

Category	Specification
Temperature	-40°C (-40°F) to +65C (149°F) ambient op temp
Wind loading	224 kph 320mm x 215mm x 65mm 1100g
Environmental	IP67  <p><b>Note</b></p> <p>This product meets the UL/cUL 62368 / IEC 62368 edition 2 specification, and the radio housings are designed to be rain-tight.</p>

## ePMP MP 3000 MicroPoP heater

While starting, if the ePMP MP 3000 MicroPoP module temperature is at 32°F (0°C) or below than that, an internal heater is activated to ensure that the device can successfully begin operation. The unit's heater is only activated when the unit is powered on and will not apply heat to the device once the startup is complete. When the unit temperature is greater than 32°F (0°C), the heater is deactivated, and the unit continues its startup sequence.

The effect on device startup time at various temperatures is defined in [Table 38](#).

Table 38: ePMP MP 3000 MicroPoP startup times based on ambient temperature

Initial Temperature	Startup time (from power on to operational)
-22°F (-30°C) H	20 minutes
-4°F (-20°C)	6 minutes
14°F (-10°C)	2 minutes, 30 seconds

## ePMP MP 3000 MicroPoP wind loading

Ensure that the device and the structure on which it is mounted are capable of withstanding the prevalent wind speeds at a proposed ePMP site. Wind speed statistics are available from national meteorological offices.

The device and its mounting bracket are capable of withstanding wind speeds of up to 180 kph (124 mph).

Wind blowing on the device subjects the mounting structure to significant lateral force. The magnitude of the force depends on both wind strength and the surface area of the device. Wind loading is estimated using the following formulae:

$$\text{Force (in kilograms)} = 0.1045aV^2$$

Where:	Is:
a	the surface area in square meters
V	wind speed in meters per second

$$\text{Force (in pounds)} = 0.0042Av^2$$

Where:	Is:
A	the surface area in square feet
v	wind speed in miles per hour

Applying these formulae to the ePMP device at different wind speeds, the resulting wind loadings are shown in [Table 39](#) and [Table 40](#).

Table 39: ePMP MP 3000 wind loading (Kg)

Type of ePMP device	Largest surface area (square meters)	Wind speed (meters per second)		
		30	40	50
ePMP MP 3000 Integrated	0.03	2.82 Kg	5.02 Kg	7.84 Kg

Table 40: ePMP MP 3000 wind loading (lb)

Type of ePMP device	Largest surface area (square feet)	Wind speed (miles per hour)		
		80	100	120
ePMP MP 3000	0.28	7.53 lb	11.76 lb	16.93 lb

## ePMP MP 3000 MicroPoP software packages

ePMP MP 3000 MicroPoP devices can be upgraded by downloading new software packages from the [Cambium Networks site](#) or by using cnMaestro. The software packages applicable to ePMP integrated radios are named:

- ePMP-AC-v4.5-GA.img (or higher version number)

## ePMP 4500C Access Point

For details of the ePMP 4500C Access Point hardware, see:

- [ePMP 4500C Access Point description](#)
- [ePMP 4500C Access Point part numbers](#)
- [ePMP 4500C Access Point mounting bracket](#)
- [ePMP 4500C Access Point interfaces](#)
- [ePMP 4500C Access Point specifications](#)
- [ePMP 4500C Access Point heater](#)
- [ePMP 4500C Access Point wind loading](#)
- [ePMP 4500C Access Point mounting instructions](#)
- [ePMP 4500C Access Point software packages](#)

## ePMP 4500C Access Point description

The ePMP 4500C device is a self-contained transceiver unit that contains both radio and networking electronics. It is available with 8 X 8 MU-MIMO connectorized external antenna.

ePMP 4500C is shown in [Figure 31](#).



Figure 31: ePMP 4500C Access Point

## ePMP 4500C Access Point part numbers

Select the correct regional variant to adhere to local licensing restrictions.

Each of the parts listed in [Table 41](#) and [Table 42](#) includes the following items:

- One connectorized external unit
- One power supply 1000/100 BASE-TX LAN injector
- One line cord

Table 41: ePMP 4500C Access Point part numbers

Cambium description	Cambium part number
ePMP 4500C 5 GHz Access Point Radio (FCC) (US cord)	C058910A122A
ePMP 4500C 5 GHz Access Point Radio (IC) (Canada/US cord)	C050910A124A
ePMP 4500C 5 GHz Access Point Radio (EU) (EU cord)	C050910A223A
ePMP 4500C 5 GHz Access Point Radio (EU) (UK cord)	C050910A323A
ePMP 4500C 5 GHz Access Point Radio (ROW) (no cord)	C050910A021A
ePMP 4500C 5 GHz Access Point Radio (ROW) (US cord)	C050910A121A
ePMP 4500C 5 GHz Access Point Radio (ROW) (EU cord)	C050910A221A
ePMP 4500C 5 GHz Access Point Radio (ROW) (UK cord)	C050910A321A
ePMP 4500C 5 GHz Access Point Radio (ROW) (India cord)	C050910A421A
ePMP 4500C 5GHz Access Point Radio (India) (India Cord)	C050910A422A
ePMP 4500C 5 GHz Access Point Radio (ROW) (China cord)	C050910A521A
ePMP 4500C 5 GHz Access Point Radio (ROW) (Brazil cord)	C050910A621A
ePMP 4500C 5 GHz Access Point Radio (ROW) (Argentina cord)	C050910A721A
ePMP 4500C 5 GHz Access Point Radio (ROW) (ANZ cord)	C050910A821A

Cambium description	Cambium part number
ePMP 4500C 5 GHz Access Point Radio (ROW) (South Africa cord)	C050910A921A
ePMP 4500C 5 GHz Access Point Radio (ROW) (No PSU)	C050910AZ21A

Table 42: ePMP 4500C accessory part numbers

Cambium description	Cambium part number
PoE Gigabit DC Injector, 15W Output at 30V, Energy Level 6 Supply	N000900L001
CABLE, UL POWER SUPPLY CORD SET, ARGENTINA	N000900L013
CABLE, UL POWER SUPPLY CORD SET, AUS/NZ	N000900L011
CABLE, UL POWER SUPPLY CORD SET, Brazil	N000900L010
CABLE, UL POWER SUPPLY CORD SET, CHINA	N000900L015
CABLE, UL POWER SUPPLY CORD SET, EU	N000900L008
CABLE, UL POWER SUPPLY CORD SET, INDIA	N000900L012
CABLE, UL POWER SUPPLY CORD SET, UK	N000900L009
CABLE, UL POWER SUPPLY CORD SET, US	N000900L007

## ePMP 4500C Access Point mounting bracket

The ePMP 4500C AP module is designed to be mounted with a external antenna or pole-mounted using the mounting bracket provided in the box with the radio.

ePMP 4500C AP mounting bracket is shown in [Figure 32](#)



Figure 32: ePMP 4500C Access Point module mounting bracket

## ePMP 4500C Access Point interfaces

The Ethernet port is located at the bottom of the unit. This interface is described in [Table 43](#).

Table 43: ePMP 4500C Series – rear interfaces

Port name	Connector	Interface	Description
Eth	RJ45	PoE input	<p>Power over Ethernet (PoE).</p>  <p><b>Note</b></p> <p>All RJ45 Ethernet LAN cables used for providing power or are connected to power ports (PoE) must be UL certified with VW-1 markings.</p>
		100/1000BASE-T Ethernet	Data
SFP	SFP	Optical or Copper Gigabit Ethernet	Management and/or data

## ePMP 4500C Access Point specifications

The ePMP 4500C connectorized module conforms to the specifications listed in [Table 44](#) and [Table 45](#).

The connectorized module meets the low-level static discharge specifications identified in [Electromagnetic compatibility \(EMC\) compliance](#) and provides internal surge suppression, but does not provide lightning suppression.

Table 44: ePMP 4500C Access Point physical specifications

Category	Specification
Dimensions (Length x Width x Height)	22.2 cm x 12.4 cm x 4.5 cm (8.75 in x 4.9 in x 1.75 in) without brackets
Weight	12.5 kg (27.56 lbs) without brackets 14.66 kg (32.32 lbs) with brackets

Table 45: ePMP 4500C Access Point environmental specifications

Category	Specification
Temperature	-30°C (-22°F) to +55°C (131°F).
Wind loading	124 mph (200 kph) maximum. See <a href="#">ePMP 4500C Access Point wind loading (Kg)</a> for a full description.
Humidity	95% condensing.
Environmental	IP67.

Category	Specification
	 <p><b>Note</b></p> <p>This product meets the UL/cUL 62368 / IEC 62368 edition 2 specification, and the radio housings are designed to be rain-tight.</p>

## ePMP 4500C Access Point heater

At startup, if the ePMP 4500C AP module temperature is at or below 32°F (0°C), an internal heater is activated to ensure that the device can begin the operation successfully. The unit's heater is only activated when the unit is powered ON and does not apply heat to the device once the startup is complete. When the unit temperature is greater than 32°F (0°C), then the heater is deactivated, and the unit continues its startup sequence.

The effect on device startup time at various temperatures is defined in [Table 46](#).

Table 46: ePMP 4500C Access Point startup times based on ambient temperature

Initial Temperature	Startup time (from power on to operational)
-22°F (-30°C) H	20 minutes
-4°F (-20°C)	6 minutes
14°F (-10°C)	2 minutes, 30 seconds

## ePMP 4500C Access Point wind loading

Ensure that the device and the structure on which it is mounted are capable of withstanding the prevalent wind speeds at a proposed ePMP site. Wind speed statistics are available from national meteorological offices.

The device and its mounting bracket are capable of withstanding wind speeds of up to 200 kph (124 mph).

Wind blowing on the device subjects the mounting structure to significant lateral force. The magnitude of the force depends on both wind strength and the surface area of the device. Wind loading is estimated using the following formulae:

$$\text{Force (in kilograms)} = 0.1045aV^2$$

Where:	Is:
a	the surface area in square meters
V	wind speed in meters per second

$$\text{Force (in pounds)} = 0.0042Av^2$$

Where:	Is:
A	the surface area in square feet
V	wind speed in miles per hour

Applying these formulae to the ePMP device at different wind speeds, the resulting wind loadings are shown in [Table 47](#) and [Table 48](#).

Table 47: ePMP 4500C Access Point wind loading (Kg)

Type of ePMP device	Largest surface area (square meters)	Wind speed (meters per second)		
		40	50	56
ePMP 4500C Access Point with Sector Antenna	0.249	41.63 Kg	65.05 Kg	81.60 Kg

Table 48: ePMP 4500C Access Point wind loading (lb)

Type of ePMP device	Largest surface area (square feet)	Wind speed (miles per hour)		
		80	100	125
ePMP 4500C Access Point with Sector Antenna	2.68	72.03 lb	112.56 lb	175.88 lb

## ePMP 4500C Access Point software packages

ePMP 4500C AP devices can be upgraded by downloading new software packages from the [Cambium Networks site](#) or by using cnMaestro. The software packages applicable to ePMP connectorized radios are named:

- ePMP-AX-v5.x.x.img (or higher version number)

## ePMP 4500 Access Point

For details of the ePMP 4500 Access Point hardware, see:

- [ePMP 4500 Access Point description](#)
- [ePMP 4500 Access Point part numbers](#)
- [ePMP 4500 Access Point mounting bracket](#)
- [ePMP 4500 Access Point interfaces](#)
- [ePMP 4500 Access Point specifications](#)
- [ePMP 4500 Access Point heater](#)
- [ePMP 4500 Access Point wind loading](#)
- [ePMP 4500 Access Point software packages](#)

### ePMP 4500 Access Point description

The ePMP 4500 device is a self-contained transceiver unit that contains both radio and networking electronics. It is available with 8 X 8 MU-MIMO integrated antenna.

ePMP 4500 is shown in [Figure 33](#).



[Figure 33: ePMP 4500 Access Point](#)

### ePMP 4500 Access Point part numbers

Select the correct regional variant to adhere to local licensing restrictions.

Each of the parts listed in [Table 49](#) and [Table 50](#) includes the following items:

- One connectorized unit
- One power supply 1000/100 BASE-TX LAN injector

- One line cord

Table 49: ePMP 4500 Access Point part numbers

Cambium description	Cambium part number
ePMP 4500 5 GHz Access Point Radio (FCC) (US cord)	C058910A122A
ePMP 4500 5 GHz Access Point Radio (IC) (Canada/US cord)	C050910A124A
ePMP 4500 5 GHz Access Point Radio (EU) (EU cord)	C050910A223A
ePMP 4500 5 GHz Access Point Radio (EU) (UK cord)	C050910A323A
ePMP 4500 5 GHz Access Point Radio (ROW) (no cord)	C050910A021A
ePMP 4500 5 GHz Access Point Radio (ROW) (US cord)	C050910A121A
ePMP 4500 5 GHz Access Point Radio (ROW) (EU cord)	C050910A221A
ePMP 4500 5 GHz Access Point Radio (ROW) (UK cord)	C050910A321A
ePMP 4500 5 GHz Access Point Radio (ROW) (India cord)	C050910A421A
ePMP 4500 5GHz Access Point Radio (India) (India Cord)	C050910A422A
ePMP 4500 5 GHz Access Point Radio (ROW) (China cord)	C050910A521A
ePMP 4500 5 GHz Access Point Radio (ROW) (Brazil cord)	C050910A621A
ePMP 4500 5 GHz Access Point Radio (ROW) (Argentina cord)	C050910A721A
ePMP 4500 5 GHz Access Point Radio (ROW) (ANZ cord)	C050910A821A
ePMP 4500 5 GHz Access Point Radio (ROW) (South Africa cord)	C050910A921A
ePMP 4500 5 GHz Access Point Radio (ROW) (No PSU)	C050910AZ21A

Table 50: ePMP 4500 accessory part numbers

Cambium description	Cambium part number
PoE Gigabit DC Injector, 15W Output at 30V, Energy Level 6 Supply	N000900L001
CABLE, UL POWER SUPPLY CORD SET, ARGENTINA	N000900L013
CABLE, UL POWER SUPPLY CORD SET, AUS/NZ	N000900L011
CABLE, UL POWER SUPPLY CORD SET, Brazil	N000900L010
CABLE, UL POWER SUPPLY CORD SET, CHINA	N000900L015
CABLE, UL POWER SUPPLY CORD SET, EU	N000900L008
CABLE, UL POWER SUPPLY CORD SET, INDIA	N000900L012
CABLE, UL POWER SUPPLY CORD SET, UK	N000900L009
CABLE, UL POWER SUPPLY CORD SET, US	N000900L007

## ePMP 4500 Access Point mounting bracket

The ePMP 4500 AP module is designed to be mounted with a sector antenna or pole-mounted using the mounting bracket provided in the box with the radio.

ePMP 4500 AP mounting bracket is shown in [Figure 34](#)



*Figure 34: ePMP 4500 Access Point module mounting bracket*

## ePMP 4500 Access Point interfaces

The Ethernet port is located at the bottom of the unit. This interface is described in [Table 51](#).

*Table 51: ePMP 4500 Series – rear interfaces*

Port name	Connector	Interface	Description
Eth	RJ45	PoE input	<p>Power over Ethernet (PoE).</p> <p></p> <p><b>Note</b></p> <p>All RJ45 Ethernet LAN cables used for providing power or are connected to power ports (PoE) must be UL certified with VW-1 markings.</p>
		100/1000BASE-T Ethernet	Data
SFP	SFP	Optical or Copper Gigabit Ethernet	Management and/or data

## Connector pin numbering

Figure 35 shows the connector pin numbering of ePMP 4500.

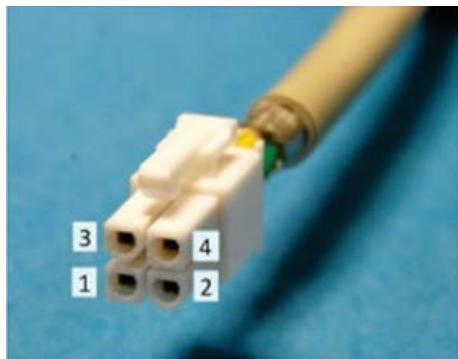


Figure 35: Connector pin numbering

Pin	Power supply connection
1, 2	Positive
3, 4	Negative

## ePMP 4500 Access Point specifications

The ePMP 4500 connectorized module conforms to the specifications listed in [Table 52](#) and [Table 53](#).

The connectorized module meets the low-level static discharge specifications identified in [Electromagnetic compatibility \(EMC\) compliance](#) and provides internal surge suppression, but does not provide lightning suppression.

Table 52: ePMP 4500 Access Point physical specifications

Category	Specification
Dimensions (Length x Width x Height)	22.2 cm x 12.4 cm x 4.5 cm (8.75 in x 4.9 in x 1.75 in) without brackets
Weight	12.5 kg (27.56 lbs) without brackets 14.66 kg (32.32 lbs) with brackets

Table 53: ePMP 4500 Access Point environmental specifications

Category	Specification
Temperature	-30°C (-22°F) to +55°C (131°F).
Wind loading	124 mph (200 kph) maximum. See <a href="#">ePMP 4500 Access Point wind loading (Kg)</a> for a full description.
Humidity	95% condensing.
Environmental	IP67.

Category	Specification
	 <p><b>Note</b></p> <p>This product meets the UL/cUL 62368 / IEC 62368 edition 2 specification, and the radio housings are designed to be rain-tight.</p>

## ePMP 4500 Access Point heater

At startup, if the ePMP 4500 AP module temperature is at or below 32°F (0°C), an internal heater is activated to ensure that the device can begin the operation successfully. The unit's heater is only activated when the unit is powered ON and does not apply heat to the device once the startup is complete. When the unit temperature is greater than 32°F (0°C), then the heater is deactivated, and the unit continues its startup sequence.

The effect on device startup time at various temperatures is defined in [Table 54](#).

Table 54: ePMP 4500 Access Point startup times based on ambient temperature

Initial Temperature	Startup time (from power on to operational)
-22°F (-30°C) H	20 minutes
-4°F (-20°C)	6 minutes
14°F (-10°C)	2 minutes, 30 seconds

## ePMP 4500 Access Point wind loading

Ensure that the device and the structure on which it is mounted are capable of withstanding the prevalent wind speeds at a proposed ePMP site. Wind speed statistics are available from national meteorological offices.

The device and its mounting bracket are capable of withstanding wind speeds of up to 200 kph (124 mph).

Wind blowing on the device subjects the mounting structure to significant lateral force. The magnitude of the force depends on both wind strength and the surface area of the device. Wind loading is estimated using the following formulae:

$$\text{Force (in kilograms)} = 0.1045aV^2$$

Where:	Is:
a	the surface area in square meters
V	wind speed in meters per second

$$\text{Force (in pounds)} = 0.0042Av^2$$

Where:	Is:
A	the surface area in square feet
V	wind speed in miles per hour

Applying these formulae to the ePMP device at different wind speeds, the resulting wind loadings are shown in [Table 55](#) and [Table 56](#).

Table 55: ePMP 4500 Access Point wind loading (Kg)

Type of ePMP device	Largest surface area (square meters)	Wind speed (meters per second)		
		40	50	56
ePMP 4500 Access Point with Sector Antenna	0.249	41.63 Kg	65.05 Kg	81.60 Kg

Table 56: ePMP 4500 Access Point wind loading (lb)

Type of ePMP device	Largest surface area (square feet)	Wind speed (miles per hour)		
		80	100	125
ePMP 4500 Access Point with Sector Antenna	2.68	72.03 lb	112.56 lb	175.88 lb

## ePMP 4500 Access Point software packages

ePMP 4500 AP devices can be upgraded by downloading new software packages from the [Cambium Networks site](#) or by using cnMaestro. The software packages applicable to ePMP integrated radios are named:

- ePMP-AX-v5.x.x.img (or higher version number)

## ePMP 4600 Access Point

For details of the ePMP 4600 Access Point hardware, see:

- [ePMP 4600 Access Point description](#)
- [ePMP 4600 Access Point part numbers](#)
- [ePMP 4600 Access Point mounting bracket](#)
- [ePMP 4600 Access Point interfaces](#)
- [ePMP 4600 Access Point specifications](#)
- [ePMP 4600 Access Point heater](#)
- [ePMP 4600 Access Point wind loading](#)
- [ePMP 4600 Access Point software packages](#)

## ePMP 4600 Access Point description

The ePMP 4600 device is a self-contained transceiver unit that houses both radio and networking electronics. It is available with 4 X 4 MU-MIMO connectorized antenna. The MPE distance for FCC is 105 cm and for IC is 20 cm.

ePMP 4600 is shown in [Figure 36](#).



[Figure 36: ePMP 4600 Access Point](#)



#### Warning

The operation of this device is prohibited on oil platforms, cars, trains, boats, and aircraft.

Operation of the transmitters in 5.925 GHz - 7.125 GHz band is prohibited for control of communications with the unmanned aircraft systems.



#### Warning

This radio transmitter 109W-0068 is approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Le présent émetteur radio (109W-0068) a été approuvé par Innovation, Sciences et Développement économique Canada pour fonctionner avec les types d'antenne énumérés ci-dessous et ayant un gain admissible maximal d'antenne. Les types d'antennes non inclus dans cette liste qui ont un gain supérieur au gain maximal indiqué pour tout type listé sont strictement interdits pour une utilisation avec cet appareil.



#### Warning

Operation on oil platforms, automobiles, trains, maritime vessels and aircraft shall be prohibited.

L'exploitation sur les plates-formes pétrolières, les automobiles, les trains, les navires maritimes et les aéronefs est interdite.



#### Warning

Devices shall not be used for control of or communications with unmanned aircraft systems.

Les appareils ne doivent pas être utilisés pour contrôler ou communiquer avec des systèmes d'aéronefs sans pilote.



### Warning

The antenna height shall be determined by the installer or operator of the standard-power access point or fixed client device, or by automatic means. This information are stored internally in the device. Provision of accurate device information is mandatory.

La hauteur de l'antenne doit être déterminée par l'installateur ou l'opérateur du point d'accès à puissance standard ou de l'appareil client fixe, ou par des moyens automatiques. Ces informations doivent être stockées en interne dans l'appareil. La fourniture d'informations précises sur l'appareil est obligatoire.

## ePMP 4600 Access Point part numbers

Select the correct regional variant to adhere to local licensing restrictions.

Each of the parts listed in [Table 57](#) includes the following items:

- One connectorized unit
- One power supply 1000/100 BASE-TX LAN injector
- One line cord

**Table 57: ePMP 4600 Access Point part numbers**

Cambium description	Cambium part number
ePMP 4600 6 GHz 4x4 Access Point Radio (ROW) (no cord)	C060940A021A
ePMP 4600 6 GHz 4x4 Access Point Radio (ROW) (US cord)	C060940A121A
ePMP 4600 6 GHz 4x4 Access Point Radio (IC) (Canada/US cord)	C068940A124A
ePMP 4600 6 GHz 4x4 Access Point Radio (ROW) (EU cord)	C060940A221A
ePMP 4600 6 GHz 4x4 Access Point Radio (EU) (EU cord)	C060940A223A
ePMP 4600 6 GHz 4x4 Access Point Radio (ROW) (UK cord)	C060940A321A
ePMP 4600 6 GHz 4x4 Access Point Radio (EU) (UK cord)	C060940A323A
ePMP 4600 6 GHz 4x4 Access Point Radio (ROW) (India cord)	C060940A421A
ePMP 4600 6 GHz 4x4 Access Point Radio (India) (India Cord)	C060940A425A
ePMP 4600 6 GHz 4x4 Access Point Radio (ROW) (China cord)	C060940A521A
ePMP 4600 6 GHz 4x4 Access Point Radio (ROW) (Brazil cord)	C060940A621A
ePMP 4600 6 GHz 4x4 Access Point Radio (ROW) (Argentina cord)	C060940A721A
ePMP 4600 6 GHz 4x4 Access Point Radio (ROW) (ANZ cord)	C060940A821A
ePMP 4600 6 GHz 4x4 Access Point Radio (ROW) (South Africa cord)	C060940A921A
ePMP 4600 6 GHz 4x4 Access Point Radio (ROW) (No PSU)	C060940AZ21A
ePMP 4600 6 GHz 4x4 Access Point Radio (FCC) (US cord)	C068940A122B
ePMP 4600 6 GHz 4x4 Access Point Radio (Indonesia) (EU Cord)	C060940A226A

Cambium description	Cambium part number
ePMP 4600 6 GHz 4x4 Access Point	C060940P021A
ePMP 6 GHz Force 4600C Subscriber Module	C060940P051A

## ePMP 4600 Access Point mounting bracket

The ePMP 4600 AP module is designed to be mounted with a sector antenna or pole-mounted using the mounting bracket provided in the box with the radio.

ePMP 4600 AP mounting bracket is shown in [Figure 37](#)



Figure 37: ePMP 4600 Access Point module mounting bracket

## ePMP 4600 Access Point interfaces

The Ethernet port is located at the bottom of the unit. This interface is described in [Table 58](#).

Table 58: ePMP 4600 Series – rear interfaces

Port name	Connector	Interface	Description
Eth	RJ45	PoE input	<p>Power over Ethernet (PoE).</p> <p></p> <p><b>Note</b></p> <p>All RJ45 Ethernet LAN cables used for providing power or are connected to power ports (PoE) must be UL certified with VW-1 markings.</p>
		100/1000BASE-T Ethernet	Data
SFP	SFP	Optical or Copper Gigabit Ethernet	Management and/or data

## ePMP 4600 Access Point specifications

The ePMP 4600 connectorized module conforms to the specifications listed in [Table 59](#) and [Table 60](#).

The connectorized module meets the low-level static discharge specifications identified in [Electromagnetic compatibility \(EMC\) compliance](#) and provides internal surge suppression, but does not provide lightning suppression.

**Table 59: ePMP 4600 Access Point physical specifications**

Category	Specification
Dimensions (Length x Width x Height)	22.2 cm x 12.4 cm x 4.5 cm (8.75 in x 4.9 in x 1.75 in) without brackets
Weight	12.5 kg (27.56 lbs) without brackets 14.66 kg (32.32 lbs) with brackets

**Table 60: ePMP 4600 Access Point environmental specifications**

Category	Specification
Temperature	-30°C (-22°F) to +55°C (131°F).
Wind loading	124 mph (200 kph) maximum. See <a href="#">ePMP 4600 Access Point wind loading (Kg)</a> for a full description.
Humidity	95% condensing.
Environmental	IP67  <b>Note</b> This product meets the UL/cUL 62368 / IEC 62368 edition 2 specification, and the radio housings are designed to be rain-tight.

## ePMP 4600 Access Point heater

At startup, if the ePMP 4600 AP module temperature is at or below 32°F (0°C), an internal heater is activated to ensure that the device can successfully begin operation. The unit's heater is only activated when the unit is powered on and will not apply heat to the device once the startup is complete. When the unit temperature is greater than 32°F (0°C), the heater is deactivated, and the unit continues its startup sequence.

The effect on device startup time at various temperatures is defined in [Table 61](#).

**Table 61: ePMP 4600 Access Point startup times based on ambient temperature**

Initial Temperature	Startup time (from power on to operational)
-22°F (-30°C) H	20 minutes
-4°F (-20°C)	6 minutes
14°F (-10°C)	2 minutes, 30 seconds

## ePMP 4600 Access Point wind loading

Ensure that the device and the structure on which it is mounted are capable of withstanding the prevalent wind speeds at a proposed ePMP site. Wind speed statistics are available from national meteorological offices.

The device and its mounting bracket are capable of withstanding wind speeds of up to 200 kph (124 mph).

Wind blowing on the device will subject the mounting structure to significant lateral force. The magnitude of the force depends on both wind strength and the surface area of the device. Wind loading is estimated using the following formulae:

Force (in kilograms) =  $0.1045aV^2$

Where:	Is:
a	the surface area in square meters
V	wind speed in meters per second

Force (in pounds) =  $0.0042Av^2$

Where:	Is:
A	the surface area in square feet
V	wind speed in miles per hour

Applying these formulae to the ePMP device at different wind speeds, the resulting wind loadings are shown in [Table 62](#) and [Table 63](#).

Table 62: ePMP 4600 Access Point wind loading (Kg)

Type of ePMP device	Largest surface area (square meters)	Wind speed (meters per second)		
		40	50	60
ePMP 4500 Access Point with Sector Antenna	0.13	21.74 Kg	33.96 Kg	48.91 Kg

Table 63: ePMP 4600 Access Point wind loading (lb)

Type of ePMP device	Largest surface area (square feet)	Wind speed (miles per hour)		
		80	100	120
ePMP 4500 Access Point with Sector Antenna	1.4	37.63 lb	58.80 lb	84.67 lb

## ePMP 4600 Access Point software packages

ePMP 4600 AP devices can be upgraded by downloading new software packages from the [Cambium Networks site](#) or by using cnMaestro. The software packages applicable to ePMP integrated radios are named:

- ePMP-AX-v5.x.x.img (or higher version number)

## ePMP 4600L Access Point

For details of the ePMP 4600L Access Point hardware, see:

- [ePMP 4600L Access Point description](#)
- [ePMP 4600L Access Point part numbers](#)
- [ePMP 4600L Access Point mounting bracket](#)
- [ePMP 4600L Access Point interfaces](#)
- [ePMP 4600L Access Point specifications](#)
- [ePMP 4600L Access Point heater](#)
- [ePMP 4600L Access Point wind loading](#)
- [ePMP 4600L Access Point software packages](#)

## ePMP 4600L Access Point description

The ePMP 4600L device is a self-contained transceiver unit that contains both radio and networking electronics. It is available with 4 X 4 MU-MIMO connectorized antenna. The MPE distance for FCC is 371 cm and for IC is 20 cm.

ePMP 4600L is shown in [Figure 38](#).



Figure 38: ePMP 4600L Access Point



#### Warning

The operation of this device is prohibited on oil platforms, cars, trains, boats, and aircraft.

Operation of the transmitters in 5.925 GHz - 7.125 GHz band is prohibited for control of communications with the unmanned aircraft systems.



#### Warning

Devices shall not be used for control of or communications with unmanned aircraft systems.

Les appareils ne doivent pas être utilisés pour contrôler ou communiquer avec des systèmes d'aéronefs sans pilote.



#### Warning

Operation on oil platforms, automobiles, trains, maritime vessels, and aircraft shall be prohibited.

L'exploitation sur les plates-formes pétrolières, les automobiles, les trains, les navires maritimes et les aéronefs est interdite.



#### Warning

The antenna height shall be determined by the installer or operator of the standard-power access point or fixed client device, or by automatic means. This information are stored internally in the device. Provision of accurate device information is mandatory.

La hauteur de l'antenne doit être déterminée par l'installateur ou l'opérateur du point d'accès à puissance standard ou de l'appareil client fixe, ou par des moyens automatiques. Ces informations doivent être stockées en interne dans l'appareil. La fourniture d'informations précises sur l'appareil est obligatoire.

## ePMP 4600L Access Point part numbers

Select the correct regional variant to adhere to local licensing restrictions.

Each of the parts listed in [Table 64](#) includes the following items:

- One connectorized unit
- One power supply 1000/100 BASE-TX LAN injector
- One line cord

Table 64: ePMP 4600L Access Point part numbers

Cambium description	Cambium part number
ePMP 4600L 6 GHz 4x4 Access Point Radio (ROW) (no cord)	C060940A021A
ePMP 4600L 6 GHz 4x4 Access Point Radio (ROW) (US cord)	C060940A121A
ePMP 4600L 6 GHz 4x4 Access Point Radio (IC) (Canada/US cord)	C068940A124A
ePMP 4600L 6 GHz 4x4 Access Point Radio (ROW) (EU cord)	C060940A221A
ePMP 4600L 6 GHz 4x4 Access Point Radio (EU) (EU cord)	C060940A223A
ePMP 4600L 6 GHz 4x4 Access Point Radio (ROW) (UK cord)	C060940A321A
ePMP 4600L 6 GHz 4x4 Access Point Radio (EU) (UK cord)	C060940A323A
ePMP 4600L 6 GHz 4x4 Access Point Radio (ROW) (India cord)	C060940A421A
ePMP 4600L 6 GHz 4x4 Access Point Radio (India) (India Cord)	C060940A425A
ePMP 4600L 6 GHz 4x4 Access Point Radio (ROW) (China cord)	C060940A521A
ePMP 4600L 6 GHz 4x4 Access Point Radio (ROW) (Brazil cord)	C060940A621A
ePMP 4600L 6 GHz 4x4 Access Point Radio (ROW) (Argentina cord)	C060940A721A
ePMP 4600L 6 GHz 4x4 Access Point Radio (ROW) (ANZ cord)	C060940A821A
ePMP 4600L 6 GHz 4x4 Access Point Radio (ROW) (South Africa cord)	C060940A921A
ePMP 4600L 6 GHz 4x4 Access Point Radio (ROW) (No PSU)	C060940AZ21A
ePMP 4600L 6 GHz 4x4 Access Point Radio (FCC) (US cord)	C068940A122B
ePMP 4600L 6 GHz 4x4 Access Point Radio (Indonesia) (EU Cord)	C060940A226A
ePMP 4600L 6 GHz 2x2 Access Point	C068940P142A

## ePMP 4600L Access Point mounting bracket

The ePMP 4600L AP module is designed to be mounted with a sector antenna or pole-mounted using the mounting bracket provided in the box with the radio.

ePMP 4600L AP mounting bracket is shown in [Figure 39](#)



Figure 39: ePMP 4600L Access Point module mounting bracket

## ePMP 4600L Access Point interfaces

The Ethernet port is located at the bottom of the unit. This interface is described in [Table 65](#).

Table 65: ePMP 4600L Series – rear interfaces

Port name	Connector	Interface	Description
Eth	RJ45	PoE input	Power over Ethernet (PoE). 
		100/1000BASE-T Ethernet	<b>Note</b> All RJ45 Ethernet LAN cables used for providing power or are connected to power ports (PoE) must be UL certified with VW-1 markings.
SFP	SFP	Optical or Copper Gigabit Ethernet	Management and/or data

## ePMP 4600L Access Point specifications

The ePMP 4600L connectorized module conforms to the specifications listed in [Table 66](#) and [Table 67](#).

The connectorized module meets the low-level static discharge specifications identified in [Electromagnetic compatibility \(EMC\) compliance](#) and provides internal surge suppression, but does not provide lightning suppression.

Table 66: ePMP 4600L Access Point physical specifications

Category	Specification
Dimensions (Length x Width x Height)	22.2 cm x 12.4 cm x 4.5 cm (8.75 in x 4.9 in x 1.75 in) without brackets
Weight	12.5 kg (27.56 lbs) without brackets 14.66 kg (32.32 lbs) with brackets

Table 67: ePMP 4600L Access Point environmental specifications

Category	Specification
Temperature	-30°C (-22°F) to +55°C (131°F)
Wind loading	124 mph (200 kph) maximum. See <a href="#">ePMP 4600L Access Point wind loading (Kg)</a> for a full description
Humidity	95% condensing
Environmental	IP67 <div style="border: 1px solid #ccc; padding: 5px; margin-top: 10px;">  <b>Note</b>            This product meets the UL/cUL 62368 / IEC 62368 edition 2 specification, and the radio housings are designed to be rain-tight.         </div>

## ePMP 4600L Access Point heater

At startup, if the ePMP 4600L AP module temperature is at or below 32°F (0°C), an internal heater is activated to ensure that the device can successfully begin operation. The unit's heater is only activated when the unit is powered on and will not apply heat to the device once the startup is complete. When the unit temperature is greater than 32°F (0°C), the heater is deactivated, and the unit continues its startup sequence.

The effect on device startup time at various temperatures is defined in [Table 68](#).

Table 68: ePMP 4600L Access Point startup times based on ambient temperature

Initial Temperature	Startup time (from power on to operational)
-22°F (-30°C) H	20 minutes
-4°F (-20°C)	6 minutes
14°F (-10°C)	2 minutes, 30 seconds

## ePMP 4600L Access Point wind loading

Ensure that the device and the structure on which it is mounted are capable of withstanding the prevalent wind speeds at a proposed ePMP site. Wind speed statistics are available from national meteorological offices.

The device and its mounting bracket are capable of withstanding wind speeds of up to 200 kph (124 mph).

Wind blowing on the device will subject the mounting structure to significant lateral force. The magnitude of the force depends on both wind strength and the surface area of the device. Wind loading is estimated using the following formulae:

$$\text{Force (in kilograms)} = 0.1045aV^2$$

<b>Where:</b>	Is:
a	the surface area in square meters
V	wind speed in meters per second

$$\text{Force (in pounds)} = 0.0042Av^2$$

<b>Where:</b>	Is:
A	the surface area in square feet
V	wind speed in miles per hour

Applying these formulae to the ePMP device at different wind speeds, the resulting wind loadings are shown in [Table 69](#) and [Table 70](#).

Table 69: ePMP 4600L Access Point wind loading (Kg)

Type of ePMP device	Largest surface area (square meters)	Wind speed (meters per second)		
		40	50	60
ePMP 4500 Access Point with Sector Antenna	0.13	21.74 Kg	33.96 Kg	48.91 Kg

Table 70: ePMP 4600L Access Point wind loading (lb)

Type of ePMP device	Largest surface area (square feet)	Wind speed (miles per hour)		
		80	100	120
ePMP 4500 Access Point with Sector Antenna	1.4	37.63 lb	58.80 lb	84.67 lb

## ePMP 4600L Access Point software packages

ePMP 4600L AP devices can be upgraded by downloading new software packages from the [Cambium Networks site](#) or by using cnMaestro. The software packages applicable to ePMP integrated radios are named:

- ePMP-AX-v5.x.x.img (or higher version number)

## ePMP 4500L Access Point

For details of the ePMP 4500L Access Point hardware, see:

- [ePMP 4500L Access Point description](#)
- [ePMP 4500L Access Point part numbers](#)
- [ePMP 4500L Access Point mounting bracket](#)
- [ePMP 4500L Access Point interfaces](#)
- [ePMP 4500L Access Point specifications](#)
- [ePMP 4500L Access Point heater](#)
- [ePMP 4500L Access Point wind loading](#)
- [ePMP 4500L Access Point software packages](#)

## ePMP 4500L Access Point description

The ePMP 4500L device is a self-contained transceiver unit that contains both radio and networking electronics. It is available with 2 X 2 MU-MIMO connectorized antenna.

ePMP 4500L is shown in [Figure 40](#).



[Figure 40: ePMP 4500L Access Point](#)

## ePMP 4500L Access Point part numbers

Select the correct regional variant to adhere to local licensing restrictions.

Each of the parts listed in [Table 71](#) and [Table 72](#) includes the following items:

- One connectorized unit
- One power supply 1000/100 BASE-TX LAN injector
- One line cord

Table 71: ePMP 4500L Access Point part numbers

Cambium description	Cambium part number
ePMP 4500L 6 GHz 2x2 Access Point Radio (ROW) (no cord)	C060940A051A
ePMP 4500L 6 GHz 2x2 Access Point Radio (ROW) (US cord)	C060940A151A
ePMP 4500L 6 GHz 2x2 Access Point Radio (IC) (Canada/US cord)	C068940A154A
ePMP 4500L 6 GHz 2x2 Access Point Radio (ROW) (EU cord)	C060940A251A
ePMP 4500L 6 GHz 2x2 Access Point Radio (EU) (EU cord)	C060940A253A
ePMP 4500L 6 GHz 2x2 Access Point Radio (ROW) (UK cord)	C060940A351A
ePMP 4500L 6 GHz 2x2 Access Point Radio (EU) (UK cord)	C060940A353A
ePMP 4500L 6 GHz 2x2 Access Point Radio (ROW) (India cord)	C060940A451A
ePMP 4500L 6 GHz 2x2 Access Point Radio (India) (India Cord)	C060940A455A
ePMP 4500L 6 GHz 2x2 Access Point Radio (ROW) (China cord)	C060940A551A
ePMP 4500L 6 GHz 2x2 Access Point Radio (ROW) (Brazil cord)	C060940A651A
ePMP 4500L 6 GHz 2x2 Access Point Radio (ROW) (Argentina cord)	C060940A751A
ePMP 4500L 6 GHz 2x2 Access Point Radio (ROW) (ANZ cord)	C060940A851A
ePMP 4500L 6 GHz 2x2 Access Point Radio (ROW) (South Africa cord)	C060940A951A
ePMP 4500L 6 GHz 2x2 Access Point Radio (ROW) (No PSU)	C060940AZ51A
ePMP 4500L 6 GHz 2x2 Access Point Radio (FCC) (US cord)	C068940A152A
ePMP 4500L 6 GHz 2x2 Access Point Radio (Indonesia) (EU Cord)	C060940A256A

Table 72: ePMP 4500L accessory part numbers

Cambium description	Cambium part number
PoE Gigabit DC Injector, 15W Output at 30V, Energy Level 6 Supply	N000900L001
CABLE, UL POWER SUPPLY CORD SET, ARGENTINA	N000900L013
CABLE, UL POWER SUPPLY CORD SET, AUS/NZ	N000900L011
CABLE, UL POWER SUPPLY CORD SET, Brazil	N000900L010
CABLE, UL POWER SUPPLY CORD SET, CHINA	N000900L015
CABLE, UL POWER SUPPLY CORD SET, EU	N000900L008
CABLE, UL POWER SUPPLY CORD SET, INDIA	N000900L012
CABLE, UL POWER SUPPLY CORD SET, UK	N000900L009
CABLE, UL POWER SUPPLY CORD SET, US	N000900L007

## ePMP 4500L Access Point mounting bracket

The ePMP 4500L AP module is designed to be mounted with a sector antenna or pole-mounted using the mounting bracket provided in the box with the radio.

ePMP 4500L AP mounting bracket is shown in [Figure 41](#)



[Figure 41: ePMP 4500L Access Point module mounting bracket](#)

## ePMP 4500L Access Point interfaces

The Ethernet port is located at the bottom of the unit. This interface is described in [Table 73](#).

[Table 73: ePMP 4500L Series – rear interfaces](#)

Port name	Connector	Interface	Description
Eth	RJ45	PoE input	Power over Ethernet (PoE).  <b>Note</b> All RJ45 Ethernet LAN cables used for providing power or are connected to power ports (PoE) must be UL certified with VW-1 markings.
		100/1000BASE-T Ethernet	Data
SFP	SFP	Optical or Copper Gigabit Ethernet	Management and/or data

## ePMP 4500L Access Point specifications

The ePMP 4500L connectorized module conforms to the specifications listed in [Table 74](#) and [Table 75](#).

The connectorized module meets the low-level static discharge specifications identified in [Electromagnetic compatibility \(EMC\) compliance](#) and provides internal surge suppression, but does not provide lightning suppression.

Table 74: ePMP 4500L Access Point physical specifications

Category	Specification
Dimensions (Length x Width x Height)	22.2 cm x 12.4 cm x 4.5 cm (8.75 in x 4.9 in x 1.75 in) without brackets
Weight	12.5 kg (27.56 lbs) without brackets 14.66 kg (32.32 lbs) with brackets

Table 75: ePMP 4500L Access Point environmental specifications

Category	Specification
Temperature	-30°C (-22°F) to +55°C (131°F)
Wind loading	124 mph (200 kph) maximum. See <a href="#">ePMP 4500L Access Point wind loading (Kg)</a> for a full description.
Humidity	95% condensing
Environmental	IP67.   <b>Note</b> This product meets the UL/cUL 62368 / IEC 62368 edition 2 specification, and the radio housings are designed to be rain-tight.

## ePMP 4500L Access Point heater

At startup, if the ePMP 4500L AP module temperature is at or below 32°F (0°C), an internal heater is activated to ensure that the device can successfully begin operation. The unit's heater is only activated when the unit is powered on and will not apply heat to the device once the startup is complete. When the unit temperature is greater than 32°F (0°C), the heater is deactivated, and the unit continues its startup sequence.

The effect on device startup time at various temperatures is defined in [Table 76](#).

Table 76: ePMP 4500L Access Point startup times based on ambient temperature

Initial Temperature	Startup time (from power on to operational)
-22°F (-30°C) H	20 minutes
-4°F (-20°C)	6 minutes
14°F (-10°C)	2 minutes, 30 seconds

## ePMP 4500L Access Point wind loading

Ensure that the device and the structure on which it is mounted are capable of withstanding the prevalent wind speeds at a proposed ePMP site. Wind speed statistics are available from national meteorological offices.

The device and its mounting bracket are capable of withstanding wind speeds of up to 200 kph (124 mph).

Wind blowing on the device will subject the mounting structure to significant lateral force. The magnitude of the force depends on both wind strength and the surface area of the device. Wind loading is estimated using the following formulae:

Force (in kilograms) =  $0.1045aV^2$

Where:	Is:
a	the surface area in square meters
V	wind speed in meters per second

Force (in pounds) =  $0.0042Av^2$

Where:	Is:
A	the surface area in square feet
V	wind speed in miles per hour

Applying these formulae to the ePMP device at different wind speeds, the resulting wind loadings are shown in [Table 77](#) and [Table 78](#).

Table 77: ePMP 4500L Access Point wind loading (Kg)

Type of ePMP device	Largest surface area (square meters)	Wind speed (meters per second)		
		40	50	56
ePMP 4500 Access Point with Sector Antenna	0.032	5.35 Kg	8.36 Kg	10.49 Kg

Table 78: ePMP 4500L Access Point wind loading (lb)

Type of ePMP device	Largest surface area (square feet)	Wind speed (miles per hour)		
		80	100	125
ePMP 4500 Access Point with Sector Antenna	0.344	9.25 lb	14.45 lb	22.58 lb

## ePMP 4500L Access Point software packages

ePMP 4500L AP devices can be upgraded by downloading new software packages from the [Cambium Networks site](#) or by using cnMaestro. The software packages applicable to ePMP integrated radios are named:

- ePMP-AX-v5.x.x.img (or higher version number)

## Force 300-25

For details of the Force 300-25 hardware, see:

- [Force 300-25 integrated description](#)
- [Force 300-25 part numbers](#)
- [Force 300-25 mounting bracket](#)
- [Force 300-25 interfaces](#)
- [Force 300-25 heater](#)
- [Force 300-25 wind loading](#)
- [Force 300-25 software packages](#)

### Force 300-25 integrated description

The Force 300-25 device is a self-contained transceiver unit that contains both radio and networking electronics.

Force 300-25 integrated is shown in [Figure 42](#).



*Figure 42: Force 300-25 integrated*

### Force 300-25 part numbers

Select the correct regional variant to adhere to local licensing restrictions.

Each of the parts listed in [Table 79](#) and [Table 80](#) includes the following items:

- One integrated unit
- One power supply 1000/100 BASE-TX LAN injector
- One line cord

Table 79: Force 300-25 part numbers

Cambium description	Cambium part number
ePMP Force 300-25-25 5 GHz High Gain Radio (FCC) (US Cord)	C058910C102A
ePMP Force 300-25-25 5 GHz High Gain Radio (IC) (Canada/US Cord)	C050910C104A
ePMP Force 300-25-25 5 GHz High Gain Radio (EU) (EU Cord)	C050910C203A
ePMP Force 300-25-25 5 GHz High Gain Radio (EU) (UK Cord)	C050910C303A
ePMP Force 300-25-25 5 GHz High Gain Radio (RoW) (no Cord)	C050910C001A
ePMP Force 300-25-25 5 GHz High Gain Radio (RoW) (US Cord)	C050910C101A
ePMP Force 300-25-25 5 GHz High Gain Radio (RoW) (EU Cord)	C050910C201A
ePMP Force 300-25-25 5 GHz High Gain Radio (RoW) (UK Cord)	C050910C301A
ePMP Force 300-25-25 5 GHz High Gain Radio (RoW) (India Cord)	C050910C401A
ePMP Force 300-25-25 5 GHz High Gain Radio (RoW) (China Cord)	C050910C501A
ePMP Force 300-25-25 5 GHz High Gain Radio (RoW) (Brazil Cord)	C050910C601A
ePMP Force 300-25-25 5 GHz High Gain Radio (RoW) (Argentina Cord)	C050910C701A
ePMP Force 300-25-25 5 GHz High Gain Radio (RoW) (ANZ Cord)	C050910C801A
ePMP Force 300-25-25 5 GHz High Gain Radio (RoW) (South Africa Cord)	C050910C901A
ePMP Force 300-25-25 5 GHz High Gain Radio (RoW) (No PSU)	C050910CZ01A

Table 80: Force 300-25 accessory part numbers

Cambium description	Cambium part number
PoE Gigabit DC Injector, 15W Output at 30V, Energy Level 6 Supply	N000900L001
CABLE, UL POWER SUPPLY CORD SET, ARGENTINA	N000900L013
CABLE, UL POWER SUPPLY CORD SET, AUS/NZ	N000900L011
CABLE, UL POWER SUPPLY CORD SET, Brazil	N000900L010
CABLE, UL POWER SUPPLY CORD SET, CHINA	N000900L015
CABLE, UL POWER SUPPLY CORD SET, EU	N000900L008
CABLE, UL POWER SUPPLY CORD SET, INDIA	N000900L012
CABLE, UL POWER SUPPLY CORD SET, UK	N000900L009
CABLE, UL POWER SUPPLY CORD SET, US	N000900L007

## Force 300-25 mounting bracket

The Force 300-25 module is designed to be pole-mounted using the mounting bracket provided in the box with the radio.

Force 300-25 mounting bracket is shown in [Figure 43](#).



Figure 43: Force 300-25 module mounting bracket

## Force 300-25 interfaces

The Ethernet port is located on the rear of the integrated unit. This interface is described in [Table 81](#).

Table 81: Force 300-25 Series – rear interfaces

Port name	Connector	Interface	Description
Eth	RJ45	PoE input	Power over Ethernet (PoE).  <div style="background-color: #e0f2f1; padding: 5px;"> <b>Note</b>  All RJ45 Ethernet LAN cables used for providing power or are connected to power ports (PoE) must be UL certified with VW-1 markings. </div>
		100/1000BASE-T Ethernet	Data

## Force 300-25 specifications

The Force 300-25 integrated module conforms to the specifications listed in [Table 82](#) and [Table 83](#).

The integrated module meets the low-level static discharge specifications identified in [Electromagnetic compatibility \(EMC\) compliance](#) and provides internal surge suppression, but does not provide lightning suppression.

Table 82: Force 300-25 physical specifications

Category	Specification
Dimensions (Diameter x Depth)	47 cm x 31 cm (18.5 in x 12.2 in)
Weight	2.4 kg (5.2 lbs)

Table 83: Force 300-25 environmental specifications

Category	Specification
Temperature	-30°C (-22°F) to +55°C (131°F)
Wind loading	124 mph (200 kph) maximum. See <a href="#">Force 300-25 wind loading</a> for a full description.
Humidity	95% condensing
Environmental	IP55 <div style="border: 1px solid #ccc; padding: 5px; margin-top: 10px;">  <b>Note</b>            This product meets the UL/cUL 62368 / IEC 62368 edition 2 specification, and the radio housings are designed to be rain-tight.         </div>

## Force 300-25 heater

At startup, if the Force 300-25 module temperature is at or below 32°F (0°C), an internal heater is activated to ensure that the device can successfully begin operation. The unit's heater is only activated when the unit is powered on and will not apply heat to the device once the startup is complete. When the unit temperature is greater than 32°F (0°C), the heater is deactivated, and the unit continues its startup sequence.

The effect on device startup time at various temperatures is defined in [Table 84](#).

Table 84: Force 300-25 startup times based on ambient temperature

Initial Temperature	Startup time (from power on to operational)
-22°F (-30°C) H	20 minutes
-4°F (-20°C)	6 minutes
14°F (-10°C)	2 minutes, 30 seconds

## Force 300-25 wind loading

Ensure that the device and the structure on which it is mounted are capable of withstanding the prevalent wind speeds at a proposed ePMP site. Wind speed statistics are available from national meteorological offices.

The device and its mounting bracket are capable of withstanding wind speeds of up to 200 kph (124 mph).

Wind blowing on the device will subject the mounting structure to significant lateral force. The magnitude of the force depends on both wind strength and the surface area of the device. Wind loading is estimated using the following formulae:

$$\text{Force (in kilograms)} = 0.1045aV^2$$

Where:	Is:
a	the surface area in square meters
V	wind speed in meters per second

$$\text{Force (in pounds)} = 0.0042Av^2$$

Where:	Is:
A	the surface area in square feet
v	wind speed in miles per hour

Applying these formulae to the ePMP device at different wind speeds, the resulting wind loadings are shown in [Table 85](#) and [Table 86](#).

Table 85: Force 300-25 wind loading (Kg)

Type of ePMP device	Largest surface area (square meters)	Wind speed (meters per second)		
		40	50	60
Force 300-25 Integrated	0.15	25.08 Kg	39.2 Kg	56.43 Kg

Table 86: Force 300-25 wind loading (lb)

Type of ePMP device	Largest surface area (square feet)	Wind speed (miles per hour)		
		80	100	120
Force 300-25 Integrated	1.61	43.28 lb	67.62 lb	97.37 lb

## Force 300-25 software packages

Force 300-25 devices can be upgraded by downloading new software packages from the [Cambium Networks site](#) or by using cnMaestro. The software packages applicable to ePMP integrated radios are named:

- ePMP-AC-v4.5-GA.img (or higher version number)

## Force 300-25L

For details of the Force 300-25L hardware, see:

- [Force 300 CSM Connectorized Subscriber Module description](#)
- [Force 300-25L key features](#)
- [Force 300-25L part numbers](#)
- [Force 300-25L interfaces](#)
- [Force 300-25L specifications](#)
- [Force 300-25L heater](#)
- [Force 300-25L wind loading](#)
- [Force 300-25L software packages](#)

## Force 300-25L integrated description

The Force 300-25L is an integrated 802.11ac Wave2 based Subscriber Module with an integrated 25 dBi dish.

The radio supports PTP and ePTP protocols and is compatible with PMP applications with ePMP 3000, ePMP 3000L, and ePMP 2000 APs.

Force 300-25L integrated is shown in [Figure 44](#).



*Figure 44: Force 300-25L integrated*

## Force 300-25L key features

- Supports up to 400 Mbps usable throughput
- Frequency Range from 4.9 GHz to 6.4 GHz
- Up to 26 dBm Tx Power
- Network management: HTTPS, SNMPv2c, SSH, cnMaestro
- Channel Size: 20 / 40 / 80 MHz

## Force 300-25L part numbers

Select the correct regional variant to adhere to local licensing restrictions.

Each of the parts listed in [Table 87](#) and [Table 88](#) includes the following items:

- One unit
- One Dish
- One Fixed Mounting Bracket
- One unit
- Two Hose Clamps
- One PoE injector
- One Line Cord

**Note**

An optional Tilt Mount Bracket is available separately (N000900L063A).

Table 87: Force 300-25L part numbers

Cambium description	Cambium part number
ePMP 5 GHz Force 300-25L SM Bulk Packaging (ROW) (no cord)	C050910M071A
ePMP 5 GHz Force 300-25L SM Bulk Packaging (ROW) (US cord)	C050910M171A
ePMP 5 GHz Force 300-25L SM Bulk Packaging (ROW) (EU cord)	C050910M271A
ePMP 5 GHz Force 300-25L SM Bulk Packaging (EU) (EU cord)	C050910M273A
ePMP 5 GHz Force 300-25L SM Bulk Packaging (ROW) (UK cord)	C050910M371A
ePMP 5 GHz Force 300-25L SM Bulk Packaging (EU) (UK cord)	C050910M373A
ePMP 5 GHz Force 300-25L SM Bulk Packaging (ROW) (India cord)	C050910M471A
ePMP 5 GHz Force 300-25L SM Bulk Packaging (India) (India Cord)	C050910M472A
ePMP 5 GHz Force 300-25L SM Bulk Packaging (ROW) (China cord)	C050910M571A
ePMP 5 GHz Force 300-25L SM Bulk Packaging (ROW) (Brazil cord)	C050910M671A
ePMP 5 GHz Force 300-25L SM Bulk Packaging (ROW) (Argentina cord)	C050910M771A
ePMP 5 GHz Force 300-25L SM Bulk Packaging (ROW) (ANZ cord)	C050910M871A
ePMP 5 GHz Force 300-25L SM Bulk Packaging (ROW) (South Africa cord)	C050910CM71A
ePMP 5 GHz Force 300-25L SM Bulk Packaging (ROW) (No PSU)	C050910MZ71A
ePMP 5 GHz Force 300-25L SM Bulk Packaging (ROW) (no cord)	C050910C071A
ePMP 5 GHz Force 300-25L SM Bulk Packaging (ROW) (US cord)	C050910C171A
ePMP 5 GHz Force 300-25L SM Bulk Packaging (ROW) (EU cord)	C050910C271A
ePMP 5 GHz Force 300-25L SM Bulk Packaging (EU) (EU cord)	C050910C273A
ePMP 5 GHz Force 300-25L SM Bulk Packaging (ROW) (UK cord)	C050910C371A
ePMP 5 GHz Force 300-25L SM Bulk Packaging (EU) (UK cord)	C050910C373A
ePMP 5 GHz Force 300-25L SM Bulk Packaging (ROW) (India cord)	C050910C471A
ePMP 5 GHz Force 300-25L SM Bulk Packaging (India) (India Cord)	C050910C472A
ePMP 5 GHz Force 300-25L SM Bulk Packaging (ROW) (China cord)	C050910C571A
ePMP 5 GHz Force 300-25L SM Bulk Packaging (ROW) (Brazil cord)	C050910C671A
ePMP 5 GHz Force 300-25L SM Bulk Packaging (ROW) (Argentina cord)	C050910C771A
ePMP 5 GHz Force 300-25L SM Bulk Packaging (ROW) (ANZ cord)	C050910C871A
ePMP 5 GHz Force 300-25L SM Bulk Packaging (ROW) (South Africa cord)	C050910C971A
ePMP 5 GHz Force 300-25L SM Bulk Packaging (ROW) (No PSU)	C050910CZ71A

Table 88: Force 300-25L accessory part numbers

Cambium description	Cambium part number
PoE Gigabit DC Injector, 15W Output at 30V, Energy Level 6 Supply	N000900L001
CABLE, UL POWER SUPPLY CORD SET, ARGENTINA	N000900L013
CABLE, UL POWER SUPPLY CORD SET, AUS/NZ	N000900L011
CABLE, UL POWER SUPPLY CORD SET, Brazil	N000900L010
CABLE, UL POWER SUPPLY CORD SET, CHINA	N000900L015
CABLE, UL POWER SUPPLY CORD SET, EU	N000900L008
CABLE, UL POWER SUPPLY CORD SET, INDIA	N000900L012
CABLE, UL POWER SUPPLY CORD SET, UK	N000900L009
CABLE, UL POWER SUPPLY CORD SET, US	N000900L007

## Force 300-25L interfaces

The Ethernet port is located on the rear of the unit.

Table 89: Force 300-25L – rear interfaces

Port name	Connector	Interface	Description
Eth	RJ45	PoE input	Power over Ethernet (PoE).
		100/1000BASE-T Ethernet	Data

## Force 300-25L specifications

The Force 300-25L integrated module conforms to the specifications listed in [Table 90](#) and [Table 91](#). The integrated module meets the low-level static discharge specifications identified in [Electromagnetic compatibility \(EMC\) compliance](#) and provides internal surge suppression, but does not provide lightning suppression.

Table 90: Force 300-25L physical specifications

Category	Specification
Dimensions (Diameter x Depth)	TBDmm x TBDmm x TBDmm (TBDin x TBDin x TBDin)
Weight	TBD
Antenna	Integrated dish, 25 dBi,
Pole Diameter Range	3.8 cm – 6.4 cm (1.5 in – 2.5 in)
Power Consumption	12 W Maximum, 9 W Typical
Input Voltage	30 V Passive PoE (14-30V DC input)

Table 91: Force 300-25L environmental specifications

Category	Specification
Temperature	-30°C to +55°C (-22°F to +122°F) ambient op temp
Wind Survival	200 km/hour (124 mi/hour)
Environmental	IP55  <div style="border: 1px solid black; padding: 5px; background-color: #e0f2f1;"> <b>Note</b>            This product meets the UL/cUL 62368 / IEC 62368 edition 2 specification, and the radio housings are designed to be rain-tight.         </div>

## Force 300-25L heater

At startup, if the Force 300-25L module temperature is at or below 32°F (0°C), an internal heater is activated to ensure that the device can successfully begin operation. The unit's heater is only activated when the unit is powered on and will not apply heat to the device once the startup is complete. When the unit temperature is greater than 32°F (0°C), the heater is deactivated, and the unit continues its start-up sequence.

The effect on device startup time at various temperatures is defined in [Table 92](#).

Table 92: Force 300-25L startup times based on ambient temperature

Initial Temperature	Startup time (from power on to operational)
-22°F (-30°C) H	20 minutes
-4°F (-20°C)	6 minutes
14°F (-10°C)	2 minutes, 30 seconds

## Force 300-25L wind loading

Ensure that the device and the structure on which it is mounted are capable of withstanding the prevalent wind speeds at a proposed ePMP site. Wind speed statistics are available from national meteorological offices.

The device and its mounting bracket are capable of withstanding wind speeds of up to 180 kph (124 mph).

Wind blowing on the device will subject the mounting structure to significant lateral force. The magnitude of the force depends on both wind strength and the surface area of the device. Wind loading is estimated using the following formulae:

$$\text{Force (in kilograms)} = 0.1045aV^2$$

Where:	Is:
a	the surface area in square meters
V	wind speed in meters per second

$$\text{Force (in pounds)} = 0.0042Av^2$$

Where:	Is:
A	the surface area in square feet
v	wind speed in miles per hour

Applying these formulae to the ePMP device at different wind speeds, the resulting wind loadings are shown in [Table 93](#) and [Table 94](#).

Table 93: Force 300-25L wind loading (Kg)

Type of ePMP device	Largest surface area (square meters)	Wind speed (meters per second)		
		30	40	50
Force 300-25L Integrated	0.03	2.82 Kg	5.02 Kg	7.84 Kg

Table 94: Force 300-25L wind loading (lb)

Type of ePMP device	Largest surface area (square feet)	Wind speed (miles per hour)		
		80	100	120
Force 300-25L	0.28	7.53 lb	11.76 lb	16.93 lb

## Force 300-25L software packages

Force 300-25L devices can be upgraded by downloading new software packages from the [Cambium Networks site](#) or by using cnMaestro. The software packages applicable to ePMP integrated radios are named:

- ePMP-AC-v4.5-GA.img (or higher version number)

## Force 300-19

For details of the Force 300-19 hardware, see:

- [Force 300-19 integrated description](#)
- [Force 300-19 part numbers](#)
- [Force 300-19 mounting bracket](#)
- [Force 300-19 interfaces](#)
- [Force 300-19 specifications](#)
- [Force 300-19 heater](#)
- [Force 300-19 wind loading](#)
- [Force 300-19 software packages](#)

## Force 300-19 integrated description

The Force 300-19 device is a self-contained transceiver unit that contains both radio and networking electronics. The device is labeled with FCCID:Z8H89FT0048 | IC:109W-0048.

Force 300-19 is shown in [Figure 45](#).



Figure 45: Force 300-19 Access Point

## Force 300-19 part numbers

Select the correct regional variant to adhere to local licensing restrictions.

Each of the parts listed in [Table 95](#) and [Table 96](#) include the following items:

- One integrated unit
- One power supply 1000/100 BASE-TX LAN injector
- One line cord

Table 95: Force 300-19 part numbers

Cambium description	Cambium part number
ePMP 5 GHz Force 300-19 SM (FCC) (US cord)	C058900C801A
ePMP 5 GHz Force 300-19 SM (IC) (Canada/US cord)	C050900C801A
ePMP 5 GHz Force 300-19 SM (EU) (EU cord)	C050900C802A
ePMP 5 GHz Force 300-19 SM (EU) (UK cord)	C050900C803A
ePMP 5 GHz Force 300-19 SM (ROW) (no cord)	C050900C804A
ePMP 5 GHz Force 300-19 SM (ROW) (US cord)	C050900C805A
ePMP 5 GHz Force 300-19 SM (ROW) (EU cord)	C050900C806A
ePMP 5 GHz Force 300-19 SM (ROW) (UK cord)	C050900C807A
ePMP 5 GHz Force 300-19 SM (ROW) (India cord)	C050900C808A
ePMP 5 GHz Force 300-19 SM (India) (India cord)	C050900C809A
ePMP 5 GHz Force 300-19 SM (ROW) (China cord)	C050900C810A
ePMP 5 GHz Force 300-19 SM (ROW) (Brazil cord)	C050900C811A
ePMP 5 GHz Force 300-19 SM (ROW) (Argentina cord)	C050900C812A

Cambium description	Cambium part number
ePMP 5 GHz Force 300-19 SM (ROW) (ANZ cord)	C050900C813A
ePMP 5 GHz Force 300-19 SM (ROW) (South Africa cord)	C050900C814A
ePMP 5 GHz Force 300-19 SM (ROW) (No PSU)	C050900C815A

Table 96: Force 300-19 accessory part numbers

Cambium description	Cambium part number
PoE Gigabit DC Injector, 15W Output at 30V, Energy Level 6 Supply	N000900L001
CABLE, UL POWER SUPPLY CORD SET, ARGENTINA	N000900L013
CABLE, UL POWER SUPPLY CORD SET, AUS/NZ	N000900L011
CABLE, UL POWER SUPPLY CORD SET, Brazil	N000900L010
CABLE, UL POWER SUPPLY CORD SET, CHINA	N000900L015
CABLE, UL POWER SUPPLY CORD SET, EU	N000900L008
CABLE, UL POWER SUPPLY CORD SET, INDIA	N000900L012
CABLE, UL POWER SUPPLY CORD SET, UK	N000900L009
CABLE, UL POWER SUPPLY CORD SET, US	N000900L007

## Force 300-19 mounting bracket

The Force 300-19 module is designed to be pole-mounted using the mounting bracket provided in the box with the radio.

Force 300-19 mounting bracket is shown in [Figure 46](#)



Figure 46: Force 300-19 module mounting bracket

## Force 300-19 interfaces

The Ethernet port is located on the rear of the integrated unit. This interface is described in [Table 97](#).

Table 97: Force 300-19 Series – rear interfaces

Port name	Connector	Interface	Description
Eth	RJ45	PoE input	Power over Ethernet (PoE).  <div style="border: 1px solid black; padding: 5px; background-color: #e0f2ff;"> <b>Note</b>  All RJ45 Ethernet LAN cables used for providing power or connected to power ports (PoE) must be UL certified with VW-1 markings. </div>
		100/1000BASE-T Ethernet	Data

## Force 300-19 specifications

The Force 300-19 integrated module conforms to the specifications listed in [Table 98](#) and [Table 99](#).

The integrated module meets the low-level static discharge specifications identified in [Electromagnetic compatibility \(EMC\) compliance](#) and provides internal surge suppression, but does not provide lightning suppression.

Table 98: Force 300-19 physical specifications

Category	Specification
Dimensions	27.8 cm x 27.8 cm x 4.5cm (10.9 in x 10.9 in x 1.8 in)
Weight	1.45 kg (3.2 lbs) (Including mounting bracket)
Antenna Gain	19 dBi

Table 99: Force 300-19 environmental specifications

Category	Specification
Temperature	-30°C (-22°F) to +60°C (140°F)
Wind loading	113 mph (180 kph) maximum. See <a href="#">Force 300-19 wind loading</a> for a full description.
Humidity	95% condensing
Environmental	IP55  <div style="border: 1px solid black; padding: 5px; background-color: #e0f2ff;"> <b>Note</b>  This product meets the UL/cUL 62368 / IEC 62368 edition 2 specification, and the radio housings are designed to be rain-tight. </div>

## Force 300-19 heater

At startup, if the Force 300-19 module temperature is at or below 32°F (0°C), an internal heater is activated to ensure that the device can successfully begin operation. The unit's heater is only activated when the unit is powered on and will not apply heat to the device once the startup is complete. When the

unit temperature is greater than 32°F (0°C), the heater is deactivated, and the unit continues its startup sequence.

The effect on device startup time at various temperatures is defined in [Table 100](#).

Table 100: Force 300-19 startup times based on ambient temperature

Initial Temperature	Startup time (from power on to operational)
-22°F (-30°C) H	20 minutes
-4°F (-20°C)	6 minutes
14°F (-10°C)	2 minutes, 30 seconds

## Force 300-19 wind loading

Ensure that the device and the structure on which it is mounted are capable of withstanding the prevalent wind speeds at a proposed ePMP site. Wind speed statistics are available from national meteorological offices.

The device and its mounting bracket are capable of withstanding wind speeds of up to 180 kph (113 mph).

Wind blowing on the device will subject the mounting structure to significant lateral force. The magnitude of the force depends on both wind strength and the surface area of the device. Wind loading is estimated using the following formulae:

$$\text{Force (in kilograms)} = 0.1045aV^2$$

Where:	Is:
a	the surface area in square meters
V	wind speed in meters per second

$$\text{Force (in pounds)} = 0.0042Av^2$$

Where:	Is:
A	the surface area in square feet
v	wind speed in miles per hour

Applying these formulae to the ePMP device at different wind speeds, the resulting wind loadings are shown in [Table 101](#) and [Table 102](#).

Table 101: Force 300-19 wind loading (Kg)

Type of ePMP device	Largest surface area (square meters)	Wind speed (meters per second)		
		40	50	60
Force 300-19 Integrated	0.08	13.4 Kg	20.9 Kg	30.1Kg

Table 102: Force 300-19 wind loading (lb)

Type of ePMP device	Largest surface area (square feet)	Wind speed (miles per hour)		
		80	100	120
Force 300-19 Integrated	0.8281	22.3 lb	34.8 lb	50.1 lb

## Force 300-19 software packages

Force 300-19 devices can be upgraded by downloading new software packages from the [Cambium Networks site](#) or by using cnMaestro. The software packages applicable to ePMP integrated radios are named:

- ePMP-AC-v4.5-GA.img (or higher version number)

## Force 300-19R

For details of the Force 300-19R hardware, see:

- [Force 300-19R integrated description](#)
- [Force 300-19R part numbers](#)
- [Force 300-19R mounting bracket](#)
- [Force 300-19R interfaces](#)
- [Force 300-19R specifications](#)
- [Force 300-19R heater](#)
- [Force 300-19R wind loading](#)
- [Force 300-19R software packages](#)

## Force 300-19R integrated description

The Force 300-19R device is a self-contained transceiver unit that contains both radio and networking electronics. The device is labeled with FCCID:Z8H89FT0048 | IC:109W-0048.

## Force 300-19R part numbers

Select the correct regional variant to adhere to local licensing restrictions.

Each of the parts listed in [Table 103](#) and [Table 104](#) include the following items:



Figure 47: Force 300-19R

- One integrated unit
- One power supply 1000/100 BASE-TX LAN injector
- One line cord

Table 103: Force 300-19R part numbers

Cambium description	Cambium part number
ePMP 5 GHz Force 300-19R SM (FCC) (US cord)	C058900C901A
ePMP 5 GHz Force 300-19R SM (IC) (Canada/US cord)	C050900C901A
ePMP 5 GHz Force 300-19R SM (EU) (EU cord)	C050900C902A
ePMP 5 GHz Force 300-19R SM (EU) (UK cord)	C050900C903A
ePMP 5 GHz Force 300-19R SM (ROW) (no cord)	C050900C904A
ePMP 5 GHz Force 300-19R SM (ROW) (US cord)	C050900C905A
ePMP 5 GHz Force 300-19R SM (ROW) (EU cord)	C050900C906A
ePMP 5 GHz Force 300-19R SM (ROW) (UK cord)	C050900C907A
ePMP 5 GHz Force 300-19R SM (ROW) (India cord)	C050900C908A
ePMP 5 GHz Force 300-19R SM (India) (India cord)	C050900C909A
ePMP 5 GHz Force 300-19R SM (ROW) (China cord)	C050900C910A
ePMP 5 GHz Force 300-19R SM (ROW) (Brazil cord)	C050900C911A
ePMP 5 GHz Force 300-19R SM (ROW) (Argentina cord)	C050900C912A
ePMP 5 GHz Force 300-19R SM (ROW) (ANZ cord)	C050900C913A
ePMP 5 GHz Force 300-19R SM (ROW) (South Africa cord)	C050900C914A
ePMP 5 GHz Force 300-19R SM (ROW) (No PSU)	C050900C915A

Table 104: Force 300-19R accessory part numbers

Cambium description	Cambium part number
PoE Gigabit DC Injector, 15W Output at 30V, Energy Level 6 Supply	N000900L001
CABLE, UL POWER SUPPLY CORD SET, ARGENTINA	N000900L013
CABLE, UL POWER SUPPLY CORD SET, AUS/NZ	N000900L011
CABLE, UL POWER SUPPLY CORD SET, Brazil	N000900L010
CABLE, UL POWER SUPPLY CORD SET, CHINA	N000900L015
CABLE, UL POWER SUPPLY CORD SET, EU	N000900L008
CABLE, UL POWER SUPPLY CORD SET, INDIA	N000900L012
CABLE, UL POWER SUPPLY CORD SET, UK	N000900L009
CABLE, UL POWER SUPPLY CORD SET, US	N000900L007

## Force 300-19R mounting bracket

The Force 300-19R module is designed to be pole-mounted using the mounting bracket provided in the box with the radio.

Force 300-19R mounting bracket is shown in [Figure 48](#)



Figure 48: Force 300-19R module mounting bracket

## Force 300-19R interfaces

The Ethernet port is located on the rear of the integrated unit. This interface is described in [Table 105](#).

Table 105: Force 300-19R Series – rear interfaces

Port name	Connector	Interface	Description
Eth	RJ45	PoE input	Power over Ethernet (PoE).
		100/1000BASE-T Ethernet	Data

## Force 300-19R specifications

The Force 300-19R integrated module conforms to the specifications listed in [Table 106](#) and [Table 107](#).

The integrated module meets the low-level static discharge specifications identified in [Electromagnetic compatibility \(EMC\) compliance](#) and provides internal surge suppression, but does not provide lightning suppression.

Table 106: Force 300-19R physical specifications

Category	Specification
Dimensions	27.8 cm x 27.8 cm x 4.5cm (10.9 in x 10.9 in x 1.8 in)
Weight	1.45 kg (3.2 lbs) (Including mounting bracket)
Antenna Gain	19 dBi

Table 107: Force 300-19R environmental specifications

Category	Specification
Temperature	-30°C (-22°F) to +60°C (140°F)
Wind loading	113 mph (180 kph) maximum. See <a href="#">Force 300-19R wind loading</a> for a full description.
Humidity	95% condensing
Environmental	IP67



### Note

This product meets the UL/cUL 62368 / IEC 62368 edition 2 specification, and the radio housings are designed to be rain-tight.

## Force 300-19R heater

At startup, if the Force 300-19R module temperature is at or below 32°F (0°C), an internal heater is activated to ensure that the device can successfully begin operation. The unit's heater is only activated when the unit is powered on and will not apply heat to the device once the startup is complete. When the unit temperature is greater than 32°F (0°C), the heater is deactivated, and the unit continues its startup sequence.

The effect on device startup time at various temperatures is defined in [Table 108](#).

Table 108: Force 300-19R startup times based on ambient temperature

Initial Temperature	Startup time (from power on to operational)
-22°F (-30°C) H	20 minutes
-4°F (-20°C)	6 minutes
14°F (-10°C)	2 minutes, 30 seconds

## Force 300-19R wind loading

Ensure that the device and the structure on which it is mounted are capable of withstanding the prevalent wind speeds at a proposed ePMP site. Wind speed statistics are available from national meteorological offices.

The device and its mounting bracket are capable of withstanding wind speeds of up to 180 kph (113 mph).

Wind blowing on the device will subject the mounting structure to significant lateral force. The magnitude of the force depends on both wind strength and the surface area of the device. Wind loading is estimated using the following formulae:

$$\text{Force (in kilograms)} = 0.1045aV^2$$

Where:	Is:
a	the surface area in square meters
V	wind speed in meters per second

$$\text{Force (in pounds)} = 0.0042Av^2$$

Where:	Is:
A	the surface area in square feet
v	wind speed in miles per hour

Applying these formulae to the ePMP device at different wind speeds, the resulting wind loadings are shown in [Table 109](#) and [Table 110](#).

Table 109: Force 300-19R wind loading (Kg)

Type of ePMP device	Largest surface area (square meters)	Wind speed (meters per second)		
		40	50	60
Force 300-19 Integrated	0.08	13.4Kg	20.9Kg	30.1Kg

Table 110: Force 300-19R wind loading (lb)

Type of ePMP device	Largest surface area (square feet)	Wind speed (miles per hour)		
		80	100	120
Force 300-19 Integrated	0.8281	22.3 lb	34.8 lb	50.1 lb

## Force 300-19R software packages

Force 300-19R devices can be upgraded by downloading new software packages from the [Cambium Networks site](#) or by using cnMaestro. The software packages applicable to ePMP integrated radios are named:

- ePMP-AC-v4.5-GA.img (or higher version number)

## Force 300-16

For details of the Force 300-16 hardware, see:

- [Force 300-16 integrated description](#)
- [Force 300-16 part numbers](#)
- [Force 300-16 interfaces](#)
- [Force 300-16 specifications](#)
- [Force 300-16 heater](#)
- [Force 300-16 wind loading](#)
- [Force 300-16 software packages](#)

### Force 300-16 integrated description

The Force 300-16 device is a self-contained transceiver unit that contains both radio and networking electronics.

Force 300-16 integrated is shown in [Figure 49](#).



*Figure 49: Force 300-16 integrated*



#### IMPORTANT NOTE

##### FCC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 211 cm between the radiator and your body.



#### IMPORTANT NOTE

##### IC Radiation Exposure Statement:

This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator and your body.

*Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement et votre corps.*

## Force 300-16 part numbers

Select the correct regional variant to adhere to local licensing restrictions.

Each of the parts listed in [Table 111](#) and [Table 112](#) include the following items:

- One integrated unit
- One power supply 1000/100 BASE-TX LAN injector
- One line cord

Table 111: Force 300-16 part numbers

Cambium description	Cambium part number
ePMP 5 GHz Force 300-16 Radio (FCC) (US cord)	C058910C112A
ePMP 5 GHz Force 300-16 Radio (IC) (Canada/US cord)	C050910C114A
ePMP 5 GHz Force 300-16 Radio (EU) (EU cord)	C050910C213A
ePMP 5 GHz Force 300-16 Radio (EU) (UK cord)	C050910C313A
ePMP 5 GHz Force 300-16 Radio (ROW) (no cord)	C050910C011A
ePMP 5 GHz Force 300-16 Radio (ROW) (US cord)	C050910C111A
ePMP 5 GHz Force 300-16 Radio (ROW) (EU cord)	C050910C211A
ePMP 5 GHz Force 300-16 Radio (ROW) (UK cord)	C050910C311A
ePMP 5 GHz Force 300-16 Radio (ROW) (India cord)	C050910C411A
ePMP 5 GHz Force 300-16 Radio (India) (India cord)	C050910C412A
ePMP 5 GHz Force 300-16 Radio (ROW) (China cord)	C050910C511A
ePMP 5 GHz Force 300-16 Radio (ROW) (Brazil cord)	C050910C611A
ePMP 5 GHz Force 300-16 Radio (ROW) (Argentina cord)	C050910C711A
ePMP 5 GHz Force 300-16 Radio (ROW) (ANZ cord)	C050910C811A
ePMP 5 GHz Force 300-16 Radio (ROW) (South Africa cord)	C050910C911A
ePMP 5 GHz Force 300-16 Radio (ROW) (No PSU)	C050910CZ11A

Table 112: Force 300-16 accessory part numbers

Cambium description	Cambium part number
PoE Gigabit DC Injector, 15W Output at 30V, Energy Level 6 Supply	N000900L001
CABLE, UL POWER SUPPLY CORD SET, ARGENTINA	N000900L013

Cambium description	Cambium part number
CABLE, UL POWER SUPPLY CORD SET, AUS/NZ	N000900L011
CABLE, UL POWER SUPPLY CORD SET, Brazil	N000900L010
CABLE, UL POWER SUPPLY CORD SET, CHINA	N000900L015
CABLE, UL POWER SUPPLY CORD SET, EU	N000900L008
CABLE, UL POWER SUPPLY CORD SET, INDIA	N000900L012
CABLE, UL POWER SUPPLY CORD SET, UK	N000900L009
CABLE, UL POWER SUPPLY CORD SET, US	N000900L007

## Force 300-16 interfaces

The Ethernet port is located on the rear of the integrated unit.

Table 113: Force 300-16 Series – rear interfaces

Port name	Connector	Interface	Description
Eth	RJ45	PoE input	<p>Power over Ethernet (PoE).</p>  <p><b>Note</b></p> <p>All RJ45 Ethernet LAN cables used for providing power or are connected to power ports (PoE) must be UL certified with VW-1 markings.</p>
		100/1000BASE-T Ethernet	Data

## Force 300-16 specifications

The Force 300-16 integrated module conforms to the specifications listed in [Table 114](#) and [Table 115](#).

The integrated module meets the low-level static discharge specifications identified in [Electromagnetic compatibility \(EMC\) compliance](#) and provides internal surge suppression, but does not provide lightning suppression.

Table 114: Force 300-16 physical specifications

Category	Specification
Dimensions (Diameter x Depth)	12.4 cm x 25.1 cm x 11.9 cm (4.9 in x 9.9 in x 4.7 in) – with mounting bracket
Weight	0.5 kg (1.1 lbs) – with mounting bracket

Table 115: Force 300-16 environmental specifications

Category	Specification
Temperature	-30°C (-22°F) to +60°C (140°F)
Wind loading	112 mph (180 kph) maximum. See <a href="#">Force 300-16 wind loading</a> for a full description.
Environmental	<p>IP55</p> <div style="display: flex; align-items: center;">  <p><b>Note</b></p> <p>This product meets the UL/cUL 62368 / IEC 62368 edition 2 specification, and the radio housings are designed to be rain-tight.</p> </div>

## Force 300-16 heater

At startup, if the Force 300-16 module temperature is at or below 32°F (0°C), an internal heater is activated to ensure that the device can successfully begin operation. The unit's heater is only activated when the unit is powered on and will not apply heat to the device once the startup is complete. When the unit temperature is greater than 32°F (0°C), the heater is deactivated, and the unit continues its startup sequence.

The effect on device startup time at various temperatures is defined in [Table 116](#).

Table 116: Force 300-16 startup times based on ambient temperature

Initial Temperature	Startup time (from power on to operational)
-22°F (-30°C) H	20 minutes
-4°F (-20°C)	6 minutes
14°F (-10°C)	2 minutes, 30 seconds

## Force 300-16 wind loading

Ensure that the device and the structure on which it is mounted are capable of withstanding the prevalent wind speeds at a proposed ePMP site. Wind speed statistics are available from national meteorological offices.

The device and its mounting bracket are capable of withstanding wind speeds of up to 180 kph (124 mph).

Wind blowing on the device will subject the mounting structure to significant lateral force. The magnitude of the force depends on both wind strength and the surface area of the device. Wind loading is estimated using the following formulae:

$$\text{Force (in kilograms)} = 0.1045aV^2$$

Where:	Is:
a	the surface area in square meters
V	wind speed in meters per second

$$\text{Force (in pounds)} = 0.0042Av^2$$

Where:	Is:
A	the surface area in square feet
v	wind speed in miles per hour

Applying these formulae to the ePMP device at different wind speeds, the resulting wind loadings are shown in [Table 117](#) and [Table 118](#).

Table 117: Force 300-16 wind loading (Kg)

Type of ePMP device	Largest surface area (square meters)	Wind speed (meters per second)		
		30	40	50
Force 300-16 Integrated	0.03	2.8 Kg	5 Kg	7.8 Kg

Table 118: Force 300-16 wind loading (lb)

Type of ePMP device	Largest surface area (square feet)	Wind speed (miles per hour)		
		80	100	120
Force 300-16 Integrated	0.34	9.1 lb	14.3 lb	20.6 lb

## Force 300-16 software packages

Force 300-16 devices can be upgraded by downloading new software packages from the [Cambium Networks site](#) or by using cnMaestro. The software packages applicable to ePMP integrated radios are named:

- ePMP-AC-v4.5-GA.img (or higher version number)

## Force 300-13

For details of the Force 300-13 hardware, see:

- [Force 300-13 integrated description](#)
- [Force 300-13 part numbers](#)
- [Force 300-13 interfaces](#)
- [Force 300-13 specifications](#)
- [Force 300-13 heater](#)
- [Force 300-13 wind loading](#)
- [Force 300-13 software packages](#)

## Force 300-13 integrated description

The Force 300-13 device is a self-contained transceiver unit that contains both radio and networking electronics.

(FCCID:Z8H89FT0048 | IC:109W-0048).

Force 300-13 integrated is shown in [Figure 50](#).



*Figure 50: Force 300-13 integrated radio*

## Force 300-13 part numbers

Select the correct regional variant to adhere to local licensing restrictions.

Each of the parts listed in [Table 119](#) and [Table 120](#) include the following items:

- One integrated unit
- One power supply 1000/100 BASE-TX LAN injector
- One line cord

**Table 119: Force 300-13 part numbers**

Cambium description	Cambium part number
ePMP 5GHz Force 300-13 SM (FCC) (US cord)	C058900C701A
ePMP 5GHz Force 300-13 SM (IC) (Canada/US cord)	C050900C701A
ePMP 5GHz Force 300-13 SM (EU) (EU cord)	C050900C702A
ePMP 5GHz Force 300-13 SM (EU) (UK cord)	C050900C703A
ePMP 5GHz Force 300-13 SM (ROW) (no cord)	C050900C704A
ePMP 5GHz Force 300-13 SM (ROW) (US cord)	C050900C705A
ePMP 5GHz Force 300-13 SM (ROW) (EU cord)	C050900C706A
ePMP 5GHz Force 300-13 SM (ROW) (UK cord)	C050900C707A
ePMP 5GHz Force 300-13 SM (ROW) (India cord)	C050900C708A
ePMP 5GHz Force 300-13 SM (India) (India cord)	C050900C709A
ePMP 5GHz Force 300-13 SM (ROW) (China cord)	C050900C710A
ePMP 5GHz Force 300-13 SM (ROW) (Brazil cord)	C050900C711A

Cambium description	Cambium part number
ePMP 5GHz Force 300-13 SM (ROW) (Argentina cord)	C050900C712A
ePMP 5GHz Force 300-13 SM (ROW) (ANZ cord)	C050900C713A
ePMP 5GHz Force 300-13 SM (ROW) (South Africa cord)	C050900C714A
ePMP 5GHz Force 300-13 SM (ROW) (No PSU)	C050900C715A

Table 120: Force 300-13 accessory part numbers

Cambium description	Cambium part number
PoE Gigabit DC Injector, 15W Output at 30V, Energy Level 6 Supply	N000900L001
CABLE, UL POWER SUPPLY CORD SET, ARGENTINA	N000900L013
CABLE, UL POWER SUPPLY CORD SET, AUS/NZ	N000900L011
CABLE, UL POWER SUPPLY CORD SET, Brazil	N000900L010
CABLE, UL POWER SUPPLY CORD SET, CHINA	N000900L015
CABLE, UL POWER SUPPLY CORD SET, EU	N000900L008
CABLE, UL POWER SUPPLY CORD SET, INDIA	N000900L012
CABLE, UL POWER SUPPLY CORD SET, UK	N000900L009
CABLE, UL POWER SUPPLY CORD SET, US	N000900L007

## Force 300-13 interfaces

The Ethernet port is located on the rear of the integrated unit.

Table 121: Force 300-13 Series – rear interfaces

Port name	Connector	Interface	Description
Eth	RJ45	PoE input	<p>Power over Ethernet (PoE).</p>  <p><b>Note</b></p> <p>All RJ45 Ethernet LAN cables used for providing power or are connected to power ports (PoE) must be UL certified with VW-1 markings.</p>
		100/1000BASE-T Ethernet	Data

## Force 300-13 specifications

The Force 300-13 integrated module conforms to the specifications listed in [Table 122](#) and [Table 123](#).

The integrated module meets the low-level static discharge specifications identified in [Electromagnetic compatibility \(EMC\) compliance](#) and provides internal surge suppression, but does not provide lightning suppression.

Table 122: Force 300-13 physical specifications

Category	Specification
Dimensions (Diameter x Depth)	12.4 cm x 25.1 cm x 11.9 cm (4.9 in x 9.9 in x 4.7 in) - with mounting bracket
Weight	0.5 kg (1.1 lbs) - with mounting bracket
Antenna Gain	13 dBi

Table 123: Force 300-13 environmental specifications

Category	Specification
Temperature	-30°C (-22°F) to +60°C (140°F)
Wind loading	112 mph (180 kph) maximum. See <a href="#">Force 300-13 wind loading</a> for a full description.
Environmental	IP55 <div style="border: 1px solid #ccc; padding: 5px; margin-top: 10px;">  <b>Note</b>            This product meets the UL/cUL 62368 / IEC 62368 edition 2 specification, and the radio housings are designed to be rain-tight.         </div>

## Force 300-13 heater

At startup, if the Force 300-13 module temperature is at or below 32°F (0°C), an internal heater is activated to ensure that the device can successfully begin operation. The unit's heater is only activated when the unit is powered on and will not apply heat to the device once the startup is complete. When the unit temperature is greater than 32°F (0°C), the heater is deactivated, and the unit continues its startup sequence.

The effect on device startup time at various temperatures is defined in [Table 124](#).

Table 124: Force 300-13 startup times based on ambient temperature

Initial Temperature	Startup time (from power on to operational)
-22°F (-30°C) H	20 minutes
-4°F (-20°C)	6 minutes
14°F (-10°C)	2 minutes, 30 seconds

## Force 300-13 wind loading

Ensure that the device and the structure on which it is mounted are capable of withstanding the prevalent wind speeds at a proposed ePMP site. Wind speed statistics are available from national meteorological offices.

The device and its mounting bracket are capable of withstanding wind speeds of up to 180 kph (124 mph).

Wind blowing on the device will subject the mounting structure to significant lateral force. The magnitude of the force depends on both wind strength and the surface area of the device. Wind loading is estimated using the following formulae:

$$\text{Force (in kilograms)} = 0.1045aV^2$$

Where:	Is:
a	the surface area in square meters
V	wind speed in meters per second

$$\text{Force (in pounds)} = 0.0042Av^2$$

Where:	Is:
A	the surface area in square feet
v	wind speed in miles per hour

Applying these formulae to the ePMP device at different wind speeds, the resulting wind loadings are shown in [Table 125](#) and [Table 126](#).

Table 125: Force 300-13 wind loading (Kg)

Type of ePMP device	Largest surface area (square meters)	Wind speed (meters per second)		
		30	40	50
Force 300-13 Integrated	0.03	2.82 Kg	5.02 Kg	7.84 Kg

Table 126: Force 300-13 wind loading (lb)

Type of ePMP device	Largest surface area (square feet)	Wind speed (miles per hour)		
		80	100	120
Force 300-13 Integrated	0.28	7.53 lb	11.76 lb	16.93 lb

## Force 300-13 software packages

Force 300-16 devices can be upgraded by downloading new software packages from the [Cambium Networks site](#) or by using cnMaestro. The software packages applicable to ePMP integrated radios are named:

- ePMP-AC-v4.5-GA.img (or higher version number)

## Force 300-13L

For details of the Force 300-13L hardware, see:

- [Force 300-13L integrated description](#)
- [Force 300-13L part numbers](#)

- [Force 300-13L interfaces](#)
- [Force 300-13L specifications](#)
- [Force 300-13L wind loading](#)
- [Force 300-13L LEDs](#)
- [Force 300-13L software packages](#)

## Force 300-13L integrated description

The Force 300-13L device is a self-contained transceiver unit that contains both radio and networking electronics. The Force 300-13L uses 802.11ac technology and supports MU-MIMO and other features offered by the ePMP 3000 and ePMP 3000L APs. It is also backward compatible with the ePMP 2000 using backward compatibility features.

Force 300-13L integrated is shown in [Figure 51](#).



[Figure 51: Force 300-13L integrated](#)

## Force 300-13L part numbers

Select the correct regional variant to adhere to local licensing restrictions.

Each of the parts listed in [Table 127](#) and [Table 128](#) include the following items:

- One integrated unit
- One power supply 1000/100 BASE-TX LAN injector
- One-line cord

Table 127: Force 300-13L part numbers

Cambium description	Cambium part number
ePMP 5 GHz Force 300-13L SM (ROW) (no cord)	C050910C031A
ePMP 5 GHz Force 300-13L SM (ROW) (US cord)	C050910C131A
ePMP 5 GHz Force 300-13L SM (ROW) (EU cord)	C050910C231A
ePMP 5 GHz Force 300-13L SM (EU) (EU cord)	C050910C233A
ePMP 5 GHz Force 300-13L SM (ROW) (UK cord)	C050910C331A
ePMP 5 GHz Force 300-13L SM (EU) (UK cord)	C050910C333A
ePMP 5 GHz Force 300-13L SM (ROW) (India cord)	C050910C431A
ePMP 5 GHz Force 300-13L SM (India) (India Cord)	C050910C432A
ePMP 5 GHz Force 300-13L SM (ROW) (China cord)	C050910C531A
ePMP 5 GHz Force 300-13L SM (ROW) (Brazil cord)	C050910C631A
ePMP 5 GHz Force 300-13L SM (ROW) (Argentina cord)	C050910C731A
ePMP 5 GHz Force 300-13L SM (ROW) (ANZ cord)	C050910C831A
ePMP 5 GHz Force 300-13L SM (ROW) (South Africa cord)	C050910C931A
ePMP 5 GHz Force 300-13L SM (ROW) (No PSU)	C050910CZ31A

Table 128: Force 300-13L accessory part numbers

Cambium description	Cambium part number
PoE Gigabit DC Injector, 15W Output at 30V, Energy Level 6 Supply	N000900L001
CABLE, UL POWER SUPPLY CORD SET, ARGENTINA	N000900L013
CABLE, UL POWER SUPPLY CORD SET, AUS/NZ	N000900L011
CABLE, UL POWER SUPPLY CORD SET, Brazil	N000900L010
CABLE, UL POWER SUPPLY CORD SET, CHINA	N000900L015
CABLE, UL POWER SUPPLY CORD SET, EU	N000900L008
CABLE, UL POWER SUPPLY CORD SET, INDIA	N000900L012
CABLE, UL POWER SUPPLY CORD SET, UK	N000900L009
CABLE, UL POWER SUPPLY CORD SET, US	N000900L007

## Force 300-13L interfaces

The Ethernet port is located on the rear of the integrated unit.

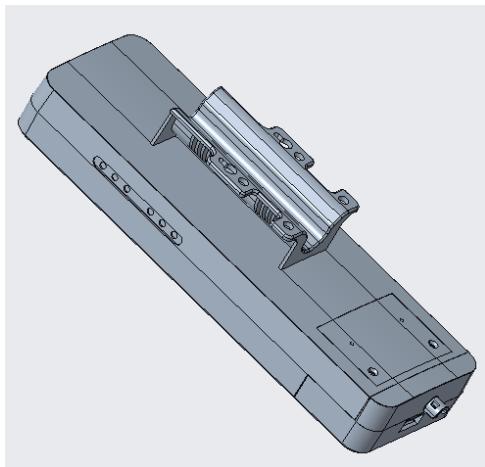


Figure 52: Rear Interfaces

Table 129: Force 300-13L Series – rear interfaces

Port name	Connector	Interface	Description
Ethernet	RJ45	24V PoE input	10/100 BASE-T
		100 BASE-TX Ethernet	Management and data
Reset Button	Physical button	N/A	For resetting the radio and for setting the radio back to its factory default configuration.

## Force 300-13L specifications

The Force 300-13L integrated module conforms to the specifications listed in [Table 130](#) and [Table 131](#).

The integrated module meets the low-level static discharge specifications identified in [Electromagnetic compatibility \(EMC\) compliance](#) and provides internal surge suppression, but does not provide lightning suppression.

Table 130: Force 300-13L physical specifications

Category	Specification
Dimensions (Diameter x Depth)	235 x 77 x 58 mm
Weight	0.35 kg (0.88 lbs)
Antenna Gain	13 dBi

Table 131: Force 300-13L environmental specifications

Category	Specification
Temperature	-30°C to +55°C (-22°F to +122°F)
Wind loading	125 km/hour (78 mi/hour)
Environmental	IP55

Category	Specification
	 <p><b>Note</b></p> <p>This product meets the UL/cUL 62368 / IEC 62368 edition 2 specification, and the radio housings are designed to be raintight.</p>

## Force 300-13L wind loading

Ensure that the device and the structure on which it is mounted are capable of withstanding the prevalent wind speeds at a proposed ePMP site. Wind speed statistics are available from national meteorological offices.

The device and its mounting bracket are capable of withstanding wind speeds of up to 125 kph (78 mph).

Wind blowing on the device will subject the mounting structure to significant lateral force. The magnitude of the force depends on both wind strength and surface area.

## Force 300-13L LEDs

The LEDs and the corresponding description are described in [Table 132](#).

Table 132: Force 300-13L LED Functions

RSSI 3		LED	Function								
RSSI 2		POWER	Green: Power is applied to the device Unlit: No power is applied to the device or improper power source								
RSSI 1		WiFi	XXX								
LAN		LAN	XXX								
WIFI											
POWER		RF SIGNAL	Radio scanning: LEDs light in an ascending sequence to indicate that the radio is scanning Radio registered: LEDs light to indicate the RSSI level at the device.								
	RSSI > -60 dBm		-70 dBm		< RSSI ≤ -60 dBm		-80 dBm		< RSSI ≤ -70 dBm		RSSI ≤ -80 dBm

## Force 300-13L software packages

Force 300-13L devices can be upgraded by downloading new software packages from the [Cambium Networks site](#) or by using cnMaestro. The software packages applicable to ePMP integrated radios are named:

- ePMP- NonGPS\_Synced-[version].tar.gz (or higher version number)

## Force 300 CSM

For details of the Force 300 CSM hardware, see:

- [Force 300 CSM description](#)
- [Force 300 CSM part numbers](#)
- [Force 300 CSM interfaces](#)
- [Force 300 CSM specifications](#)
- [Force 300 CSM heater](#)
- [Force 300 CSM wind loading](#)
- [Force 300 CSM software packages](#)

### Force 300 CSM description

The Force 300 CSM device is a connectorized subscriber module transceiver unit that contains both radio and networking electronics.

Force 300 CSM is shown in [Figure 53](#).



Figure 53: Force 300 CSM

### Force 300 CSM part numbers

Select the correct regional variant to adhere to local licensing restrictions.

Each of the parts listed in [Table 133](#) and [Table 134](#) includes the following items:

- One integrated unit
- One power supply 1000/100 BASE-TX LAN injector
- One line cord

Table 133: Force 300 CSM part numbers

Cambium description	Cambium part number
ePMP 5 GHz Force 300 CSM SM (FCC) (US cord)	C058910C122A
ePMP 5 GHz Force 300 CSM SM (IC) (Canada/US cord)	C050910C124A
ePMP 5 GHz Force 300 CSM SM (EU) (EU cord)	C050910C223A
ePMP 5 GHz Force 300 CSM SM (EU) (UK cord)	C050910C323A
ePMP 5 GHz Force 300 CSM SM (ROW) (no cord)	C050910C021A
ePMP 5 GHz Force 300 CSM SM (ROW) (US cord)	C050910C121A
ePMP 5 GHz Force 300 CSM SM (ROW) (EU cord)	C050910C221A
ePMP 5 GHz Force 300 CSM SM (ROW) (UK cord)	C050910C321A
ePMP 5 GHz Force 300 CSM SM (ROW) (India cord)	C050910C421A
ePMP 5 GHz Force 300 CSM SM (India) (India cord)	C050910C422A
ePMP 5 GHz Force 300 CSM SM (ROW) (China cord)	C050910C521A
ePMP 5 GHz Force 300 CSM SM (ROW) (Brazil cord)	C050910C621A
ePMP 5 GHz Force 300 CSM SM (ROW) (Argentina cord)	C050910C721A
ePMP 5 GHz Force 300 CSM SM (ROW) (ANZ cord)	C050910C821A
ePMP 5 GHz Force 300 CSM SM (ROW) (South Africa cord)	C050910C921A
ePMP 5 GHz Force 300 CSM SM (ROW) (No PSU)	C050910CZ21A

Table 134: Force 300 CSM accessory part numbers

Cambium description	Cambium part number
PoE Gigabit DC Injector, 15W Output at 30V, Energy Level 6 Supply	N000900L001
CABLE, UL POWER SUPPLY CORD SET, ARGENTINA	N000900L013
CABLE, UL POWER SUPPLY CORD SET, AUS/NZ	N000900L011
CABLE, UL POWER SUPPLY CORD SET, Brazil	N000900L010
CABLE, UL POWER SUPPLY CORD SET, CHINA	N000900L015
CABLE, UL POWER SUPPLY CORD SET, EU	N000900L008
CABLE, UL POWER SUPPLY CORD SET, INDIA	N000900L012
CABLE, UL POWER SUPPLY CORD SET, UK	N000900L009
CABLE, UL POWER SUPPLY CORD SET, US	N000900L007

## Force 300 CSM interfaces

The Ethernet port is located on the rear of the unit.

Table 135: Force 300 CSM Series – rear interfaces

Port name	Connector	Interface	Description
Eth	RJ45	PoE input	<p>Power over Ethernet (PoE).</p>  <p><b>Note</b> All RJ45 Ethernet LAN cables used for providing power or are connected to power ports (PoE) must be UL certified with VW-1 markings.</p>
		100/1000BASE-T Ethernet	Data

## Force 300 CSM specifications

The Force 300 CSM connectorized module conforms to the specifications listed in [Table 136](#) and [Table 137](#).

The module meets the low-level static discharge specifications identified in [Electromagnetic compatibility \(EMC\) compliance](#) and provides internal surge suppression, but does not provide lightning suppression.

Table 136: Force 300 CSM physical specifications

Category	Specification
Dimensions (Diameter x Depth)	220mm x 80mm x 25mm (8.7in x 3.15in x 1.0in)
Weight	0.5 kg (1.1 lbs) – with mounting bracket

Table 137: Force 300 CSM environmental specifications

Category	Specification
Temperature	-30°C (-22°F) to +60C (140°F)
Wind loading	112 mph (180 kph) maximum. See <a href="#">Force 300 CSM wind loading</a> for a full description.
Environmental	IP67  <p><b>Note</b> This product meets the UL/cUL 62368 / IEC 62368 edition 2 specification, and the radio housings are designed to be rain-tight.</p>

## Force 300 CSM heater

At startup, if the Force 300 CSM module temperature is at or below 32°F (0°C), an internal heater is activated to ensure that the device can successfully begin operation. The unit's heater is only activated when the unit is powered on and will not apply heat to the device once the startup is complete. When the unit temperature is greater than 32°F (0°C), the heater is deactivated, and the unit continues its startup sequence.

The effect on device startup time at various temperatures is defined in [Table 138](#).

Table 138: Force 300 CSM startup times based on ambient temperature

Initial Temperature	Startup time (from power on to operational)
-22°F (-30°C) H	20 minutes
-4°F (-20°C)	6 minutes
14°F (-10°C)	2 minutes, 30 seconds

## Force 300 CSM wind loading

Ensure that the device and the structure on which it is mounted can withstand the prevalent wind speeds at a proposed ePMP site. Wind speed statistics are available from national meteorological offices.

The device and its mounting bracket are capable of withstanding wind speeds of up to 180 kph (124 mph).

Wind blowing on the device will subject the mounting structure to significant lateral force. The magnitude of the force depends on both wind strength and the surface area of the device. Wind loading is estimated using the following formulae:

Force (in kilograms) =  $0.1045aV^2$

Where:	Is:
a	the surface area in square meters
V	wind speed in meters per second

Force (in pounds) =  $0.0042Av^2$

Where:	Is:
A	the surface area in square feet
v	wind speed in miles per hour

Applying these formulae to the ePMP device at different wind speeds, the resulting wind loadings are shown in [Table 139](#) and [Table 140](#).

Table 139: Force 300 CSM wind loading (Kg)

Type of ePMP device	Largest surface area (square meters)	Wind speed (meters per second)		
		30	40	50
Force 300 CSM Connectorized	0.03	2.82 Kg	5.02 Kg	7.84 Kg

Table 140: Force 300 CSM wind loading (lb)

Type of ePMP device	Largest surface area (square feet)	Wind speed (miles per hour)		
		80	100	120
Force 300 CSM Connectorized	0.28	7.53 lb	11.76 lb	16.93 lb

## Force 300 CSM software packages

The Force 300 CSM devices can be upgraded by downloading new software packages from the [Cambium Networks site](#) or by using cnMaestro. The software packages applicable to ePMP integrated radios are named:

- ePMP-AC-v4.5-GA.img (or higher version number)

## Force 300 CSML

For details of the Force 300 CSML hardware, see:

- [Force 300 CSML description](#)
- [Force 300 CSML part numbers](#)
- [Force 300 CSML interfaces](#)
- [Force 300 CSML mounting bracket](#)
- [Force 300 CSML specifications](#)
- [Force 300 CSML wind loading](#)
- [Force 300 CSML LEDs](#)
- [Force 300 CSML software packages](#)

## Force 300 CSML description

The Force 300 CSML device is a self-contained transceiver unit that contains both radio and networking electronics. The Force 300 CSML uses 802.11ac technology and supports MU-MIMO and other features offered by the ePMP 3000 and ePMP 3000L APs. It is also backward compatible with the ePMP 2000 using backward compatibility features.

Force 300 CSML is shown in [Figure 54](#).



Figure 54: Force 300 CSML

## Force 300 CSML part numbers

Select the correct regional variant to adhere to local licensing restrictions.

Each of the parts listed in [Table 141](#) and [Table 142](#) include the following items:

- One connectorized unit
- One power supply 1000/100 BASE-TX LAN injector
- One-line cord

Table 141: Force 300 CSML part numbers

Cambium description	Cambium part number
ePMP 5 GHz Force 300 CSML SM (ROW) (no cord)	C050910C061A
ePMP 5 GHz Force 300 CSML SM (ROW) (US cord)	C050910C161A
ePMP 5 GHz Force 300 CSML SM (ROW) (EU cord)	C050910C261A
ePMP 5 GHz Force 300 CSML SM (EU) (EU cord)	C050910C263A
ePMP 5 GHz Force 300 CSML SM (ROW) (UK cord)	C050910C361A
ePMP 5 GHz Force 300 CSML SM (EU) (UK cord)	C050910C363A
ePMP 5 GHz Force 300 CSML SM (ROW) (India cord)	C050910C461A
ePMP 5 GHz Force 300 CSML SM (India) (India Cord)	C050910C462A
ePMP 5 GHz Force 300 CSML SM (ROW) (China cord)	C050910C561A
ePMP 5 GHz Force 300 CSML SM (ROW) (Brazil cord)	C050910C661A
ePMP 5 GHz Force 300 CSML SM (ROW) (Argentina cord)	C050910C761A
ePMP 5 GHz Force 300 CSML SM Bulk Packaging (ROW) (ANZ cord)	C050910C861A
ePMP 5 GHz Force 300 CSML SM (ROW) (South Africa cord)	C050910C961A
ePMP 5 GHz Force 300 CSML SM (ROW) (No PSU)	C050910CZ61A

Table 142: Force 300 CSML accessories part numbers

Cambium description	Cambium part number
PoE Gigabit DC Injector, 15W Output at 30V, Energy Level 6 Supply	N000900L001
CABLE, UL POWER SUPPLY CORD SET, ARGENTINA	N000900L013
CABLE, UL POWER SUPPLY CORD SET, AUS/NZ	N000900L011
CABLE, UL POWER SUPPLY CORD SET, Brazil	N000900L010
CABLE, UL POWER SUPPLY CORD SET, CHINA	N000900L015
CABLE, UL POWER SUPPLY CORD SET, EU	N000900L008

## Force 300 CSML interfaces

The Ethernet port is located on the rear of the connectorized unit.



Figure 55: Rear interfaces

Table 143: Force 300 CSML Series – Rear interfaces

Port name	Connector	Interface	Description
Ethernet	RJ45	24V PoE input	10/100BASE-T
		100 BASE-TX Ethernet	Management and data
Reset Button	Physical button	N/A	For resetting the radio and for setting the radio back to its factory default configuration.

## Force 300 CSML mounting bracket

The Force 300 CSML module is designed to be pole-mounted using the mounting bracket provided in the box with the radio.

Force 300 CSML mounting bracket is shown in [Figure 56](#).



Figure 56: Force 300 CSML module mounting bracket

## Force 300 CSML specifications

The Force 300 CSML module conforms to the specifications listed in [Table 144](#) and [Table 145](#). The connectorized module meets the low-level static discharge specifications identified in [Electromagnetic compatibility \(EMC\) compliance](#) and provides internal surge suppression, but does not provide lightning suppression.

Table 144: Force 300 CSML physical specifications

Category	Specification
Dimensions (Diameter x Depth)	227 x 88 x 33 mm
Weight	0.521 kg (1.15 lbs) without antenna

Table 145: Force 300 CSML environmental specifications

Category	Specification
Temperature	-30°C to +55°C (-22°F to +122°F)
Wind loading	125 km/hour (78 mi/hour)
Environmental	IP55  <b>Note</b> This product meets the UL/cUL 62368 / IEC 62368 edition 2 specification, and the radio housings are designed to be rain-tight.

## Force 300 CSML wind loading

Ensure that the device and the structure on which it is mounted are capable of withstanding the prevalent wind speeds at a proposed ePMP site. Wind speed statistics are available from national meteorological offices.

The device and its mounting brackets are capable of withstanding wind speeds of up to 125 kph (78 mph).

Wind blowing on the device will subject the mounting structure to significant lateral force. The magnitude of the force depends on both wind strength and surface area.

## Force 300 CSML LEDs

The LEDs and corresponding functions are provided in [Table 146](#).

Table 146: Force 300 CSML LED functions

	<b>LED</b>	<b>Function</b>	
	POWER	<b>Green:</b> Power is applied to the device <b>Unlit:</b> No power is applied to the device or improper power source	
	WiFi	XXX	
	LAN	XXX	
		<b>Radio scanning:</b> LEDs light in an ascending sequence to indicate that the radio is scanning	
	RF SIGNAL	<b>Radio registered:</b> LEDs light to indicate the RSSI level at the device.	
	RSSI	 > -60 dBm  -70 dBm  < RSSI ≤ -60 dBm	 -80 dBm  < RSSI ≤ -70 dBm  RSSI ≤ -80 dBm

## Force 300 CSML software packages

Force 300 CSML devices can be upgraded by downloading new software packages from the [Cambium Networks site](#) or by using cnMaestro. The software packages applicable to ePMP integrated radios are named:

- ePMP-AC-F300-[Radio Model]-[version].tar.gz (or higher version number)

## Force 425

For details of the Force 425 hardware, see:

- [Force 425 integrated description](#)
- [Force 425 part numbers](#)
- [Force 425 mounting bracket with Range Extender](#)
- [Force 425 interfaces](#)

- [Force 425 specifications](#)
- [Force 425 heater](#)
- [Force 425 software packages](#)

## Force 425 integrated description

The Force 425 device is a self-contained transceiver unit that contains both radio and networking electronics.

Force 425 is shown in [Figure 57](#).



*Figure 57: Force 425 integrated*

## Force 425 part numbers

Select the correct regional variant to adhere to local licensing restrictions.

Each of the parts listed in [Table 147](#) and [Table 148](#) includes the following items:

- One integrated unit
- One power supply 1000/100 BASE-TX LAN injector
- One line cord

[Table 147: ePMP Force 425 part numbers](#)

Cambium description	Cambium part number
ePMP 5 GHz Force 425 SM 2-pack packaging (ROW) (no cord) - Priced per radio	C050940M001A
ePMP 5 GHz Force 425 SM 2-pack packaging (ROW) (US cord) - Priced per radio	C050940M101A
ePMP 5 GHz Force 425 SM 2-pack packaging (IC) (Canada/US cord) - Priced per radio	C058940M104A
ePMP 5 GHz Force 425 SM 2-pack packaging (ROW) (EU cord) - Priced per radio	C050940M201A
ePMP 5 GHz Force 425 SM 2-pack packaging (EU) (EU cord) - Priced per radio	C050940M203A

Cambium description	Cambium part number
ePMP 5 GHz Force 425 SM 2-pack packaging (ROW) (UK cord) - Priced per radio	C050940M301A
ePMP 5 GHz Force 425 SM 2-pack packaging (EU) (UK cord) - Priced per radio	C050940M303A
ePMP 5 GHz Force 425 SM 2-pack packaging (ROW) (India cord) - Priced per radio	C050940M401A
ePMP 5 GHz Force 425 SM 2-pack packaging (India) (India Cord) - Priced per radio	C050940M402A
ePMP 5 GHz Force 425 SM 2-pack packaging (ROW) (China cord) - Priced per radio	C050940M501A
ePMP 5 GHz Force 425 SM 2-pack packaging (ROW) (Brazil cord) - Priced per radio	C050940M601A
ePMP 5 GHz Force 425 SM 2-pack packaging (ROW) (Argentina cord) - Priced per radio	C050940M701A
ePMP 5 GHz Force 425 SM 2-pack packaging (ROW) (ANZ cord) - Priced per radio	C050940M801A
ePMP 5 GHz Force 425 SM 2-pack packaging (ROW) (South Africa cord) - Priced per radio	C050940M901A
ePMP 5 GHz Force 425 SM 2-pack packaging (ROW) (No PSU) - Priced per radio	C050940MZ01A
ePMP 5 GHz Force 425 SM 2-pack packaging (FCC) (US Cord) - Priced per radio	C058940M102A

Table 148: Force 425 accessory part numbers

Cambium description	Cambium part number
ePMP Force 425 Range Extender Dish Accessory 4-Pack Packaging, priced per unit	N000900L062A

## Force 425 mounting bracket with Range Extender

The Force 425 module is designed to be pole-mounted using the mounting bracket provided in the box with the radio.

Force 425 mounting bracket is shown in Figure 58



Figure 58: Force 425 module mounting bracket with Range Extender

## Force 425 interfaces

The Ethernet port is located on the rear of the integrated unit. This interface is described in [Table 149](#).

Table 149: Force 425 Series – rear interfaces

Portname	Connector	Interface	Description
Eth	RJ45	PoE input	Power over Ethernet (PoE).
		100/1000BASE-T Ethernet	Data
	SFP	10 Gigabit cage	Optional 10 Gigabit SFP cage for SFP module

## Force 425 specifications

The Force 425 integrated module conforms to the specifications listed in [Table 150](#) and [Table 151](#).

The integrated module meets the low-level static discharge specifications identified in [Electromagnetic compatibility \(EMC\) compliance](#) and provides internal surge suppression, but does not provide lightning suppression.

Table 150: Force 425 physical specifications

Category	Specification
Dimensions (Diameter x Depth)	470 mm diameter x 285 mm depth (18.5 in diameter x 11.2 in depth)
Weight	4.8 kg (10.6 lbs.)

Table 151: Force 425 environmental specifications

Category	Specification
Temperature	-30°C to 65°C (-22°F to 149°F)
Wind loading	200 km/hour (124 mph)
Humidity	95% condensing
Environmental	IPx0

## Force 425 heater

At startup, if the Force 425 module temperature is at or below 32°F (0°C), an internal heater is activated to ensure that the device can successfully begin operation. The unit's heater is only activated when the unit is powered on and will not apply heat to the device once the startup is complete. When the unit temperature is greater than 32°F (0°C), the heater is deactivated, and the unit continues its startup sequence.

The effect on device startup time at various temperatures is defined in [Table 152](#).

Table 152: Force 425 startup times based on ambient temperature

Initial Temperature	Startup time (from power on to operational)
-22°F (-30°C) H	20 minutes
-4°F (-20°C)	6 minutes
14°F (-10°C)	2 minutes, 30 seconds

## Force 425 wind loading

Ensure that the device and the structure on which it is mounted are capable of withstanding the dominant wind speeds at a proposed ePMP site. Wind speed statistics are available from national meteorological offices.

The device and its mounting bracket are capable of withstanding wind speeds of up to 200 kph (124 mph).

Wind blowing on the device subjects the mounting structure to significant lateral force. The magnitude of the force depends on both wind strength and the surface area of the device. Wind loading is estimated using the following formulae:

$$\text{Force (in kilograms)} = 0.1045aV^2$$

Where:	Is:
a	the surface area in square meters
V	wind speed in meters per second

$$\text{Force (in pounds)} = 0.0042Av^2$$

Where:	Is:
--------	-----

A	the surface area in square feet
v	wind speed in miles per hour

Applying these formulae to the ePMP device at different wind speeds, the resulting wind loadings are shown in [Table 153](#) and [Table 154](#).

Table 153: Force 425 wind loading (Kg)

Type of ePMP device	Largest surface area (square meters)	Wind speed (meters per second)		
		40	50	60
Force 425 Integrated	0.15	25.08 Kg	39.2 Kg	56.43 Kg

Table 154: Force 425 wind loading (lb)

Type of ePMP device	Largest surface area (square feet)	Wind speed (miles per hour)		
		80	100	120
Force 425 Integrated	1.61	43.28 lb	67.62 lb	97.37 lb

## Force 425 software packages

Force 425 devices can be upgraded by downloading new software packages from the [Cambium Networks site](#) or by using cnMaestro. The software packages applicable to ePMP integrated radios are named:

- ePMP-AX-v5.0.img (or higher version number)

## Force 400C

For details of the Force 400C hardware, see:

- [Force 400C integrated description](#)
- [Force 400C part numbers](#)
- [Force 400C interfaces](#)
- [Force 400C specifications](#)
- [Force 400C heater](#)
- [Force 400C wind loading](#)
- [Force 400C software packages](#)

## Force 400C integrated description

The Force 400C device is a self-contained transceiver unit that contains both radio and networking electronics.

Force 400C is shown in [Figure 59](#).



Figure 59: Force 400C integrated

## Force 400C part numbers

Select the correct regional variant to adhere to local licensing restrictions.

Each of the parts listed includes the following items:

- One integrated unit
- One power supply 1000/100 BASE-TX LAN injector
- One line cord

Table 155: Force 400C part numbers

Cambium description	Cambium partnumber
ePMP 5 GHz Force 400C (ROW) (no cord)	C050940C021A
ePMP 5 GHz Force 400C (ROW) (US cord)	C050940C121A
ePMP 5 GHz Force 400C (IC) (Canada/US cord)	C058940C124A
ePMP 5 GHz Force 400C (ROW) (EU cord)	C050940C221A
ePMP 5 GHz Force 400C (EU) (EU cord)	C050940C223A
ePMP 5 GHz Force 400C (ROW) (UK cord)	C050940C321A
ePMP 5 GHz Force 400C (EU) (UK cord)	C050940C323A
ePMP 5 GHz Force 400C (ROW) (India cord)	C050940C421A
ePMP 5 GHz Force 400C (India) (India Cord)	C050940C422A
ePMP 5 GHz Force 400C (ROW) (China cord)	C050940C521A

Cambium description	Cambium partnumber
ePMP 5 GHz Force 400C (ROW) (Brazil cord)	C050940C621A
ePMP 5 GHz Force 400C (ROW) (Argentina cord)	C050940C721A
ePMP 5 GHz Force 400C (ROW) (ANZ cord)	C050940C821A
ePMP 5 GHz Force 400C (ROW) (South Africa cord)	C050940C921A
ePMP 5 GHz Force 400C (ROW) (No PSU)	C050940CZ21A
ePMP 5 GHz Force 400C (FCC) (US Cord)	C058940C122A

Table 156: Force 400C accessory part numbers

Cambiumdescription	Cambiumpartnumber
ePMP Force 400 spares kit	N000900L061A

## Force 400C interfaces

The Ethernet port is located on the rear of the integrated unit.

Table 157: Force 400C series – rear interfaces

Portname	Connector	Interface	Description
Eth	RJ45	PoE input	Power over Ethernet (PoE)
		100/1000BASE-T Ethernet	Data
	SFP	10 Gigabit cage	Optional 10 Gigabit SFP cage for SFP module

## Force 400C specifications

The Force 400C integrated module conforms to the specifications listed in [Table 158](#) and [Table 159](#).

The integrated module meets the low-level static discharge specifications identified in [Electromagnetic compatibility \(EMC\) compliance](#) and provides internal surge suppression, but does not provide lightning suppression.

Table 158: Force 400C physical specifications

Category	Specification
Dimensions (Diameter x Depth)	256 mm x 125 mm x 46 mm (10.1 in x 4.9 in. x 1.8 in.)
Weight	1.3 kg (2.9 lbs.)

Table 159: Force 400C environmental specifications

Category	Specification
Temperature	-30°C to 65°C (-22°F to 149°F)

Category	Specification
Wind loading	200 km/hour (124 mph)
Environmental	IPx0

## Force 400C heater

At startup, if the Force 400C module temperature is at or below 32°F (0°C), an internal heater is activated to ensure that the device can successfully begin operation. The unit's heater is only activated when the unit is powered on and will not apply heat to the device once the startup is complete. When the unit temperature is greater than 32°F (0°C), the heater is deactivated and the unit continues its start-up sequence.

The effect on device startup time at various temperatures is defined in [Table 160](#).

Table 160: Force 400C startup times based on ambient temperature

Initial Temperature	Startup time (from power on to operational)
-22°F (-30°C) H	20 minutes
-4°F (-20°C)	6 minutes
14°F (-10°C)	2 minutes, 30 seconds

## Force 400C wind loading

Ensure that the device and the structure on which it is mounted are capable of withstanding the prevalent wind speeds at a proposed ePMP site. Wind speed statistics are available from national meteorological offices.

The device and its mounting bracket are capable of withstanding wind speeds of up to 180 kph (124 mph).

Wind blowing on the device will subject the mounting structure to significant lateral force. The magnitude of the force depends on both wind strength and the surface area of the device. Wind loading is estimated using the following formulae:

Force (in kilograms) =  $0.1045aV^2$

Where:	Is:
a	the surface area in square meters
V	wind speed in meters per second

Force (in pounds) =  $0.0042Av^2$

Where:	Is:
A	the surface area in square feet
v	wind speed in miles per hour

Applying these formulae to the ePMP device at different wind speeds, the resulting wind loadings are shown in [Table 161](#) and [Table 162](#).

Table 161: Force 400C wind loading (Kg)

Type of ePMP device	Largest surface area (square meters)	Wind speed (meters per second)		
		30	40	50
Force 400C Integrated	0.03	2.82 Kg	5.02 Kg	7.84 Kg

Table 162: Force 400C wind loading (lb)

Type of ePMP device	Largest surface area (square feet)	Wind speed (miles per hour)		
		80	100	120
Force 400C Integrated	0.28	7.53 lb	11.76 lb	16.93 lb

## Force 400C software packages

Force 400C devices can be upgraded by downloading new software packages from the [Cambium Networks site](#) or by using cnMaestro. The software packages applicable to ePMP integrated radios are named:

- ePMP-AX-v5.x.x.img (or higher version number)

## Force 4600C

For details of the Force 4600C hardware, see:

- [Force 4600C integrated description](#)
- [Force 4600C part numbers](#)
- [Force 4600C interfaces](#)
- [Force 4600C specifications](#)
- [Force 4600C heater](#)
- [Force 4600C wind loading](#)
- [Force 4600C software packages](#)

## Force 4600C integrated description

The Force 4600C device is a self-contained transceiver unit that contains both radio and networking electronics. The MPE distance for FCC is 371 cm and for IC is 20 cm.

Force 4600C is shown in [Figure 60](#).



Figure 60: Force 4600C integrated



#### Warning

The operation of this device is prohibited on oil platforms, cars, trains, boats, and aircraft. Operation of the transmitters in 5.925 GHz - 7.125 GHz band is prohibited for control of communications with the unmanned aircraft systems.



#### Warning

Devices shall not be used for control of or communications with unmanned aircraft systems. Les appareils ne doivent pas être utilisés pour contrôler ou communiquer avec des systèmes d'aéronefs sans pilote.



#### Warning

Operation on oil platforms, automobiles, trains, maritime vessels, and aircraft shall be prohibited. L'exploitation sur les plates-formes pétrolières, les automobiles, les trains, les navires maritimes et les aéronefs est interdite.



#### Warning

The antenna height shall be determined by the installer or operator of the standard-power access point or fixed client device, or by automatic means. This information are stored internally in the device. Provision of accurate device information is mandatory.

La hauteur de l'antenne doit être déterminée par l'installateur ou l'opérateur du point d'accès à puissance standard ou de l'appareil client fixe, ou par des moyens automatiques. Ces informations doivent être stockées en interne dans l'appareil. La fourniture d'informations précises sur l'appareil est obligatoire.

## Force 4600C part numbers

Select the correct regional variant to adhere to local licensing restrictions.

Each of the parts listed includes the following items:

- One integrated unit
- One power supply 1000/100 BASE-TX LAN injector
- One line cord

Table 163: Force 4600C part numbers

Cambiumdescription	Cambium partnumber
ePMP 6 GHz Force 4600C SM Radio (ROW) (no cord)	C060940C021A
ePMP 6 GHz Force 4600C SM Radio (ROW) (US cord)	C060940C121A
ePMP 6 GHz Force 4600C SM Radio (IC) (Canada/US cord)	C068940C124A
ePMP 6 GHz Force 4600C SM Radio (ROW) (EU cord)	C060940C221A
ePMP 6 GHz Force 4600C SM Radio (EU) (EU cord)	C060940C223A
ePMP 6 GHz Force 4600C SM Radio (ROW) (UK cord)	C060940C321A
ePMP 6 GHz Force 4600C SM Radio (EU) (UK cord)	C060940C323A
ePMP 6 GHz Force 4600C SM Radio (ROW) (India cord)	C060940C421A
ePMP 6 GHz Force 4600C SM Radio (India) (India Cord)	C060940C425A
ePMP 6 GHz Force 4600C SM Radio (ROW) (China cord)	C060940C521A
ePMP 6 GHz Force 4600C SM Radio (ROW) (Brazil cord)	C060940C621A
ePMP 6 GHz Force 4600C SM Radio (ROW) (Argentina cord)	C060940C721A
ePMP 6 GHz Force 4600C SM Radio (ROW) (ANZ cord)	C060940C821A
ePMP 6 GHz Force 4600C SM Radio (ROW) (South Africa cord)	C060940C921A
ePMP 6 GHz Force 4600C SM Radio (ROW) (No PSU)	C060940CZ21A
ePMP 6 GHz Force 4600C SM Radio (FCC) (US Cord)	C068940C122B
ePMP 6 GHz Force 4600C SM Radio (Indonesia) (EU Cord)	C060940C226A

Table 164: Force 4600C accessory part numbers

Cambiumdescription	Cambium partnumber
ePMP 6 GHz Force 4625 Spare Feedhorn Only (ROW)	C060940F041A
ePMP 6 GHz Force 4625 Spare Feedhorn Only (IC)	C068940F144A
ePMP 6 GHz Force 4625 Spare Feedhorn Only (EU)	C060940F243A
ePMP 6 GHz Force 4625 Spare Feedhorn Only (India)	C060940F445A
ePMP 6 GHz Force 4625 Spare Feedhorn Only (FCC)	C068940F142A
ePMP 6 GHz Force 4625 Spare Feedhorn Only (Indonesia)	C060940F446A
ePMP 5 and 6 GHz Force 4525 and 4625 Spare Dish 2-Pack	C050940M140A

## Force 4600C interfaces

The Ethernet port is located on the rear of the integrated unit.

Table 165: Force 4600C series – rear interfaces

Portname	Connector	Interface	Description
Eth	RJ45	PoE input	Power over Ethernet (PoE)
		100/1000BASE-T Ethernet	Data
	SFP	10 Gigabit cage	Optional 10 Gigabit SFP cage for SFP module

## Force 4600C specifications

The Force 4600C integrated module conforms to the specifications listed in [Table 166](#) and [Table 167](#).

The integrated module meets the low-level static discharge specifications identified in [Electromagnetic compatibility \(EMC\) compliance](#) and provides internal surge suppression, but does not provide lightning suppression.

Table 166: Force 4600C physical specifications

Category	Specification
Dimensions (Diameter x Depth)	256 mm x 125 mm x 46 mm (10.1 in x 4.9 in. x 1.8 in.)
Weight	1.3 kg (2.9 lbs.)

Table 167: Force 4600C environmental specifications

Category	Specification
Temperature	-30°C to 55°C (-22°F to 131°F)
Wind loading	200 km/hour (124 mph)
Environmental	IPx0

## Force 4600C heater

At startup, if the Force 4600C module temperature is at or below 32°F (0°C), an internal heater is activated to ensure that the device can successfully begin operation. The unit's heater is only activated when the unit is powered on and will not apply heat to the device once the startup is complete. When the unit temperature is greater than 32°F (0°C), the heater is deactivated and the unit continues its start-up sequence.

The effect on device startup time at various temperatures is defined in [Table 168](#).

Table 168: Force 4600C startup times based on ambient temperature

InitialTemperature	Startuptime(frompowerontooperational)
-22°F (-30°C) H	20 minutes
-4°F (-20°C)	6 minutes

Initial Temperature	Startup time (from power on to operational)
14°F (-10°C)	2 minutes, 30 seconds

## Force 4600C wind loading

Ensure that the device and the structure on which it is mounted are capable of withstanding the prevalent wind speeds at a proposed ePMP site. Wind speed statistics are available from national meteorological offices.

The device and its mounting bracket are capable of withstanding wind speeds of up to 180 kph (124 mph).

Wind blowing on the device will subject the mounting structure to significant lateral force. The magnitude of the force depends on both wind strength and the surface area of the device. Wind loading is estimated using the following formulae:

$$\text{Force (in kilograms)} = 0.1045aV^2$$

Where:	Is:
a	the surface area in square meters
V	wind speed in meters per second

$$\text{Force (in pounds)} = 0.0042Av^2$$

Where:	Is:
A	the surface area in square feet
v	wind speed in miles per hour

Applying these formulae to the ePMP device at different wind speeds, the resulting wind loadings are shown in [Table 169](#) and [Table 170](#).

Table 169: Force 4600C wind loading (Kg)

Type of ePMP device	Largest surface area (square meters)	Wind speed (meters per second)		
		30	40	50
Force 4600C Integrated	0.03	2.82 Kg	5.02 Kg	7.84 Kg

Table 170: Force 4600C wind loading (lb)

Type of ePMP device	Largest surface area (square feet)	Wind speed (miles per hour)		
		80	100	120
Force 4600C Integrated	0.28	7.53 lb	11.76 lb	16.93 lb

## Force 4600C software packages

Force 4600C devices can be upgraded by downloading new software packages from the [Cambium Networks site](#) or by using cnMaestro. The software packages applicable to ePMP integrated radios are named:

- ePMP-AX-v5.x.x.img (or higher version number)

## Force 4525

For details of the Force 4525 hardware, see:

- [Force 4525 integrated description](#)
- [Force 4525 part numbers](#)
- [Force 4525 interfaces](#)
- [Force 4525 specifications](#)
- [Force 4525 heater](#)
- [Force 4525 wind loading](#)
- [Force 4525 software packages](#)

## Force 4525 integrated description

The Force 4525 device is a self-contained transceiver unit that contains both radio and networking electronics. The Force 4525 uses 802.11ac technology and supports MU-MIMO.

Force 4525 is shown in [Figure 61](#).



*Figure 61: Force 4525 integrated*

## Force 4525 part numbers

Select the correct regional variant to adhere to local licensing restrictions.

Each of the parts listed includes the following items:

- One integrated unit
- One power supply 1000/100 BASE-TX LAN injector
- One line cord

Table 171: Force 4525 part numbers

Cambiumdescription	Cambium partnumber
ePMP 6 GHz Force 4600C SM Radio (ROW) (no cord)	C060940C021A
ePMP 6 GHz Force 4600C SM Radio (ROW) (US cord)	C060940C121A
ePMP 6 GHz Force 4600C SM Radio (IC) (Canada/US cord)	C068940C124A
ePMP 6 GHz Force 4600C SM Radio (ROW) (EU cord)	C060940C221A
ePMP 6 GHz Force 4600C SM Radio (EU) (EU cord)	C060940C223A
ePMP 6 GHz Force 4600C SM Radio (ROW) (UK cord)	C060940C321A
ePMP 6 GHz Force 4600C SM Radio (EU) (UK cord)	C060940C323A
ePMP 6 GHz Force 4600C SM Radio (ROW) (India cord)	C060940C421A
ePMP 6 GHz Force 4600C SM Radio (India) (India Cord)	C060940C425A
ePMP 6 GHz Force 4600C SM Radio (ROW) (China cord)	C060940C521A
ePMP 6 GHz Force 4600C SM Radio (ROW) (Brazil cord)	C060940C621A
ePMP 6 GHz Force 4600C SM Radio (ROW) (Argentina cord)	C060940C721A
ePMP 6 GHz Force 4600C SM Radio (ROW) (ANZ cord)	C060940C821A
ePMP 6 GHz Force 4600C SM Radio (ROW) (South Africa cord)	C060940C921A
ePMP 6 GHz Force 4600C SM Radio (ROW) (No PSU)	C060940CZ21A
ePMP 6 GHz Force 4600C SM Radio (FCC) (US Cord)	C068940C122B
ePMP 6 GHz Force 4600C SM Radio (Indonesia) (EU Cord)	C060940C226A

Table 172: Force 4525 accessory part numbers

Cambiumdescription	Cambiumpartnumber
ePMP Force 4525 spares kit	XXXXXXXXXXXXXX

## Force 4525 interfaces

The Ethernet port is located on the rear of the integrated unit.

Table 173: Force 4525 series – rear interfaces

Portname	Connector	Interface	Description
Eth	RJ45	PoE input	Power over Ethernet (PoE)
		100/1000BASE-T Ethernet	Data
	SFP	10 Gigabit cage	
		Optional 10 Gigabit SFP cage for SFP module	

## Force 4525 specifications

The Force 4525 integrated module conforms to the specifications listed in [Table 174](#) and [Table 175](#).

The integrated module meets the low-level static discharge specifications identified in [Electromagnetic compatibility \(EMC\) compliance](#) and provides internal surge suppression, but does not provide lightning suppression.

Table 174: Force 4525 physical specifications

Category	Specification
Dimensions (Diameter x Depth)	256 mm x 125 mm x 46 mm (10.1 in x 4.9 in. x 1.8 in.)
Weight	1.3 kg (2.9 lbs.)

Table 175: Force 4525 environmental specifications

Category	Specification
Temperature	-30°C to 55°C (-22°F to 131°F)
Wind loading	200 km/hour (124 mph)
Environmental	IPx0

## Force 4525 heater

At startup, if the Force 4525 module temperature is at or below 32°F (0°C), an internal heater is activated to ensure that the device can successfully begin operation. The unit's heater is only activated when the unit is powered on and will not apply heat to the device once the startup is complete. When the unit temperature is greater than 32°F (0°C), the heater is deactivated and the unit continues its start-up sequence.

The effect on device start-up time at various temperatures is defined in [Table 176](#).

Table 176: Force 4525 startup times based on ambient temperature

InitialTemperature	Startuptime(frompowerontooperational)
-22°F (-30°C) H	20 minutes
-4°F (-20°C)	6 minutes
14°F (-10°C)	2 minutes, 30 seconds

## Force 4525 wind loading

Ensure that the device and the structure on which it is mounted are capable of withstanding the prevalent wind speeds at a proposed ePMP site. Wind speed statistics are available from national meteorological offices.

The device and its mounting bracket are capable of withstanding wind speeds of up to 180 kph (124 mph).

Wind blowing on the device will subject the mounting structure to significant lateral force. The magnitude of the force depends on both wind strength and the surface area of the device. Wind loading is estimated using the following formulae:

Force (in kilograms) =  $0.1045aV^2$

Where:	Is:
a	the surface area in square meters
V	wind speed in meters per second

Force (in pounds) =  $0.0042Av^2$

Where:	Is:
A	the surface area in square feet
v	wind speed in miles per hour

Applying these formulae to the ePMP device at different wind speeds, the resulting wind loadings are shown in [Table 177](#) and [Table 178](#).

Table 177: Force 4525 wind loading (Kg)

Type of ePMP device	Largest surface area (square meters)	Wind speed (meters per second)		
		30	40	50
Force 4525 Integrated	0.03	2.82 Kg	5.02 Kg	7.84 Kg

Table 178: Force 4525 wind loading (lb)

Type of ePMP device	Largest surface area (square feet)	Wind speed (miles per hour)		
		80	100	120
Force 4525 Integrated	0.28	7.53 lb	11.76 lb	16.93 lb

## Force 4525 software packages

Force 4525 devices can be upgraded by downloading new software packages from the [Cambium Networks site](#) or by using cnMaestro. The software packages applicable to ePMP integrated radios are named:

- ePMP-AX-v5.x.x.img (or higher version number)

## Force 4625

For details of the Force 4625 hardware, see:

- [Force 4625 integrated description](#)
- [Force 4625 part numbers](#)
- [Force 4625 interfaces](#)
- [Force 4625 specifications](#)
- [Force 4625 heater](#)
- [Force 4625 wind loading](#)
- [Force 4625 software packages](#)

### Force 4625 integrated description

The Force 4625 device is a self-contained transceiver unit that contains both radio and networking electronics. The Force 4625 uses 802.11ac technology and supports MU-MIMO. The MPE distance for FCC is 36 cm and for IC is 20 cm.

Force 4625 is shown in [Figure 62](#).



*Figure 62: Force 4625 integrated*



#### Warning

The operation of this device is prohibited on oil platforms, cars, trains, boats, and aircraft.

Operation of the transmitters in 5.925 GHz - 7.125 GHz band is prohibited for control of communications with the unmanned aircraft systems.



#### Warning

Operation on oil platforms, automobiles, trains, maritime vessels, and aircraft shall be prohibited.

L'exploitation sur les plates-formes pétrolières, les automobiles, les trains, les navires maritimes et les aéronefs est interdite.



### Warning

The antenna height shall be determined by the installer or operator of the standard-power access point or fixed client device, or by automatic means. This information are stored internally in the device. Provision of accurate device information is mandatory.

La hauteur de l'antenne doit être déterminée par l'installateur ou l'opérateur du point d'accès à puissance standard ou de l'appareil client fixe, ou par des moyens automatiques. Ces informations doivent être stockées en interne dans l'appareil. La fourniture d'informations précises sur l'appareil est obligatoire.

## Force 4625 part numbers

Select the correct regional variant to adhere to local licensing restrictions.

Each of the parts listed includes the following items:

- One integrated unit
- One power supply 1000/100 BASE-TX LAN injector
- One line cord

Table 179: Force 4625 part numbers

Cambium description	Cambium partnumber
ePMP 6 GHz Force 4625 SM Bulk packaging (ROW) (no cord)	C060940M041A
ePMP 6 GHz Force 4625 SM Bulk packaging (ROW) (US cord)	C060940M141A
ePMP 6 GHz Force 4625 SM Bulk packaging (IC) (Canada/US cord)	C068940M144A
ePMP 6 GHz Force 4625 SM Bulk packaging (ROW) (EU cord)	C060940M241A
ePMP 6 GHz Force 4625 SM Bulk packaging (EU) (EU cord)	C060940M243A
ePMP 6 GHz Force 4625 SM Bulk packaging (ROW) (UK cord)	C060940M341A
ePMP 6 GHz Force 4625 SM Bulk packaging (EU) (UK cord)	C060940M343A
ePMP 6 GHz Force 4625 SM Bulk packaging (ROW) (India cord)	C060940M441A
ePMP 6 GHz Force 4625 SM Bulk packaging (India) (India Cord)	C060940M445A
ePMP 6 GHz Force 4625 SM Bulk packaging (ROW) (China cord)	C060940M541A
ePMP 6 GHz Force 4625 SM Bulk packaging (ROW) (Brazil cord)	C060940M641A
ePMP 6 GHz Force 4625 SM Bulk packaging (ROW) (Argentina cord)	C060940M741A
ePMP 6 GHz Force 4625 SM Bulk packaging (ROW) (ANZ cord)	C060940M841A
ePMP 6 GHz Force 4625 SM Bulk packaging (ROW) (South Africa cord)	C060940M941A
ePMP 6 GHz Force 4625 SM Bulk packaging (ROW) (No PSU)	C060940MZ41A
ePMP 6 GHz Force 4625 SM Bulk packaging (FCC) (US Cord)	C068940M142A
ePMP 6 GHz Force 4625 SM Bulk packaging (Indonesia) (EU Cord)	C060940M246A
ePMP 6GHz Force 4625 Subscriber Module	C068940P142A

Table 180: Force 4625 accessory part numbers

Cambiumdescription	Cambiumpartnumber
ePMP 5 and 6 GHz Force 4525 and 4625 Spare Dish 2-Pack	C050940M140A
ePMP Force 4000 series Spares Kit	N000900L071A

## Force 4625 interfaces

The Ethernet port is located on the rear of the integrated unit.

Table 181: Force 4625 series – rear interfaces

Portname	Connector	Interface	Description
Eth	RJ45	PoE input	Power over Ethernet (PoE)
		100/1000BASE-T Ethernet	Data
	SFP	10 Gigabit cage	Optional 10 Gigabit SFP cage for SFP module

## Force 4625 specifications

The Force 4625 integrated module conforms to the specifications listed in [Table 182](#) and [Table 183](#).

The integrated module meets the low-level static discharge specifications identified in [Electromagnetic compatibility \(EMC\) compliance](#) and provides internal surge suppression, but does not provide lightning suppression.

Table 182: Force 4625 physical specifications

Category	Specification
Dimensions (Diameter x Depth)	256 mm x 125 mm x 46 mm (10.1 in x 4.9 in. x 1.8 in.)
Weight	1.3 kg (2.9 lbs.)

Table 183: Force 4625 environmental specifications

Category	Specification
Temperature	-30°C to 55°C (-22°F to 131°F)
Wind loading	200 km/hour (124 mph)
Environmental	IPx0

## Force 4625 heater

At startup, if the Force 4625 module temperature is at or below 32°F (0°C), an internal heater is activated to ensure that the device can successfully begin operation. The unit's heater is only activated when the unit is powered on and will not apply heat to the device once the startup is complete. When the unit temperature is greater than 32°F (0°C), the heater is deactivated and the unit continues its start-up sequence.

The effect on device startup time at various temperatures is defined in [Table 184](#).

Table 184: Force 4625 startup times based on ambient temperature

Initial Temperature	Startup time (from power on to operational)
-22°F (-30°C) H	20 minutes
-4°F (-20°C)	6 minutes
14°F (-10°C)	2 minutes, 30 seconds

## Force 4625 wind loading

Ensure that the device and the structure on which it is mounted are capable of withstanding the prevalent wind speeds at a proposed ePMP site. Wind speed statistics are available from national meteorological offices.

The device and its mounting bracket are capable of withstanding wind speeds of up to 180 kph (124 mph).

Wind blowing on the device will subject the mounting structure to significant lateral force. The magnitude of the force depends on both wind strength and the surface area of the device. Wind loading is estimated using the following formulae:

$$\text{Force (in kilograms)} = 0.1045aV^2$$

Where:	Is:
a	the surface area in square meters
V	wind speed in meters per second

$$\text{Force (in pounds)} = 0.0042Av^2$$

Where:	Is:
A	the surface area in square feet
v	wind speed in miles per hour

Applying these formulae to the ePMP device at different wind speeds, the resulting wind loadings are shown in [Table 185](#) and [Table 186](#).

Table 185: Force 4625 wind loading (Kg)

Type of ePMP device	Largest surface area (square meters)	Wind speed (meters per second)		
		30	40	50
Force 4625 Integrated	0.03	2.82 Kg	5.02 Kg	7.84 Kg

Table 186: Force 4625 wind loading (lb)

Type of ePMP device	Largest surface area (square feet)	Wind speed (miles per hour)		
		80	100	120
Force 4625 Integrated	0.28	7.53 lb	11.76 lb	16.93 lb

## Force 4625 software packages

Force 4625 devices can be upgraded by downloading new software packages from the [Cambium Networks site](#) or by using cnMaestro. The software packages applicable to ePMP integrated radios are named:

- ePMP-AX-v5.x.x.img (or higher version number)

## Power supply

For details of the ePMP power supply units, see:

- [Power supply description](#)
- [Power supply part numbers](#)
- [Power supply interfaces](#)
- [Power supply specifications](#)
- [Power supply location considerations](#)

### Power supply description

The power supply unit that is connected to the ePMP modules is rated for indoor use. The ePMP modules are installed outdoors and terminated to network equipment using Cat5e cables with RJ45 connectors. The Cat5e cables are plugged into an AC or DC power supply to inject Power over Ethernet (PoE) into the module. The Cat5e cables connected to the power supply transitioning from indoors to outdoors must be rated for outdoor use.



#### Attention

All RJ45 Ethernet LAN cables used for providing power or are connected to power ports (PoE) must be UL certified with VW-1 markings.

### Power supply part numbers

Each module requires one power supply and one power supply line cord (line cord included with radio device, refer to, [Table 187](#)).

Table 187: Power supply part numbers

Cambium description	Cambium part number	Device Compatibility
ePMP Power Supply for GPS Radio - no cord (spare)	N000900L001	ePMP MP 3000 Access Point
POWER SUPPLY, 30W, 56V - Gbps support	N000000L034	ePMP 3000 Access Point




### Attention

Each ePMP device must be powered by the corresponding power supply listed in [Table 187](#). This product is intended to be supplied by a UL Listed and IEC certified Power Supply Unit marked "LPS" or "PS2" and providing power over the Ethernet (PoE) supply.

## Power supply interfaces

The power supply interfaces are illustrated in [Figure 63](#) and described in [Table 188](#) and [Table 189](#).

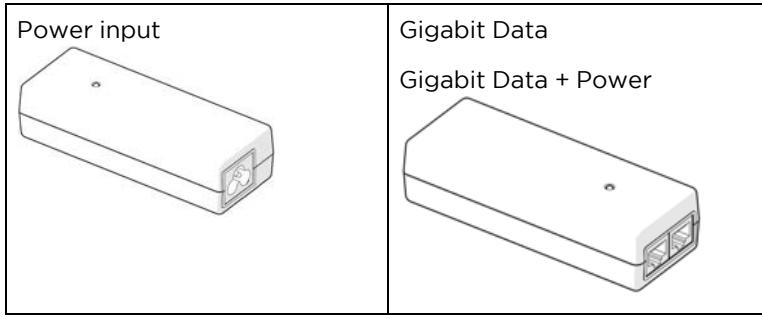

[Figure 63: Power supply interfaces](#)

[Table 188: Power supply interface functions - N000900L001](#)

Interface	Function
Power input	Mains power input.
Power output	30V
Gigabit Data + Power	RJ45 socket for connecting Cat5e cable to the radio.   <b>Note</b> All RJ45 Ethernet LAN cables used for providing power or are connected to power ports (PoE) must be UL certified with VW-1 markings.
Gigabit Data	RJ45 socket for connecting Cat5e cable to the network.

[Table 189: Power supply interface functions - N000000L034](#)

Interface	Function
Power input	Mains power input.
Power output	56V
Gigabit Data + Power	RJ45 socket for connecting Cat5e cable to the radio.   <b>Note</b> All RJ45 Ethernet LAN cables used for providing power or are connected to power ports (PoE) must be UL certified with VW-1 markings.

Interface	Function
Gigabit Data	RJ45 socket for connecting Cat5e cable to the network.

Table 190: Power Supply LED functions

LED	Function
Power (green)	Power supply detection

## Power supply specifications

The ePMP power supply conforms to the specifications listed in [Table 191](#), [Table 192](#), and [Table 193](#).

Table 191: Power supply physical specifications

Category	Specification
Dimensions (H x W x D)	14 x 6.5 x 3.6 cm (5.5 x 2.55 x 1.42 in)
Weight	0.26 lbs

Table 192: Power supply environmental specifications

Category	Specification
Ambient Operating Temperature	0°C to +40°C
Humidity	20% - 90%

Table 193: Power supply electrical specifications

Category	Specification
AC Input	100 to 240 VAC
Efficiency	Meets Energy Level 6
Over Current Protection	Short circuit, with auto-recovery
Hold uptime	10 ms minimum at maximum load, 120 VAC

## Power supply location considerations

Find a location for the power supply that meets the following requirements:

- The power supply is rated for indoor use and can be mounted on a wall or other flat surface.
- The power supply must be kept dry, with no possibility of condensation, flooding, or rising dampness.
- The power supply can be accessed to view status indicators.

- The power supply can be connected to the ePMP module drop cable and network terminating equipment.
- The power supply can be connected to a mains or DC power supply that meets the requirements defined in [Table 193](#).

## Ethernet cabling

For more information on the Ethernet cabling components of an ePMP installation, see:

- [Ethernet standards and cable lengths](#)
- [Outdoor Cat5e cable](#)

## Ethernet standards and cable lengths

All configurations require a copper Ethernet connection from the power supply port to the power supply and network terminating equipment.



### Attention

All cables used for outdoor installations must be suitable to be used for that environment and rated accordingly.

For each power supply, the maximum permitted drop cable length is specified in [Table 194](#).

Table 194: Power supply drop cable length restrictions

Part number	Description	Maximum cable length (*1)
N000900L001	Power Supply for Radio with Gigabit Ethernet (no cord)	330 feet (100m)
N000000L034		

(\*1) The maximum length of Ethernet cable from the device to the network device needs to follow 802.3 standards. If the power supply is not the network device the cable from the power supply to the network device must be included in the total maximum cable length.

## Outdoor Cat5e cable

### Cambium Industrial Cable

Cambium Industrial Cable uses 24-gauge solid bare copper conductors, covered by bonded-pair polymer insulation. The conductors are protected by double-layer shielding consisting of a solid foil layer under the braided tinned copper mesh, providing excellent shielding while maximizing flexibility. The cable is jacketed by industrial-grade UV-resistant, abrasion-resistant, and oil-resistant PVC.

Cambium's Industrial RJ45 connectors are specifically designed to work optimally with Cambium Industrial Cable.

The connectors are fully shielded with integrated strain relief for greater pull strength, utilize a staggered contact design that minimizes crosstalk, and maximizes electrical performance, and the contacts are plated with 50 micro-inch thick 24-carat gold, exceeding TIA-1096 specifications and ensuring the best possible connection and oxidation resistance.

Industrial-grade cable by Cambium Networks is well suited for high-quality durable installations of subscriber modules, APs, and enterprise point-to-point links and in tactical non-permanent deployments of infrastructure.

Table 126 Cambium Industrial Cable part numbers

Cambium description	Cambium part number
Industrial Grade CAT 5 Cable 50 meter unterminated	N000000L106A
Industrial Grade CAT 5 Cable 100 meter unterminated	N000000L106A
Industrial Grade CAT 5 Cable 300 meter unterminated	N000000L108A
Industrial Grade RJ45 Connector 100 Pack	C000000L109A
Termination Tool for C000000L109A RJ45 connectors	C000000L110A



#### Attention

All RJ45 Ethernet LAN cables used for providing power or are connected to power ports (PoE) must be UL certified with VW-1 markings.

## Surge suppression unit

Structures, equipment, and people must be protected against power surges (typically caused by lightning) by conducting the surge current to the ground via a separate preferential solid path.

The actual degree of protection required depends on local conditions and applicable local regulations. To adequately protect an ePMP installation, both ground bonding and transient voltage surge suppression are required.

Network operators should always follow best practices for grounding and lightning protection. Doing so will minimize network outages and reduce the associated costs of tower climbs and equipment repair/replacement.



#### Note

Lightning-prone installations can be improved by:

- Installing a surge suppressor near the device (transient surge suppression)
- Grounding the device to the pole (ground bonding)
- Lowering the device/dish such that it is not the highest metallic object on the pole.

## Gigabit Ethernet Surge Suppressor

The Gigabit Ethernet surge suppressor is critical for lightning protection to minimize the potential for damage.



Figure 64: Gigabit Ethernet Surge Suppressor

Table 127 Surge suppressor part numbers

Cambium description	Cambium part number	Device Compatibility
Gigabit Surge Suppressor (30V)	C000000L065A	Force 300-25 Force 300-19(R) Force 300-16 Force 300-13
Gigabit Surge Suppressor (56V)	C000000L033A	ePMP 3000 Access Point



### Attention

Choose the 30V or 56V surge suppressor option based on your installed device power rating. Installing a 30V surge suppressor for a 56V device or a 56V surge suppressor for a 30V device may result in inadequate surge protection. Refer to [Table 127](#) for more details.

## cnPulse sync generator

cnPulse is the latest GPS synchronization generation device designed specifically for Cambium Networks PMP and PTP radios. The cnPulse module is \*IP67 (weatherproof and supports a wide temperature range for rugged environments. The GPS receiver is highly reliable and supports both GPS and GNSS signals.



**Figure 65: cnPulse sync generator**

cnPulse receives its power from the CAT-5 drop cable in mode 2 so no external power supply is required. There are no configuration or software settings required. For ePMP 3000, cnPulse is deployed in-line with the radio's CAT-5 drop cable.

For more information, see: <http://community.cambiumnetworks.com/t5/cnPulse/bd-p/cnPulse>



**Note**

This product meets the UL/cUL 62368 / IEC 62368 edition 2 specification, and the radio housings are designed to be rain-tight.

# Chapter 3: System Planning

---

This chapter provides the information to help user to plan an ePMP link.

The following topics are described in this chapter:

- Planning of the ePMP links to conform to the regulatory restrictions that apply in the country of operation is explained in [Radio spectrum planning](#)
- Factors to be considered when planning links such as range, path loss, and throughput are described in [Link planning](#)
- The grounding and lightning protection requirements of an ePMP installation are described in [Grounding and lightning protection](#)
- Factors to be considered when planning ePMP data networks are described in [Data network planning](#)

## Radio spectrum planning

This section describes planning of the ePMP links to conform to the regulatory restrictions that apply in the country of operation.



### Attention

The user must ensure the ePMP product operates in accordance with local regulatory limits.



### Note

Contact the applicable radio regulator to check if the registration of the ePMP link is required.

## General wireless specifications

The wireless specifications that apply to ePMP 802.11ac variants are listed under [Table 195](#). The wireless specifications that are specific to each frequency variant are listed in [Table 196](#).

Table 195: Wireless specifications (all variants)

Item	Specification
Channel selection	Manual selection (fixed frequency) Automatic Channel Selection
Manual power control	To avoid interference with other users of the band, maximum power can be set lower than the default power limit.
Maximum transmit power	ePMP 3000 Access Point: 33 dBm Force 300-25: 29 dBm

Item	Specification
	Force 300-19(R): 28dBm Force 300-16: 29 dBm Force 300-13: 28dBm
Integrated device antenna type	Force 300-25: Dish antenna Force 300-19(R): Integrated patch Force 300-16: Integrated patch Force 300-13: Integrated patch
Duplex scheme	Adaptive TDD
Over-the-air encryption	AES
Error Correction	FEC

Table 196: Wireless specifications, 5 GHz band

Item	5 GHz
RF band (GHz)	4.910 – 5.970 MHz
Channel bandwidth	20 MHz, 40 MHz, or 80 MHz
Typical antenna gain	Integrated dish antenna – 25 dBi Integrated patch antenna – 16 dBi Sector antenna – 17 dBi Dual-Horn antenna – 13 dBi Omni antenna – 13 dBi
Antenna 3dB Beamwidth	Integrated Dish: 6-10° azimuth, 6-10° elevation Integrated Patch: 15° azimuth, 30° elevation Sector antenna: 70° azimuth, 6° elevation Dual-Horn antenna: 45° azimuth/elevation Omni antenna: 360° azimuth, 7° elevation

## Regulatory limits

The local regulator may restrict frequency usage and channel width and may limit the amount of conducted or radiated transmitter power.

Many countries impose EIRP limits (Allowed EIRP) on products operating in the bands used by the ePMP Series. For example, in the 5 GHz band, these limits are calculated as follows:

- In the 5.8 GHz band (5725 MHz to 5875 MHz), the EIRP must not exceed the lesser of 36 dBm or  $(23 + 10 \times \log \text{Channel width in MHz})$  dBm.

Some countries (for example the USA) impose conducted power limits on products operating in the 5 GHz band.

## Conforming to the limits

Ensure the link is configured to conform to the local regulatory requirements by configuring the correct country code (located in the web management interface, under **Configure > Radio**). In the following situations, the country code does not prevent the operation automatically outside the regulations:

- When operating in ETSI regions, it is required to enter a license key in the ePMP web management interface to unlock valid country-specific frequencies. This key can be obtained from <https://support.cambiumnetworks.com/licensekeys/epmp>.

## Available spectrum

The available spectrum for the operation depends on the region. When configured with the appropriate country code, the unit allows operation on those channels only which are permitted by the regulations.

Certain regulations have allocated certain channels as unavailable for use:

- Some European countries have allocated, part of the 5.8 GHz band to Road Transport and Traffic Telematics (RTTT) systems.

Where regulatory restrictions apply to certain channels, these channels are barred automatically by the use of the correct country code. For example, at 5.8 GHz in some European countries, the RTTT band 5795 MHz to 5815 MHz is barred. With the appropriate country code configured for this region, the ePMP does not operate on channels within this band.

The number and identity of channels barred by the license key and country code are dependent on the channel bandwidth.

## Channel bandwidth

Select the required channel bandwidth for the link. The selection depends upon the ePMP frequency variant and country code.

The wider a channel bandwidth the greater is its capacity. As narrower channel bandwidths take up less spectrum, selecting a narrow channel bandwidth may be a better choice when operating in locations where the spectrum is very busy.

Both ends of the link must be configured to operate on the same channel bandwidth.

## Electromagnetic compatibility (EMC) compliance

The ePMP complies with European EMC Specification EN301 489-1 with testing carried out to the detailed requirements of EN301 489-4.

The EMC specification type approvals that is granted for ePMP are listed under [Table 197](#).

Table 197: EMC emissions compliance

Region	Specification (Type Approvals)
USA	FCC CFR 47 Part 15 class B
Canada	RSS210, Issue 8 RSS247, Issue 1 (May 2015)

Region	Specification (Type Approvals)
Europe	ETSI EN301 489-4

## Compliance with safety standards

This section lists the safety specifications against which the ePMP is tested and certified. It also describes keeping the RF exposure within safe limits.

## Link planning

This section describes factors to be taken into account when planning links, such as range, obstacles path loss, and throughput.

### Range and obstacles

Calculate the range of link and identify any obstacles that may affect performance of the radio.

Perform a survey to identify all the obstructions (such as trees and buildings) in the path and to assess the risk of interference. This information is necessary to achieve an accurate link feasibility assessment.

### Path loss

Path loss is the amount of attenuation the radio signal undergoes between the two ends of the link. The path loss is the sum of the attenuation of the path if there were no obstacles in the way (Free Space Path Loss), the attenuation caused by obstacles (Excess Path Loss), and a margin to allow for possible fading of the radio signal (Fade Margin). The following calculation needs to be performed to judge whether a particular link can be installed:

$L_{free\_space} + L_{excess} + L_{fade} + L_{seasonal} < L_{capability}$	
Where:	Is:
$L_{free\_space}$	Free Space Path Loss (dB)
$L_{excess}$	Excess Path Loss (dB)
$L_{fade}$	Fade Margin Required (dB)
$L_{seasonal}$	Seasonal Fading (dB)
$L_{capability}$	Equipment Capability (dB)

Free space path loss is a major determinant in received (Rx) signal level. Rx signal level, in turn, is a major factor in the system operating margin (fade margin), which is calculated as follows:

$$System\ Operating\ Margin\ (fade\ margin)\ dB = Rx\ signal\ level\ (dB) - Rx\ sensitivity\ (dB)$$

Thus, the fade margin is the difference between the strength of the received signal and the strength that the receiver requires for maintaining a reliable link.

## Adaptive modulation

Adaptive modulation ensures that the highest throughput that can be achieved instantaneously are obtained, taking account of propagation and interference. When the link is installed, web pages provide information about the link loss currently measured by the equipment, both instantaneously and averaged.

## Data network planning

This section describes factors to be considered when planning ePMP data networks.

### Ethernet interfaces

The ePMP Ethernet ports conform to the specifications listed in [Table 198](#).

Table 198: Ethernet bridging specifications

Ethernet Bridging	Specification
Protocol	10BASE-T/100BASE-Tx/1000BASE-T IEEE 802.3 IEEE 802.3at (PoE) IEEE802.3u compliant Auto-negotiation
Interface	10/100/1000BASE-T (RJ-45)
Maximum Ethernet Frame Size	1700 bytes
Service classes for bridged traffic	3 classes



#### Note

Practical Ethernet rates depend on the network configuration, higher layer protocols, and platforms used.

Over the air, throughput is capped to the rate of the Ethernet interface at the receiving end of the link.

## Management VLAN

Decide if the IP interface of the device management agent is connected in a VLAN. If so, decide if this is a standard (IEEE 802.1Q) VLAN or provider bridged (IEEE 802.1ad) VLAN, and select the VLAN ID for this VLAN.

The use of a separate management VLAN is strongly recommended. The use of the management VLAN helps to ensure that the device management agent cannot be accessed by customers.

## Quality of service for bridged Ethernet traffic

Decide the amount of quality of service is configured in ePMP to minimize the frame loss and latency for high-priority traffic. Wireless links often have lower data capacity than wired links or network equipment like switches and routers, and quality of service configuration is most critical at network bottlenecks.

ePMP provides three priority types for traffic waiting for transmission over the wireless link (Voice, High and Low). **Low** is the lowest priority and **Voice** is the highest priority. Traffic is scheduled using strict priority; in other words, traffic in a given priority is transmitted when all the high-priority transmissions are complete.

# Chapter 4: Using the Device Management Interface

---

This chapter describes all configuration and alignment tasks that are performed while deploying the ePMP system.

Perform the following tasks while configuring the ePMP devices:

- [Preparing for configuration](#)
- [Connecting to the unit](#)
- [Using the web interface](#)
- [Using the installation wizard – Access Point](#)
- [Using the installation wizard – Subscriber Module](#)
- [Using the menu options](#)

## Preparing for configuration

This section describes the checks to be performed before proceeding with the unit configuration.

### Safety precautions

All national and local safety standards must be followed while configuring the units.



#### Warning

Ensure that personnel is not exposed to unsafe levels of RF energy. The units start to radiate as soon as they are powered up. Respect the safety standards defined in [Compliance with safety standards](#), in particular, the minimum separation distances.

Observe the following guidelines:

- Never work in front of the antenna when the device is powered on.
- Always switch off the power supply before connecting or disconnecting the Ethernet cable from the module.

### Regulatory compliance

All applicable radio regulations must be followed while configuring the units and aligning the antennas. For more information, refer to [Compliance with safety standards](#) section.

### Connecting to the unit

To connect the unit to management PC, perform the following procedures:

- [Configuring the management PC](#)
- [Connecting to the PC and powering up](#)


## Configuring the management PC

Perform the following steps to configure the local management PC to communicate with the ePMP module:

1. Select **Properties** for the Ethernet port.

In Windows 7, it is found in **Control Panel > Network and Internet > Network Connections > Local Area Connection**.

2. Select the **Internet Protocol (TCP/IP)** menu.
3. Click **Properties**.

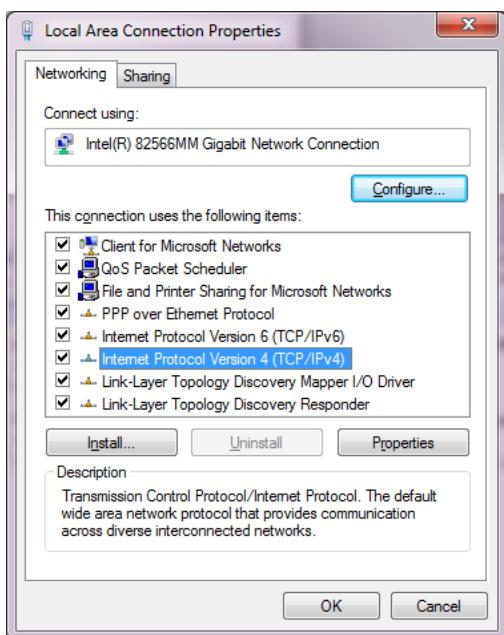

4. Enter an IP address that is valid for the 169.254.1.x network, avoiding 169.254.1.1. A good example is 169.254.1.100.
5. Enter a subnet mask of **255.255.255.0**.  
Leave the default gateway blank.
6. Click **OK** and then click **Close**.

## Connecting to the PC and powering up

Perform the following steps to connect a management PC directly to the ePMP for configuration and alignment purposes and to power up the ePMP device.

1. Verify that the device and power supply are connected correctly (the device Ethernet port is connected to the power supply Ethernet power port (**Gigabit Data+Power** or **10/100Mbit Data+Power**)).
2. Connect the PC Ethernet port to the LAN (**Gigabit Data** or **10/100Mbit Data**) port of the power supply using a standard (not crossed) Ethernet cable.
3. Apply main or battery power to the power supply. The Green power LED must blink continuously.



#### Note

If the power and Ethernet LEDs do not blink continuously, refer to [Testing hardware](#) section to troubleshoot.

## Using the web interface

This section describes the usage of ePMP web interfaces.

- [Logging into the web interface](#)

### Logging into the web interface


Perform the following procedure to login into the web interface as a system administrator.

#### Equipment and tools

- ePMP device connected to the power supply by Ethernet cable.
- PC is connected to the power supply by Ethernet cable.
- Power supply powered up.
- Minimum supported browser versions: Chrome v29, Firefox v24, Internet Explorer 10, Safari v5.

#### Procedure

1. Verify that the device and power supply are connected correctly (the device Ethernet port is connected to the power supply Ethernet power port (**Gigabit Data+Power** or **10/100Mbit Data+Power**)).
2. Configure the host machine with an IP address in the 169.254.1.x subnet (excluding 169.254.1.1).
3. Configure the host machine with an IP address in the 169.254.1.x subnet (excluding 169.254.1.1).
4. Connect the power supply to power mains.
5. From the browser, navigate to the device's default IP address **169.254.1.1**.

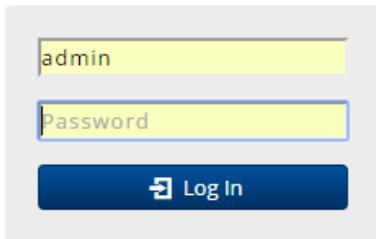

6. Log in with **admin** username and **admin** password.



#### Note

If **Device IP address Mode** is set to **DHCP** and the device is unable to retrieve IP address information via DHCP, the device management IP is set to 192.168.0.1 (AP Mode), 192.168.0.2 (SM mode), or the previously-configured static Device IP Address. Units may always be accessed via the Ethernet port at 169.254.1.1.



#### Attention

All the new ePMP devices contain default username and password configurations. It is recommended to change the password configurations immediately. These passwords are configured in the management UI section **Configuration > System > Account Management**.

## Using the installation wizard – Access Point

ePMP device provides a guided configuration mechanism for configuring key parameters for the link operation.

This setup can be accessed from the **Installation** page by clicking on the **Start Setup** button.

Click **Finish Setup** to commit the changes to the device.

### Step 1: Main system parameters

Figure 66 shows the Main system parameters page.

Quick Start

Cancel Setup **Finish Setup**

Main

Device Name \* ePMP3000

Backward Compatibility  Disabled  Enabled

SSID GetElevated

Figure 66: Quick Start page

Attribute	Description
<b>Main</b>	
Device Name	The configured identifier used in NMS such as cnMaestro.
Backward Compatibility	<b>Enabled:</b> 802.11n ePMP subscribers can register to the AP (requires subscriber software upgrade). <b>Disabled:</b> 802.11n ePMP subscribers are not able to register to the AP.
SSID	SSID is a unique identifier for a wireless LAN which is specified in the AP's beacon. (Access Point Mode). SSID must be the same at both ends and different from the site name.

## Step 2: Radio parameters

Figure 67 shows the Radio parameters page.

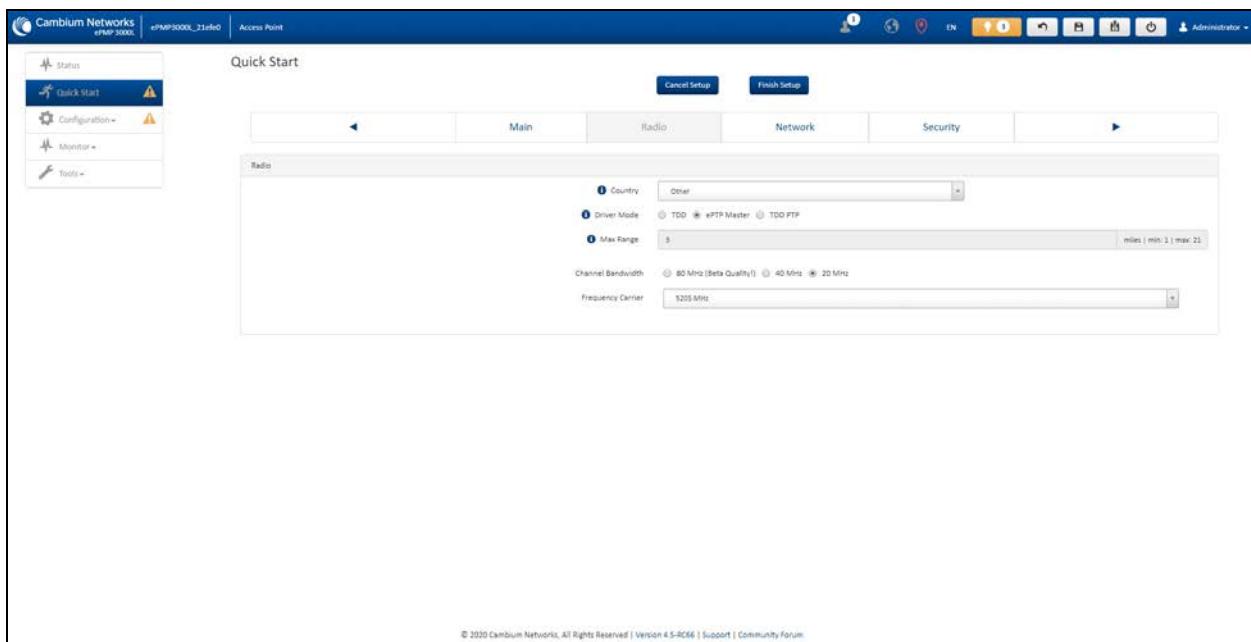


Figure 67: Radio parameters page

Attribute	Description
<b>Radio</b>	
Country	Defines the country code that is used by the device. The country code of the Subscriber Module follows the country code of the associated AP unless it is an FCC SKU in which case the country code is the United States or Canada. Country code defines the regulatory rules in use for the device.

Attribute	Description
Driver Mode	<p><b>TDD:</b> The device is operating in point-to-multipoint (PMP) mode using TDD scheduling. The AP can GPS synchronize in this mode.</p> <p><b>ePTP Master:</b> The AP is operating as a Master in point-to-point mode. The AP does not support GPS Synchronization in this mode but can provide significantly lower latency than other modes. QoS (MIR and traffic priority) capability and Link Quality/Capacity indicators are not available in this mode.</p> <p><b>TDD PTP:</b> The AP is operating in point-to-point (PTP) mode using TDD scheduling. The AP can GPS synchronize in this mode.</p>
Downlink/Uplink Ratio	The schedule of downlink traffic to uplink traffic on the radio link. The three options, <b>75/25</b> , <b>50/50</b> , and <b>30/70</b> , allow the radio to operate in a fixed ratio on every frame. In other words, this ratio represents the amount of the total radio link's aggregate throughput that will be used for downlink resources, and the amount of the total radio link's aggregate throughput that will be used for uplink resources.
Max Range	This parameter represents the cell coverage radius. Subscriber Modules outside the configured radius does not able to connect. It is recommended to configure Max Range to match the actual physical distance of the farthest subscriber.
Channel Bandwidth	Configure the channel size used by the radio for RF transmission.
Frequency Carrier	Configure the frequency carrier for RF transmission. This list is dynamically adjusted to the regional restrictions based on the setting of the <b>Country</b> parameter. Ensure that a thorough spectrum analysis is completed before configuring this parameter.

## Step 3: Network parameters

Figure 68 shows the Network parameters page.

Quick Start

Cancel Finish Setup

Main Radio Network Security

Network

IP Assignment  Static  DHCP

IP Address: 10.120.217.41

Subnet Mask: 255.255.255.0

Gateway: 10.120.217.254

Preferred DNS Server: 10.120.12.169

Alternate DNS Server: 10.120.12.170

Figure 68: Network parameters page

Attribute	Description
<b>Network</b>	
IP Assignment	<p><b>Static:</b> Device management IP addressing is configured manually in fields <b>IP Address</b>, <b>Subnet Mask</b>, <b>Gateway</b>, <b>Preferred DNS Server</b>, and <b>Alternate DNS Server</b>.</p> <p><b>DHCP:</b> Device management IP addressing (<b>IP address</b>, <b>Subnet Mask</b>, <b>Gateway</b>, and <b>DNS Server</b>) is assigned via a network DHCP server, and parameters <b>IP Address</b>, <b>Subnet Mask</b>, <b>Gateway</b>, <b>Preferred DNS Server</b>, and <b>Alternate DNS Server</b> are not configurable.</p>
IP Address	<p>Internet protocol (IP) address. This address is used by the family of Internet protocols to uniquely identify this unit on a network.</p> <p>If IP Address Assignment is set to DHCP and the device is unable to retrieve IP address information via DHCP, the device management IP is set to fallback IP 192.168.0.1 (AP) or 192.168.0.2 (SM).</p>
Subnet Mask	Defines the address range of the connected IP network. For example, if the <b>IP Address</b> is configured to <b>192.168.2.1</b> and <b>Subnet Mask</b> is configured to <b>255.255.255.0</b> , the device will belong to subnet <b>192.168.2.X</b> .
Gateway	Configure the IP address of the device on the current network that acts as a gateway. A gateway acts as an entrance and exit to packets from and to other networks.
Preferred DNS Server	Configure the primary IP address of the server used for DNS resolution.
Alternate DNS Server	Configure the secondary IP address of the server used for DNS resolution.

## Step 4: Security parameters

Figure 69 shows the Security parameters page.

**Quick Start**

◀ Main Radio Network Security ▶

**Security**

Wireless Security  Open  WPA2  RADIUS

WPA2 Pre-shared Key  .....

IP Address	Port
Table is empty	

GUI User Authentication  Device Local Only  
 Remote RADIUS Server Only  Remote RADIUS Server and Fallback to Local

Figure 69: Security parameters page

Attribute	Description
<b>Network</b>	
Wireless Security	<p><b>Open:</b> All Subscriber Module devices requesting network entry are allowed registration.</p> <p><b>WPA2:</b> The WPA2 mechanism provides AES radio link encryption and Subscriber Module network entry authentication. When enabled, the Subscriber Module must register using the Authentication Pre-shared Key configured on the AP and Subscriber Module.</p> <p><b>RADIUS:</b> Enables Subscriber Module authentication through a pre-configured Radius server.</p>
WPA2 Pre-shared Key	Configure this key on the AP, then configure the Subscriber Module with this key to complete the authentication configuration. This key must be between 8 to 128 symbols.
Servers	<p>Up to three RADIUS servers can be configured on the device with the following attributes:</p> <p><b>IP Address:</b> IP Address of the RADIUS server on the network.</p> <p><b>Port:</b> The RADIUS server port. The default is 1812.</p> <p><b>Secret:</b> Secret key that is used to communicate with the RADIUS server.</p>
GUI User Authentication	<p>This parameter applies to both the AP and its registered SMs.</p> <p><b>Device Local Only:</b> The device GUI authentication is local to the device using one of the accounts configured under <b>Configuration &gt; System &gt; Account Management</b>.</p> <p><b>Remote RADIUS Server Only:</b> The device GUI authentication is performed using a RADIUS server.</p> <p><b>Remote RADIUS Server and Fallback to Local:</b> The device GUI authentication is performed using a RADIUS server. Upon failure of authentication through a RADIUS server, the authentication falls back to one of the local accounts configured under <b>Configuration &gt; System &gt; Account Management</b>.</p>

## Using the installation wizard – Subscriber Module

The ePMP device features the guided configuration mechanism for configuring key parameters for link operation.

This setup is accessed on the **Installation** page by clicking on the **Start Setup**  button.

Click **Finish Setup** to commit the changes to the device.

### Step 1: Main system parameters

Figure 70 shows the Main system parameters page.

Figure 70: Main system parameters page

Attribute	Description
<b>Main</b>	
Device Name	The configured identifier used in NMS such as cnMaestro.
Radio Mode	This parameter controls the function of the device - All ePMP devices are configured to operate as an <b>Access Point</b> (AP) or a <b>Subscriber Module</b> (SM).

## Step 2: Radio parameters

Figure 71 shows the Radio parameters page.

Figure 71: Radio parameters page

Attribute	Description
<b>Radio</b>	
<b>Preferred APs</b>	
SSID	The <b>Preferred Access Points SSID</b> defines the AP SSID to which the Subscriber Module (SM) device attempts the registration.

Attribute	Description
Wireless Security	<b>Open:</b> The SM device attempts the registration to preferred APs SSID with no security mechanism.  <b>WPA2:</b> The WPA2 mechanism provides AES radio link encryption and SM network entry authentication. When enabled, the SM must register using the Authentication Pre-shared Key configured on the AP and SM.
WPA2 Pre-shared Key	The <b>Preferred Access Points WPA2 Pre-shared Key</b> must be configured on the SM device to match the pre-shared key configured on the Access Point for registration with WPA2 security.
Scan Channel Bandwidth	Configure the channel size used by the radio for RF transmission.
Radio Frequency Scan List	Configure the frequency carrier for RF transmission. This list is dynamically adjusted to the regional restrictions based on the setting of the <b>Country</b> parameter. Ensure that a thorough spectrum analysis is completed before configuring this parameter.

## Step 3: Network parameters

Figure 72 shows the Network parameters page.

Figure 72: Network parameters page

Attribute	Description
<b>Network</b>	
Network Mode	<b>NAT:</b> The SM acts as a router and packets are forwarded or filtered based on their IP header (source or destination).  <b>Bridge:</b> The SM acts as a switch and packets are forwarded or filtered based on their MAC destination address.  <b>Router:</b> The SM acts as a router and packets are forwarded or filtered based on their IP header (source or destination) using specific static routes and IP aliases configured by the operator.

Attribute	Description
IP Assignment	<b>Static:</b> Device management IP addressing is configured manually in fields <b>IP Address</b> , <b>Subnet Mask</b> , <b>Gateway</b> , <b>Preferred DNS Server</b> , and <b>Alternate DNS Server</b> .  <b>DHCP:</b> Device management IP addressing ( <b>IP address</b> , <b>Subnet Mask</b> , <b>Gateway</b> , and <b>DNS Server</b> ) is assigned via a network DHCP server, and parameters <b>IP Address</b> , <b>Subnet Mask</b> , <b>Gateway</b> , <b>Preferred DNS Server</b> , and <b>Alternate DNS Server</b> are not configurable.
IP Address	Internet protocol (IP) address. This address is used by the family of Internet protocols to uniquely identify this unit on a network.  If IP Address Assignment is set to DHCP and the device is unable to retrieve IP address information through DHCP, the device management IP is set to fallback IP 192.168.0.1 (AP) or 192.168.0.2 (SM).
Subnet Mask	Defines the address range of the connected IP network. For example, if the <b>IP Address</b> is configured to <b>192.168.2.1</b> and <b>Subnet Mask</b> is configured to <b>255.255.255.0</b> , the device belongs to subnet <b>192.168.2.X</b> .
Gateway	Configure the IP address of the device on the current network that acts as a gateway. A gateway acts as an entrance and exit to packets from and to other networks.
Preferred DNS Server	Configure the primary IP address of the server used for DNS resolution.
Alternate DNS Server	Configure the secondary IP address of the server used for DNS resolution.

## Step 4: Security parameters

Figure 73 shows the Security parameters page.

Figure 73: Security parameters page

Attribute	Description
Network	
EAP-TTLS Username	Configure the EAP-TTLS Username to match the credentials on the RADIUS server being used for the network.

Attribute	Description
Use Ethernet MAC Address at EAP-TTLS Username	The device MAC Address can be used as the EAP-TTLS Username in either ":" or "-" delimited format.
EAP-TTLS Password	Configure the EAP-TTLS Password to match the credentials on the RADIUS server being used for the network.
Authentication Identity String	Configure this identity string to match the credentials on the RADIUS server being used for the network. The default value for this parameter is <b>anonymous</b> .
Authentication Identity Realm	Configure this identity string to match the credentials on the RADIUS server being used for the network. The default value for this parameter is <b>cambiumnetworks.com</b> .

## Using the menu options

Use the menu navigation bar in the left panel to navigate to the web pages. Some of the menu options are only displayed for specific system configurations. Refer to, [Table 199](#) to locate information about each web page.

Table 199: Menu options and web pages

Main menu	Menu option	Web page information
Status		<a href="#">Status page</a>
Installation		<a href="#">Installation page</a>
Configuration		<a href="#">Configuration menu</a>
	Radio	<a href="#">Configuration &gt; Radio page</a>
	System	<a href="#">Configuration &gt; System page</a>
	Network	<a href="#">Configuration &gt; Network page</a>
	Security	<a href="#">Configuration &gt; Security page</a>
Monitor		<a href="#">Monitor menu</a>
	Performance	<a href="#">Monitor &gt; Performance page</a>
	System	<a href="#">Monitor &gt; System page</a>
	Wireless	<a href="#">Monitor &gt; Wireless page</a>
	Throughput Chart	<a href="#">Monitor &gt; Throughput Chart page</a>
	GPS	<a href="#">Monitor &gt; GPS page (Access Point mode)</a>
	Network	<a href="#">Monitor &gt; Network page</a>
	System Log	<a href="#">Monitor &gt; System Log page</a>

Main menu	Menu option	Web page information
Tools		<a href="#">Tools menu</a>
	Software Upgrade	<a href="#">Tools &gt; Software Upgrade page</a>
	Backup / Restore	<a href="#">Tools &gt; Backup/Restore page</a>
	License Management	<a href="#">Tools &gt; License Management page (Access Point Mode)</a>
	Spectrum Analyzer	<a href="#">Tools &gt; Spectrum Analyzer page</a>
	eAlign	<a href="#">Tools &gt; eAlign page</a>
	Wireless Link Test	<a href="#">Tools &gt; Wireless Link Test page</a>
	Watchdog	<a href="#">Tools &gt; Watchdog page</a>
	Ping	<a href="#">Tools &gt; Ping page</a>
	Traceroute	<a href="#">Tools &gt; Traceroute page</a>

## Status page

The status page describes the status information of the QoE device. Figure 74 shows the Status page.

Status	
Device Name	ePMP3000
SSID	GetElevated
Operating Frequency	5 200 MHz
Operating Channel Bandwidth	20 MHz
Transmitter Output Power	8 dBm
Antenna Gain	17 dBi
Country	United States
Access Point Mode	TDD
Downlink/Uplink Frame Ratio	75/25
Wireless Security	WPA2
cnMaestro Remote Management	Enabled
cnMaestro Connection Status	Connected to cloud.cambiumnetworks.com
cnMaestro Account ID	CAMBRIUM_NA_SALES
Wireless MAC Address	00:04:56:20:9D:F4
Ethernet MAC Address	00:04:56:20:9D:F9
SFP Port MAC Address	00:04:56:20:9D:F8
IP Address	10.120.223.101
Date and Time	16 Nov 2018, 08:02:23 CDT
System Uptime	15 hours, 0 minute
System Description	--
Sync Source Status	GPS Sync Up
Device Coordinates	42.05291030000001, -88.02544669999997
DFS Status	Not Available
Ethernet Status	1 000 Mbps / Full
Wireless Status	Up
SFP Port	Down
SFP Port Type	N/A
Registered Subscriber Modules	2
Registered Elevate Subscriber Modules	0

Figure 74: Status page

Table 132 Status page attributes

Attribute	Description
Device Name	The configured device name of the AP, used for identifying the device in an NMS such as the Cambium Network Services Server (CNSS).
SSID	The current configured name/SSID of the AP.

Attribute	Description
Operating Frequency	The current frequency carrier used for radio transmission, based on the configuration of the <b>Frequency Carrier</b> parameter (in DFS regions, if radar has been detected, this field may display either <b>DFS Alternate Frequency Carrier 1</b> or <b>DFS Alternate Frequency Carrier 2</b> ).
Operating Channel Bandwidth	The current channel bandwidth used for radio transmission, based on the configuration of the <b>Channel Bandwidth</b> parameter.
Transmitter Output Power	The current operating transmit power of the AP.
Antenna Gain	The configured gain of the external antenna.
Country	The current configured country code, which has an effect on DFS operation and transmits power restrictions. Registered Subscriber Modules will inherit this country code when registration is complete (unless SM is locked to the US region).
Access Point Mode	<p><b>TDD:</b> The Access Point is operating in point-to-multipoint (PMP) mode using TDD scheduling. The AP can GPS synchronize in this mode (except when in Flexible mode).</p> <p><b>ePTP Master:</b> The Access Point is operating as a Master in point-to-point mode. The AP does not support GPS Synchronization in this mode but can provide <b>significantly lower latency</b> than other modes. QoS (MIR and traffic priority) capability and Link Quality/Capacity indicators are not available in this mode.</p> <p><b>PTP:</b> The Access Point is operating in point-to-point (PTP) mode using TDD scheduling. The AP can GPS synchronize in this mode (except when in Flexible mode).</p>
Downlink/Uplink Frame Ratio	The current configured schedule of downlink traffic to uplink traffic on the radio link. In other words, this ratio represents the amount of the total radio link's aggregate throughput that will be used for downlink resources and the amount of the total radio link's aggregate throughput that will be used for uplink resources.
Wireless Security	Currently configured authentication type used for radio link encryption as well as SM authentication.
cnMaestro Remote Management	Indicates whether the device is currently configured to be managed by the Cambium cloud management system – cnMaestro™.
cnMaestro Connection Status	The current management status of the device concerning the Cambium Cloud Server. When Enabled under <b>Configuration &gt; System</b> , the device will be managed by the Cambium Remote Management System, which allows all Cambium devices to be managed from the Cambium Cloud Server.
cnMaestro Account ID	The ID that the device is currently using to be managed by the Cambium Cloud Server.

Attribute	Description
Wireless MAC Address	The MAC address of the device wireless interface.
Ethernet MAC Address	The MAC address of the device Ethernet (LAN) interface.
SFP Port MAC Address	The MAC address of the device SFP interface.
IP Address	The currently configured device IP address (LAN) is used for management access.
IPv6 Link Local Address	A link-local address is required for the IPv6-enabled interface (applications may rely on the link-local address even when there is no IPv6 routing). The IPv6 link-local address is comparable to the auto-configured IPv4 address 169.254.0.0/16.
IPv6 Address	The IPv6 address for device management.
Date and Time	The current date and time on the device, subject to the configuration of the parameter <b>Time Zone</b> .
System Uptime	The total uptime of the radio since the last reset.
System Description	The current configured system description.
Sync Source Status	Displays the current status of sync timing for the AP.
Device Coordinates	The current configured Latitude and Longitude coordinates in decimal format.
DFS Status	<p><b>N/A:</b> DFS operation is not required for the region configured in parameter <b>Country Code</b>.</p> <p><b>Channel Availability Check:</b> Before transmitting, the device must check the configured <b>Frequency Carrier</b> for radar pulses for 60 seconds). If no radar pulses are detected, the device transitions to state <b>In-Service Monitoring</b>.</p> <p><b>In-Service Monitoring:</b> Radio is transmitting and receiving normally while monitoring for radar pulses that require a channel move.</p> <p><b>Radar Signal Detected:</b> The receiver has detected a valid radar pulse and is carrying out detect-and-avoid mechanisms (moving to an alternate channel).</p> <p><b>In-Service Monitoring at Alternative Channel:</b> The radio has detected a radar pulse and has moved the operation to a frequency configured in <b>DFS Alternative Frequency Carrier 1</b> or <b>DFS Alternative Frequency Carrier 2</b>.</p> <p><b>System Not In Service due to DFS:</b> The radio has detected a Radar pulse and has failed channel availability checks on all alternative frequencies. The non-occupancy time for the radio frequencies in which Radar detected is 30 minutes.</p>
Ethernet Status	<p><b>Up:</b> The Ethernet (LAN) interface is functioning properly. This also displays the current port speed and duplex mode to which the Ethernet port has auto negotiated to or configured.</p> <p><b>Down:</b> The Ethernet (LAN) interface is either disconnected or has encountered an error and is not servicing traffic.</p>

Attribute	Description
Wireless Status	<b>Up:</b> The radio (WAN) interface is functioning properly <b>Down:</b> The radio (WAN) interface has encountered an error and is not servicing traffic.
SFP Port	Displays the current port speed and duplex mode to which the SFP port has auto-negotiated or displays the current port speed and duplex mode that have been configured manually.
SFP Port Type	Displays the type of SFP module connected to the device.
Registered Subscriber Modules	The total number of SMs currently registered to the AP.
Registered Elevate Subscriber Modules	The total number of ePMP Elevate (third-party software solution) subscribers registered to the AP.

## Installation page

For more information on the installation page, refer to [Using the installation wizard – Access Point](#) and [Using the installation wizard – Subscriber Module](#) sections.

## Configuration menu

Use the **Configuration** menu to access all applicable device configuration parameters.

### Configuration > Radio page

Figure 75 and Figure 76 shows the Radio pages (AP mode and SM mode).

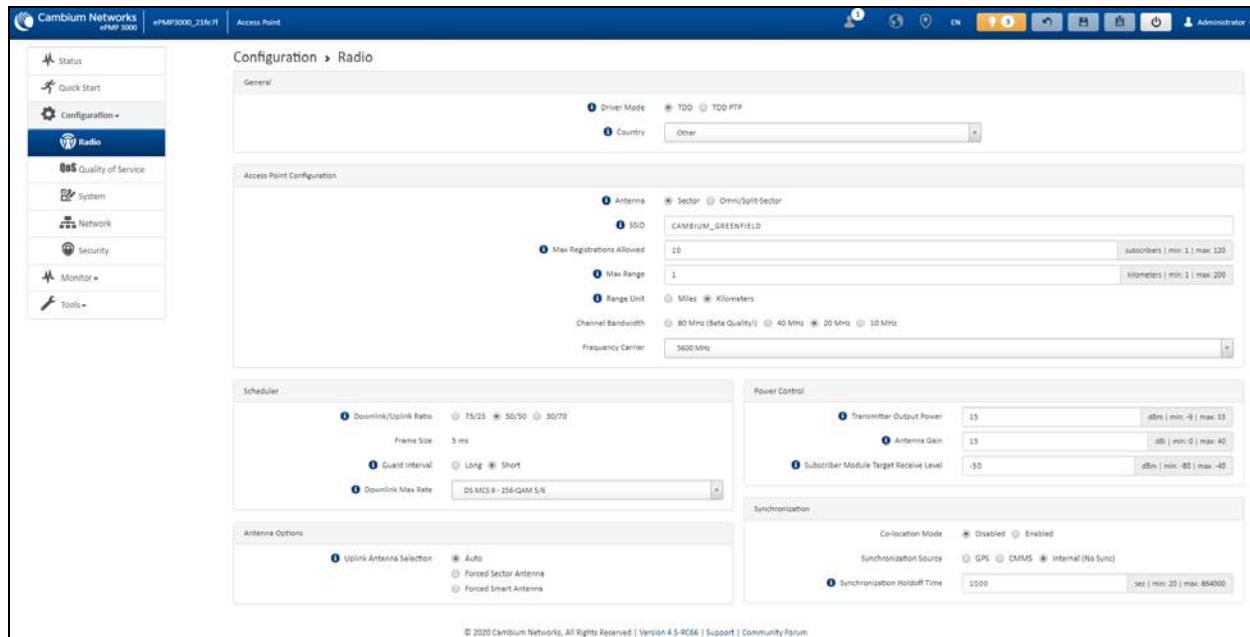


Figure 75: Configuration > Radio page (AP mode)

**Note**

The **Trial Configuration** allows you to try a configuration change without applying the configuration.

**Configuration > Radio**

**General**

Radio Mode  Access Point  Subscriber Module

Driver Mode  TDD  ePTP Slave

EN

**Preferred APs**

[Add new AP](#) [Show Details](#)

SSID	Wireless Security	WPA2 Pre-shared Key
Table is empty		

**Power Control**

Transmitter Output Power: 3 dBm | min: 3 | max: 30

Antenna Gain: 25 dB | min: 25 | max: 40

Network Entry RSI Threshold: -90 dBm | min: -100 | max: -20

Network Entry SNR Threshold: 0 dB | min: -5 | max: 60

**Antenna Options**

Uplink Antenna Selection:  Auto  Forced Sector Antenna  Forced Smart Antenna

**Radio Configuration**

Max Tx Power:  Auto  Manual

Uplink Max Rate: DS-MCS 9-256-QAM 3/6

Scan Channel Bandwidth:  80 MHz  40 MHz  20 MHz

**Radio Frequency 20 MHz Scan List**

[Unselect All](#) [Select All](#)

4920 MHz	4925 MHz	4930 MHz	4935 MHz	4940 MHz	4945 MHz	4950 MHz	4955 MHz	4960 MHz	4965 MHz	4970 MHz	4975 MHz	4980 MHz	4985 MHz	4990 MHz
4995 MHz	5000 MHz	5005 MHz	5010 MHz	5015 MHz	5020 MHz	5025 MHz	5030 MHz	5035 MHz	5040 MHz	5045 MHz	5050 MHz	5055 MHz	5060 MHz	5065 MHz
5070 MHz	5075 MHz	5080 MHz	5085 MHz	5090 MHz	5095 MHz	5100 MHz	5105 MHz	5110 MHz	5115 MHz	5120 MHz	5125 MHz	5130 MHz	5135 MHz	5140 MHz
5145 MHz	5150 MHz	5155 MHz	5160 MHz	5165 MHz	5170 MHz	5175 MHz	5180 MHz	5185 MHz	5190 MHz	5195 MHz	5200 MHz	5205 MHz	5210 MHz	5215 MHz
5220 MHz	5225 MHz	5230 MHz	5235 MHz	5240 MHz	5245 MHz	5250 MHz	5255 MHz	5260 MHz	5265 MHz	5270 MHz	5275 MHz	5280 MHz	5285 MHz	5290 MHz
5295 MHz	5300 MHz	5305 MHz	5310 MHz	5315 MHz	5320 MHz	5325 MHz	5330 MHz	5335 MHz	5340 MHz	5345 MHz	5350 MHz	5355 MHz	5360 MHz	5365 MHz
5370 MHz	5375 MHz	5380 MHz	5385 MHz	5390 MHz	5395 MHz	5400 MHz	5405 MHz	5410 MHz	5415 MHz	5420 MHz	5425 MHz	5430 MHz	5435 MHz	5440 MHz
5445 MHz	5450 MHz	5455 MHz	5460 MHz	5465 MHz	5470 MHz	5475 MHz	5480 MHz	5485 MHz	5490 MHz	5495 MHz	5500 MHz	5505 MHz	5510 MHz	5515 MHz
5520 MHz	5525 MHz	5530 MHz	5535 MHz	5540 MHz	5545 MHz	5550 MHz	5555 MHz	5560 MHz	5565 MHz	5570 MHz	5575 MHz	5580 MHz	5585 MHz	5590 MHz
5595 MHz	<input checked="" type="checkbox"/> 5600 MHz	5605 MHz	5610 MHz	5615 MHz	5620 MHz	5625 MHz	5630 MHz	5635 MHz	5640 MHz	5645 MHz	5650 MHz	5655 MHz	5660 MHz	5665 MHz
5670 MHz	5675 MHz	5680 MHz	5685 MHz	5690 MHz	5695 MHz	5700 MHz	5705 MHz	5710 MHz	5715 MHz	5720 MHz	5725 MHz	5730 MHz	5735 MHz	5740 MHz
5745 MHz	5750 MHz	5755 MHz	5760 MHz	5765 MHz	5770 MHz	5775 MHz	5780 MHz	5785 MHz	5790 MHz	5795 MHz	5800 MHz	5805 MHz	5810 MHz	5815 MHz
5820 MHz	5825 MHz	5830 MHz	5835 MHz	5840 MHz	5845 MHz	5850 MHz	5855 MHz	5860 MHz	5865 MHz	5870 MHz	5875 MHz	5880 MHz	5885 MHz	5890 MHz
5895 MHz	5900 MHz	5905 MHz	5910 MHz	5915 MHz	5920 MHz	5925 MHz	5930 MHz	5935 MHz	5940 MHz	5945 MHz	5950 MHz	5955 MHz	5960 MHz	5965 MHz

Select All

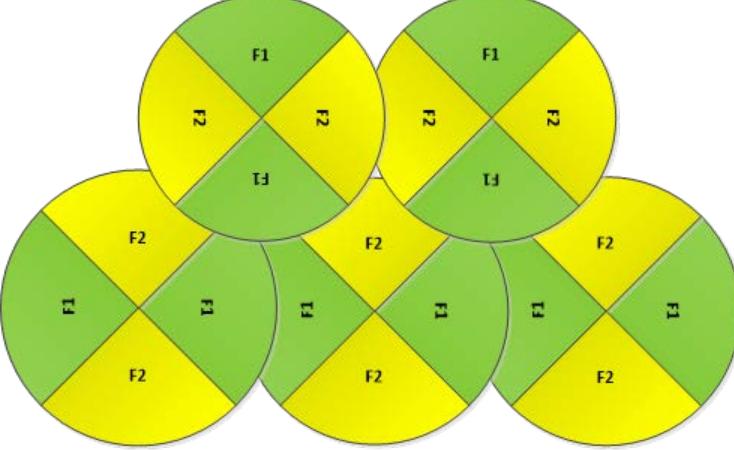
© 2020 Cambium Networks, All Rights Reserved | Version 4.5 | Support | Community Forum

Figure 76: Configuration > Radio page (SM mode)

Table 133 Configuration > Radio page attributes

Attribute	Description
<b>General</b>	
Driver Mode	<p><b>TDD:</b> The device is operating in Point-to-Multipoint (PMP) mode using TDD scheduling. The AP can GPS synchronize in this mode.</p> <p><b>ePTP Slave:</b> The SM is operating as a Slave in point-to-point mode. The AP and the system do not support GPS Synchronization in this mode but can provide significantly lower latency than other modes. QoS (MIR and traffic priority) capability and Link Quality/Capacity indicators are not available in this mode.</p> <p><b>TDD PTP:</b> The Access Point is operating in point-to-point (PTP) mode using TDD scheduling. The AP can GPS synchronize in this mode.</p>

Attribute	Description
Radio Mode	<p><b>Access Point:</b> The unit controls the point-to-point link and its maintenance. On start-up, the Access Point transmits until a link with the Subscriber Module is made.</p> <p><b>Subscriber Module:</b> The unit listens for its peer and only transmits when the peer has been identified.</p>
Backward Compatibility (Access Point Mode)	<p><b>Enabled:</b> 802.11n ePMP subscribers can register to the AP (requires subscriber software upgrade).</p> <p><b>Disabled:</b> 802.11n ePMP subscribers are not able to register to the AP.</p>
Country (Access Point Mode)	<p>Defines the country code being used by the device. The country code of the Subscriber Module follows the country code of the associated Access Point unless it is an FCC SKU in which case the country code is the United States or Canada. Country code defines the regulatory rules in use for the device.</p>
Range Unit (Access Point Mode)	<p>Units of measurement on the device are displayed in either miles (m) or kilometers (km).</p>
<b>Access Point Configuration (AP mode)</b>	
Antenna (Access Point Mode)	<p><b>Sector:</b> Panel, 90° or Dual-Horn, 60°</p> <p><b>Omni:</b> KP-5QSOMNI-13</p>
SSID (Access Point Mode)	<p>SSID is a unique identifier for a wireless LAN which is specified in the AP's beacon. (AP mode). SSID must be the same at both ends and different from the site name.</p>
Max Registrations Allowed (Access Point Mode)	<p>Based on a sector/network planning and subscriber service level implementations, this parameter allows setting the maximum number of subscribers that are allowed to register/gain network entry. The maximum number of subscribers allowed for each channel bandwidth is as follows:</p> <ul style="list-style-type: none"> <li>• <b>20/40 MHz:</b> 120 subscribers</li> <li>• <b>10 MHz:</b> 60 subscribers</li> <li>• <b>5 MHz:</b> 30 subscribers</li> </ul> <p>The maximum registrations allowed depending on the channel bandwidth of the current operating frequency which can be the primary <b>Frequency Carrier</b> or one of the alternate Frequency Carriers.</p> <p>For DFS regions, the maximum number of subscribers is based on the channel bandwidth of the current operating channel. That is <b>Frequency Carrier</b>, <b>Alternate Frequency Carrier 1</b>, or <b>Alternate Frequency Carrier 2</b>.</p> <p>The number of elevate devices that are allowed to register is specified by the applied license.</p>

Attribute	Description
Max Range (Access Point Mode)	This parameter represents the cell coverage radius. Subscriber Modules outside the configured radius does not able to connect. It is recommended to configure Max Range to match the actual physical distance of the farthest subscriber.
Channel Bandwidth (Access Point Mode)	Configure the channel size used by the radio for RF transmission.
Frequency Carrier (Access Point Mode)	Configure the frequency carrier for RF transmission. This list is dynamically adjusted to the regional restrictions based on the setting of the <b>Country</b> parameter. Ensure that a thorough spectrum analysis has been completed before configuring this parameter.
Frequency Reuse (Access Point Mode)	<p>The <b>Frequency Reuse</b> parameter allows operators to define which APs are co-located (or within radio range) with other APs. This definition results in an automatic radio network modification such that self-interference is reduced amongst the co-located sectors.</p> <p>A network in which two frequencies <b>F1</b> and <b>F2</b> are reused throughout the installation is shown in <a href="#">Figure 76</a>.</p> <p>Note that CMM3 and CMM4 devices cannot be used as synchronization sources for ePMP 3000, the parameter setting suggestions below serve as a guideline for mixed 802.11n and 802.11ac networks.</p>  <p><b>Figure 77: Frequency reuse installation</b></p> <p>The set of APs to configure the <b>Frequency Reuse</b> option is dependent on the GPS synchronization sources in the whole network, CMM3, CMM4, CMM5, or GPS.</p> <p>The GPS sync source is the same on all APs or is a combination of “GPS”, “CMM4”, “CMM5”</p> <p>In this configuration the GPS synchronization source in the whole network is one of the following:</p> <ul style="list-style-type: none"> <li>GPS</li> </ul>

Attribute	Description
	<ul style="list-style-type: none"> <li>• CMM4</li> <li>• CMM5</li> </ul> <p>The rules in selecting the APs to enable the <b>Frequency Reuse</b> in this installation are:</p> <p>Only ONE of the APs on the same tower configured with the same frequency must be configured with the <b>Frequency Reuse Mode</b> parameter set to <b>Back Sector</b>; the other AP must be configured with <b>Frequency Reuse</b> set to <b>Front Sector</b>.</p> <p>Also, APs on different towers facing each other with overlapped coverage must be configured with <b>Frequency Reuse</b> set to <b>Back Sector</b>.</p> <p>1B1BThe GPS sync source is a mixture of all types (“CMM3”, “CMM4”, “CMM5” or “GPS”)</p> <p>In this configuration the GPS sync source in the whole network is one of the following:</p> <ul style="list-style-type: none"> <li>• (CMM3 and GPS) or</li> <li>• (CMM3 and CMM4 / CMM5) or</li> <li>• (CMM3 and CMM4 / CMM5 and GPS)</li> </ul> <p>The rules in selecting the APs to configure <b>Frequency Reuse</b> to <b>Frequency Reuse</b> to <b>Front Sector</b> or <b>Back Sector</b> in a mixture of sync sources installations are:</p> <p>Only ONE of the APs on the same tower configured with the same frequency must have <b>Frequency Reuse</b> set to <b>Back Sector</b> if the sync source of both APs is the same or the sync is a combination of GPS and CMM4 / CMM5; the other AP has the <b>Front Sector</b> ON.</p> <p>For the APs on different towers facing each other with overlapped coverage:</p> <ul style="list-style-type: none"> <li>• If both APs have the same sync source, then only ONE of them must have the <b>Back Sector</b> ON; the other AP shall have the <b>Front Sector</b> ON.</li> <li>• If one AP has GPS as sync source and the other one has CMM4 / CMM5 then only ONE of them must have <b>Back Sector</b> ON; the other AP shall have <b>Front Sector</b> ON.</li> <li>• If one AP has GPS or CMM4 / CMM5 as sync source and the other one has CMM3.</li> <li>• If the AP with CMM3 sync source has <b>Back Sector</b> ON, then the other AP (with GPS or CMM4 / CMM5 sync source) must have the <b>Back Sector</b> ON.</li> </ul>

Attribute	Description
	<ul style="list-style-type: none"> <li>If the AP with CMM3 sync source has <b>Frequency Reuse</b> set to <b>Off</b>, then the other AP (with GPS or CMM4 CMM5 sync source) must have <b>Frequency Reuse</b> set to <b>OFF</b>.</li> </ul>
<b>Power Control</b>	
Transmitter Output Power (Access Point Mode)	<b>Transmitter Output Power</b> is the total transmit power of the device. The device has four transmit chains and total transmit power sums the power from all chains. This does not include antenna gain. Transmitter Output Power may be limited by regulatory rules for the country in use.
Antenna Gain	The total gain of the antenna is being used by the device.
Subscriber Module Target Receive Level (Access Point Mode)	Defines the desired received power level at the AP from the registered Subscriber Module. APs use this parameter to control the transmission power of the Subscriber Module to reduce system self-interference.
Network Entry RSSI Threshold (Subscriber Module Mode)	This defines the Downlink RSSI threshold below which a Subscriber Module does not register to an Access Point.
Network Entry SNR Threshold (Subscriber Module Mode)	This defines the Downlink Signal-to-Noise-Ratio (SNR) threshold below which the Subscriber Module does not register to an Access Point.
<b>Synchronization (AP mode)</b>	
Co-location Mode (Access Point Mode)	<p><b>Disabled:</b> The ePMP device can synchronize only with other ePMP APs.</p> <p><b>Enabled:</b> The ePMP device can be configured to synchronize with PMP 100 or PMP 450 series of radios in addition to other ePMP APs. Refer to <a href="#">ePMP and PMP 100 Co-location and Migration Recommendations Guide</a> for guidance on synchronizing ePMP and PMP 100. Verify that frame size (ms) is configured equally across the co-located installations.</p>
Synchronization Source (Access Point Mode)	<p><b>GPS:</b> Synchronization timing is received through the AP's connected GPS antenna. Co-located or in-range APs receiving synchronization via GPS or CMM transmits and receive at the same time, thereby reducing self-interference.</p> <p><b>CMM5:</b> Synchronization timing is received through the AP's Ethernet port through a connected Cambium Cluster Management Module 5 (CMM5). Co-located or in-range APs receiving synchronization through GPS or CMM transmits and receive at the same time, thereby reducing self-interference. For more information on CMM configuration, refer to <i>PMP Synchronization Solutions User Guide</i>.</p> <p>If CMM is used, verify that the cables from the CMM to the network switch are at most 30 ft (shielded) or 10 ft (unshielded) and that the network switch is not PoE (802.3af).</p> <p><b>Internal:</b> Synchronization timing is generated by the AP and the timing is not based on GPS pulses.</p>

Attribute	Description
	APs using synchronization source of <b>Internal</b> does not transmit and receive in sync with other co-located or in-range APs, which introduces self-interference into the system.
Synchronization Holdoff Time (Access Point Mode)	The <b>Synchronization Holdoff Time</b> is designed to gracefully handle fluctuations/losses in the GPS synchronization signaling. After the AP has received a reliable synchronization pulse for at least 60 seconds, if there is a loss of synchronization signal, the <b>Synchronization Holdoff</b> timer is started. During the holdoff interval, all SM registrations are maintained. If a valid GPS synchronization pulse is regained during the holdoff interval, then the AP continues to operate normally. If a valid synchronization pulse is not regained from the GPS source during the holdoff interval, then the AP ceases radio transmission. The default is <b>30 seconds</b> .
<b>Preferred Access Points (SM mode)</b>	
Preferred Access Points list (Subscriber Module Mode)	The <b>Preferred Access Points List</b> is comprised of a list of up to 16 Access Point devices to which the SM device sequentially attempts registration. For each AP configured, if authentication is required, enter the <b>Wireless Security</b> type and <b>WPA2 Pre-shared Key</b> associated with the configured SSID.
<b>Scheduler (AP mode)</b>	
Downlink/Uplink Ratio (Access Point Mode)	The schedule of downlink traffic to uplink traffic on the radio link. The three options, <b>75/25</b> , <b>50/50</b> , and <b>30/70</b> , allow the radio to operate in a fixed ratio on every frame. In other words, this ratio represents the amount of the total radio link's aggregate throughput that is used for downlink resources, and the amount of the total radio link's aggregate throughput that is used for uplink resources.
Guard interval (Access Point Mode)	The purpose of the guard interval is to introduce immunity to propagation delays, echoes, and reflections, to which digital data is normally very sensitive. Longer guard periods allow more distant echoes to be tolerated. However, longer guard intervals reduce channel efficiency.
Downlink Max Rate (AP mode)	Specifies the maximum downlink MCS value that the Rate Adapt algorithm chooses for Radio 1. If an installation is exhibiting packet loss due to downlink interference, modifying <b>Downlink Max Rate</b> to limit the device's maximum MCS rate may result in more reliable packet delivery. This is especially true in installations among changing and unpredictable interference.
	<p> <b>Note</b></p> <p>This setting is not available if the AP is set to ePTP Master mode.</p>
<b>Radio Configuration</b>	
Maximum Tx Power (SM mode)	<b>Auto:</b> The AP can control, using ATPC (Automatic Transmit Power Control), the TX power of the SM up to the maximum capability of the SM's transmitter (based on regulatory limits).

Attribute	Description
	<b>Manual:</b> The AP can control the TX power of the SM up to the value configured in the <b>Transmitter Power</b> field.
Transmitter Output Power (SM mode)	The total transmit power of the radio interface. The device has four transmit chains for each channel and total transmit power sums the power from all chains. This does not include antenna gain. Transmitter output power may be limited by regulatory rules for the country in use.
Uplink Maximum Rate (SM mode)	Specifies the maximum uplink MCS value that the Rate Adapt algorithm chooses for Radio 1. If an installation is exhibiting packet loss due to uplink interference, modifying <b>Uplink Max Rate</b> to limit the device's maximum MCS rate may result in more reliable packet delivery. This is especially true in installations among changing and unpredictable interference.
	<div style="display: flex; align-items: center;">  <b>Note</b>            This setting is not available if the SM is set to ePTP Slave mode.         </div>
Scan Channel Bandwidth (Subscriber Module Mode)	The selected scan channel bandwidths are scanned by the SM. Any combination can be selected. When bandwidth is selected, a tab for the bandwidth appears and a listing of all available channels is presented once the tab for the bandwidth is selected. Each bandwidth tab contains a number on the left side. This number defines how many channels have been selected for that bandwidth. If no channels are selected for bandwidth, then all the channels are scanned.

## Configuration > Quality of Service (QoS)

### The AP Quality of Service (QoS) page

The ePMP platform supports three QoS priority levels (not available in ePTP Master mode) using air fairness, priority-based starvation avoidance scheduling algorithm.

Ordering of traffic amongst the priority levels is based on a percentage of total link throughput. In other words, all priorities receive some throughput so that low priority traffic is not starved from the transmission. In effect, the greatest amount of throughput is guaranteed to the VOIP priority level, then high, and then low.

Priority Level	ePMP Traffic Priority Label
Highest Priority	VOIP (only utilized when <b>VOIP Enable</b> is set to <b>Enabled</b> )
Medium Priority	High
Lowest Priority	Low

By default, all traffic passed over the air interface is a low priority. The Quality of Service page of AP may be utilized to map traffic to certain priority levels using QoS classification rules. The rules included in the table are enforced starting with the first row of the table.



### Warning

Each additional traffic classification rule increases device CPU utilization. Careful network traffic planning is required to efficiently use the device processor.

The ePMP platform also supports radio data rate-limiting (Maximum Information Rate, or MIR) based on the configuration of the MIR table. Operators may add up to 16 MIR profiles on the AP, each with unique limits for uplink and downlink data rates. The SM field **MIR Profile Setting** is used to configure the appropriate MIR profile for limiting the SM's data rate. [Figure 78](#) shows the Quality of Service page.

The screenshot shows the Cambium Networks ePMP 3000 web interface. The left sidebar includes links for Status, Quick Start, Configuration, Radio, Quality of Service (selected), System, Network, Security, Monitor, and Tools. The main content area is titled 'Configuration > Quality of Service (Beta Quality!)'. It contains two main sections: 'Maximum Information Rate (MIR)' and 'Traffic Priority'.  
**MIR Section:** Shows the 'MIR' status as 'Enabled'. A table lists 'MIR Profiles' with one entry: 'Number' 0, 'Description' 'default', 'Downlink MIR (Mbps)' 100000, and 'Uplink MIR (Kbps)' 100000.  
**Traffic Priority Section:** Shows 'Traffic Priority' as 'Enabled'. It includes settings for 'VLAN Priority' (Low or High), 'Broadcast Priority' (Low or High), and 'Multicast Priority' (Low or High).  
**Classification Rules Section:** Shows 'Add Classification Rules' with a table for 'Classification Rules'. It lists two entries: 'Type' CoS (Value 5, Priority Voice) and 'Type' DSCP (Value 46, Priority Voice).  
© 2020 Cambium Networks. All Rights Reserved | Version 4.5-RC69 | Support | Community Forum

[Figure 78: Configuration > AP Quality of Service page](#)

Table 200: AP Radio Configuration attributes

Attribute	Description
<b>Maximum Information Rate (MIR)</b>	
MIR	<b>Disabled:</b> When disabled, RF transmission is only limited by the capacity of the link (and any active QoS classification rules). <b>Enabled:</b> When enabled, all downlink and uplink traffic is limited based on the profiles configured in the MIR table.
MIR Profiles	The MIR (Maximum Information Rate) table is comprised of up to sixteen profiles which, after configured, may be set on the SM to employ a certain service level or data rate.
Number	Assign a profile number to each row in the AP MIR table. This profile number is then set on each SM to limit data transfer rates based on the operator's configuration of the MIR table and its profiles.

Attribute	Description
Description	Assign a logical description for each service level. For example, a tiered service-level provider may deploy service levels <b>Gold</b> , <b>Silver</b> and <b>Bronze</b> or <b>20 Mbps</b> , <b>10 Mbps</b> and <b>5 Mbps</b> to offer a clear description.
Downlink MIR (kbps)	Specify the downlink rate at which the AP is allowed to transmit for this configured profile.
Uplink MIR (kbps)	Specify the uplink rate at which the AP is allowed to transmit for this configured profile.
<b>Traffic Priority</b>	
Traffic Priority	<p><b>Disabled:</b> No traffic prioritization is performed. All traffic is treated with equal priority (low priority).</p> <p><b>Enabled:</b> Traffic prioritization is enabled, and specific types of traffic can be prioritized using the fields below.</p>
VoIP Priority	<p><b>Enabled:</b> When enabled, two entries are automatically added to the first and second rows of the QoS Classification Rules table, one with <b>Rule Type CoS</b> (5) and one with <b>Rule Type DSCP</b> (46). The addition of these rules ensures that VoIP traffic passed over the radio downlink is given the highest priority. The <b>CoS</b> and <b>DSCP</b> values may be modified to accommodate non-standard VoIP equipment.</p> <p><b>Disabled:</b> When disabled, VoIP traffic is scheduled normally along with all other user data.</p>
Broadcast Priority	<p><b>Low Priority:</b> All broadcast traffic sent over the downlink is prioritized as low priority and is delivered to the SM after scheduled high priority and VoIP traffic.</p> <p><b>High Priority:</b> All broadcast traffic sent over the downlink is prioritized as a high priority and is scheduled for delivery to SMs before low priority traffic but after VoIP traffic.</p>
Multicast Priority	<p><b>Low Priority:</b> All multicast traffic sent over the downlink is prioritized as low priority and will be delivered to the SM after scheduled high priority and VoIP traffic.</p> <p><b>High Priority:</b> All multicast traffic sent over the downlink is prioritized as a high priority and is scheduled for delivery to SMs before low priority traffic but after VoIP traffic.</p>
QoS Classification Rules	The QoS Classification Rules table contains all of the rules enforced by the device when passing traffic over the radio downlink. Traffic passed through the device is matched against each rule in the table; when a match is made the traffic is sent over the radio link using the priority defined in <b>Traffic Priority</b> column.
Type	<p><b>CoS:</b> Class of Service; traffic prioritization is based on the 3-bit header present in the 802.1Q VLAN-tagged Ethernet frame header in the packet entering the AP's Ethernet port.</p> <p><b>VLAN ID:</b> Traffic prioritization is based on the VLAN ID of the packet entering the AP's Ethernet port.</p> <p><b>EtherType:</b> Traffic prioritization is based on the two-octet Ethertype field in the Ethernet frame entering the AP's Ethernet port. The Ethertype is used to identify the protocol of the data in the payload of the Ethernet frame.</p>

Attribute	Description
	<p><b>IP:</b> Traffic prioritization is based on the source and (or) destination IP address of the packet entering the AP's Ethernet port. A subnet mask may be included to define a range of IP addresses to match.</p> <p><b>MAC:</b> Traffic prioritization is based on the source and (or) destination MAC address of the packet entering the AP's Ethernet port. A mask may be included to define a range of MAC addresses to match. The mask is made up of a hex representation of a series of 1s to start the mask and 0s that end the mask. A 1 may not follow a 0. Thus FF:FF:FF:00:00 is allowed, but FF:00:FF:FF:FF is not. The MAC address is combined with the mask to define the range of allowed MAC addresses.</p>
Details	Represents the details of the Class of Service (CoS) present in the packet entering the AP's Ethernet port.
Priority	Represents the QoS classification rule priority.

## The SM Quality of Service page

The ePMP platform supports three QoS priority levels (not available in ePTP Master mode) using air fairness, priority-based starvation avoidance scheduling algorithm.

Ordering of traffic amongst the priority levels is based on a percentage of total link throughput. In other words, all priorities receive some throughput so that low priority traffic is not starved from the transmission. In effect, the greatest amount of throughput is guaranteed to the VOIP priority level, then High, then Low.

Priority Level	ePMP Traffic Priority Label
Highest Priority	VOIP (only utilized when <b>VOIP Enable</b> is set to <b>Enabled</b> )
Medium Priority	High
Lowest Priority	Low

By default, all traffic passed over the air interface is a low priority. The SM's QoS page may be utilized to map traffic to certain priority levels using QoS classification rules. The rules included in the table are enforced starting with the first row of the table.



### Warning

Each additional traffic classification rule increases device CPU utilization. A good network traffic planning is required to efficiently use the device processor.

The ePMP platform also supports radio data rate-limiting (Maximum Information Rate (MIR)) based on the configuration of the MIR table. Operators may add up to 16 MIR profiles on the AP, each with unique limits for uplink and downlink data rates. The SM field **MIR Profile Setting** is used to configure the appropriate MIR profile for limiting the SM's data rate. [Figure 79](#) shows the Quality of Service page.

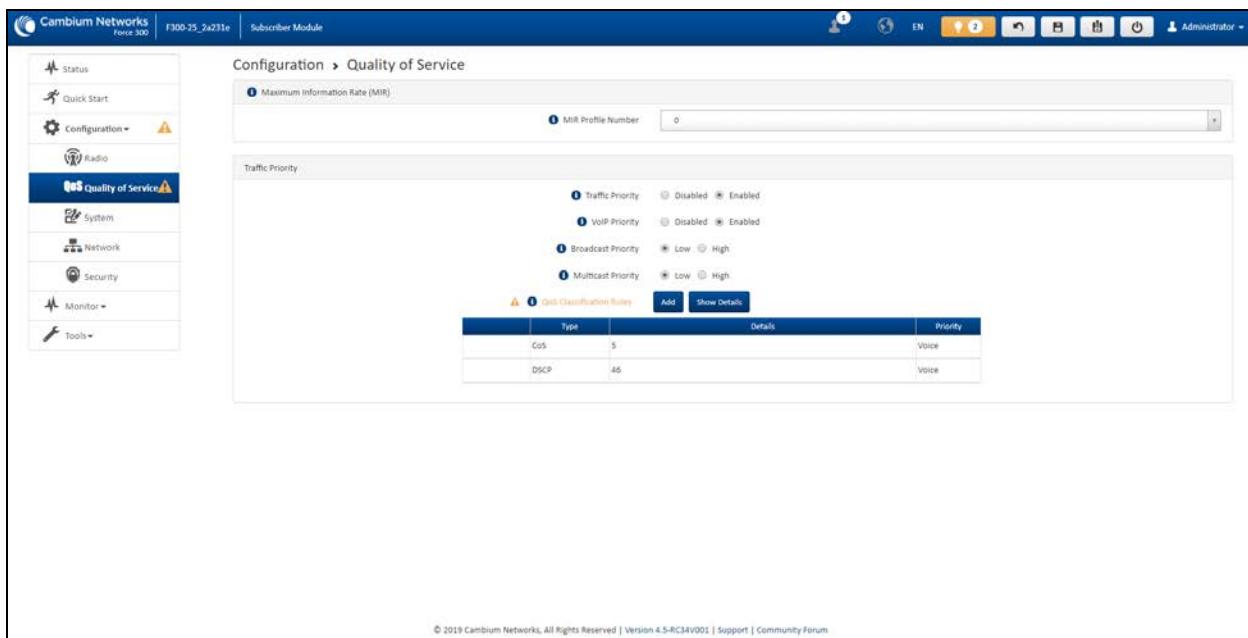


Figure 79: Configuration > SM Quality of Service page

Table 135 SM QoS attributes

Attribute	Description
<b>Maximum Information Rate (MIR)</b>	
MIR Profile Number	Configure the desired MIR (Maximum Information Rate) profile for SM operation. This profile must be configured on the AP else the default profile (0) is used.
Traffic Priority	<b>Enabled:</b> The QoS Classification Rules table is editable and is utilized by the device to classify traffic.  <b>Disabled:</b> The QoS Classification Rules table is greyed out and all traffic is sent at one priority level.
VoIP Priority	<b>Enabled:</b> When enabled, two entries are automatically added to the first and second rows of the QoS Classification Rules table, one with <b>Rule Type CoS</b> (5) and one with <b>Rule Type DSCP</b> (46). The addition of these rules ensures that VoIP traffic passed over the radio downlink is given the highest priority. The <b>CoS</b> and <b>DSCP</b> values may be modified to accommodate non-standard VoIP equipment.
Broadcast Priority	<b>Low Priority:</b> All Broadcast traffic sent over the uplink is prioritized as low priority and is delivered to the AP after scheduled high priority and VoIP traffic.  <b>High Priority:</b> All Broadcast traffic sent over the uplink is prioritized as a high priority and is scheduled for delivery to the AP before low priority traffic but after VoIP traffic.
Multicast Priority	<b>Low Priority:</b> All Multicast traffic sent over the uplink is prioritized as low priority and is delivered to the AP after scheduled high priority and VoIP traffic.  <b>High Priority:</b> All Multicast traffic sent over the uplink is prioritized as a high priority and is scheduled for delivery to the AP before low priority traffic but after VoIP traffic.

Attribute	Description
Subscriber Module Priority	<p><b>Normal:</b> SM gives priority to the packets as defined in the rules which can be <b>Low</b>, <b>High</b>, or <b>VoIP</b>. <b>Normal</b> priority allows data to be added to the appropriate <b>High</b>, <b>Low</b>, and <b>VoIP</b> queues based on the QoS rules. This is the default setting. If no rule is defined for a packet, then the packet priority is <b>Low</b>.</p> <p><b>High:</b> SM places all data other than VoIP in the <b>High</b> queue. It is given higher priority than SMs configured with <b>Low</b> and <b>Normal</b> when there is contention for bandwidth under the AP.</p> <p><b>Low:</b> <b>Low</b> priority places all data that is not VoIP in the <b>Low</b> priority queue. It will be given lower priority than SMs configured with <b>High</b> when there is contention for bandwidth under the same AP.</p> <p><b>VoIP</b> queue is the highest priority queue followed by the <b>High</b> queue and then by the <b>Low</b> queue. Higher priority queues have preference over lower priority queues, but does not suffer them.</p>
QoS Classification Rules	<p>The QoS Classification Rules table contains all of the rules enforced by the device when passing traffic over the radio downlink. Traffic passed through the device is matched against each rule in the table; when a match is made the traffic is sent over the radio link using the priority defined in column <b>Traffic Priority</b>.</p>
Type	<p><b>DSCP:</b> Differentiated Services Code Point; traffic prioritization is based on the 6-bit differentiated services field in the IP header present in the packet entering the Ethernet port.</p> <p><b>CoS:</b> Class of Service; traffic prioritization is based on the 3-bit header present in the 802.1Q VLAN-tagged Ethernet frame header in the packet entering the SM's Ethernet port.</p> <p><b>VLAN ID:</b> Traffic prioritization is based on the VLAN ID of the packet entering the SM's Ethernet port.</p> <p><b>EtherType:</b> Traffic prioritization is based on a 2 octet Ethertype field in the Ethernet frame entering the SM's Ethernet port. The Ethertype is used to identify the protocol of the data in the payload of the Ethernet frame.</p> <p><b>IP:</b> Traffic prioritization is based on the source and/or destination IP addresses of the packet entering the SM's Ethernet port. A subnet mask may be included to define a range of IP addresses to match.</p> <p><b>MAC:</b> Traffic prioritization is based on the source and/or destination MAC addresses of the packet entering the SM's Ethernet port. A mask may be included to define a range of MAC addresses to match. The mask is made up of a hex representation of a series of 1s to start the mask and 0s that end the mask. A 1 may not follow a 0. Thus, FF:FF:FF:OO:OO is allowed, but FF:OO:FF:FF:FF is not. The MAC address is combined with the mask to define the range of allowed MAC addresses.</p>
Details	<p>The <b>Rule Details</b> column is used to further configure each classification rule specified in column <b>Rule Type</b>.</p>
Priority	<p><b>High:</b> Traffic entering the SM's Ethernet port is prioritized as <b>high priority</b> for sending over the radio link (traffic will be sent after VOIP-classified traffic but before Low-classified traffic).</p>

Attribute	Description
	<b>Low:</b> Traffic entering the SM's Ethernet port is prioritized as <b>low priority</b> for sending over the radio link (traffic will be sent after VOIP-classified and High-classified traffic is sent).

## Configuration > System page

Figure 80 shows the System page.

The screenshot shows the 'Configuration > System' page. The left sidebar includes links for Status, Quick Start, Configuration, Radio, Quality of Service, System, Network, Security, Monitor, and Tools. The main content area is divided into several sections:

- General:** Device Name (F300-25\_2a231e), Display Device Name Before Login (Disabled), Inactive Logout (Enabled), Inactive Logout Period (10 minutes), Webpage Auto Update (5 seconds), Range Unit (Miles), Web Access (HTTP, HTTPS), SSH Port (80), SSH Server Port (22), Telnet Port (23), MAC-Telnet Access (Enabled), MAC-Telnet Protocol (MAC-Telnet, MAC-SSH).
- Network Time Protocol (NTP):** NTP Server IP Assignment (Static, DHCP), Preferred NTP Server (0.in.pool.ntp.org), Alternate NTP Server (1.in.pool.ntp.org), Time Zone (UTC+05:30 IST - India Standard Time).
- Location Services:** Device Latitude, Device Longitude, Device Height, Device Location (Open in Google Maps).
- System Logging (Systlog):** Server 1-4, SysLog Mask (Info, Notices, Warnings, Errors, Alerts, Emergency).
- cnMaestro:** Remote Management (Enabled), cnMaestro URL (cloud.cambiumnetworks.com), Cambium ID, Onboarding Key.
- Account Management:** Administrator Account (Enabled), Username (admin), Password (redacted), Home User Account (Enabled), Username (home), Password (redacted), Installer Account (Enabled), Username (installer), Password (redacted), Read-Only Account (Enabled), Username (readonly), Password (redacted).

Figure 80: Configuration > System page parameters

Table 136 Configuration > System page attributes

Attribute	Description
<b>General</b>	
Device Name	The configured identifier is used in an NMS such as cnMaestro.
Display Device Name Before Login	<b>Disabled:</b> For security, the configured <b>Device Name</b> is hidden on the device login screen.

Attribute	Description
	<b>Enabled:</b> The configured <b>Device Name</b> is displayed upper-left on the device login screen.
Inactive Logout	<b>Disabled:</b> The device does not automatically log out users after a period of inactivity.  <b>Enabled:</b> After the period configured in the <b>Inactive Logout Period</b> has elapsed, the device automatically log out the user.
Inactive Logout Period	Represents the amount of time for which a user remains logged in. After this period has elapsed, the user automatically logged out.
Web-page Auto Update	Configure the interval for which the device retrieves system statistics for display on the management interface. For example, if this setting is configured to 5 seconds, the statistics and status parameters displayed on the management interface is refreshed every 5 seconds (default).  <b>Webpage Auto Update</b> is a session-only configuration change. It is updated with the <i>Enter</i> key and is not savable when using the <b>Save</b> button.
Range Unit	Units of measurement on the device are displayed in either miles (m) or kilometers (km).
Web Access	<b>HTTP:</b> The web management interface of the device is accessed through HTTP.  <b>HTTPS:</b> The web management interface of the device may only be accessed through secure HTTPS.
HTTP Port	This specifies the TCP/UDP port to be used with HTTP or HTTPS. The default value for HTTP is 80 and HTTPS is 443.
SSH Access	<b>Disabled:</b> Access to the device through SSH is not possible.  <b>Enabled:</b> Cambium Networks engineers can access the device through SSH which enables them to log in to the radio and troubleshoot. <b>SSH Access</b> is <b>Enabled</b> by default.
Telnet Access	<b>Disabled:</b> Command Line Interface access through Telnet is not allowed  <b>Enabled:</b> Command Line Interface access through Telnet is allowed
<b>Network Time Protocol (NTP)</b>	
NTP Server IP Assignment	<b>Static:</b> The device retrieves NTP time data from the servers configured in fields NTP Server IP Address.  <b>DHCP:</b> The device retrieves NTP time data from the server IP issued through a network DHCP server.
Preferred NTP Server	Configure the primary NTP server IP addresses from which the device retrieves time and date information.
Alternate NTP Server	Configure alternate or secondary NTP server IP addresses from which the device retrieves time and date information.

Attribute	Description
Time Zone	The Time Zone option may be used to offset the received NTP time to match the operator's local time zone.
<b>Location Services</b>	
On-board GPS Latitude	GPS-retrieved Latitude information for the device in decimal format.
On-board GPS Longitude	GPS-retrieved Longitude information for the device in decimal format.
On-board GPS Height	GPS-retrieved height information for the device in meters.
Use GPS Coordinates	Click <b>Update</b> to retrieve device location and height information via the connected GPS source.
<b>Update</b>	
Device Latitude	Configure Latitude information for the device in decimal format.
Device Longitude	Configure Longitude information for the device in decimal format.
Device Height	Configure height above sea level for the device in meters.
Device Location	Hyperlink to display the device location in Google Maps
<b>Open in Google Maps</b>	
<b>Simple Network Management Protocol (SNMP)</b>	
Read-Only Community String	Specify a control string that can allow a Network Management Station (NMS) to read SNMP information. No spaces are allowed in this string. This password will never authenticate an SNMP user or an NMS to read/write access.  The <b>Read-only Community String</b> value is clear text and is readable by a packet monitor.
Read-Write Community String	Specify a control string that can allow a Network Management Station (NMS) to access SNMP information. No spaces are allowed in this string.
System Name	Specify a string to associate with the physical module. This parameter can be polled by the NMS. Special characters are supported.
System Description	Specify a description string to associate with the physical module. This parameter can be polled by the NMS. Special characters are supported.
System Location	Specify a description string to associate with the physical location. This parameter can be polled by the NMS. Special characters are supported.
Traps	<b>Disabled:</b> SNMP traps for system events are not sent from the device.  <b>Enabled:</b> SNMP traps for system events are sent to the servers configured in table <b>Trap Servers</b> .

Attribute	Description
Trap Community String	Configure an SNMP Trap Community String which is processed by the servers configured in <b>Trap Servers</b> . This string is used by the trap server to decide whether or not to process the traps incoming from the device. That is, for traps to successfully be received by the trap server, the community string must match.
<b>System Logging (Syslog)</b>	
Server 1-4	Specify up to four Syslog servers to which the device sends Syslog messages.
Syslog Mask	Configure the levels of Syslog messages which the devices send to the servers configured in parameters <b>Server 1-4</b> .
	<p> <b>Caution</b></p> <p>Choose only the Syslog levels for the appropriate installation. Excessive logging can cause the device log file to fill and starts overwriting the previous entries.</p>
<b>cnMaestro</b>	
Remote Management	When <b>Enabled</b> , the device is managed by cnMaestro - the Cambium Networks Remote Management System, allows all Cambium Networks devices to be managed in the cloud.
cnMaestro URL	Configure the URL of cnMaestro. The default value is <a href="https://cloud.cambiumnetworks.com">https://cloud.cambiumnetworks.com</a> .
Cambium ID	Configure the Cambium ID that the device uses for onboarding on to cnMaestro.
Onboarding Key	Configure the password/key associated with the <b>Cambium-ID</b> that the device uses for onboarding on to cnMaestro.
<b>Account Management</b>	
Administrator Account	<p>The Administrator account has full read and write permissions for the device.</p> <p><b>Disabled:</b> The disabled user is not granted access to the device management interface. The administrator user level cannot be disabled.</p> <p><b>Enabled:</b> The user is granted access to the device management interface.</p>
Username	The username associated with the administrator account is used upon device login.
Password	Configure a custom password to secure the device. Only the <b>Administrator</b> account can override this password. The password character display may be toggled using the visibility icon  .
Installer Account	The Installer account has permissions to read and write parameters applicable to unit installation and monitoring.

Attribute	Description
	<p><b>Disabled:</b> The disabled user is not granted access to the device management interface.</p> <p><b>Enabled:</b> The user is granted access to the device management interface.</p>
Username	The username associated with the installer account used upon device login.
Password	Configure a custom password to secure the device. Only the <b>Administrator</b> account can override this password. The password character display may be toggled using the visibility icon  .
Home User Account	<p>The Home User account has permission to access pertinent information for support purposes.</p> <p><b>Disabled:</b> The disabled user is not granted access to the device management interface.</p> <p><b>Enabled:</b> The user is granted access to the device management interface.</p>
Username	The username associated with the home user account is used upon device login.
Password	Configure a custom password to secure the device. Only the <b>Administrator</b> account can override this password. The password character display may be toggled using the visibility icon  .
Read-Only Account	<p>The Read-Only account has permission to view only the <b>Monitor</b> page.</p> <p><b>Disabled:</b> The disabled user is not granted access to the device management interface.</p> <p><b>Enabled:</b> The user is granted access to the device management interface.</p>
Username	The username associated with the read-only account used upon device login.
Password	Configure a custom password to secure the device. Only the <b>Administrator</b> account can override this password. The password character display may be toggled using the visibility icon  .

## Configuration > Network page

Figure 81 shows the Network page (AP mode).

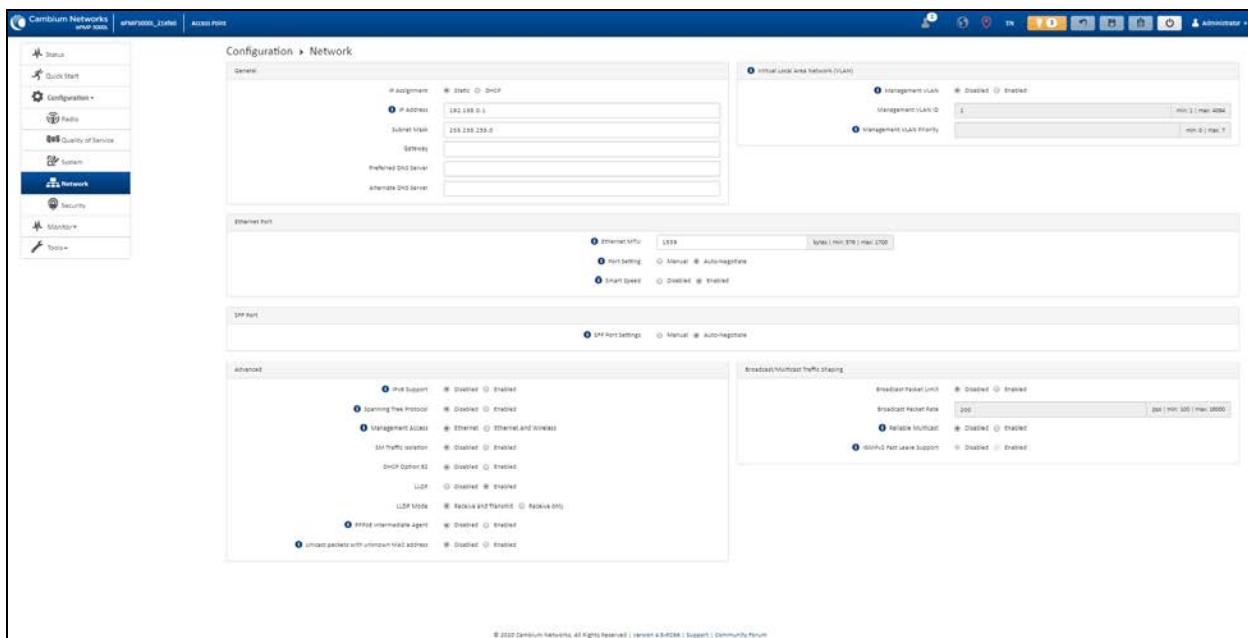


Figure 81: Configuration > Network page (AP mode)

Figure 82 shows the Network page (SM mode, Bridge Network mode).

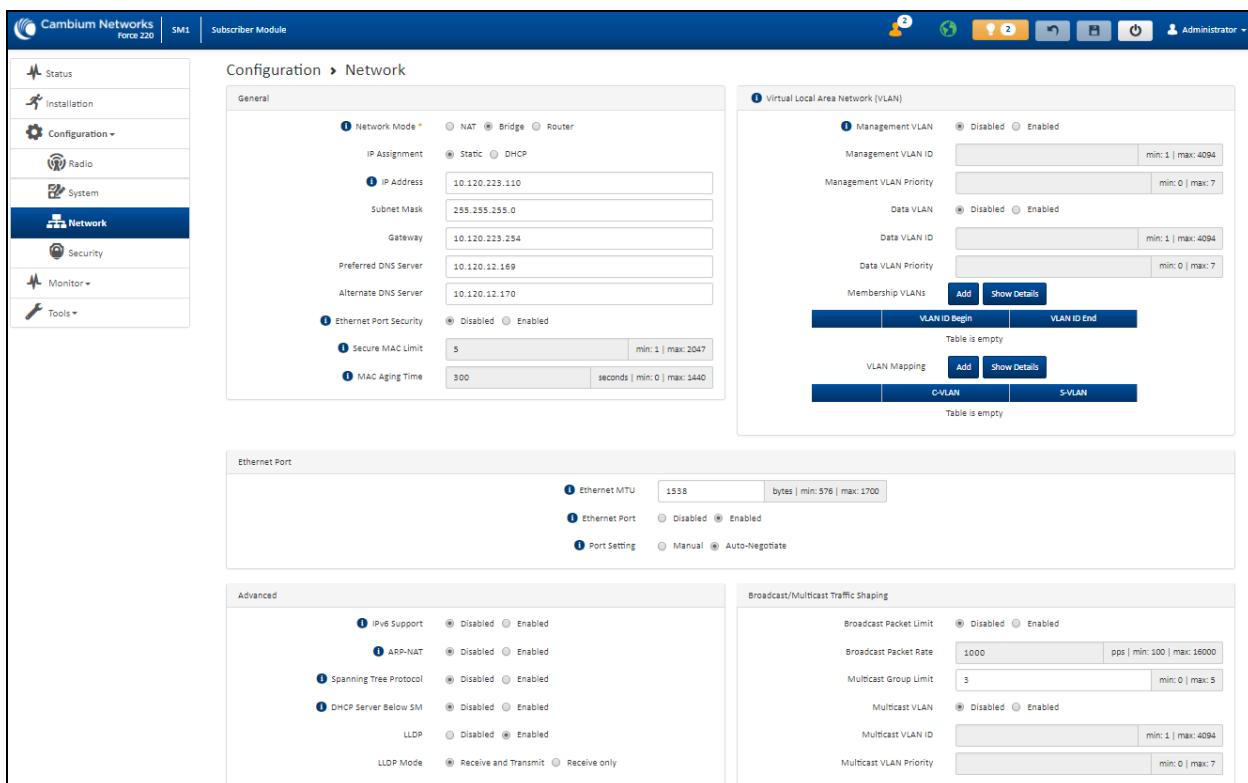


Figure 82: Configuration > Network page (SM mode, Bridge Network mode)

Figure 83 shows the Configuration > Network page (SM mode, NAT Network mode).

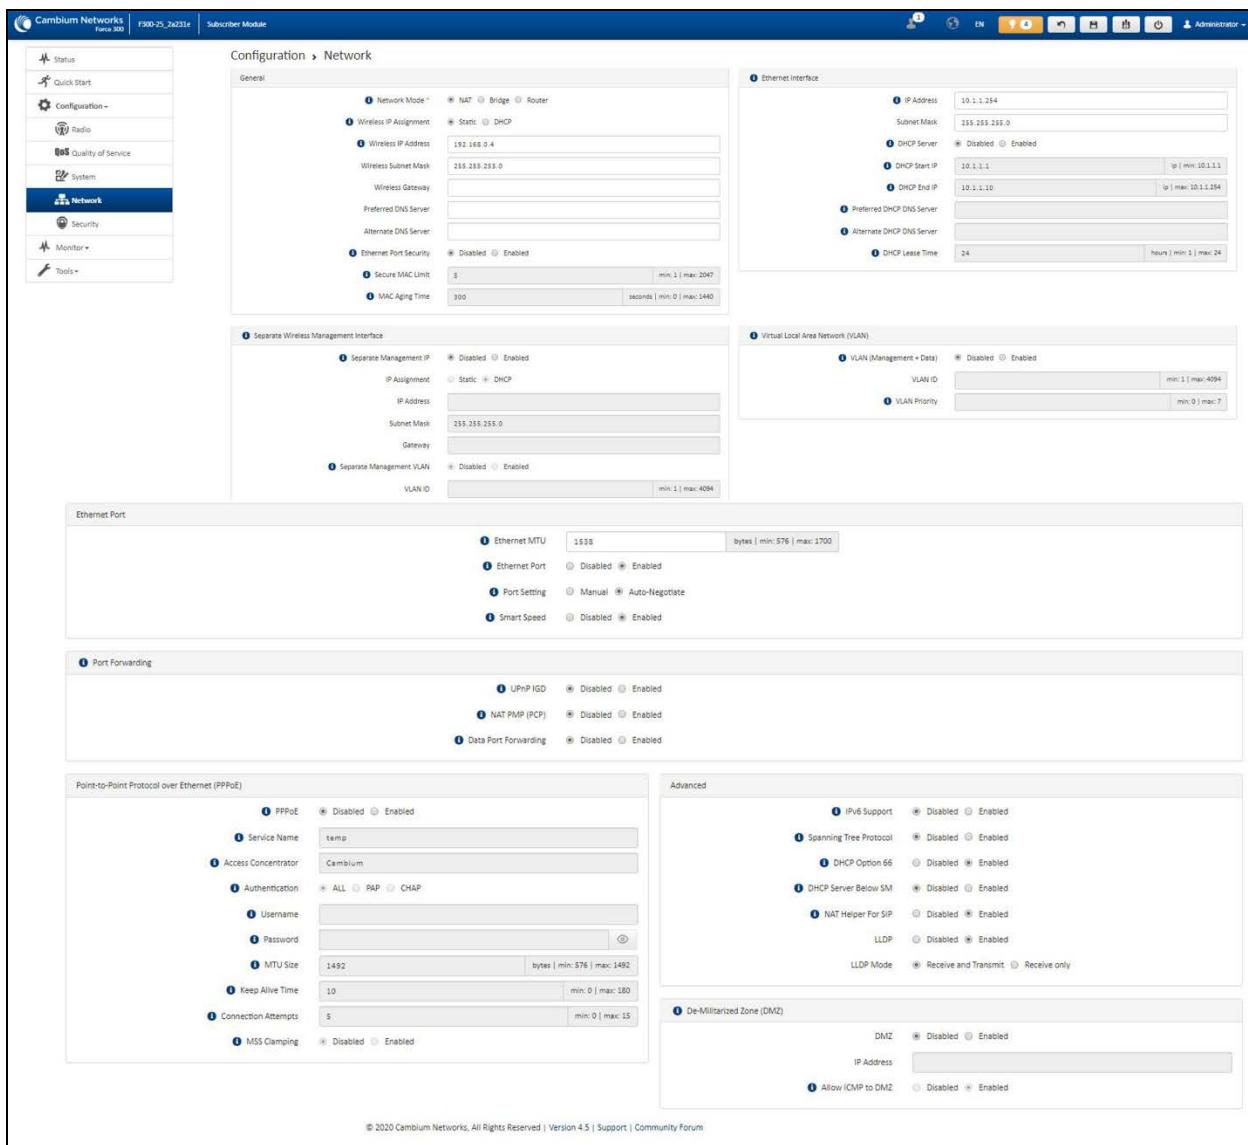


Figure 83: Configuration > Network page (SM mode, NAT Network mode)

Figure 84 shows the Configuration > Network page (SM mode, Router mode).

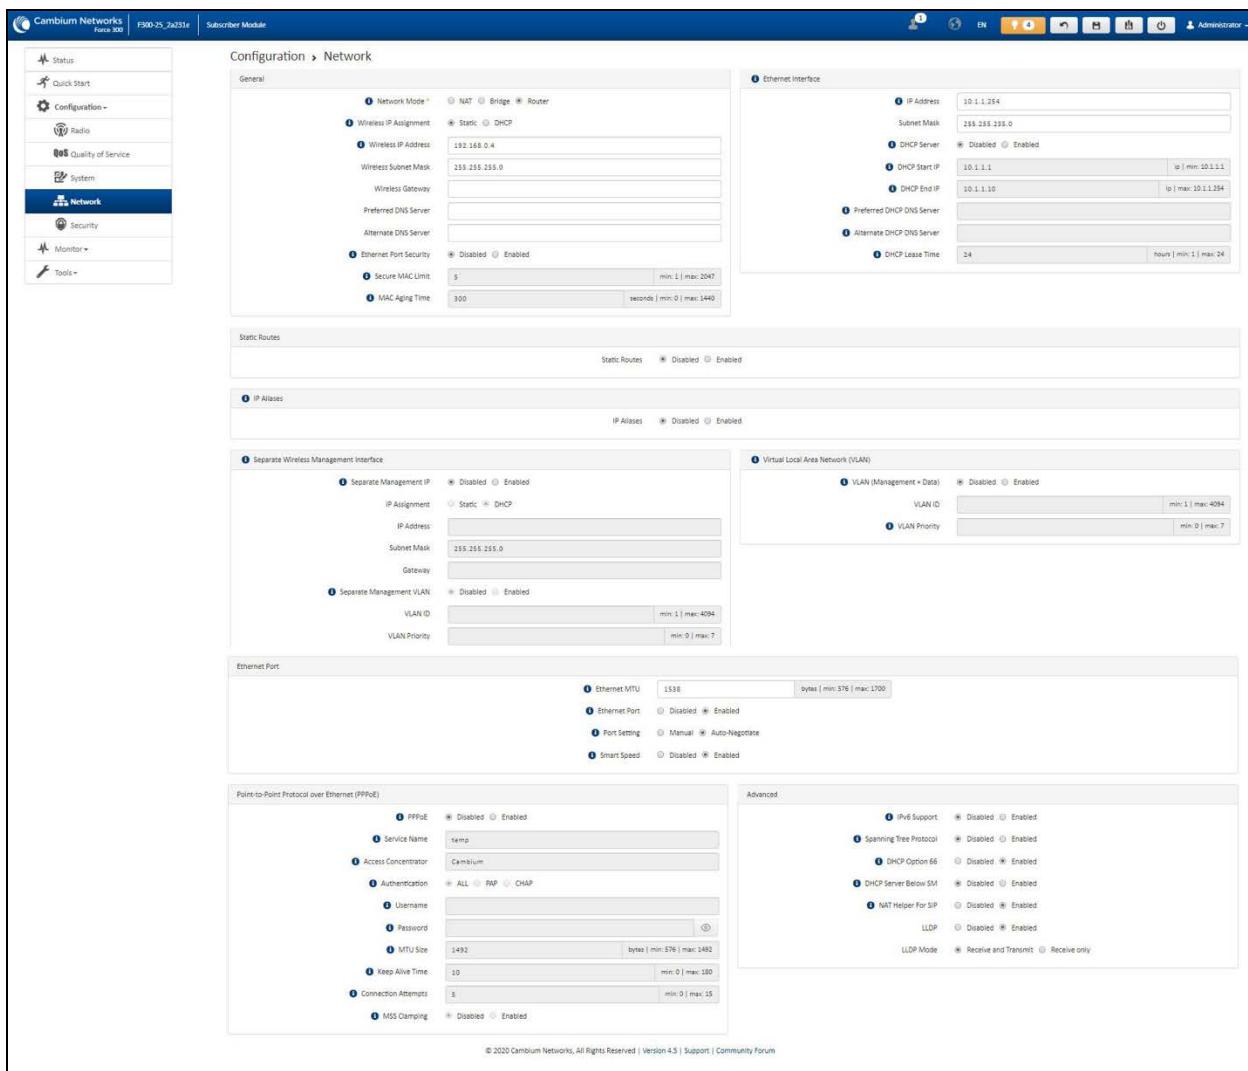


Figure 84: Configuration > Network page (SM mode, Router mode)

Table 137 Configuration > Network page attributes

Attribute	Description
<b>General</b>	
Network Mode	<p><b>NAT:</b> The SM acts as a router and packets are forwarded or filtered based on their IP header (source or destination).</p> <p><b>Bridge:</b> The SM acts as a switch and packets are forwarded or filtered based on their MAC destination address.</p> <p><b>Router:</b> The SM acts as a router and packets are forwarded or filtered based on their IP header (source or destination) using specific static routes and IP aliases configured by the operator.</p>

Attribute	Description
IP Assignment	<p><b>Static:</b> Device management IP addressing is configured manually in fields <b>IP Address</b>, <b>Subnet Mask</b>, <b>Gateway</b>, <b>Preferred DNS Server</b>, and <b>Alternate DNS Server</b>.</p> <p><b>DHCP:</b> Device management IP addressing (<b>IP address</b>, <b>Subnet Mask</b>, <b>Gateway</b>, and <b>DNS Server</b>) is assigned through a network DHCP server, and parameters <b>IP Address</b>, <b>Subnet Mask</b>, <b>Gateway</b>, <b>Preferred DNS Server</b>, and <b>Alternate DNS Server</b> are not configurable.</p>
Wireless IP Assignment (NAT mode, Router mode)	<p><b>Static:</b> Wireless IP address is configured manually in fields <b>Wireless IP Address</b>, <b>Wireless IP Subnet Mask</b>, <b>Wireless Gateway IP Address</b>, <b>Preferred DNS IP Address</b>, and <b>Alternate DNS IP Address</b>.</p> <p><b>DHCP:</b> Device management IP addressing (<b>Wireless IP address</b>, <b>Wireless Subnet mask</b>, <b>Wireless Gateway</b>, and <b>DNS server</b>) is assigned through a network DHCP server.</p>
IP Address Wireless IP Address (NAT mode, Router mode)	<p>Internet Protocol (IP) address. This address is used by the family of Internet protocols to uniquely identify this unit on a network.</p> <p>If IP Address Assignment is set to DHCP and the device is unable to retrieve IP address information through DHCP, the device management IP is set to fallback IP 192.168.0.1 (Access Point) or 192.168.0.2 (Subscriber Module).</p>
Subnet Mask Wireless IP Address (NAT mode, Router mode)	<p>Defines the address range of the connected IP network. For example, if Device IP Address (LAN) is configured to 192.168.2.1 and IP Subnet Mask (LAN) is configured to 255.255.255.0, the device will belong to subnet 192.168.2.X.</p>
Gateway Wireless Gateway (NAT mode, Router mode)	<p>Configure the IP address of the device on the current network that acts as a gateway. A gateway acts as an entrance and exit to packets from and to other networks.</p>
Preferred DNS Server	<p>Configure the primary IP address of the server used for DNS resolution.</p>
Alternate DNS Server	<p>Configure the secondary IP address of the server used for DNS resolution.</p>
IPv6 Assignment	<p>IPv6 Assignment specifies how the IPv6 address is obtained.</p> <p><b>Static:</b> Device management IP addressing is configured manually in fields <b>IPv6 Address</b> and <b>IPv6 Gateway</b>.</p> <p><b>DHCPv6:</b> Device management IP addressing (IP address and gateway) is assigned via a network DHCP server, and parameters <b>IPv6 Address</b> and <b>IPv6 Gateway</b> are unused. If the DHCPv6 server is not available previous static IPv6 address will be used as a fallback IPv6 address. If no previous static IPv6 address is available, no IPv6 address will be assigned. DHCPv6 will occur over the wireless interface by default.</p>
IPv6 Address	<p>Internet Protocol version 6 (IPv6) address. This address is used by the family of Internet protocols to uniquely identify this unit on a network.</p> <p>IPv6 addresses are represented by eight groups of four hexadecimal digits separated by colons.</p>

Attribute	Description
IPv6 Gateway	Configure the IPv6 address of the device on the current network that acts as a gateway. A gateway acts as an entrance and exit to packets from and to other networks.
Ethernet Port Security (Subscriber Module Mode)	<p><b>Disabled:</b> No MAC address limit/gaining timers are imposed for bridging at the SM device Ethernet port.</p> <p><b>Enabled:</b> By configuring <b>Secure MAC Limit</b> and <b>MAC Aging Time</b>, a limit is imposed on the number and duration of bridged devices connected to the SM Ethernet port.</p>
Secure MAC Limit (SM mode)	Configure the number of simultaneous secure MAC addresses that is allowed at the Ethernet interface of the SM
MAC Aging Time (SM mode)	Configure the time for which the secure MAC addresses should be allowed to age. Once the Aging timer expires for a MAC address, it is removed from the internal table and no longer count as an active MAC. Set the time to 0 to disable aging.
<b>Ethernet Interface (Subscriber Module NAT Mode, Router Mode)</b>	
IP Address (SM NAT mode, Router mode)	Ethernet interface Internet protocol (IP) address. This address is used by the family of Internet protocols to uniquely identify this unit on a network.
Subnet Mask (SM NAT mode, Router Mode)	Defines the address range of the connected IP network. For example, if Device IP Address (LAN) is configured to 192.168.2.1 and IP Subnet Mask (LAN) is configured to 255.255.255.0, the device belongs to subnet 192.168.2.X.
DHCP Server (SM NAT mode, Router mode)	<p><b>Disabled:</b> Use this setting when SM is in NAT or Router mode if there is an existing DHCP Server below the SM handing out IP Addresses or if all devices below the SM is configured with static IP Addresses.</p> <p><b>Enabled:</b> Use this setting when SM is in NAT or Router mode, to use the SM's local/onboard DHCP server to hand out IP addresses to its clients.</p>
DHCP Start IP (SM NAT mode, Router mode)	Configure the first address which is issued to a DHCP client. Upon additional DHCP requests, the DHCP Start IP is incremented until the local DHCP End IP is reached.
DHCP End IP (SM NAT mode, Router mode)	Configure the highest IP address in the DHCP pool that can be issued to a DHCP client.
Preferred DHCP DNS Server (SM NAT mode, Router mode)	Configure the primary DNS Server IP address which is used to configure DHCP clients (if local DHCP Server is set to <b>Enabled</b> ).
Alternate DHCP DNS Server (SM NAT Mode, Router mode)	Configure the secondary DNS Server IP address which is used to configure DHCP clients (if local DHCP Server is set to <b>Enabled</b> ).
DHCP Lease Time (SM NAT Mode, Router mode)	Configure the time for which a DHCP IP address is leased. When the lease time expires, the DHCP client must renew IP addresses through DHCP request.

Attribute	Description
PPPoE	<b>Point-to-Point Protocol over Ethernet:</b> Used for encapsulating PPP frames inside Ethernet frames.
Service Name	Optional entry to set a specific service name to connect to for the PPPoE session. If this is left blank the SM accepts the first service option that comes back from the Access Concentrator specified below, if any. This is limited to 32 characters.
Access Concentrator	An optional entry to set a specific Access Concentrator to connect to for the PPPoE session. If this is blank, the SM accepts the first Access Concentrator which matches the service name (if specified). This is limited to 32 characters.
<b>Static Routes (Subscriber Module Router Mode)</b>	
Static Routes (SM Router mode)	<p>When <b>Enabled</b>, it allows the operator to create static routes that apply to both the Wireless and Ethernet interface of the SM.</p> <p>This allows operators to configure a custom table of explicit paths between networks. Static routing is often used as a method to reduce the overhead of processing dynamic routes through a network when the specific path is known (or, it is simpler to define a specific path). Static routing is also used as a backup when dynamic routing protocols fail to complete a route from one network to another.</p> <p>In router mode, the Static Routes table is referenced by the SM to forward/filter packets to a particular destination configured by the user based on the IP addressing information contained in the table.</p> <p>Since static routes do not change with network changes, it is recommended to only use static routes for simple network paths that are not prone to frequent changes (requiring updates to the routes configured on the ePMP SM).</p> <p>It is important to consider each hop in a static route's path to ensure that the routing equipment has been configured to statically or dynamically route packets to the proper destination. Otherwise, network communication fails.</p> <p>Network Address Translation (NAT) is not performed when the SM is in Router mode.</p>
Target Network IP (SM Router mode)	Configure the target subnet/network's IP address to which the SM should route the packets.
Subnet Mask (SM Router mode)	Configure the subnet mask for the <b>Target Network IP</b> address.
Gateway (SM Router mode)	Configure the gateway to which packets that match the <b>Target Network IP Address</b> and <b>Subnet Mask</b> are sent.
Description (SM Router mode)	Provide a description to easily identify the static route and its purpose.

Attribute	Description
<b>IP Aliases (Subscriber Module Router Mode)</b>	
IP Aliases (SM Router mode)	<p>When <b>Enabled</b>, IP aliases allow the operator to associate more than one IP address to the Ethernet interface of the SM.</p> <p>This configuration of multiple IP addresses for the SM's Ethernet interface allows connections to multiple networks, often used as a mechanism for management access to the device from a convenient networking path.</p>
IP Address (SM Router mode)	Configure the IP address for the alias.
Subnet Mask (SM Router mode)	Configure the subnet mask for the alias.
Description (SM Router mode)	Provide a description to easily identify the IP alias and its purpose/connected network.
<b>Separate Wireless Management Interface (SM NAT mode, Router mode)</b>	
Separate Management IP (SM NAT mode, Router mode)	<p><b>Disabled:</b> When disabled, the Wireless IP is the management interface for the SM.</p> <p><b>Enabled:</b> When enabled, the IP Address below is the management interface for the SM.</p>
IP Assignment (SM NAT mode, Router mode)	<p><b>Static:</b> Separate Wireless Management Interface is configured manually in fields <b>IP Address</b>, <b>Subnet Mask</b> and <b>Gateway</b>.</p> <p><b>DHCP:</b> Management IP addressing (<b>IP Address</b>, <b>Subnet Mask</b>, <b>Gateway</b>, and <b>DNS Server</b>) is assigned through a network DHCP server.</p>
IP Address (SM NAT mode, Router mode)	Configure the IP address that is used to access the SM's management interface when in NAT mode. The Wireless IP (public IP) does not allow management access.
Subnet Mask (SM NAT mode, Router mode)	Defines the address range of the connected IP network. For example, if the IP Address is configured to 192.168.2.1 and Subnet Mask is configured to 255.255.255.0, the device wireless interface belongs to the subnet 192.168.2.X.
Gateway (SM NAT mode, Router mode)	Configure the IP address of a computer on the current network that acts as a gateway. A gateway acts as an entrance and exit to packets from and to other networks.
Separate Management VLAN (SM NAT mode, Router mode)	<p><b>Enabled:</b> A VLAN configuration establishes a logical group within the network. Each computer in the VLAN, regardless of initial or eventual physical location, has access to the same data based on the VLAN architecture. For the network operator, this provides flexibility in network segmentation, simpler management, and enhanced security. When the SM is in NAT mode, the Separate Wireless Management VLAN configuration applies to management data.</p> <p><b>Disabled:</b> When disabled, the SM does not have a unique management VLAN.</p>

Attribute	Description
VLAN ID (SM NAT mode, Router mode)	Configure this parameter to include the device's management traffic on a separate VLAN network.
VLAN Priority (SM NAT mode, Router mode)	<p>ePMP radios can prioritize VLAN traffic based on the eight priorities described in the IEEE 802.1p specification. <b>Data VLAN Priority</b> represents the VLAN Priority or Class of Service (CoS). Operators may use this prioritization field to give precedence to the management data of the device.</p> <p>This parameter only takes effect if the Separate Wireless Management VLAN parameter is enabled. Configure this parameter to set the value of the Priority code point field in the 802.1q tag for management traffic on the configured VLAN ID originating from the SM. The default value is 0.</p>
<b>Virtual Local Area Network (VLAN)</b>	
Management VLAN (AP mode)	<p><b>Enabled:</b> The AP management interface can be assigned to a management VLAN to separate management traffic (remote module management via SNMP or HTTP) from user traffic (such as internet browsing, voice, or video). Once the management interface is enabled for a VLAN, an AP's management interface can be accessed only by packets tagged with a VLAN ID matching the management VLAN ID.</p> <p>A VLAN configuration establishes a logical group within the network. Each computer in the VLAN, regardless of initial or eventual physical location, has access to the same data based on the VLAN architecture. For the network operator, this provides flexibility in network segmentation, simpler management, and enhanced security.</p> <p><b>Disabled:</b> When disabled, all IP management traffic is allowed to the device.</p>
VLAN (Management + Data) (SM mode)	<p><b>Enabled:</b> The device management interface can be assigned to a Management VLAN to separate management traffic (remote module management through SNMP or HTTP) from user traffic (such as internet browsing, voice, or video). Once the management interface is enabled for a VLAN, the management interface can be accessed only by packets tagged with a VLAN ID matching the management VLAN ID.</p> <p>A VLAN configuration establishes a logical group within the network. Each computer in the VLAN, regardless of initial or eventual physical location, has access to the same data based on the VLAN architecture. For the network operator, this provides flexibility in network segmentation, simpler management, and enhanced security.</p> <p><b>Disabled:</b> When disabled, all IP management traffic is allowed to the device.</p>
VLAN ID (NAT mode, Router mode)	Configure this parameter to include the device's management traffic on a separate VLAN network.

Attribute	Description
VLAN Priority (NAT mode, Router mode)	<p>ePMP radios can prioritize VLAN traffic based on the eight priorities described in the IEEE 802.1p specification. <b>Data VLAN Priority</b> represents the VLAN Priority or Class of Service (CoS). Operators may use this prioritization field to give precedence to the device management data.</p> <p>This parameter only takes effect if the Separate Wireless Management VLAN parameter is enabled. Configure this parameter to set the value of the Priority code point field in the 802.1q tag for management traffic on the configured VLAN ID originating from the SM. The default value is 0.</p>
Management VLAN ID (AP mode) (SM Bridge mode)	<p>Configure this parameter to include the device's management traffic on a separate VLAN network. For example, if Management VLAN ID is set to 2, UI access is allowed only from frames tagged with VLAN ID 2. This parameter takes effect only if the MGMT VLAN parameter is enabled.</p>
Management VLAN Priority (AP mode) (SM Bridge mode)	<p>ePMP devices can prioritize VLAN traffic based on the eight priorities described in the IEEE 802.1p specification. <b>Management VLAN Priority</b> represents the VLAN Priority or Class of Service (CoS). Operators may use this prioritization field to give precedence to the device management traffic.</p> <p>This parameter only takes effect if the Management VLAN parameter is enabled. Configure this parameter to set the value of the Priority code point field in the 802.1q tag for traffic on the management VLAN originating from the Subscriber Module. The default value is 0.</p>
Data VLAN (SM mode) (Bridge mode)	<p><b>Enabled:</b> A VLAN tag is added to all untagged traffic entering the Slave device LAN port before sending it to the Access Point and remove tags in the opposite direction from traffic (tagged with Data VLAN ID) entering on the SM device WAN port before sending to the SM device LAN port.</p> <p><b>Disabled:</b> When disabled, no changes are made to untagged traffic passing through the SM device.</p>
Data VLAN ID (SM mode) (Bridge mode)	<p>Configure this parameter to include this VLAN tag to all untagged traffic entering on the Subscriber Module device LAN port before sending it to the Access Point device and remove tags in the opposite direction from traffic (tagged with Data VLAN ID) entering on the Subscriber Module device WAN port before sending to the SM device LAN port.</p>
Data VLAN Priority (SM mode) (Bridge mode)	<p>ePMP devices can prioritize VLAN traffic based on the eight priorities described in the IEEE 802.1p specification. <b>Data VLAN Priority</b> represents the VLAN Priority or Class of Service (CoS). Operators may use this prioritization field to give precedence to device user data.</p> <p>This parameter only takes effect if the <b>Data VLAN</b> parameter is enabled. Configure this parameter to set the value of the Priority code point field in the 802.1q tag for traffic on the <b>Data VLAN</b> originating from the SM device. The default value is 0.</p>

Attribute	Description
Membership VLAN (SM Bridge mode)	Configure the <b>Membership VLAN Table</b> to include the SM in one or more VLANs. When the SM receives a packet tagged from either the Ethernet (LAN) or Wireless (WAN) side with a VLAN ID which is contained in the <b>Membership VLAN Table</b> , the packet is forwarded and sent out to the other interface. When the SM receives a packet tagged with a VLAN ID that is not present in the <b>Membership VLAN Table</b> , the frame is dropped (assuming there is at least one VLAN ID present in the Membership VLAN table or configured as a Data VLAN).
VLAN Mapping (SM Bridge mode)	Configure the <b>VLAN Mapping Table</b> to map the C-VLAN of traffic ingressing the Ethernet (LAN) port of the SM to an S-VLAN before being forwarded to the air interface on the UL. In the DL direction, the SM will automatically un-map the S-VLAN to the C-VLAN before forwarding the tagged packets to the Ethernet (LAN) interface of the SM.
C-VLAN (SM Bridge mode)	Configure the C-VLAN ID of the tagged traffic for which the mapping needs to occur.  The C-VLAN ID must be entered in the SM VLAN Membership VLAN table.
S-VLAN (SM Bridge mode)	Configure the S-VLAN ID to which the tagged traffic needs to be mapped.  The S-VLAN ID must be entered in the SM VLAN Membership VLAN table.
<b>Ethernet Port</b>	
Ethernet MTU	Specify the device MTU or Maximum Transmission Unit; the size in bytes of the largest data unit that the device is configured to process. Larger MTU configurations can enable the network to operate with greater efficiency, but in the case of retransmissions due to packet errors, efficiency is reduced since large packets must be resent in the event of an error.
Ethernet Port (SM mode)	<b>Disabled:</b> The primary Ethernet port is disabled (a mechanism for restricting access for non-payment).  <b>Enabled:</b> The primary Ethernet port is enabled.
Port Setting	Allows the Gigabit Ethernet port duplex settings and port speed to be either manually configured or auto-negotiate with the connected Ethernet device on the other end of the link.  Guidelines for using <b>Port Setting</b> : <ul style="list-style-type: none"> <li>• If auto-negotiation is turned on, this applies to both <b>Port Speed</b> and <b>Port Duplex Mode</b>.</li> <li>• If the other end of the Ethernet connection supports auto-negotiation, then select <b>Auto-Negotiate</b>.</li> <li>• If the other end of the Ethernet connection does not support auto-negotiation, then select <b>Manual</b> and both ends of the link should manually set the port speed and port duplex mode.</li> </ul>
Port Speed	With <b>Port Setting</b> configured to <b>Manual</b> , the Gigabit Ethernet port speed can be forced to 1000 Mbps, 100 Mbps, or 10 Mbps.

Attribute	Description
Port Duplex mode	With <b>Port Setting</b> configured to <b>Manual</b> , the Gigabit Ethernet port duplex mode can be forced to <b>Full</b> or <b>Half</b> .
<b>Port Forwarding (Subscriber Module Mode) (NAT Mode)</b>	
UPnP IGD (SM mode) (NAT mode)	<p>Universal Plug and Play (UPnP) is a set of networking protocols that permits networked devices, such as personal computers, printers, Internet gateways, Wi-Fi APs, and mobile devices to seamlessly discover each other's presence on the network and establish functional network services for data sharing, communications, and entertainment. UPnP is intended primarily for residential networks without enterprise-class devices. With UPnP IGD and PCP protocols, ePMP supports explicit dynamic port mappings.</p> <p>Enable UPnP IGD (Internet Gateway Device) to allow the ePMP device to use the IGD profile for UPnP support.</p>
NAT PMP (PCP) (SM mode) (NAT mode)	<p>The PCP (Port Control Protocol) allows an IPv6 or IPv4 host to control how incoming IPv6 or IPv4 packets are translated and forwarded by a Network Address Translator (NAT) or simple firewall, and also allows a host to optimize its outgoing NAT keepalive messages. PCP was standardized as a successor to the NAT Port Mapping Protocol (NAT-PMP), with which it shares similar protocol concepts and packet formats.</p> <p>Enable this parameter to allow the ePMP device to use the PCP protocol for UPnP support.</p>
Data Port Forwarding (SM mode) (NAT mode)	The Data Port Forwarding Table is used to define which range of wireless ports are forwarded to a LAN (SM local network) IP address below the SM.
Protocol (SM mode) (NAT mode)	<p><b>UDP</b>: Packet forwarding decisions are based on UDP packets.</p> <p><b>TCP</b>: Packet forwarding decisions are based on TCP packets.</p>
Port Begin (SM mode) (NAT mode)	Configure the beginning of the range of wireless ports to match for forwarding to LAN IP.
Port End (SM mode) (NAT mode)	Configure the end of the range of wireless ports to match for forwarding to LAN IP.
Forwarding IP (SM mode) (NAT mode)	Configure the LAN IP of the device situated below the SM which receives the packets forwarded based on the separate management IP port forwarding table configuration.
Mapped Port (SM mode) (NAT mode)	Configure the port of the device situated below the SM which receives the packets forwarded based on the Data Port Forwarding Table configuration.
<b>Point-to-Point Protocol over Ethernet (PPPoE) (SM mode) (NAT mode, Router mode)</b>	
PPPoE (SM mode) (NAT mode, Router mode)	Point-to-Point Protocol over Ethernet: Used for encapsulating PPP frames inside Ethernet frames.

Attribute	Description
Service Name (SM mode) (NAT mode, Router mode)	Optional entry to set a specific service name to connect to for the PPPoE session. If this is left blank the SM accepts the first service option that comes back from the Access Concentrator specified below, if any. This is limited to 32 characters.
Access Concentrator (SM mode) (NAT mode, Router mode)	Optional entry to set a specific Access Concentrator to connect to for the PPPoE session. If this is blank, the SM accepts the first Access Concentrator which matches the service name (if specified). This is limited to 32 characters.
Authentication (SM mode) (NAT mode, Router mode)	<p><b>ALL:</b> This means that CHAP authentication is attempted first, then PAP authentication. The same password is used for both types.</p> <p><b>CHAP:</b> This means that CHAP authentication is attempted.</p> <p><b>PAP:</b> This means that PAP authentication is attempted.</p>
Username (SM mode) (NAT mode, Router mode)	This is the CHAP/PAP username that is used. This is limited to 32 characters.
Password (SM mode) (NAT mode, Router mode)	This is the CHAP/PAP password that is used. This is limited to 32 characters.
MTU Size (SM mode) (NAT mode, Router mode)	Maximum Transmission Unit; the size in bytes of the largest data unit that the device is configured to process inside the PPPoE tunnel. This field allows the operator to specify the largest MTU value to use in the PPPoE session if PPPoE MSS Clamping is Enabled. The user is able to enter an MTU value up to 1492. However, if the MTU determined in LCP negotiations is less than this user-specified value, the SM uses the smaller value as its MTU for the PPPoE link.
Keep Alive Time (SM mode) (NAT Mode, Router Mode)	Configure the Keep Alive Time to allow the radio to keep the PPPoE session up after establishment. As an example, if this field is set to 5, the PPPoE client sends a keep-alive message to the PPPoE server every 5 seconds. If there is no acknowledgment, it sends the <b>Keep alive</b> message to the server four more times (for a total of five times) before tearing down the PPPoE session. Setting this to 12 means the keep-alive message is sent every 12 seconds and when there is no acknowledgment, the client tries for a total of 12 times every 12 seconds before tearing down the PPPoE session.
MSS Clamping (SM mode) (NAT mode, Router mode)	<b>Disabled:</b> The SM PPPoE session allows any MTU size determined by other devices in the PPPoE session during the LCP negotiations.

Attribute	Description
	<b>Enabled:</b> The SM PPPoE session enforces a max MTU size determined by the PPPoE MTU Size setting for all devices in the PPPoE session during the LCP negotiations unless one of the devices enforces an MTU setting that is smaller in value.
<b>SFP Port (Access Point Mode)</b>	
SFP Port (AP mode)	<b>Disabled:</b> The SFP port is inactive. <b>Enabled:</b> The SFP port is active.
<b>Advanced</b>	
IPv6 Support	System-wide IPv6 Protocol Support. When enabled, appropriate IPv6 modules and services are loaded.
Spanning Tree Protocol	<b>Disabled:</b> When disabled, Spanning Tree Protocol (802.1d) functionality is disabled at the Access Point. <b>Enabled:</b> When enabled, Spanning Tree Protocol (802.1d) functionality is enabled at the Access Point, allowing for the prevention of Ethernet bridge loops.
DHCP Server Below Subscriber Module (SM mode)	<b>Disabled:</b> This blocks DHCP servers connected to the SM device LAN side from handing out IP addresses to DHCP clients above the SM device (wireless side). <b>Enabled:</b> This allows DHCP servers connected to the SM device LAN side to assign IP addresses to DHCP clients above the SM device (wireless side). This configuration is typical in PTP links.
Management Access (AP mode)	<b>Ethernet:</b> Only allow access to the AP's web management interface through a local Ethernet (LAN) connection. In this configuration, the AP's web management interface may not be accessed from over the air (from a device situated below the SM). <b>Ethernet and Wireless:</b> Allow access to the AP's web management interface through a local Ethernet (LAN) connection and from over the air (from a device situated below the SM). APs configured with Management Access Interface set to Ethernet and Ethernet and Wireless are susceptible to unauthorized access.
SM Traffic Isolation (AP mode)	<b>Disabled:</b> This is the default mode. When SM isolation is disabled, an SM can communicate with another SM, when both the SMs are associated with the same Access Point (AP). <b>Enabled:</b> When the SM Isolation feature is <b>Enabled</b> , an SM is unable to communicate with another SM (peer-to-peer traffic) when both the SMs are associated with the same AP. This feature essentially enables the AP to drop the packets to avoid peer-to-peer traffic scenarios.
DHCP Option 82 (AP mode)	<b>Disabled:</b> The device does not insert the <b>remote-id</b> (option ID 0x2) and the <b>circuit-id</b> (ID 0x01). DHCP Option 82 is 'Disabled' by default.

Attribute	Description
	<b>Enabled:</b> The device inserts <b>remote-id</b> (option ID 0x2) to be the SM MAC address and the <b>circuit-id</b> (ID 0x01) to be the AP's MAC address. Those two fields are used to identify the remote device and connection from which the DHCP request was received.
LLDP	<p>The Link Layer Discovery Protocol (LLDP) is a vendor-neutral link layer protocol (as specified in IEEE 802.1AB) used by ePMP for advertising its identity, capabilities, and neighbors on the Ethernet/wired interface.</p> <p><b>Disabled:</b> ePMP does not receive or transmit LLDP packets from/to its neighbors.</p> <p><b>Enabled:</b> ePMP can receive LLDP packets from its neighbors and send LLDP packets to its neighbors, depending on the LLDP Mode configuration below.</p>
LLDP Mode	<p><b>Receive and Transmit:</b> ePMP sends and receives LLDP packets to/from its neighbors on the Ethernet/LAN interface.</p> <p><b>Receive Only:</b> ePMP receives LLDP packets from its neighbors on the Ethernet/LAN interface and discovers them.</p>
PPPoE Intermediate Agent	<p>When enabled, during the PPPoE Discovery phase the AP inserts access loop identification into the PPPoE PADR packets. This mechanism helps the service provider to distinguish between end hosts connected via Ethernet as an access device (typically, home routers situated below an ePMP subscriber device).</p> <p>On the AP, PPPoE Intermediate Agent enables subscriber line identification by tagging Ethernet frames of corresponding users with Vendor-Specific PPPoE Tags <b>Circuit ID</b> (defining AP name, frame, slot, port, and VLAN ID information) and <b>Remote ID</b> (defining user phone number).</p>
<b>Broadcast / Multicast Traffic Shaping (SM mode) (Bridge mode)</b>	
Broadcast Packet Limit (SM mode) (Bridge mode)	<p><b>Enabled:</b> This allows the user to set the <b>Broadcast Packet Rate</b> below. Configure this parameter to limit the number of broadcast packets that will be allowed on the ingress of the radio's Ethernet port. Set the packets per second value to limit the impact of events such as broadcast storms.</p> <p><b>Disabled:</b> There is no limit on the amount of broadcast traffic allowed into the ingress of the radio's Ethernet port.</p>
Broadcast Packet Rate (SM mode) (Bridge mode)	Set the packets per second value to limit the amount of broadcast traffic allowed on the ingress on the radio's Ethernet port. The packets per second limit can be set individually on each ePMP radio. The range is 100 to 16000 packets per second. The default is <b>1000</b> .
Reliable Multicast	<b>Enabled:</b> This feature allows ePMP to support IGMP capable devices. Once a multicast group is identified, the AP allows multicast traffic to be sent only to the SMs within the multicast group. The SMs support up to 5 unique multicast groups. Also, when this option is enabled, the multicast traffic is sent to the SMs using the current Downlink MCS rate.


Attribute	Description
	<b>Disabled:</b> ePMP supports IGMP capable devices but the multicast traffic is sent using MCS 1 on the downlink to all SMs, regardless of the multicast group.
Multicast Group Limit (SM mode) (Bridge mode)	Configure the maximum number of simultaneous multicast groups that the SM allows from devices below it. The default is <b>3</b> .
Multicast VLAN (SM mode) (Bridge mode)	<p><b>Enabled:</b> A VLAN tag is added to all untagged multicast traffic entering the SM's LAN port before sending it to the AP and remove tags in the opposite direction from traffic (tagged with Multicast VLAN ID) entering on the SM's WAN port before sending to the SM's LAN port.</p> <p><b>Disabled:</b> When disabled, no changes are made to untagged multicast traffic passing through the SM.</p>
Multicast VLAN ID (SM mode) (Bridge mode)	Configure this parameter to include this VLAN tag to all untagged <b>multicast</b> traffic entering on the SM's LAN port before sending it to the AP and remove tags in the opposite direction from multicast traffic (tagged with Multicast VLAN ID) entering on the SM's WAN port before sending to the SM's LAN port.
Multicast VLAN Priority (SM mode) (Bridge mode)	<p>ePMP radios can prioritize VLAN traffic based on the eight priorities described in the IEEE 802.1p specification. <b>Multicast VLAN Priority</b> represents the VLAN Priority or Class of Service (CoS). Operators may use this prioritization field to give precedence to the device's <b>multicast</b> data.</p> <p>This parameter only takes effect if the <b>Multicast VLAN</b> parameter is enabled. Configure this parameter to set the value of the Priority code point field in the 802.1q tag for traffic on the <b>Multicast VLAN</b> originating from the SM. The default value is 0.</p>
<b>De-Militarized Zone (Subscriber Module NAT Mode)</b>	
DMZ (SM NAT mode)	<p><b>Disabled:</b> Packets arriving on the wireless interface destined for the Ethernet side of the network are dropped if a session does not exist between the Source IP (Wireless) and Destination IP (Ethernet). By default, NAT requires the sessions to be initiated from the Ethernet side before a packet is accepted from the Wireless to the Wired side.</p> <p><b>Enabled:</b> Any packets with an unknown destination port (not associated with an existing session or not defined in the port forwarding rules) are automatically sent to the device configured with DMZ IP Address.</p>
IP Address (SM NAT mode)	Configure the IP address of an SM-connected device that is allowed to provide network services to the wide-area network.
Allow ICMP to DMZ (SM NAT mode)	<p><b>Enabled:</b> ICMP packets are forwarded to the DMZ IP</p> <p><b>Disabled:</b> SM answers ICMP requests, and SM <b>Wireless IP Address</b> becomes reachable by ping when DMZ is enabled.</p>

## Configuration > Security page

The **Security** page is used to configure system security features including authentication and Layer2/Layer3 Firewall rules. [Figure 85](#) and [Figure 86](#) shows the Security page (AP mode) and Security page (SM mode).


**Attention**

If a device firewall rule is added with **Action** set to **Deny** and **Interface** set to **LAN** or **WAN** and no other rule attribute is configured, the device drops all Ethernet or wireless traffic, respectively. Ensure that all firewall rules are specific to the type of traffic which must be denied and that no rules exist in the devices with the only Action set to **Deny** and Interface set to **LAN** or **WAN**. To regain access to the device, perform a factory default.

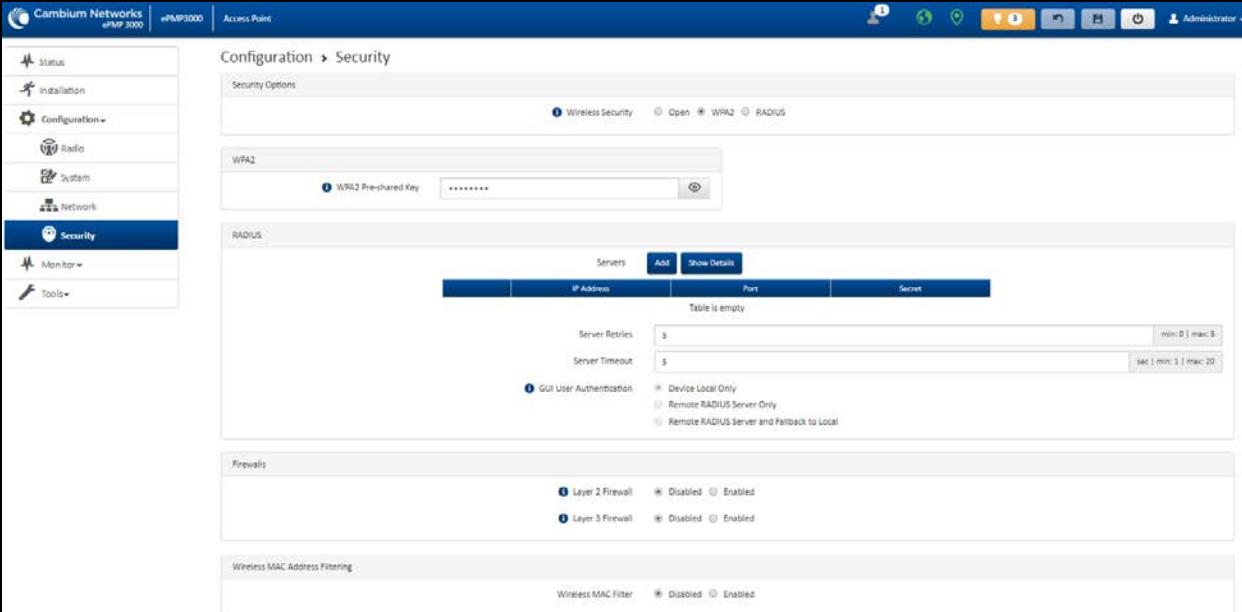

The screenshot shows the Configuration > Security page for an Access Point (ePMP3000). The left sidebar includes Status, Installation, Configuration (selected), Radio, System, Network, Security (selected), Monitor, and Tools. The main content area has tabs for Security Options (Wireless Security selected), WPA2 (WPA2 Pre-shared Key set to '\*\*\*\*\*'), RADIUS (Servers table empty, showing Server Retries and Server Timeout), Firewall (Layer 2 Firewall and Layer 3 Firewall both set to Enabled), and Wireless MAC Address Filtering (Wireless MAC Filter set to Enabled).

[Figure 85: Configuration > Security page \(AP mode\)](#)

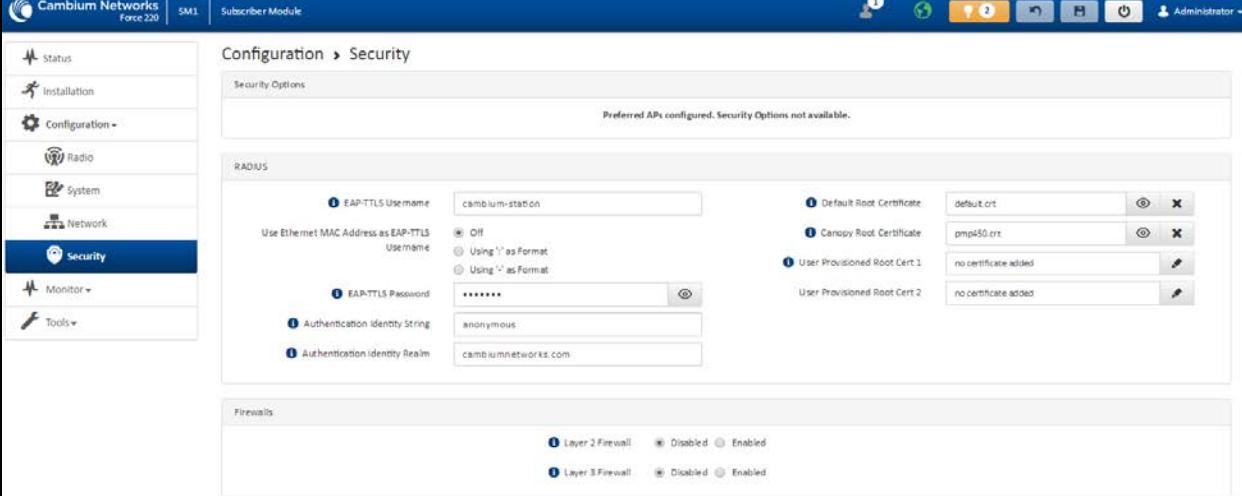

The screenshot shows the Configuration > Security page for a Subscriber Module (Force 220). The left sidebar includes Status, Installation, Configuration (selected), Radio, System, Network, Security (selected), Monitor, and Tools. The main content area has tabs for Security Options (Preferred APs configured, Security Options not available), RADIUS (EAP-TTLS Username 'cambium-station', EAP-TTLS Password '\*\*\*\*\*', Authentication Identity String 'anonymous', Authentication Identity Realm 'cambiumnetworks.com', and certificate fields for Default Root Certificate, Canopy Root Certificate, User Provisioned Root Cert 1, and User Provisioned Root Cert 2), and Firewall (Layer 2 Firewall and Layer 3 Firewall both set to Enabled).

Figure 86: Configuration > Security page (SM mode)

Table 201: Configuration > Security page attributes

Attribute	Description
<b>Security Options</b>	
Wireless Security (AP mode)	<p>For AP mode devices, select the security mode enforced upon network entry.</p> <p>For SM mode devices, select the security mode utilized upon network entry attempts.</p> <p><b>Open:</b> All SM devices requesting network entry are allowed registration.</p> <p><b>WPA2:</b> The WPA2 mechanism provides AES radio link encryption and SM network entry authentication. When enabled, the SM must register using the authentication pre-shared key configured on the AP and SM.</p> <p><b>RADIUS:</b> Enables SM authentication through a pre-configured Radius server.</p>
<b>WPA2</b>	
WPA2 Pre-shared Key	Configure this key on the AP, then configure the SM with this key to complete the authentication configuration. This key must be between 8 to 128 symbols.
<b>RADIUS (AP mode)</b>	
Servers (AP mode)	<p>For more Radio servers, click <b>Add</b>. Up to three Radius servers can be configured on the device with the following attributes:</p> <ul style="list-style-type: none"> <li><b>IP Address:</b> IP Address of the Radius server on the network.</li> <li><b>Port:</b> The Radius server port. The default is 1812.</li> <li><b>Secret:</b> Secret key that is used to communicate with the RADIUS server.</li> </ul>
Server Retries (AP mode)	The number of times the radio retries authentication with the configured Radius server before it fails authentication of the SM.
Server Timeout (AP mode)	Timeout between each retry with the configured RADIUS server before it fails authentication of the SM.
GUI User Authentication (AP mode)	<p>This applies to both the AP and its registered SMs.</p> <p><b>Device Local Only:</b> The device's GUI authentication is local to the device using one of the accounts configured under <b>Configuration &gt; System &gt; Account Management</b>.</p> <p><b>Remote RADIUS Server Only:</b> The UI authentication of the device is performed using a RADIUS server.</p> <p><b>Remote RADIUS Server and Fallback to Local:</b> The UI authentication of the device is performed using a RADIUS server. Upon failure of authentication through a RADIUS server, the authentication falls back to one of the local accounts configured under <b>Configuration &gt; System &gt; Account Management</b>.</p>
EAP-TTLS Username (SM mode)	Configure the EAP-TTLS Username to match the credentials on the RADIUS server being used for the network.

Attribute	Description
Use Ethernet MAC Address at EAP-TTLS Username (SM mode)	The device MAC Address can be used as the EAP-TTLS Username in either ":" or "-" delimited format.
EAP-TTLS Password (SM mode)	Configure the EAP-TTLS Password to match the credentials on the RADIUS server being used for the network.
Authentication Identity String (SM mode)	Configure this Identity string to match the credentials on the RADIUS server being used for the network. The default value for this parameter is <b>anonymous</b> .
Authentication Identity Realm (SM mode)	Configure this Identity string to match the credentials on the RADIUS server being used for the network. The default value for this parameter is <b>cambiumnetworks.com</b> .
Default Root Certificate (SM mode)	Default EAP-TTLS root certificate that must match the certificate on the RADIUS server.
Canopy Root Certificate (SM mode)	PMP 450 default EAP-TTLS root certificate to match the certificate on the RADIUS server used with current PMP 450 installations.
User Provisioned Root Cert 1(SM mode)	Import a user certificate if a certificate different from the default certificates is needed.
User Provisioned Root Cert 2 (SM mode)	Import a second user certificate if a certificate different from the default or 1 <sup>st</sup> user provisioned certificate is needed.
<b>Firewalls</b>	
Layer 2 Firewall	<p><b>Enabled:</b> Modifications to the Layer 2 Firewall Table are allowed and rules are enforced.</p> <p><b>Disabled:</b> Modifications to the Layer 2 Firewall Table are not allowed and rules are not enforced.</p>
Layer 2 Firewall Rules	The Layer 2 firewall table may be used to configure rules matching layer 2 (MAC layer) traffic which results in forwarding or dropping the traffic over the radio link or Ethernet interface.
Layer 3 Firewall	<p><b>Disabled:</b> Modifications to the Layer 3 Firewall Table are not allowed and rules are not enforced.</p> <p><b>Enabled:</b> Modifications to the Layer 3 Firewall Table are allowed and rules are enforced.</p>
Layer 3 Firewall Rules	The Layer 3 firewall table may be used to configure rules matching layer 3 (IP layer) traffic which results in forwarding or dropping the traffic over the radio link or Ethernet interface.
<b>Wireless MAC Address Filtering (Access Point Mode)</b>	

Attribute	Description
Wireless MAC Filter (AP mode)	<b>Disabled:</b> SMs with any MAC Address are allowed to register to the AP. <b>Enabled:</b> SMs with specific MAC addresses can be allowed (permit) or denied (prevent) registration with the AP as configured under the <b>MAC Filter List</b> .
Wireless MAC Filter Policy (AP mode)	<b>Prevent:</b> All MAC Addresses configured under the MAC Filter List are denied registration to the AP. <b>Permit:</b> Only the MAC Addresses configured under the MAC Filter List are allowed to register to the AP.
Wireless MAC Filter List (AP mode)	Configure the SM's MAC addresses that are permitted or prevented from registering to the AP.
MAC Address (AP mode)	MAC Address of the SM.
Description (AP mode)	Friendly description to identify the SM.

## Monitor menu

This section is used to analyze and troubleshoot network performance and operation. Use the **Monitor menu** to access device and network statistics and status information.

### Monitor > Performance page

Figure 87 shows the Performance page.

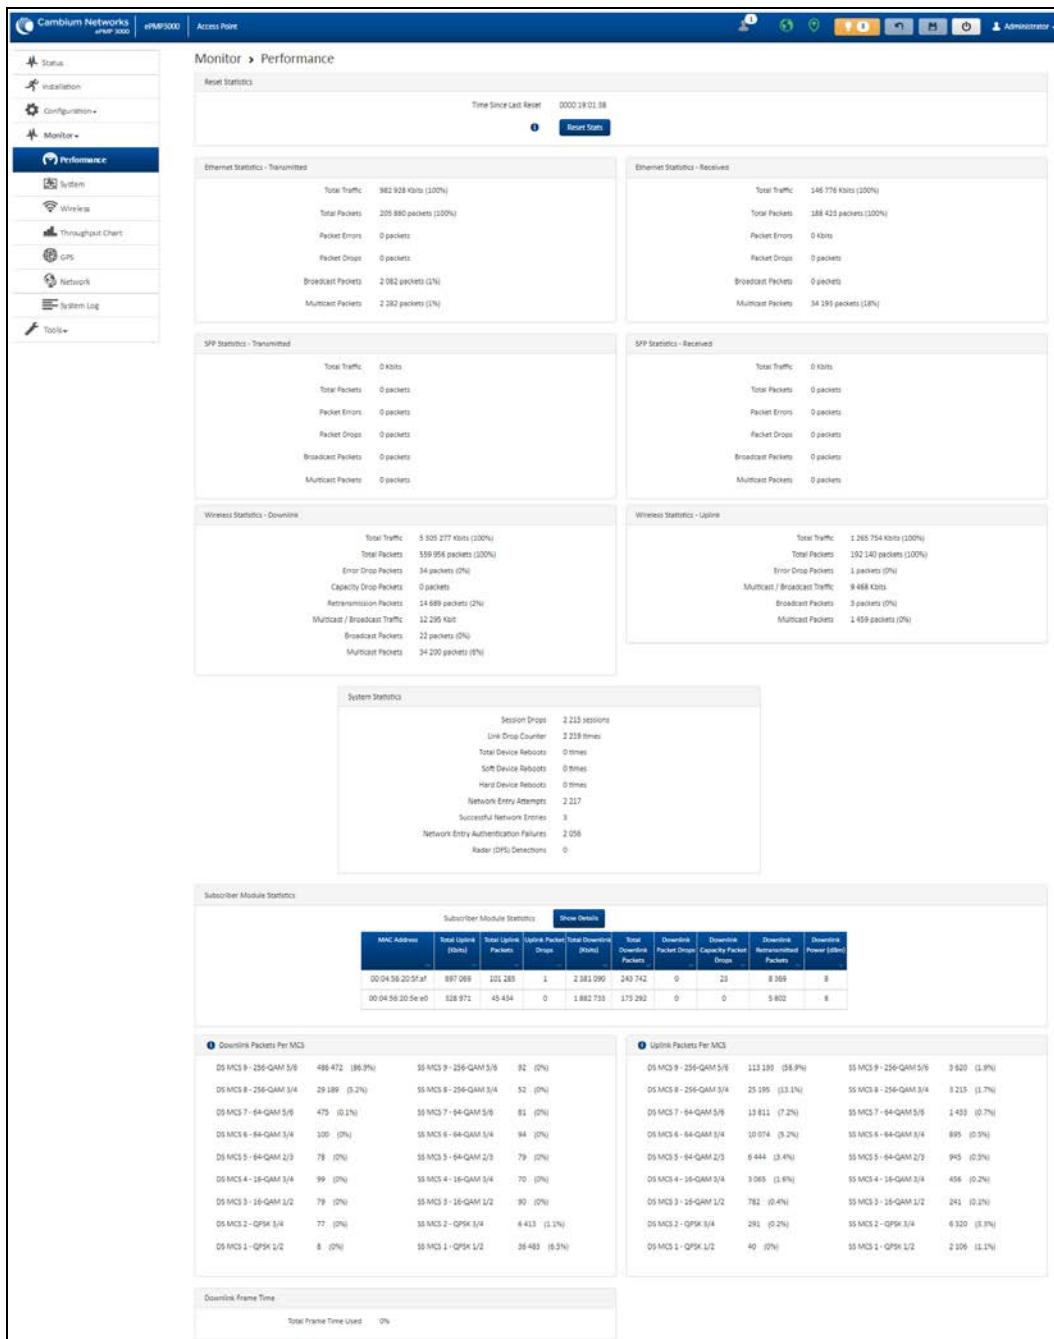


Figure 87: Monitor > Performance page

Table 139 Monitor > Performance page attributes

Attribute	Description
<b>Reset Statistics</b>	
Time Since Last Reset	Time since the stats were last reset.

Attribute	Description
<b>Ethernet Statistics – Transmitted</b>	
Total Traffic	The total amount of traffic in KB transferred from the device Ethernet interface.
Total Packets	The total number of packets transferred from the device Ethernet interface.
Packet Errors	The total number of packets transmitted out of the device Ethernet interface with errors due to collisions, CRC errors, or irregular packet size.
Packet Drops	The total number of packets dropped before sending out from the device's Ethernet interface due to Ethernet setup or filtering issues.
Broadcast Packets	The total number of broadcast packets sent through the device Ethernet interface.
Multicast Packets	The total number of multicast packets sent through the device Ethernet interface.
<b>Ethernet Statistics – Received</b>	
Total Traffic	The total amount of traffic in KB received by the device Ethernet interface.
Total Packets	The total number of packets received by the device Ethernet interface.
Packet Errors	The total number of packets received by the device Ethernet interface with errors due to collisions, CRC errors, or irregular packet size.
Packet Drops	The total number of packets dropped before sending out from the device's wireless interface due to Ethernet setup or filtering issues.
Broadcast Packets	The total number of broadcast packets received through the device Ethernet interface.
Multicast Packets	The total number of multicast packets received through the device Ethernet interface.
<b>SFP Statistics – Transmitted</b>	
Total Traffic	The total amount of traffic in KB transferred from the device SFP interface.
Total Packets	The total number of packets transferred from the device SFP interface.
Packet Errors	The total number of packets transmitted out of the device SFP interface with errors due to collisions, CRC errors, or irregular packet size.
Packet Drops	The total number of packets dropped before sending out from the device's SFP interface due to setup or filtering issues.
Broadcast Packets	The total number of broadcast packets sent through the device SFP interface.
Multicast Packets	The total number of multicast packets sent through the device SFP interface.
<b>SFP Statistics - Received</b>	
Total Traffic	The total amount of traffic in KB received by the device SFP interface.
Total Packets	The total number of packets received by the device SFP interface.


Attribute	Description
Packet Errors	The total number of packets received by the device SFP interface with errors due to collisions, CRC errors, or irregular packet size.
Packet Drops	The total number of packets dropped before sending out of the device wireless interface due to SFP setup or filtering issues.
Broadcast Packets	The total number of broadcast packets received through the device SFP interface.
Multicast Packets	The total number of multicast packets received through the device SFP interface.
<b>Wireless Statistics – Downlink</b>	
Total Traffic	The total amount of traffic transmitted out of the device wireless interface in Kbits.
Total Packets	The total number of packets transmitted out of the device wireless interface.
Error Drop Packets	The total number of packets dropped after transmitting out of the device Wireless interface due to RF errors (No acknowledgment and other RF related packet error).
Capacity Drop Packets (AP mode)	The total number of packets dropped after transmitting out of the device wireless interface due to capacity issues (data buffer/queue overflow or other performance or internal packet errors).
Retransmission Packets (AP mode)	The total number of packets re-transmitted after transmitting out of the device's wireless interface due to the packets not being received by the receiving device.
Multicast / Broadcast Traffic	The total amount of multicast and broadcast traffic transmitted out of the device wireless interface in KB.
Broadcast Packets	The total number of broadcast packets transmitted out of the device wireless interface.
Multicast Packets	The total number of multicast packets transmitted out of the device wireless interface.
<b>Wireless Statistics – Uplink</b>	
Total Traffic	The total amount of traffic received through the device wireless interface in KB.
Total Packets	The total number of packets received through the device wireless interface.
Error Drop Packets	The total number of packets dropped before sending out of the device Ethernet interface due to RF errors (packet integrity error and other RF-related packet error).
Capacity Drop Packets (SM mode)	The total number of packets dropped after transmitting out of the device wireless interface due to capacity issues (data buffer/queue overflow or other performance or internal packet errors).
Multicast / Broadcast Traffic	The total amount of multicast and broadcast traffic received on the device wireless interface in KB.

Attribute	Description
Broadcast Packets	The total number of broadcast packets received on the device wireless interface.
Multicast Packets	The total number of multicast packets received on the device wireless interface.
Link Quality (Uplink) (SM mode)	Defines the Packet Error Rate (PER) in the uplink direction by percentage. A background color corresponds to a percentage range: <ul style="list-style-type: none"> <li>Blue is between 80 and 100%.</li> <li>Green is between 50 and 80%.</li> <li>Yellow is between 30 and 50%.</li> <li>Red is between 0 and 30%.</li> </ul>
Link Capacity (Uplink) (SM mode)	Defines the capacity of the uplink as defined by MCS. DS MCS 9 provides the greatest capacity. SS MCS 1 provides the least. The capacity of the link is defined as the percentage throughput of the actual link as compared to a link that was always running at DS MCS 9. A background color corresponds to a percentage range: <ul style="list-style-type: none"> <li>Blue is between 80 and 100%.</li> <li>Green is between 50 and 80%.</li> <li>Yellow is between 30 and 50%.</li> <li>Red is between 0 and 30%.</li> </ul>
<b>System Statistics</b>	
Session Drops	Indicates the total number of Subscriber Module sessions dropped on the AP.
Link Drop Counter	Indicates the total number of times the wireless link was lost.
Total Device Reboots	Indicates the total number of times the device has been rebooted since the statistics were last reset from the <b>GUI</b> , <b>CLI</b> , or <b>SNMP</b> .
Soft Device Reboots	Indicates the number of times the device has been rebooted by the user through <b>GUI</b> , <b>CLI</b> , or <b>SNMP</b> since the statistics were last reset from the <b>GUI</b> , <b>CLI</b> , or <b>SNMP</b> .
Hard Device Reboots	Indicates the number of times the device has been rebooted via power feeding and due to power outage since the statistics were last reset from the <b>GUI</b> , <b>CLI</b> , or <b>SNMP</b> .
Network Entry Attempts (AP mode)	The total number of Network Entry Attempts by Subscriber Module devices.
Successful Network Entries (AP mode)	The total number of successful network entry attempts.
Network Entry Authentication Failures (AP mode)	The total number of failed Network Entry Attempts by SM devices.

Attribute	Description
Radar (DFS) Detections	
<b>Subscriber Module Statistics (AP mode)</b>	
MAC Address	MAC Address of the Subscriber Module connected to the AP.
Total Uplink (KB)	The total amount of traffic received through the AP wireless interface from the Subscriber Module in KB.
Total Uplink Packets	The total number of packets received through the AP wireless interface from this SM.
Uplink Packet Drops	The total number of packets dropped before sending out of the AP Ethernet interface due to RF errors (packet integrity error and other RF-related packet error) from the SM.
Total Downlink (KB)	The total amount of traffic transmitted out of the AP wireless interface in KB.
Total Downlink Packets	The total number of packets transmitted out of the AP wireless interface.
Downlink Packet Drops	The total number of packets dropped after transmitting out of the AP wireless interface due to RF errors (No acknowledgment and other RF-related packet errors).
Downlink Capacity Packet Drops	The total number of packets dropped after transmitting out of the AP Wireless interface due to capacity issues (data buffer/queue overflow or other performance or internal packet errors).
Downlink Retransmitted Packets	The total number of packets re-transmitted after transmitting out of the AP Wireless interface due to the packets not being received by the SM.
Downlink Power (dBm)	The transmit power of the AP for the downlink packets to the SM.
<b>Downlink Packets per MCS</b>	
MCS 1 – MCS 9 DS / SS	The number of packets (and percentage of total packets) transmitted out of the device wireless interface for every modulation mode used by the device transmitter, based on radio conditions.  DS represents dual-stream transmissions and SS represents single-stream transmissions.
<b>Uplink Packets per MCS</b>	
MCS 1 – MCS 9 DS / SS	The number of packets (and percentage of total packets) received on the device wireless interface for every modulation mode, based on radio conditions.  DS represents dual-stream transmissions and SS represents single-stream transmissions.
<b>Downlink Frame Time</b>	
Total Frame Time Used (AP mode)	Percentage of frame time used in the uplink.

## Monitor > System page

Figure 88 shows the System page.

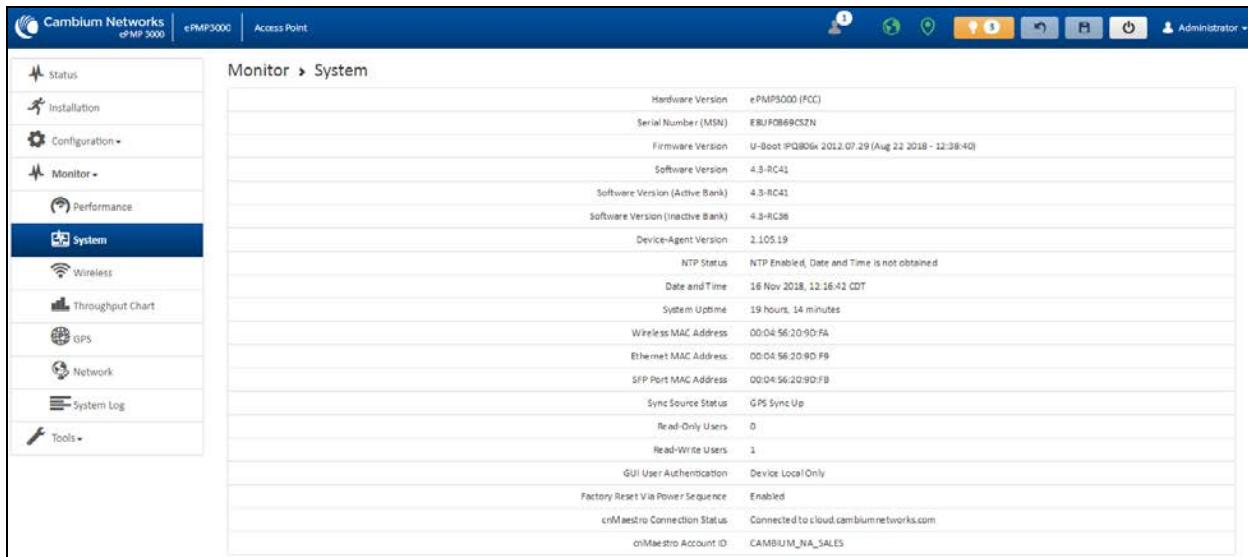

The screenshot shows the Cambium Networks ePMP3000 Device Management Interface. The top navigation bar includes the Cambium Networks logo, 'ePMP3000', 'Access Point', and an 'Administrator' dropdown. The left sidebar has a 'System' section selected, with options for Status, Installation, Configuration, Monitor, Performance, Wireless, Throughput Chart, GPS, Network, System Log, and Tools. The main content area is titled 'Monitor > System' and lists the following attributes with their values:

Hardware Version	ePMP3000 (FCC)
Serial Number (MSN)	EBUFB869CSZN
Firmware Version	U-Boot IPQ806x 2012.07.29 (Aug 22 2018 - 12:38:40)
Software Version	4.3-RC41
Software Version (Active Bank)	4.3-RC41
Software Version (Inactive Bank)	4.3-RC36
Device-Agent Version	2.105.19
NTP Status	NTP Enabled, Date and Time is not obtained
Date and Time	16 Nov 2018, 12:18:42 CDT
System Uptime	19 hours, 14 minutes
Wireless MAC Address	00:04:56:20:9D:F4
Ethernet MAC Address	00:04:56:20:9D:F8
SFP Port MAC Address	00:04:56:20:9D:F8
Sync Source Status	GPS Sync Up
Read-Only Users	0
Read-Write Users	1
GUI User Authentication	Device Local Only
Factory Reset Via Power Sequence	Enabled
cnMaestro Connection Status	Connected to cloud.cambiumnetworks.com
cnMaestro Account ID	CAMBNIUM_NA_SALES

Figure 88: Monitor > System page

Table 140 Monitor > System page attributes

Attribute	Description
Hardware Version	Board hardware version information.
Serial Number (MSN)	Serial Number information.
Firmware Version	U-Boot version information.
Software Version	The currently operating version of software on the device.
Software Version (Active Bank)	The currently operating version of software on the device.
Software Version (Inactive Bank)	The backup software version on the device is used upon failure of the active bank. Two software upgrades in sequence updates both the <b>Active Software Bank Version</b> and the <b>Inactive Software Bank Version</b> .
Device-Agent Version	The operating version of the device agent, which is used for communication with cnMaestro.
NTP Status	Indicates whether time and date have been obtained from the NTP server.
Date and Time	Current date and time, subject to time zone offset introduced by the configuration of the device <b>Time Zone</b> parameter. Until a valid NTP server is configured, this field displays the time configured from the factory.
System Uptime	The total system uptime since the last device reset.

Attribute	Description
Wireless MAC Address	The hardware address of the device's wireless interface.
Ethernet MAC Address	The hardware address of the device LAN (Ethernet) interface.
SFP Port MAC Address	The hardware address of the device SFP interface.
Sync Source Status	The status of the configured GPS synchronization source.
Read-Only Users	Displays the number of active Read-Only users logged into the radio.
Read-Write Users	Displays the number of active Read-Write users logged into the radio.
GUI User Authentication	The method by which users are authenticated when logging into the device management interface.
Factory Reset Via Power Sequence	<p><b>Enabled:</b> When Enabled under <b>Tools &gt; Backup/Restore &gt; Reset Via Power Sequence</b>, it is possible to reset the radio's configuration to factory defaults using the power cycle sequence explained under <a href="#">Resetting ePMP to factory defaults by power cycling</a>.</p> <p><b>Disabled:</b> When disabled, it is not possible to factory default the radio's configuration using the power cycle sequence.</p>
cnMaestro Connection Status	The current management status of the device for the Cambium Cloud Server. When Enabled under <b>Configuration &gt; System</b> , the device is managed by the Cambium Networks Remote Management System, which allows all Cambium devices to be managed from the Cambium Networks Cloud Server.
cnMaestro Account ID	The ID that the device is currently using to be managed by the Cambium Networks Cloud Server.

## Monitor > Wireless page

Figure 89 and Figure 90 shows Wireless page (AP mode) and Wireless page (SM mode).

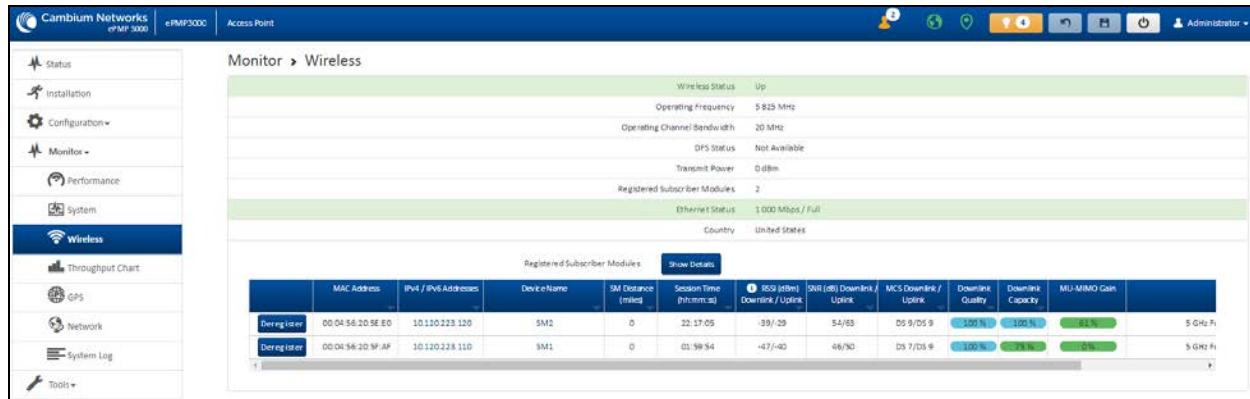


Figure 89: Monitor > Wireless page (AP Mode)

The screenshot shows the Cambium Networks Force 220 Subscriber Module (SM) interface. The left sidebar includes links for Status, Installation, Configuration, Monitor, Performance, System, Wireless (selected), Throughput Chart, Network, System Log, and Tools. The main content area is titled 'Monitor > Wireless'. It displays the following information:

- Registered AP SSID: GetElevated
- Wireless Status: Up
- Registered AP MAC Address: 00:04:56:20:90:FA
- Operating Frequency: 5 200 MHz
- Operating Channel Bandwidth: 20 MHz
- DFS Status: Not Available
- Downlink RSSI: -43 dBm
- Downlink SNR: 47 dB
- Uplink MCS: 05 MCS 7 - 64-QAM 5/6
- Downlink MCS: 05 MCS 9 - 256-QAM 5/6
- Transmit Power: 3 dBm
- Distance from AP: 0 miles
- Power Control Mode from AP: Closed Loop
- Ethernet Status: Down
- Country: United States

Below this, a section shows 'Time Since Last Scan: 00:00:19:52' and 'Registration Status: Registered'. It includes a 'Restart' button and a 'Clear the AP list and restart scanning' link. A 'Show Details' button is also present.

The 'Available APs' table has columns: Add As Preferred, SSID, MAC Address, Frequency Carrier (MHz), Channel Bandwidth (MHz), RSSI (dBm), SNR (dB), Registration State, Session Time (H:mm:ss), Wireless Security, and Meets Reg C. One row is shown:

Add As Preferred	SSID	MAC Address	Frequency Carrier (MHz)	Channel Bandwidth (MHz)	RSSI (dBm)	SNR (dB)	Registration State	Session Time (H:mm:ss)	Wireless Security	Meets Reg C
Add	GetElevated	00:04:56:20:90:FA	5 200	20	-43	47	Success	19:19:52	WPA2	Yes

Figure 90: Monitor > Wireless page (SM Mode)

Table 141 Monitor > Wireless page attributes

Attribute	Description
Registered Access Point SSID (SM mode only)	SSID of the AP to which the SM is registered.
Wireless Status (AP mode)	<b>Up:</b> The wireless interface of the device is functioning and sending beacons. <b>Down:</b> The wireless interface of the device has encountered an error disallowing full operation. Reset the device to re-initiate the wireless interface.
Wireless Status (SM mode)	<b>Up:</b> The device wireless interface is functioning and the device has completed network entry. <b>Down:</b> The device's wireless interface has encountered an error disallowing full operation. Evaluate radio and security configuration on the AP and SM device to determine the network entry failure.
Registered AP MAC Address (SM mode)	Wireless MAC address of the AP to which the SM is registered.
Range (SM mode)	The calculated distance from the AP, determined by radio signal propagation delay.
Operating Frequency	The current frequency at which the device is operating.

Attribute	Description
Operating Channel Bandwidth	The current channel size at which the device is transmitting and receiving.
DFS Status	<p><b>N/A:</b> DFS operation is not required for the region configured in parameter <b>Country Code</b>.</p> <p><b>Channel Availability Check:</b> Before transmitting, the device must check the configured <b>Frequency Carrier</b> for radar pulses for 60 seconds). If no radar pulses are detected, the device transitions to state <b>In-Service Monitoring</b>.</p> <p><b>In-Service Monitoring:</b> Radio is transmitting and receiving normally while monitoring for radar pulses that require a channel move.</p> <p><b>Radar Signal Detected:</b> The receiver has detected a valid radar pulse and is carrying out detect-and-avoid mechanisms (moving to an alternate channel).</p> <p><b>In-Service Monitoring at Alternative Channel:</b> The radio has detected a radar pulse and has moved the operation to a frequency configured in <b>DFS Alternative Frequency Carrier 1</b> or <b>DFS Alternative Frequency Carrier 2</b>.</p> <p><b>System Not In Service due to DFS:</b> The radio has detected a radar pulse and has failed channel availability checks on all alternative frequencies. The non-occupancy time for the radio frequencies in which radar was detected is 30 minutes.</p>
Downlink SNR (SM mode)	The Signal-to-Noise Ratio of the signal being received from the AP.
Transmitter Power	The current power level at which the device is transmitting.
Uplink MCS (AP mode)	Specifies the current MCS utilized for uplink transmission.
Registered Subscriber Modules (AP mode)	The count of registered AP.
Ethernet Status	The speed and duplex at which the configured LAN port is operating.
Country	Defines the country code being used by the device. The country code of the Subscriber Module follows the country code of the associated Access Point unless it is an FCC SKU in which case the country code is the United States or Canada. Country code defines the regulatory rules in use for the device.
Registered Subscriber Modules (AP mode)	<p>Use the <b>Registered Subscriber Modules</b> table to monitor the registered Subscriber Module device, their key RF status, and statistics information. The Subscriber management interface may also be accessed by clicking the hyperlinks in the <b>IPv4 / IPv6 Addresses</b> and <b>Device Name</b> columns.</p> <p>Click <b>Deregister</b> to disassociate the SM device from the AP.</p>
MAC Address (AP Mode)	The MAC address of the SM wireless interface.

Attribute	Description
IPv4 / IPv6 Addresses (AP mode)	The IP address of the SM wireless interface.
Device Name (AP mode)	The configured device name of the SM wireless interface.
SM Distance (miles)	Indicates the calculated distance of the SM from the AP.
Session Time (hh:mm:ss) (AP mode)	The time duration for which the SM has been registered and in session with the AP.
RSSI (dBm) Downlink / Uplink	Indicates the estimated RSSI of the AP at the SM (first value) and the RSSI of the SM measured at the AP (second value).
SNR (dB) Downlink / Uplink	Indicates the estimated SNR of the AP at the SM (first value) and the SRN of the SM measured at the AP (second value).
MCS Downlink / Uplink (AP mode)	Current MCS at which the downlink (first value) and uplink (second value) are operating.
Downlink Quality (AP mode)	The downlink quality is based on the current MCS and PER (Packet Error Rate) for this SM.
Downlink Capacity (AP mode)	The downlink capacity is based on the current DL MCS for the highest supported MCS (MCS15). The downlink capacity is based on the current DL MCS for the highest supported MCS (MCS15).
MU-MIMO Gain	Indicates if MU-MIMO is supported by the subscriber and the MU-MIMO gain achieved by MU-MIMO capable subscribers.
Model Name	Model of SM.
Add As Preferred (SM mode)	Click <b>Add</b> to add the AP to the <b>Preferred Access Points List</b> under <b>Configuration &gt; Radio</b> .
SSID (SM mode)	The SSID of the visible AP.
MAC Address (SM mode)	The MAC address of the visible AP.
Frequency Carrier (MHz) (SM mode)	The current operating frequency of the visible AP.
Channel Bandwidth (MHz) (SM mode)	The current operating channel bandwidth of the visible AP.
RSSI (dBm) (SM mode)	The current measured Received Signal Strength Indicator at the AP.
SNR (dB) (SM mode)	The current measured Signal-to-Noise Ratio (SNR) of the SM to AP link.
Registration State (SM mode)	The indication of the result of the Subscriber Module device network entry attempt:

Attribute	Description
	<ul style="list-style-type: none"> <li><b>Successful:</b> The SM registration is successful.</li> <li><b>Failed - Out of Range:</b> The SM is out of the Access Point's configured maximum range (<b>Max Range</b> parameter).</li> <li><b>Failed- Capacity limit reached at Access Point:</b> The AP is no longer allowing SM network entry due to capacity reached.</li> <li><b>Failed - No Allocation on Access Point:</b> The SM to AP handshaking failed due to a misconfigured pre-shared key between the SM and AP.</li> <li><b>Failed - SW Version Incompatibility:</b> The version of software resident on the AP is older than the software version on the SM.</li> <li><b>Failed - PTP Mode: ACL Policy:</b> The AP is configured with <b>PTP Access</b> set to <b>MAC Limited</b> and the SM's MAC address is not configured in the AP's <b>PTP MAC Address</b> field.</li> <li><b>Failed - Other:</b> The AP does not have the required available memory to allow network entry.</li> </ul>
Session Time (hh:mm:ss) (SM Mode)	This timer indicates the time elapsed since the SM registered to the AP.
Wireless Security (SM mode)	This field indicates the security state of the AP to SM link.
Meets Reg Criteria (SM Mode)	<p><b>Yes:</b> The scanned AP meets the Network Entry criteria defined by the internal Network Algorithm.</p> <p><b>No:</b> The scanned AP does not meet the Network Entry criteria defined by the internal Network Algorithm.</p>

## Monitor > Throughput Chart page

Use the Throughput Chart page to reference a line chart visual representation of system throughput over time. The blue line indicates downlink throughput and the orange line indicates uplink throughput. The X-axis may be configured to display data over seconds, minutes, or hours, and the Y-axis is adjusted automatically based on average throughput. Hover over data points to display details. [Figure 91](#) shows the Throughput Chart page.

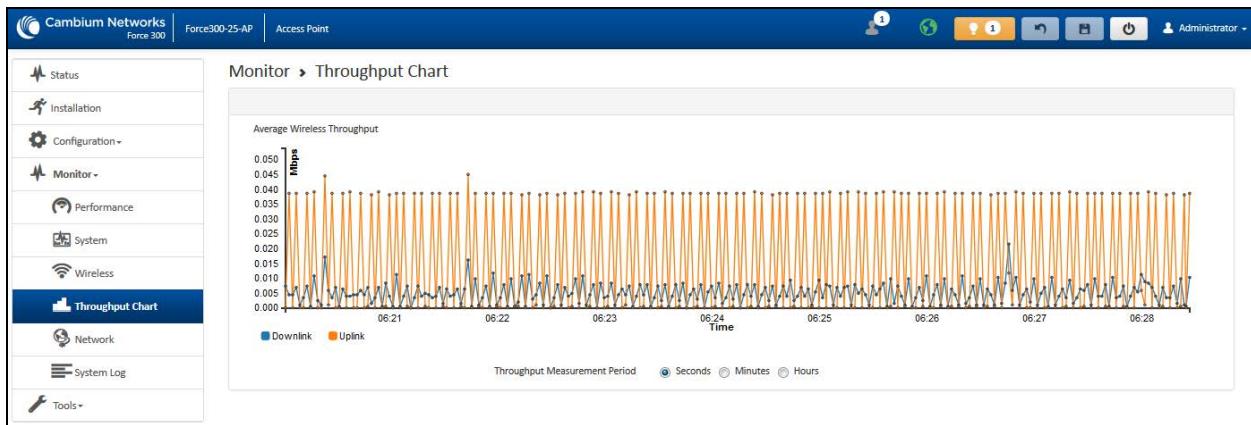


Figure 91: Monitor > Throughput Chart page

Table 142 Monitor > Throughput Chart page attributes

Attribute	Description
Throughput Measurement Period	Adjust the X-axis to display throughput intervals in seconds, minutes, or hours.

## Monitor > GPS page (AP mode)

Use the GPS Status page to reference key information about the device's GPS readings, tracked satellites, and firmware version. Figure 92 shows the GPS page (AP mode).

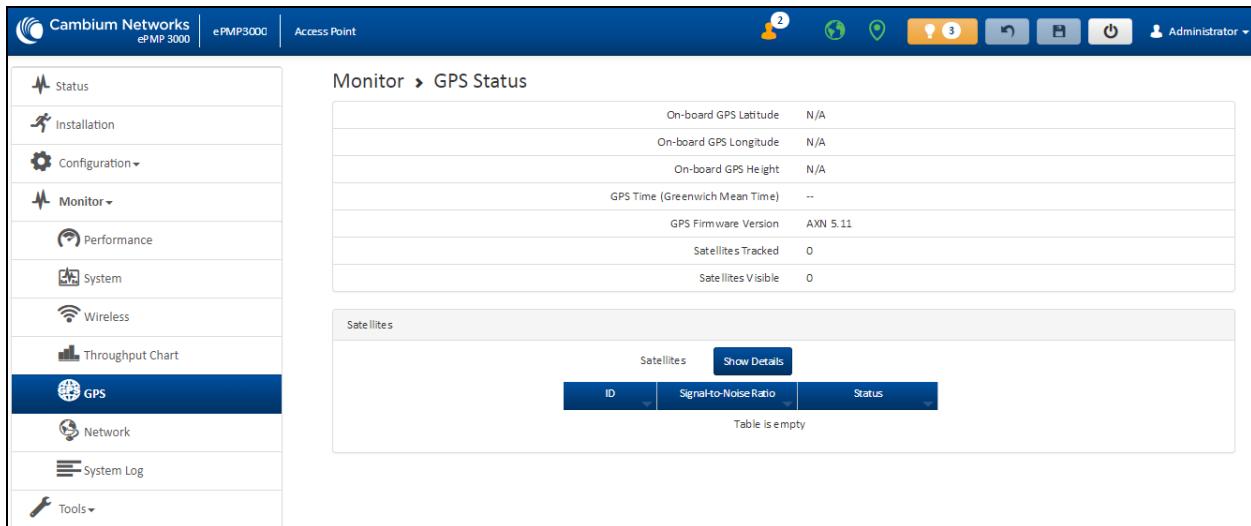


Figure 92: Monitor > GPS page attributes (AP mode)

Table 143 Monitor > GPS page attributes (AP mode)

Attribute	Description
On-board GPS Latitude (AP mode)	On a GPS Synchronized ePMP radio, the field is automatically populated with the Device Latitude information from the on-board GPS chip.
On-board GPS Longitude (AP mode)	On a GPS Synchronized ePMP radio, the field is automatically populated with the Device Longitude information from the on-board GPS chip.
On-board GPS Height (AP mode)	On a GPS Synchronized ePMP radio, the field is automatically populated with the Device height above sea level from the onboard GPS chip.
GPS Time (Greenwich Mean Time) (AP mode)	On a GPS Synchronized ePMP radio, the field is automatically populated with the time from the onboard GPS chip.
GPS Firmware version (AP mode)	On a GPS Synchronized ePMP radio, the field indicates the current firmware version of the onboard GPS chip.
Satellites Tracked (AP mode)	On a GPS Synchronized ePMP radio, the field indicates the number of satellites currently tracked by the onboard GPS chip.
Satellites Visible (AP mode)	On a GPS Synchronized ePMP radio, the field indicates the number of satellites visible to the onboard GPS chip.
Satellites (AP mode)	The <b>Satellites</b> table provides information about each satellite that is visible or tracked along with the Satellite ID and Signal to Noise Ratio (SNR) of the satellite.
ID (AP mode)	Represents the Satellite ID.
Signal-to-Noise Ratio (AP mode)	This is an expression of the carrier signal quality concerning signal noise.
Status (AP mode)	Status of each Satellite available.

## Monitor > Network page

Use the Network Status page to reference key information about the device network status. [Figure 93](#) shows the Network page.

**Ethernet Interface**

IP Assignment	Static
IP Address	10.120.223.101
Subnet Mask	255.255.255.0
Default Gateway	10.120.223.254
MTU Size	1700
Ethernet Status	1000 Mbps / Full
Port Speed	1.000 Mbps
Port Duplex Mode	Full
SFP Port	Down
SFP Port Speed	N/A
SFP Port Duplex Mode	N/A
SFP Port Type	N/A

**Network Status**

DNS Server IP	10.120.12.169, 10.120.12.170
DHCP Option 82	Disabled
NTP Status	NTP Enabled, Date and Time is not obtained

**ARP Table**

MAC Address	IP Address	Interface
00:22:8E:6E:40:00	10.120.223.254	Bridge

**Bridge Table**

MAC Address	Port	Subscriber Module MAC	Aging Timer (secs)
00:04:56:20:90:FA	Own	N/A	0
00:04:56:20:5F:AF	WLAN	N/A	0
00:04:56:20:5F:F0	WLAN	N/A	1
00:04:56:20:5F:8B	WLAN	N/A	21
00:04:56:20:5F:34	WLAN	N/A	34

Figure 93: Monitor > Network page

Table 144 Monitor > Network page attributes

Attribute	Description
<b>Ethernet Interface</b>	
IP Assignment	<p><b>Static:</b> Device management IP addressing is configured manually in fields <b>IP Address</b>, <b>Subnet Mask</b>, <b>Gateway</b>, <b>Preferred DNS Server</b>, and <b>Alternate DNS Server</b>.</p> <p><b>DHCP:</b> Device management IP addressing (<b>IP Address</b>, <b>Subnet Mask</b>, <b>Gateway</b>, and <b>DNS Server</b>) is assigned through a network DHCP server, and parameters <b>IP Address</b>, <b>Subnet Mask</b>, <b>Gateway</b>, <b>Preferred DNS Server</b>, and <b>Alternate DNS Server</b> are not configurable.</p>
IP Address	<p>Internet protocol (IP) address. This address is used by the family of Internet protocols to uniquely identify this unit on a network.</p> <p>If IP Address Assignment is set to DHCP and the device is unable to retrieve IP address information via DHCP, the device management IP is set to fallback IP 192.168.0.1 (Access Point) or 192.168.0.2 (Subscriber Module).</p>

Attribute	Description
Subnet Mask	Defines the address range of the connected IP network. For example, if Device IP Address (LAN) is configured to 192.168.2.1 and IP Subnet Mask (LAN) is configured to 255.255.255.0, the device will belong to subnet 192.168.2.X.
Default Gateway	Configure the IP address of the device on the current network that acts as a gateway. A gateway acts as an entrance and exit to packets from and to other networks.
MTU Size	The currently configured <b>Maximum Transmission Unit</b> for the device Ethernet (LAN) interface. Larger MTU configurations can enable the network to operate with greater efficiency, but in the case of retransmissions due to packet errors, efficiency is reduced since large packets must be resent in the event of an error.
Main PSU Port	The speed and duplex at which the configured LAN port is operating.
Port Speed	The speed at which the configured LAN port is operating.
Port Duplex Mode	The duplex at which the configured LAN port is operating.
<b>Network Status</b>	
DNS Server IP	The configured IP address(es) of the network DNS servers.
DHCP Option 82	Status of DHCP Option 82 operation in the network.
NTP Status	Represents the status of NTP retrieval in the network.
<b>ARP Table</b>	
MAC Address	MAC Address of the devices on the bridge.
IP Address	IP Address of the devices on the bridge.
Interface	The interface on which the ePMP identified the devices on.
<b>Bridge Table</b>	
MAC Address	The hardware address of the ePMP device.
Port	The port to which the device is connected.
SM MAC	MAC Address for the connected SM device.
Aging Timer (secs)	Time set for the MAC addresses in the Bridge table before renewal.

## Monitor > System Log page

The **System Log** page is used to view the device system log and to download the log file to the accessing PC/device. [Figure 94](#) shows the System Log page.

Figure 94: Monitor > System Log page

Table 145 Monitor > System Log page attributes

Attribute	Description
Syslog Display	<b>Enabled:</b> The system log file is displayed on the management UI. <b>Disabled:</b> The system log file is hidden on the management UI.
Download	Used to download the full system log file to a connected PC or device.

## Tools menu

The **Tools** menu provides several options for upgrading device software, configuration backup/restore, managing licenses, analyzing RF spectrum, testing the wireless link, testing network connectivity, and analyzing interferers.

### Tools > Software Upgrade page

The **Software Upgrade** page is used to update the device radio software to take advantage of new software features and improvements. Figure 95 shows the Software Upgrade page.



#### Attention

Refer to **Release Notes** associated with each software release for special notices, feature updates, resolved software issues, and known software issues.

The Release Notes can be found at [Cambium Networks Support Center](#).

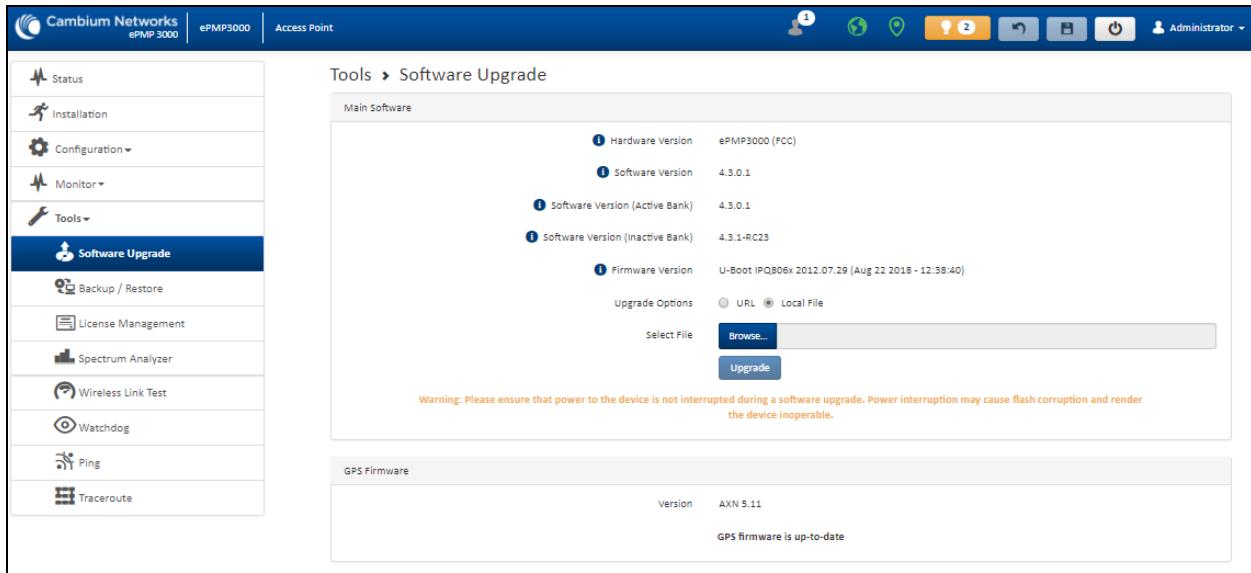


Figure 95: Tools > Software Upgrade page

Table 146 Tools > Software Upgrade page attributes

Attribute	Description
<b>Main Software</b>	
Hardware Version	Defines the board type and frequency band of operation.
Software Version	Defines the current operating software version.
Software Version (Active Bank)	ePMP devices two banks of flash memory which each contain a version of the software. The version of the software last upgraded onto the flash memory is made the active bank. This software is used by the device when rebooted.
Software Version (Inactive Bank)	The version of the software that was the Active Bank is made the Inactive Bank when another version of the software is upgraded onto the Flash memory. The Inactive Bank of the software is used by the device in case the Active Bank cannot be used due to a failure condition.
Firmware Version	The current U-boot version.
Upgrade Options	<p><b>URL:</b> A web server may be used to retrieve software upgrade packages (downloaded to the device through the webserver). For example, if a web server is running at IP address 192.168.2.1 and the software upgrade packages are located in the home directory, an operator may select an option <b>From URL</b> and configure the <b>Software Upgrade Source</b> field to <b>http://192.168.2.1/&lt;software_upgrade_package&gt;</b>.</p> <p><b>Local File:</b> Click <b>Browse</b> to select the local file containing the software upgrade package.</p>

Attribute	Description
Select File	Click <b>Browse</b> to select a local file (located on the device accessing the web management interface) for upgrading the device software.
Upgrade	Click the <b>Upgrade</b> button to begin the software upgrade process.  Ensure that the power to the device is not interrupted during a software upgrade. Power interruption may cause flash corruption and render the device inoperable.
<b>GPS Firmware</b>	
Firmware Version	The current firmware of the on-board GPS chip.
Upgrade Options	<b>URL:</b> A web server may be used to retrieve GPS firmware upgrade packages (downloaded to the device through the webserver). For example, if a web server is running at IP address 192.168.2.1 and the firmware upgrade packages are located in the home directory, an operator may select an option <b>From URL</b> and configure the <b>GPS Firmware Upgrade Source</b> field to <b>http://192.168.2.1/&lt;firmware_upgrade_package&gt;</b> .  <b>Local File:</b> Click <b>Browse</b> and select the local file containing the GPS firmware upgrade package.
Select File	Click <b>Browse</b> and select a local file (located on the device accessing the web management interface) for upgrading the on-board GPS chip firmware.

## Tools > Backup/Restore page

The **Backup/Restore** page is used to update the device radio software to take advantage of new software features and improvements. [Figure 96](#) shows the Backup/Restore page.

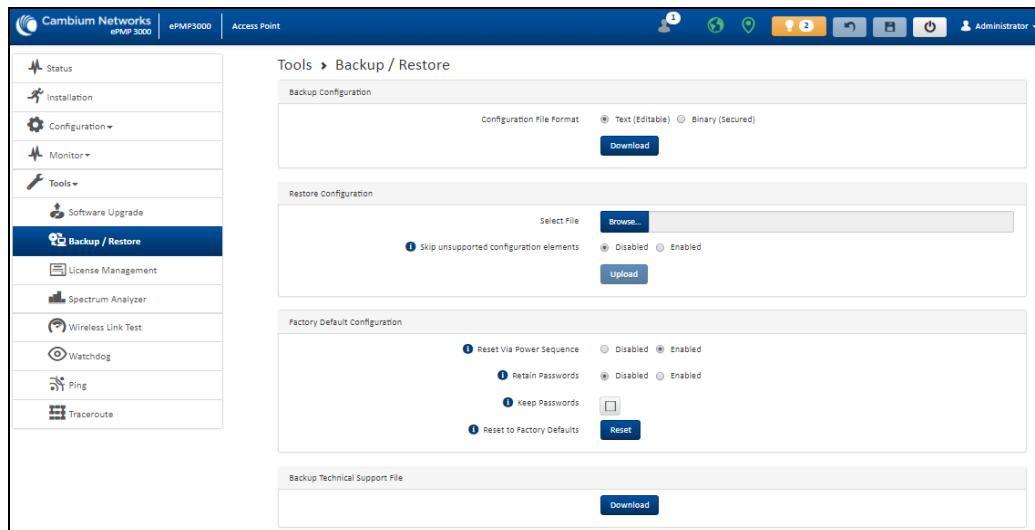


Figure 96: Tools > Backup/Restore page

Table 147 Tools > Backup/Restore page attributes

Attribute	Description
<b>Backup Configuration</b>	
Configuration File Format	<p><b>Text (Editable):</b> This option downloads the configuration file in the .json format and can be viewed and/or edited using a standard text editor.</p> <p><b>Binary (Secured):</b> This option downloads the configuration file in the .bin format, and cannot be viewed and/or edited using an editor. Use this format for a secure backup.</p>
<b>Restore Configuration</b>	
Select File	Click <b>Browse</b> and select a local file (located on the device accessing the web management interface) for restoring the device configuration.
Skip unsupported configuration elements	In the case of configuration incompatibility, the unsupported configuration elements can be ignored and skipped.
<b>Factory Default Configuration</b>	
Reset Via Power Sequence	<p><b>Enabled:</b> When enabled, it is possible to reset the radio's configuration to factory defaults using the power cycle sequence explained under <a href="#">Resetting ePMP to factory defaults by power cycling</a>.</p> <p><b>Disabled:</b> When disabled, it is not possible to factory default the radio's configuration using the power cycle sequence.</p>
Retain Passwords	<p>When set to <b>Enabled</b>, then after a factory default of the radio for any reason, the passwords used for UI and CLI access does not be defaulted and remains unchanged. The default value of this field is <b>Disabled</b>.</p> <p>If the passwords cannot be retrieved after the factory default, access to the radio will be lost/unrecoverable. This feature prevents unauthorized users from gaining access to the radio for any reason, including theft.</p>
Keep Passwords	When the <b>Keep Passwords</b> checkbox is selected, the passwords used for GUI and CLI access will not be the default and remains unchanged. This is a one-time option, and it does not apply to factory default procedures completed by power cycling (Reset through the Power Sequence).
Reset to Factory Defaults	<p>Use this button to reset the device to its factory default configuration.</p> <p>A reset to factory default configuration resets all device parameters. With the SM device in the default configuration, it may not be able to register to an AP device configured for your network.</p>
<b>Backup Technical Support File</b>	
Download	The Backup Technical Support File is a compressed archive of the applicable statistics and configuration parameters used by <a href="#">Cambium Networks Support</a> for troubleshooting. This file is downloaded from the ePMP device to the accessing device.

## Tools > License Management page (Access Point mode)

The AP's **License Management** page is used to:

- Install licensing for ePMP Elevate subscriber access allotments
- Convert the AP from Lite (10 subscribers) to Full (120 subscribers)
- Configure the Country Code ETSI-locked devices.

There are two types of ePMP elevate license management mechanisms available on the ePMP device - Flexible and Fixed, described below:

**Flexible Licensing**

With Flexible Licensing, your licenses are stored in a license server and can be shared among all your Access Points. Each Access Point will only use as many licenses as it has connected subscribers. When a subscriber disconnects, a license is returned to the pool and can be used by any other Access Point.

In order to use Flexible Licensing, your Access Points must:

- be able to make HTTPS requests out to the Internet,
- be running firmware version 3.5 or greater,
- have an accurate NTP time source.

[Use Flexible Licensing ➔](#)

**Fixed Licensing**

With Fixed Licensing, you will generate a license key for a specific MAC address, and load that license key into the Access Point. The license key represents the number of Elevate Subscribers that can be supported by that Access Point. The license key may not be transferred to any other Access Point.

You should use Fixed Licensing if your Access Points:

- are unable to make HTTPS requests to the Internet, or
- are running firmware version 3.4.1 or earlier, or
- don't have an accurate NTP time source.

[Use Fixed Licensing ➔](#)

Figure 97: AP ePMP Elevate license management options



### Note

Elevate Flexible Licensing is available only for ePMP AP devices with GPS sync.

Country Code configuration for ETSI locked device and Full Capacity Keys for AP Lite devices are available only via Fixed License Management. Elevate is available via Fixed or Flexible License Management. [Figure 98](#) shows the License Management page.



### Note

To use flexible licensing, the AP must have DNS server access to be able to resolve URLs (and communicate with the license server). Also, the AP must have a valid, accurate time server (NTP) connection.

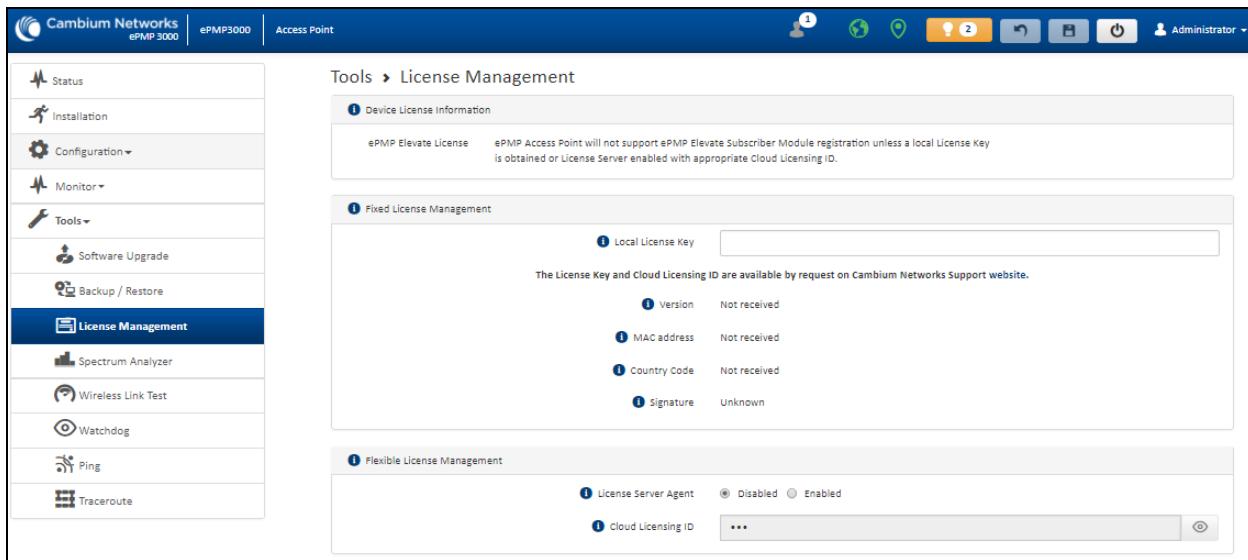


Figure 98: Tools > License Management page

Table 148 Tools > License Management attributes

Attribute	Description
<b>Flexible License Management</b>	
License Server Agent	<p><b>Disabled:</b> No communication with the License Server is established.</p> <p><b>Enabled:</b> Enables the <b>License Server</b> functionality to obtain the number of allowed ePMP Elevate SMs to be connected to the AP.</p>
Cloud Licensing ID	This field represents a Cambium Networks customer identification used for AP identification on the License Server. This identifier is generated upon License Entitlement activation at the Cambium Networks web-based Support Center.
Connection Status	The <b>Connection Status</b> displays the License Server process state when the <b>License Server Agent</b> is <b>Enabled</b> . This status may also be referenced on the device <b>Home</b> page.
Enable Proxy	<p><b>Disabled:</b> The AP must have a valid internet connection to reach the license server.</p> <p><b>Enabled:</b> A proxy server is specific for the license server access from a private network.</p>
Proxy Server IP Address	Specify the IP address of the proxy server used for internet access from a private network.
Proxy Server Port	Specify the port used on the proxy server for internet access from a private network.
Refresh Requests Failed	The number of failed refresh (polling) requests to the License Server. The <b>ePMP Elevate Subscriber Module Limit</b> resets to 1 after the 3 <sup>rd</sup> failed refresh request.

Attribute	Description
Update Requests Failed	The number of failed updates (licensing information transfer) requests to the License Server. The <b>ePMP Elevate Subscriber Module Limit</b> resets to 1 after the 5 <sup>th</sup> failed updated request.
NTP Status	Represents whether the current time and date are retrieved from the configured NTP server.
ePMP Elevate Subscriber Module Limit	The number of ePMP Elevate devices allowed to register to the AP.
<b>Flexible License Management</b>	
Local License Key	The <b>License Key</b> is obtained from <a href="#">Cambium Networks Support Site</a> and must be entered into this field to enable additional functionality (registration capacity, ePMP Elevate support) of the ePMP device.
Version	Specifies the licensing version scheme for the license key.
MAC address	The MAC Address is extracted from the license key and must match the MAC Address of this device for the licenses to be enacted.
Country Code	A two-character value representing the licensed country.
Subscriber Module Limit	ePMP Lite / Force 110 devices are limited to 10 SMs in AP TDD mode. <b>SM Limit</b> displays <b>Unlocked</b> if a license is present which allows no limit of SMs to register to the device in AP TDD mode.
Signature	A valid license key must have a valid signature included. The status is displayed after a license key is entered and saved. Licenses can only be used if the signature is valid.

## Tools > Spectrum Analyzer page

The Spectrum Analyzer feature is no longer available from the web User Interface. This tool is now available as a stand-alone application and available at:

[https://support.cambiumnetworks.com/files/epmp\\_tools\\_and\\_docs](https://support.cambiumnetworks.com/files/epmp_tools_and_docs).

## Tools > eAlign page

The eAlign page is used to aid with subscriber link alignment. [Figure 99](#) shows the eAlign page.

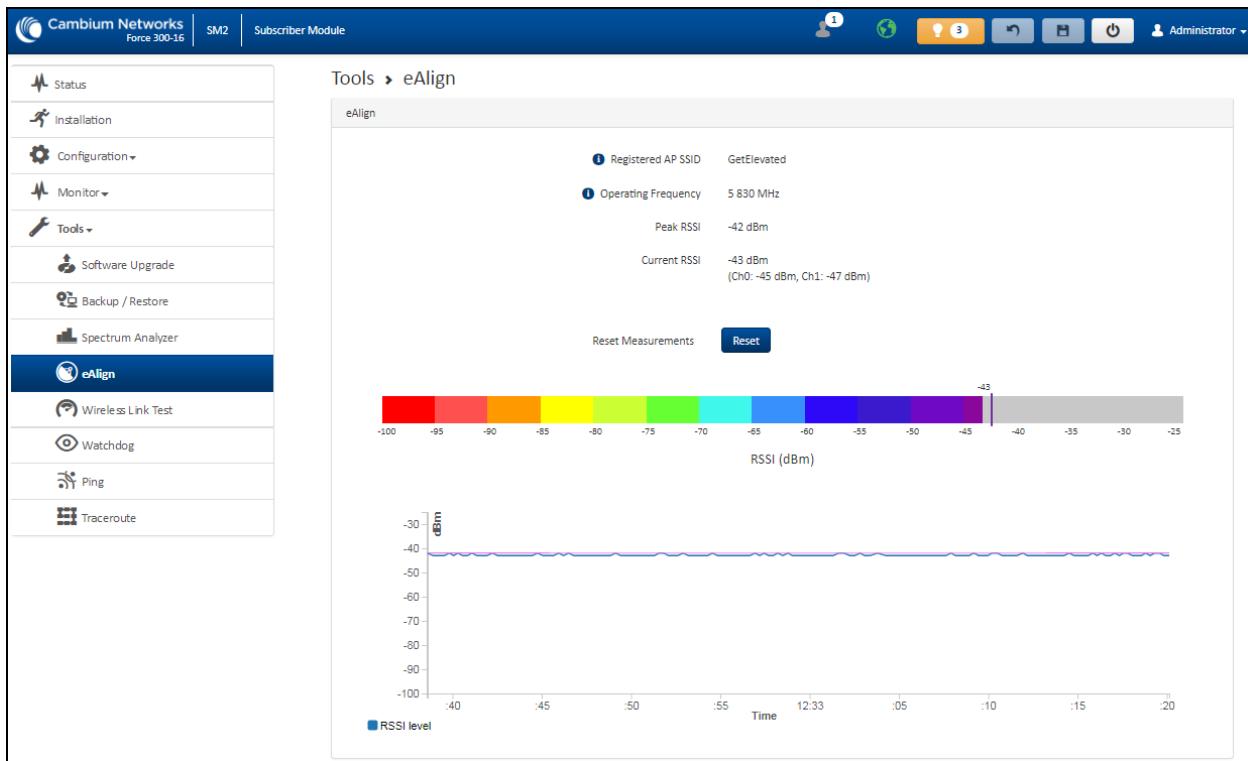


Figure 99: Tools > eAlign page



#### Note

A valid link to an SM is required to provide meaningful RSSI measurements.


ePMP supports Automatic Transmit Power Control (ATPC) where the Subscriber Module devices are instructed by the Access Point to adjust their Tx power for the Subscriber Module device signal (UL RSSI) to arrive at the Access Point at a predetermined RSSI level (configurable on the Access Point under **Configuration > Radio > Power Control > Subscriber Module Target Receive Level**). This feature is beneficial to keep the overall noise floor in the sector to an acceptable level. However, the feature negates the purpose of eAlign measurements on the Access Point device since, during the alignment, the Subscriber Module may constantly change its Tx power. It is recommended to turn off ATPC and set the Subscriber Module Tx power to maximum allowable power during alignment.

While aligning the link using eAlign, perform the following steps:

1. On the Subscriber Module, set **Configuration > Radio > Power Control > Max Tx Power** to **Manual**.
2. Set **Configuration > Radio > Power Control > Transmitter Power** to 26 dBm (or maximum value allowed by regulations).
3. Click **Save**.
4. Perform link alignment using eAlign.
5. Once alignment is complete, set **Configuration > Radio > Power Control > Max Tx Power** back to **Auto**.
6. Click **Save**.

## Tools > Wireless Link Test page

The Wireless Link Test page is used to conduct a simple test of wireless throughput. This allows the user to determine the throughput that can be expected on a particular link without having to use external tools. [Figure 100](#) shows the Wireless Link Test page.

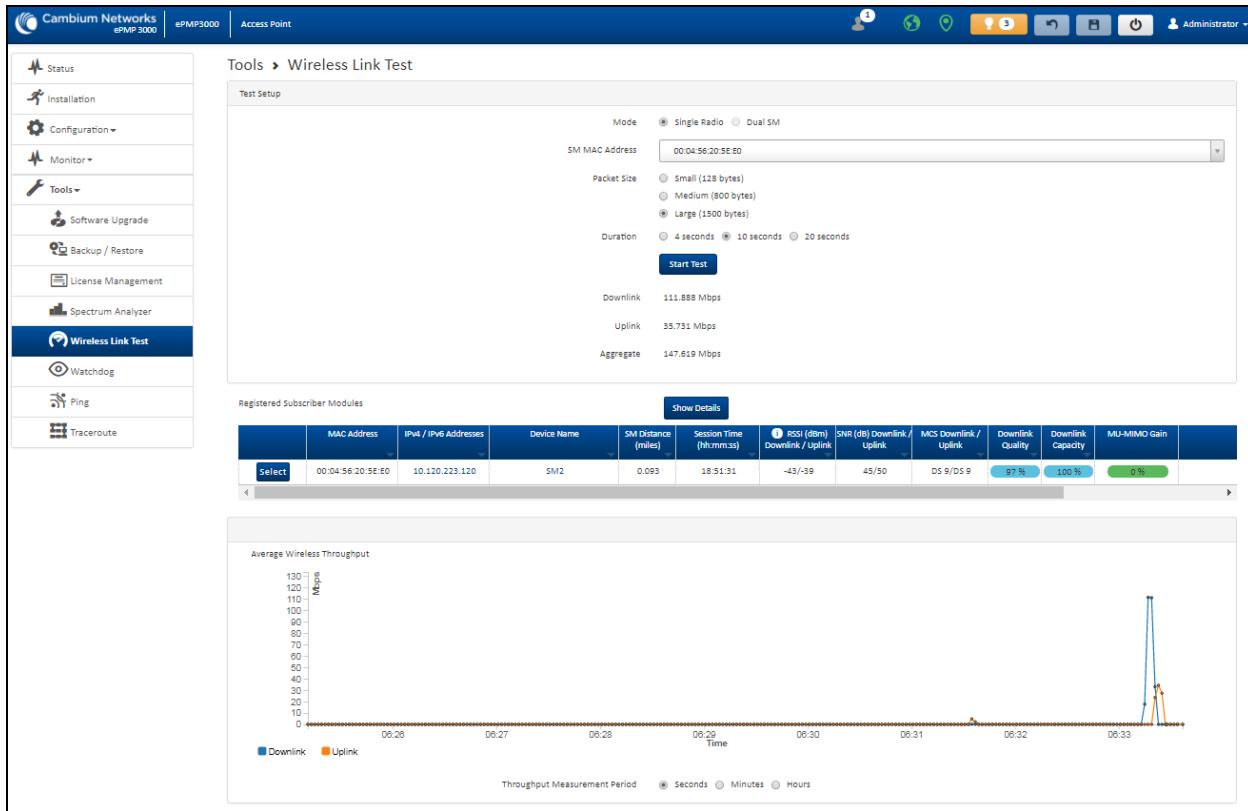

[Figure 100: Tools > Wireless Link Test page](#)

Table 149 Tools > Wireless Link Test page attributes

Attribute	Description
<b>Test Setup</b>	
Mode	<b>Single Radio:</b> The link test is conducted between the AP and one SM. <b>Dual SM:</b> The link test is conducted between the AP and two grouped SM (must be operating in MU-MIMO mode).
SM MAC Address	Choose the MAC Address of the SM with which the wireless link test is conducted.
Packet Size	Choose the Packet Size to use for the throughput test.
Duration	Choose the time duration in seconds to use for the throughput test.
Downlink	Indicates the result of the throughput test on the downlink, in Mbps.
Uplink	Indicates the result of the throughput test on the uplink, in Mbps.

Attribute	Description
Average	An auto-adjusting chart displaying the average throughput of the link.
Registered SM	Provides information about the wireless link of each registered SM.

## Tools > Watchdog page

The Watchdog performs ping checks to determine the reachability of a target IP address. If the target IP address is unreachable, a chosen action is performed. [Figure 101](#) shows the Watchdog page.

[Figure 101: Tools > Watchdog page](#)

Table 150 Tools > Watchdog page attributes

Attribute	Description
<b>Test Setup</b>	
Watchdog	<p><b>Disabled:</b> The device does not ping a specified IP address periodically for verification of connectivity</p> <p><b>Enabled:</b> The device periodically pings the IP address specified. If IP connectivity is lost, the action defined in <b>Watchdog Action</b> is performed.</p>
Watchdog Action	<p><b>Wireless Restart:</b> In case of lost ping connectivity to the specified IP address, the device automatically restarts the wireless interface.</p> <p><b>Ethernet Restart:</b> In case of lost ping connectivity to the specified IP address, the device automatically restarts the Ethernet interface.</p> <p><b>Device Reboot:</b> In case of lost ping connectivity to the specified IP address, the device automatically reboots.</p>
IP Address	Indicates the target IP address for which the device attempts ping connectivity diagnostics.

Attribute	Description
Watchdog Ping Interval	Indicates the interval in minutes between each ping connectivity diagnostic.
Watchdog Ping Retries	Indicates the number of ping retries executed by the device before considering the test failed (and conducting the action defined in <b>Watchdog Action</b> ).

## Tools > Ping page

The Ping page is used to conduct a simple test of IP connectivity to other devices that are reachable from the network. If no ping response is received or if **Destination Host Unreachable** is reported, the target may be down, there may be no route back to the device, or there may be a failure in the network hardware (DNS server failure).


Figure 102: Tools > Ping page

Table 151 Tools > Ping page attributes

Attribute	Description
<b>Ping</b>	
IP Address Version	<b>IPv4:</b> The ping test is conducted via the IPv4 protocol. <b>IPv6:</b> The ping test is conducted via the IPv6 protocol.
IP Address	Enter the IP address of the ping target.
Number of packets (-c)	Enter the total number of ping requests to send to the target.
Buffer size (-s)	Enter the number of data bytes to be sent.
TTL (-t)	Set the IP Time-To-Live (TTL) for multicast packets. This flag applies if the ping target is a multicast address.
Ping results	The results of the ping test are displayed in the box.

## Tools > Traceroute page

The Traceroute page is used to display the route (path) and associated diagnostics for IP connectivity between the device and the destination specified. Figure 103 shows the Traceroute page.

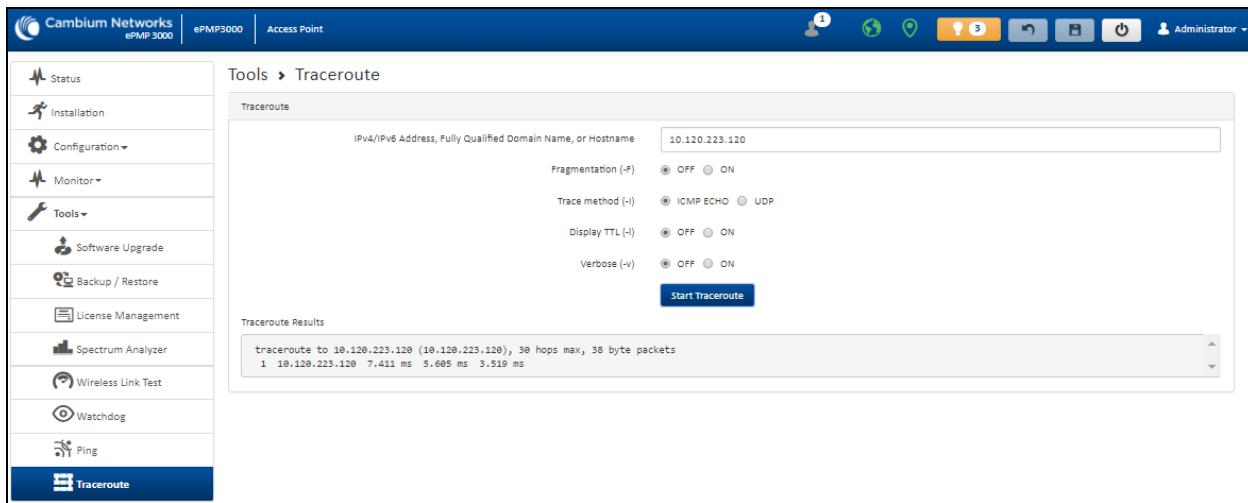

The screenshot shows the Cambium Networks ePMP3000 Device Management Interface. The top navigation bar includes the Cambium Networks logo, the device model (ePMP3000), and the current status (Access Point). The top right corner shows the administrator user and various system icons. The left sidebar contains a navigation menu with links to Status, Installation, Configuration, Monitor, Tools (which is currently selected), Software Upgrade, Backup / Restore, License Management, Spectrum Analyzer, Wireless Link Test, Watchdog, and Ping. The main content area is titled 'Tools > Traceroute'. It has a form for entering the target IP address (10.120.223.120), fragmentation settings (Fragmentation (-F) is ON), trace method (Trace method (-I) is ICMP ECHO), display TTL (Display TTL (-l) is ON), and verbose output (Verbose (-v) is OFF). Below the form is a 'Start Traceroute' button. The 'Traceroute Results' section shows the output of the traceroute command, which includes the target IP, hop count, and round-trip times for each hop.

Figure 103: Tools > Traceroute page

Table 152 Tools > Traceroute page attributes

Attribute	Description
Traceroute	
IP Address	Enter the IP address of the target of the traceroute diagnostic.
Fragmentation (-F)	<b>ON:</b> Allow the source and target to fragment probe packets. <b>OFF:</b> Do not fragment probe packets (on the source or target).
Trace method (-I)	<b>ICMP ECHO:</b> Use ICMP ECHO for traceroute probes. <b>UDP:</b> Use UDP for traceroute probes.
Display TTL (-l)	<b>ON:</b> Display TTL values for each hop on the route. <b>OFF:</b> Suppress display of TTL values for each hop on the route.
Verbose (-v)	<b>ON:</b> ICMP packets other than TIME_EXCEEDED and UNREACHABLE are displayed in the output. <b>OFF:</b> Suppress display of extraneous ICMP messaging.
Traceroute Results	Traceroute test results are displayed in the box.

# Chapter 5: Operation and Troubleshooting

This chapter provides instructions for operators of ePMP networks. The following topics are described in this chapter:

- [General Planning for troubleshooting](#)
- [Upgrading device software](#)
- [Testing the hardware](#)
- [Troubleshooting the radio link](#)
- [Resetting ePMP to factory defaults by power cycling](#)

## General Planning for troubleshooting

Effective troubleshooting depends in part on measures taken before experiencing the trouble in the network. Cambium Networks recommends the following measures for each site:

- Identify troubleshooting tools that are available at your site (such as a protocol analyzer).
- Identify commands and other sources that can capture baseline data for the site. These may include:
  - Ping
  - tracert or traceroute
  - Throughput Test results
  - Throughput data
  - Configure GUI page captures
  - Monitor GUI page captures
  - Session logs
- Start a log for the site, including:
  - Operating procedures
    - Site-specific configuration records
    - Network topology
    - Software releases
    - Types of hardware deployed
    - Site-specific troubleshooting process

- Escalation procedures
- GPS latitude/longitude of each network element

## Upgrading device software

To take an advantage of new features and software improvements for the ePMP system, visit Cambium Networks ePMP Software website: <https://support.cambiumnetworks.com/files/epmp>

To upgrade the device software, perform the following steps:

1. Login to the device UI through the management IP.
2. Navigate to page **Tools > Software Upgrade**.
3. Under the **Main Software** section, set the **Upgrade Option** to **URL** to pull the software file from a network software server or select **Local File** to upload a file from the accessing device.  
If **URL** is selected, enter the server IP address, Server Port, and File path.
4. If **Local File** is selected, click **Browse** to launch the file selection dialogue.  
Click **Upgrade**
5. Do not power off the unit in the middle of an upgrade process.
6. Once the software upgrade is complete, click the **Reset** icon.

## Testing the hardware

This section describes the procedure to test the hardware when it fails while starting or during operation.

Before start testing the hardware, verify that all the outdoor cables which connects the device to equipment inside the building, are of the supported type, as defined in [Ethernet cabling](#).

### Checking the power supply LED

When the power supply is connected to the main power supply, the expected LED behavior is:

- The power LED illuminates continuously in Green color.

If the expected LED operation does not occur, or if a fault is suspected in the hardware, check the LED states and choose the correct test procedure.

- [Power LED is OFF](#)
- [Ethernet LED is OFF](#)

### Power LED is OFF

**Meaning:** Either the power supply is not receiving power from the AC/DC outlet, or there is a wiring fault in the unit.

**Action:** Remove the device cable from the PSU and observe the effect on the power LED. If the power LED does not illuminate, confirm that the main power supply is working, for example, check the plug. If the power supply is working, report a suspected power supply fault to Cambium Networks.

## Ethernet LED is OFF

**Meaning:** There is no Ethernet traffic between the device and the power supply.

**Action:** The fault may be in the LAN or device cable:

- Remove the LAN cable from the power supply, examine it, and confirm it is not faulty.
- If the PC connection is working, remove the AP/SM cable from the power supply, examine it, and check that the wiring to pins 1, 2 and 3, 6 are correct and not crossed.

## Test Ethernet packet errors reported by the device

Login to the device and click **Monitor > Performance**. Click **Reset System Counters** at the bottom of the page and wait until LAN RX – Total Packet Counter has reached 1 million. If the counter does not increment or increments too slowly, because for example the ePMP system is newly installed and there is no offered Ethernet traffic, then license this procedure and consider using the [Test ping packet loss](#) procedure.

Check the **LAN RX – Error Packet Counter** statistic. The test has passed if this is less than 10.

## Test Ethernet packet errors reported by managed switch or router

If the device is connected to a managed Ethernet switch or router, it may be possible to monitor the error rate of Ethernet packets. Refer to *ePMP User Guide* of the managed network equipment. The test has passed if the rate of packet errors reported by the managed Ethernet switch or router is less than ten in one million packets.

## Test ping packet loss

Using a computer, it is possible to generate and monitor packets lost between the power supply and the AP/SM. This can be achieved by executing the Command Prompt application which is supplied as standard with Windows and Mac operating systems.



### Attention

This procedure disrupts network traffic carried by the device under test.

1. Ensure that the IP address of the computer is configured appropriately for connection to the device under test, and does not conflict with other devices connected to the network.
2. If the power supply is connected to an Ethernet switch or router then connect the computer to a spare port, if available.
3. If it is not possible to connect the computer to a spare port of an Ethernet switch or router, then the power supply must be disconnected from the network in order to execute this test:
  - Disconnect the power supply from the network.
  - Connect the computer directly to the LAN port of the power supply.
4. On the computer, open the Command Prompt application.
5. Send 1000 ping packets of length 1500 bytes. The process takes 1000 seconds, which is approximately 17 minutes.

If the computer is running a Windows operating system, this is achieved by typing (for an IPv6 address, use the **ping6** command):

```
ping -n 1000 -l 1500 <ipaddress>
```

where <ipaddress> is the IP address of the AP or SM under test.

If the computer is running a MAC operating system, this is achieved by typing:

```
ping -c 1000 -s 1492 <ipaddress>
```

where <ipaddress> is the IP address of the AP/SM under test.

6. Record the number of ping packets are lost. This is reported by Command Prompt on completion of the test.

The test has passed if the number of lost packets is less than 2.

## Troubleshooting the radio link

This section describes the process of testing the link when there is no radio communication, when it is unreliable, or when the data throughput rate is too low. It may be necessary to test both ends of the link.

### The module has lost or does not establish radio connectivity

If there is no wireless activity, then perform the following steps:

1. Check that the devices are configured with the same **Frequency Carrier**.
2. Check that the **Channel Bandwidth** is configured the same at both ends of the link.
3. On the AP, verify that the **Max Range** setting is configured to a distance slightly greater than the distance between the Access Point and the other end of the link.
4. Check that the Access Point **Synchronization Source** is configured properly based on the network configuration.
5. Verify the authentication settings on the devices. if **Authentication Type** is set to **WPA2**, verify that the **Pre-shared Key** matches between the AP and the SM **Preferred Access Points List**.
6. Check that the software at each end of the link is the same version.
7. Check that the desired AP SSID is configured in the SM **Preferred Access Points List**.
8. On the SM, check the **DL RSSI** and **DL CINR** values. Verify that for the SM installed distance, that the values are consistent with the values reported by the **LINKPlanner** tool.
9. Check Tx Power on the devices.
10. Check that the link is not obstructed or misaligned.
11. Check the DFS status page (**Monitor, System Status**) at each end of the link and establish that there is a quiet wireless channel to use.
12. If there are no faults found in the configuration and there is absolutely no wireless signal, retry the installation procedure.
13. If this does not work then report a suspected device fault to Cambium Networks.

## Module exhibiting frequent boots or disconnects

For any Force 300-16 units exhibiting frequent disconnects or reboots, the 4.4 official release must be applied twice to ensure both banks are updated. Once completed, ensure both banks are running 4.4 under **Monitor > System**. In general, this practice can be followed for all 802.11ac models as they support two banks for software storage.

## Link is unreliable or does not achieve the data rates required

If there is some activity, but the link is unreliable or does not achieve the data rates required, then perform the following steps:

1. Check that the interference has not increased by monitoring the uplink and downlink CINR values reported in the Access Point page **Monitor > Wireless Status**.
2. Check that the RSSI values reported at the device are proper based on the distance of the link – the LINKPlanner tool is designed to estimate these values.
3. Check that the path loss is low enough for the communication rates required.
4. Check that the device has not become misaligned.
5. Review the Quality of Service configuration and ensure that traffic is properly classified and prioritized.

## Resetting ePMP to factory defaults by power cycling

Operators may reset an ePMP radio to the default factory configuration by a sequence of power cycling (removing and re-applying power to the device). This procedure allows operators to perform a factory default reset without a tower climb or additional tools. The procedure is depicted in .

1. Remove the Ethernet cable from the PoE jack of the power supply for at least 10 seconds.
2. Reconnect the Ethernet cable to re-supply power to the ePMP device for **3-5 seconds** and disconnect the cable to power off the ePMP device for 3-5 seconds. (1<sup>st</sup> power cycle).
3. Reconnect the Ethernet cable to re-supply power to the ePMP device for **3-5 seconds** and disconnect the cable to power off the ePMP device for 3-5 seconds. (2<sup>nd</sup> power cycle).
4. Reconnect the Ethernet cable to re-supply power to the ePMP device for **3-5 seconds** and disconnect the cable to power off the ePMP device for 3-5 seconds. (3<sup>rd</sup> power cycle).
5. Reconnect the Ethernet cable to re-supply power to the ePMP device for **3-5 seconds** and disconnect the cable to power off the ePMP device for 3-5 seconds. (4<sup>th</sup> power cycle).
6. Reconnect the Ethernet cable to re-supply power to the ePMP device for at least **30 seconds** and allow it to go through the boot-up procedure



### Note

Device goes through an additional reset automatically. This resets the current configuration files to factory default configuration (such as IP addresses, Device mode, and RF configuration). The device can be pinged from a PC to check if boot-up is complete (Successful ping replies indicate boot-up is complete).

7. Access the ePMP device using the default IP address of 192.168.0.1 (AP) or 192.168.0.2 (SM).

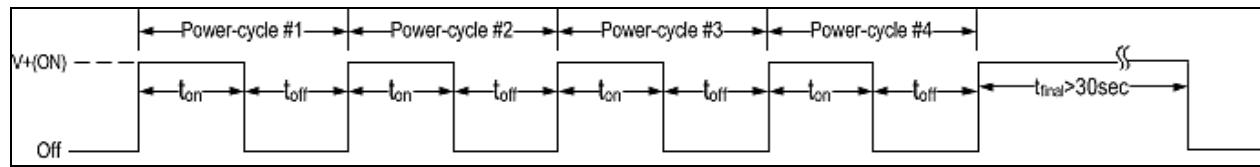


Figure 104: Power cycle timings

Where:	Is:
V+(ON)	Power through PoE has been applied to the device
Off	Power through PoE has been removed from the device
$t_{on}$	The time duration for which the device is powered on. This should be 3-5 seconds.
$t_{off}$	The time duration for which the device is powered off. This should be 3-5 seconds.

# Glossary

---

Term	Definition
AES	Advanced Encryption Standard
ANSI	American National Standards Institute
CINR	Carrier to Interference plus Noise Ratio
CMM	Cluster Management Module
DFS	Dynamic Frequency Selection
EIRP	Equivalent Isotropically Radiated Power
EMC	Electromagnetic Compatibility
EMD	Electromagnetic Discharge
ETH	Ethernet
ETSI	European Telecommunications Standards Institute
FCC	Federal Communications Commission
FEC	Forward Error Correction
GUI	Graphical User Interface
HTTP	Hypertext Transfer Protocol
IC	Industry Canada
IEEE	Institute of Electrical and Electronics Engineers
IP	Internet Protocol
LAN	Local Area Network
LED	Light Emitting Diode
LoS	Line of Sight
MIMO	Multiple In Multiple Out
MIR	Maximum Information Rate
MU-MIMO	Multi-User Multiple In Multiple Out
MTU	Maximum Transmission Unit
nLOS	Near Line of Sight
NTP	Network Time Protocol
OFDM	Orthogonal Frequency Division Multiplexing
PC	Personal Computer

Term	Definition
PMP	Point to Multipoint
PTP	Point to Point
QAM	Quadrature Amplitude Modulation
QPSK	Quadrature Phase Shift Keyed
RF	Radio Frequency
RMA	Return Merchandise Authorization
RSSI	Received Signal Strength Indication
RTTT	Road Transport and Traffic Telematics
RX	Receive
SAR	Standard Absorption Rate
SNMP	Simple Network Management Protocol
SW	Software
TDD	Time Division Duplex
TDWR	Terminal Doppler Weather Radar
TX	Transmit
UNII	Unlicensed National Information Infrastructure
URL	Uniform Resource Locator

# Cambium Networks

---

Cambium Networks delivers wireless communications that work for businesses, communities, and cities worldwide. Millions of our radios are deployed to connect people, places and things with a unified wireless fabric that spans multiple standards and frequencies of fixed wireless and Wi-Fi, all managed centrally via the cloud. Our multi-gigabit wireless fabric offers a compelling value proposition over traditional fiber and alternative wireless solutions. We work with our Cambium certified ConnectedPartners to deliver purpose-built networks for service provider, enterprise, industrial, and government connectivity solutions in urban, suburban, and rural environments, with wireless that just works.

User Guides	<a href="http://www.cambiumnetworks.com/guides">http://www.cambiumnetworks.com/guides</a>
Technical training	<a href="https://learning.cambiumnetworks.com/learn">https://learning.cambiumnetworks.com/learn</a>
Support website (enquiries)	<a href="https://support.cambiumnetworks.com">https://support.cambiumnetworks.com</a>
Main website	<a href="http://www.cambiumnetworks.com">http://www.cambiumnetworks.com</a>
Sales enquiries	<a href="mailto:solutions@cambiumnetworks.com">solutions@cambiumnetworks.com</a>
Warranty	<a href="https://www.cambiumnetworks.com/support/standard-warranty/">https://www.cambiumnetworks.com/support/standard-warranty/</a>
Telephone number list	<a href="http://www.cambiumnetworks.com/contact-us/">http://www.cambiumnetworks.com/contact-us/</a>
Address	Cambium Networks Limited, Unit B2, Linhay Business Park, Eastern Road, Ashburton, Devon, TQ13 7UP United Kingdom



Cambium Networks and the stylized circular logo are trademarks of Cambium Networks, Ltd. All other trademarks are the property of their respective owners.

© Copyright 2023 Cambium Networks, Ltd. All rights reserved.